

Submit 3 Copies To Appropriate District Office  
 District I  
 1625 N. French Dr., Hobbs, NM 87240  
 District II  
 1301 W. Grand Ave., Artesia, NM 88210  
 District III  
 1000 Rio Brazos Rd., Aztec, NM 87410  
 District IV  
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
 Energy, Minerals and Natural Resources

Form C-103  
 June 19, 2008

OIL CONSERVATION DIVISION  
 1220 South St. Francis Dr.  
 Santa Fe, NM 87505

WELL API NO. 30-015-10300
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name: Hondo Singer C
8. Well Number 1
9. OGRID Number 16696
10. Pool name or Wildcat WC Cisco (Gas)
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3311' GR

SUNDRY NOTICES AND REPORTS ON WELLS  
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:  
 Oil Well  Gas Well  Other

2. Name of Operator  
 OXY USA Inc.

3. Address of Operator  
 P.O. BOX 4294, HOUSTON, TX 77210

4. Well Location  
 Unit Letter F : 1980 feet from the North line and 1980 feet from the WEST line  
 Section 18 Township 20S Range 27E NMPM County Eddy

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

- PERFORM REMEDIAL WORK  PLUG AND ABANDON   
 TEMPORARILY ABANDON  CHANGE PLANS   
 PULL OR ALTER CASING  MULTIPLE COMPL   
 DOWNHOLE COMMINGLE

OTHER:

SUBSEQUENT REPORT OF:

- REMEDIAL WORK  ALTERING CASING   
 COMMENCE DRILLING OPNS.  P AND A   
 CASING/CEMENT JOB


OTHER:

**Notify OCD 24 hrs. prior  
 to any work done.**

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD: 10399' PBD: 8575' Perfs: 8626-8874' CIBP: 8575'

See Attachment



Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE [Signature] TITLE Regulatory Analyst DATE 02/14/2011  
Jereme\_Robinson@oxy.com  
 Type or print name Jereme Robinson E-mail address: Jereme\_Robinson@oxy.com PHONE 713.366.5360

**For State Use Only**  
 APPROVED BY [Signature] TITLE Approval Granted providing work is complete by 5/21/2011 DATE 2/21/2011  
 Conditions of Approval (if any):



OXY USA Inc.

Hondo Singer C #1 - API: 30-015-10300

TD-10399' PBD-8575' Perfs-8626-8874' CIBP-8575'  
13-3/8" @ 355' w/ 370sx, 17-1/2" hole to 360', TOC-Surf  
9-5/8" @ 2970' w/ 816sx, 12-1/4" hole to 2970', TOC-Surf-Circ  
7" @ 8899' w/125sx, 8-3/4" hole to 8899', TOC-8067''calc  
4-1/2" Liner @8774-10246' w/50sx, 6-1/4" hole to 10399', TOC-8774'-calc

Use 10# MLF between plugs, Class C cement

\*Notify OCD 24 hours prior to job.

Procedure:

- 1) add 35' cmt to existing CIBP @ 8575', top of cmt @ 8540' WOC-TAG
- 2) Plug @ 8107-8007' w/45 sx cmt
- 3) Plug @ 6845-6745' w/ 40sx cmt WOC-TAG
- 4) Set CIBP @ 6413' w/ 35' cmt to 6378' WOC-TAG
- 5) Plug @ 4600-4500' w/ 35sx cmt
- 6) Plug @ 4010-3910' w/ 35sx cmt WOC-TAG
- 7) Plug @ 3020-2920' w/ 75sx cmt WOC-TAG
- 8) Plug @ 1882-1782' w/ 35sx cmt WOC-TAG
- 9) Plug up annulus of 7" and 9-5/8" csg from previous top of sqz to Surf, estimated 235+/- sx
- 10) Plug @ 405-Surf w/ 225sx cmt WOC-TAG

Reclaim Location per Rules.

See attached Current and Proposed Post Job, WBD

**OXY USA Inc. - Current**  
**Hondo Singer C #1**  
**API No. 30-015-10300**

17-1/2" hole @ 360'  
13-3/8" csg @ 355'  
w/ 370sx-TOC-Surf-Circ

12-1/4" hole @ 2970'  
9-5/8" csg @ 2970'  
w/ 816sx-TOC-Surf-Circ


8-3/4" hole @ 8899'  
7" csg @ 8899'  
w/ 125sx-TOC-8067'-Calc

6/00-CIBP @ 8575'

5/00-CIBP @ 8935' w/ 35' cmt

6-1/4" hole @ 10399'  
4-1/2" liner @ 8774-10246'  
w/ 50sx-TOC-8774'-Calc

5/00-CIBP @ 10130' w/ 35' cmt

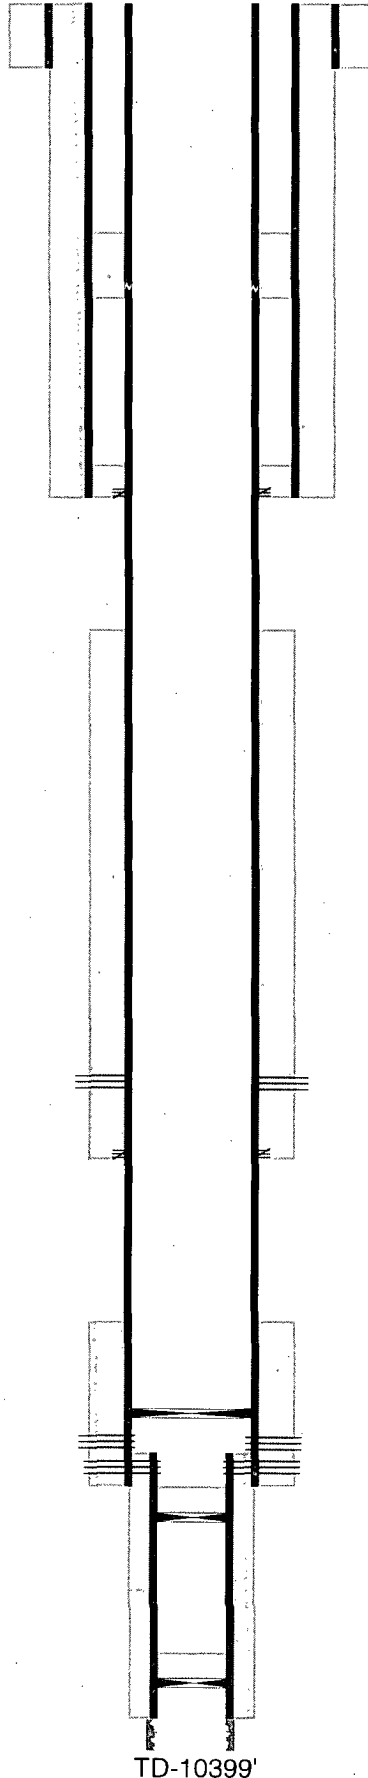

4/00-Csg Lk @ 1771-1832' sqz w/ 500sx

1/85-Perf @ 2930' sqz 30sx

8/84-BS Perfs @ 6463-6545' 1/85 sqz w/ cmt

8/84-Perf @ 6795' sqz w/ 500sx-TOC-3960'-CBL

5/00-Strawn Perfs @ 8626-8874'

Morrow OH @ 10246-10399'

TD-10399'

**OXY USA Inc. - Current  
Hondo Singer C #1  
API No. 30-015-10300**

17-1/2" hole @ 360'  
13-3/8" csg @ 355'  
w/ 370sx-TOC-Surf-Circ


12-1/4" hole @ 2970'  
9-5/8" csg @ 2970'  
w/ 816sx-TOC-Surf-Circ

TOC @ 3960'

8-3/4" hole @ 8899'  
7" csg @ 8899'  
w/ 125sx-TOC-8067'-Calc

Strawn Perfs @ 8626-8874'

6-1/4" hole @ 10399'  
4-1/2" liner @ 8774-10246'  
w/ 50sx-TOC-8774'-Calc

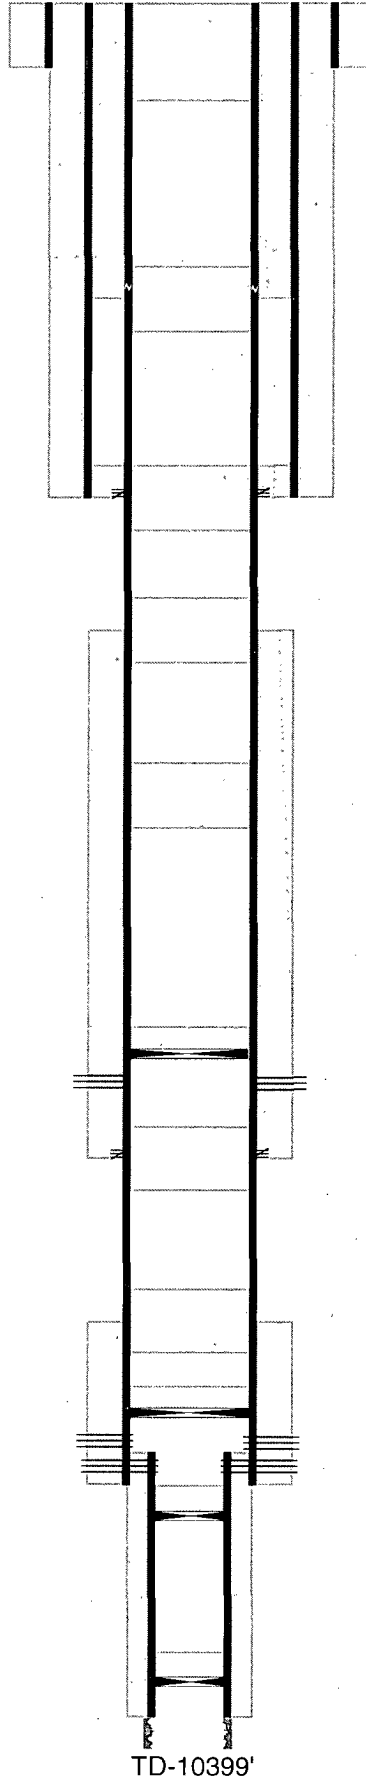

Plug @ 405-Surf w/ 225sx cmt WOC-TAG

Plug @ top sqz to Surf in annulus of 7 & 9-5/8"  
est. 235 +/- sx

Plug @ 1882-1782' w/35sx WOC-TAG

Plug @ 3020-2920' w/75sx WOC-TAG (Shoe)

Plug @ 4010-3910' w/ 35sx cmt WOC-TAG

Plug @ 4600-4500' w/ 35sx cmt

CIBP @ 6413' w/ 35' cmt to 6378' WOC-TAG

BS Perfs @ 6463-6545' 1/85 sqz w/ cmt

Plug @ 6845'-6745' w/ 40sx cmt WOC-TAG

Plug @ 8107-8007' w/45sx

CIBP @ 8575' add 35' cmt to 8540' WOC-TAG

CIBP @ 8935' w/ 35' cmt

CIBP @ 10130' w/ 35' cmt

Morrow OH @ 10246-10399'