

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

SUBMIT IN DUPLICATE

FORM APPROVED

157

(See other instructions on reverse side)

5. LEASE DESIGNATION AND SERIAL NO.  
NM-#056122

6. IF INDIAN, ALLOTTEE OR TRIBE NAME  
NA

7. UNIT AGREEMENT NAME  
NA

8. FARM OR LEASE NAME, WELL NO.  
Eagle "33H" Federal #8

9. API WELL NO.  
30-015-29596

10. FIELD AND POOL, OR WILDCAT  
Red Lake (Q-GB-SA)

11. SEC., T., R., M., OR BLOCK AND SURVEY OR AREA  
"H" Section 33-17S-27E

WELL COMPLETION OR RECOMPLETION REPORT AND LOG\*

1a. TYPE OF WELL: OIL WELL  GAS WELL  DRY  Other

b. TYPE OF COMPLETION: NEW WELL  WORK OVER  DEEP-EN  PLUG BACK  DIFF. RESVR

2. NAME OF OPERATOR  
DEVON ENERGY CORPORATION (NEVADA)

3. ADDRESS AND TELEPHONE NO.  
20 N. BROADWAY, SUITE 1500, OKC, OK 73102-8260 (405) 235-3611

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)\*  
At surface 2435' FNL & 531' FEL; Unit "H"  
At top prod. interval reported below (SAME)  
At total depth (SAME)

14. PERMIT NO. DATE ISSUED 5/6/97 12. COUNTY OR PARISH Eddy County 13. STATE NM

15. DATE SPUNDED 6/26/97 16. DATE T.D. REACHED 6/1/97 17. DATE COMPL. (Ready to prod.) 7/13/97 18. ELEVATIONS (DF, RKB, RT, GR, ETC.)\* KB 3518', GL 3509', DF 3517' 19. ELEV. CASINGHEAD

20. TOTAL DEPTH, MD & TVD 2549' 21. PLUG, BACK T.D., MD & TVD 2503' 22. IF MULTIPLE COMPL., HOW MANY? NA 23. INTERVALS DRILLED BY 24. PRODUCING INTERVAL(S), OF THIS COMPLETION—TOP, BOTTOM, NAME (MD AND TVD)\* San Andres - 1529-2245'

ACCEPTED FOR RECORD  
AUG 20 1997

25. WAS DIRECTIONAL SURVEY MADE? No 26. TYPE ELECTRIC AND OTHER LOGS RUN LDT/CNL/DLL/MSFL/GR; CBL 27. WAS WELL CORED? No

28. CASING RECORD (Report all strings set in well)

CASING SIZE/GRADE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	TOP OF CEMENT, CEMENTING RECORD	AMOUNT PULLED
8-5/8" J-55	24#	1086'	12-1/4"	surf; 300 sxs lite & 200 sxs "C"	NA
5-1/2" J-55	15.5#	2550'	7-7/8"	surf; 275 sxs lite C & 275 sxs "C"	NA

29. LINER RECORD 30. TUBING RECORD

SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT*	SCREEN (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)
					2-7/8"	1947'	(OET)

31. PERFORATION RECORD (Interval, size and number)  
1529'-1656' U. SAN ANDRES (4 -40" EHD holes)  
1842'-1893' ALPHA (7 -40" EHD holes)  
1997'-2029' "A" (3 -40" EHD holes)  
2054'-2119' "B" (7 -40" EHD holes)  
2152'-2187' "C" (6 -40" EHD holes)  
2201'-2245' "D" (3 -40" EHD holes)

32. ACID SHOT, FRACTURE, CEMENT SQUEEZE, ETC.

DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED
1529-2245'	2500 gals of 15% NeFe acid
1529-2245'	180,000 gals linear gel water + 6000# 100 mesh sand + 86,000# 16/30 Brady sand

33.\* PRODUCTION  
DATE FIRST PRODUCTION 7/14/97 PRODUCTIONS METHOD I (Flowing, gas lift, pumping—size and type of pump) Pumping (2-1/2" x 2" x 12' RWTC Pump) WELL STATUS (Producing or shut-in) Producing

DATE OF TEST 7/30/97 HOURS TESTED 24 CHOKE SIZE PROD'N FOR TEST PERIOD OIL-BBL. 65 GAS-MCF. 65 WATER-BBL. 261 GAS-OIL RATIO 1000/1  
FLOW. TUBING PRESS. CASING PRESSURE CALCULATED 24-HOUR RATE OIL-BBL. 65 GAS-MCF. 65 WATER-BBL. 261 OIL GRAVITY-API (CORR.) 38

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.) Sold TEST WITNESSED BY Danny Hokett

35. LIST OF ATTACHMENTS  
Logs, Deviation Surveys

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records  
SIGNED Crystal Thornton TITLE ENGINEERING TECHNICIAN DATE August 11, 1997

\*(See Instructions and Spaces for Additional Data on Reverse Side)

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

37. SUMMARY OF POROUS ZONES: (Show all important zones of porosity and contents thereof; cored intervals; and all drill stem, tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries):

FORMATION	TOP	BOTTOM	DESCRIPTION, CONTENTS, ETC.
Premier Sand	1440'	1484'	sandstone dolomite
San Andres	1484'	2549'	
		DEPTH	ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.. (continued from the front)
		NA	

38. GEOLOGIC MARKERS


NAME	MEAS. DEPTH	TOP	
		MEAS. DEPTH	TRUE VERT. DEPTH
Bowers	632'		+2386
Queen	826'		+2192
Grayburg	1192'		+1826
Premier	1440'		+1528
San Andres	1484'		+1534

# L & M DRILLING, INC.

**OIL WELL DRILLING CONTRACTORS**  
**PO BOX 1370 ARTESIA, NEW MEXICO 88211-1370**  
**(505) 746-4405 746-3518 748-2205**

July 7, 1997

Devon Energy Corporation  
20 North Broadway, Suite 1500  
Oklahoma City, OK 73102-8260

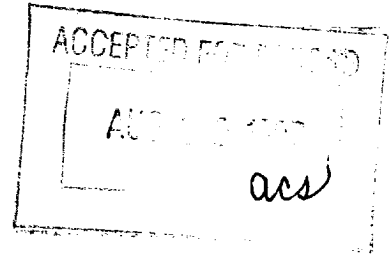

RE: Eagle 33H Federal #8  
2435' FNL & 531' FEL  
Sec. 33, T17S, R27E  
Eddy County, New Mexico

Gentlemen:

The following is a Deviation Survey for the above captioned well.

DEPTH	DEVIATION
145'	3/4°
328'	3/4°
498'	1°
670'	1 1/4°
1003'	1 1/2°
1541'	1 1/2°
1946'	1 1/2°
2225'	1 1/4°
2550'	1 1/2°


Very truly yours,



Eddie C. LaRue  
Vice President

STATE OF NEW MEXICO }  
COUNTY OF EDDY }

The foregoing was acknowledged before me  
this 7th day of July, 1997.

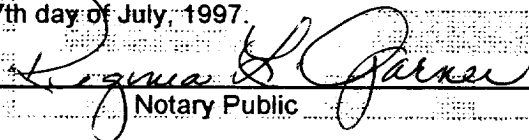  
\_\_\_\_\_  
Notary Public