


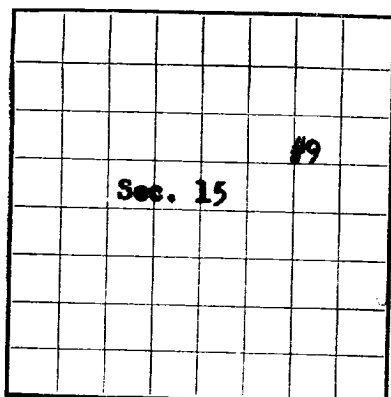

LOCATE WELL CORRECTLY

RECEIVED

JUN 16 1961

U. S. GEOLOGICAL SURVEY
ARTESIA, NEW MEXICO

UNITED STATES

DEPARTMENT OF THE INTERIOR

GEOLOGICAL SURVEY

RECEIVED

JUN 19 1961

D. C. C.
ARTESIA, OFFICE

LOG OF OIL OR GAS WELL

Company Skelly Oil Company Address Box 38 - Hobbs, New Mexico
Lessor or Tract Dow "A" Field Grayburg Jackson State New Mexico
Well No. 9 Sec. 15 T. 17S R. 31E Meridian N.M.P.M. County Eddy
Location 1980 ft. XX of N Line and 660 ft. XX of E Line of section 15 Elevation 3889'
(Derrick floor relative to sea level)
The information given herewith is a complete and correct record of the well and all work done thereon
so far as can be determined from all available records.
Signed (ORIGINAL SIGNED) H. E. Aab

Date _____ Title Dist. Supt.

The summary on this page is for the condition of the well at above date.

Commenced drilling April 24, 1961 Finished drilling May 23, 1961

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from 2219' to 2408' No. 4, from 3538' to 3642'
No. 2, from 3197' to 3452' No. 5, from _____ to _____
No. 3, from 3488' to 3530' No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
<u>8-5/8"</u>	<u>24.4</u>	<u>8</u>	<u>85 J-55</u>	<u>745</u>	<u>Pipe</u>	<u>2219'</u>			<u>2219'</u>
<u>5-1/2"</u>	<u>15.5</u>	<u>8</u>	<u>85 J-55</u>	<u>3542</u>	<u>Float</u>	<u>2408'</u>			<u>2408'</u>
									<u>3642'</u>

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
<u>8-5/8"</u>	<u>751'</u>	<u>100</u>	<u>Pump & Plug</u>		
<u>5-1/2"</u>	<u>3546'</u>	<u>385</u>	<u>Pump & Plug</u>		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools were used from 0 feet to 3642 feet, and from _____ feet to _____ feet

DATES

_____, 19____ Put to producing June 5, 1961

The production for the first 24 hours was 58 barrels of fluid of which 99.9% was oil; _____%
emulsion; _____% water; and 1% sediment. Gravity, °Bé. 34.30

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

Register, Driller Kidd, Driller
Wood, Driller _____, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
0	517	517	Sand & red beds
517	704	187	Anhydrite
704	1680	976	Salt
1680	1839	159	Anhydrite
1839	2166	327	Sand & anhydrite
2166	2782	616	Dolomite, anhydrite & sand
2782	2960	178	Sand & anhydrite
2960	3182	222	Sand
3182	3488	306	Dolomite & sand
3488	3536	48	Sand
3536	3642	106	Dolomite
	3642	Total Depth	

GEOLOGICAL TOPS BY MCCULLOUGH GAMMA RAY DENSITY LOG:

Top Anhydrite	517'
Top Salt	704'
Base Salt	1680'
Top Yates	1839'
Top Seven Rivers	2166'
Top Queen	2782'
Top Penrose	2960'
Top Grayburg	3182'
Top Premier	3488'
Top San Andres	3536'

AT THE END OF COMPLETE DRILLER'S
LOG, ADD GEOLOGIC TOPS. STATE
WHETHER FROM LOG OR SAMPLES

NAFBC

MA **—** **U.S.O.**

16-43094-2 U. S. GOVERNMENT PRINTING OFFICE

IMPOSSIBLE HAVE EVIDENCE

ALL OF THE EVIDENCE OF TOWERS

(SIGNED) H. E. VOP

FOLYMER LETTERS COLLEGE

100-11

15. **DEVELOPMENT OF THE**

ГЕОЛОГИЧКА ЗЕМЛЕЊА

DEPARTMENT OF THE INTERIOR

OMILLED 215123

REF ID: A60000

THE UNIVERSITY OF BRISTOL

RECEIVED 7/1/78 05350

10-10-68 10:10 AM

107. 0-100

1992

1. DATE 10-10-68