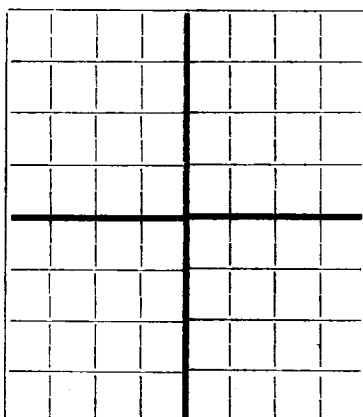


N

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

AREA 640 ACRES
LOCATE WELL CORRECTLY

Danciger Oil & Refining Company, W. T. Waggoner Building, Fort Worth, Texas

Company or Operator

Manoil E. Turner

Address

Well No.

20-1

in 04/22/48

of Sec. 10

T 17-S

Lease

R. 21-S, N. M. P. M., Grayburg-Jackson Field, 244 County.

Well is 2210 feet south of the North line and 930 feet west of the East line of Section 10.

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is. Address. Artesia, New Mexico

If Government land the permittee is. Address. Fort Worth, Texas

The Lessee is. Danciger Oil & Refining Company Address. Fort Worth, Texas

Drilling commenced. April 15 1948 Drilling was completed. June 6 1948

Name of drilling contractor. Kersay & Company Address. Artesia, New Mexico

Elevation above sea level at top of casing. 3800 feet. G.L.

The information given is to be kept confidential until 19.

OIL SANDS OR ZONES

No. 1, from 1975 to 1978 No. 4, from to

No. 2, from 1970 to 1975 No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from None to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
7"	204	8 R	Spang	210'					
8 1/2"	142	"	"	1000'					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
	7"	210'	80	Malliburton		
	8 1/2"	1000'	100	"		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
	4"	Nitro-glycerine	110 Qts.	6/8/48	1975 - 1980	1985

Results of shooting or chemical treatment. Well producing 10 bbls. per day before shooting; after shooting, produced 15 bbls. per day.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 1935 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing June 8 1948

The production of the first 24 hours was 15 barrels of fluid of 37° 100% was oil; %

emulsion; % water; and % sediment. Gravity, Be.

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

Kersay & Company, Driller, Driller

, Driller, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 7th

day of July 1948

GRACE O'CONNOR, Notary Public

In and for Tarrant County, Texas

Notary Public

June 1, 1949

My Commission expires

Fort Worth, Texas - July 7, 1948

Name Date

Position Secretary

Representing DANCIGER OIL & REFINING COMPANY

Address Company Operator Fort Worth, Texas

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	220		Sand
220	338		Red bed & sand
338	370		Anhydrite
370	470		Red rock
470	480		Red rock, shells, brim.
480	515		Salt
515	525		Salt & gyp shells
525	610		Salt
610	625		Salt & potash
625	695		Salt
695	1000		Salt & potash
1000	1115		Salt
1115	1165		Salt & anhy. shells
1165	1220		Anhydrite
1220	1265		Anhydrite & red bed
1265	1305		Anhydrite
1305	1400		Red bed
1400	1505		Anhydrite
1505	1575		Anhydrite, sandy
1575	1575		Same
1575	1575		Sand
1575	1575		Anhydrite
1575	1575		Sand
1575	1575		Anhydrite
1575	1575		T.B.