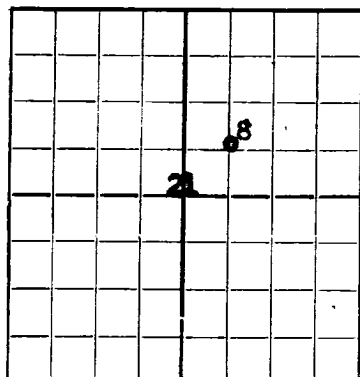


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

Skelly Oil Company

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Well No. 8 in SW/4 NE/4 of Sec. 21, T. 17E, R. 31E, N. M. P. M., Grayburg-Jackson Field, Eddy County.
Well is 1980 feet south of the North line and 1980 feet west of the East line of Sec. 21
If State land the oil and gas lease is No. _____ Assignment No. _____
If patented land the owner is _____ Address _____
If Government land the permittee is H. M. Dow Address _____
The Lessee is Skelly Oil Co. Address Tulsa, Oklahoma
Drilling commenced January 23, 1944 Drilling was completed May 5, 1944
Name of drilling contractor J. C. Clower Address Eunice, N.M.
Elevation above sea level at top of casing D.E. 3805 feet.
The information given is to be kept confidential until Not Confidential 19____

OIL SANDS OR ZONES

No. 1, from 2165 to 2175 No. 4, from _____ to _____
No. 2, from 2630 to 2700 No. 5, from _____ to _____
No. 3, from 2785 to 2800 No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 535 to 542 feet. _____
No. 2, from _____ to _____ feet. _____
No. 3, from _____ to _____ feet. _____
No. 4, from _____ to _____ feet. _____

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
8-5/8"	32	8V	LS	624'				
7"	26	8R	SS	2055'				
5-1/2"	17	8R	SS	2973'	Pulled out 2644' Left in 329'			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17-1/4"	8-5/8"	627	100	Halliburton		
8-1/4"	7"	2035	150	Halliburton		
	5-1/2"	2054	300	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
	4"	SNG	100	2/28/44	2890-2940	
	4"	SNG	50 & 40	3/6/44	2778-2805 & 2685-2705	
	4"	SNG	200	3/10/44	2130-2190	

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet.
Cable tools were used from 0 feet to 3677 feet, and from PSTD 2198 feet to _____ feet.

PRODUCTION

Put to producing May 16 1944
The production of the first 24 hours was 71 barrels of fluid of which 100 % was oil; 44 % emulsion; _____ % water; and _____ % sediment. Gravity, Be _____
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

H. A. Kasterson Driller H. J. Wtaker Driller
Paul Critton Driller _____ Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 26th

Hobbs, New Mexico - October 26, 1951

day of October, 1951Name John C. Wtaker
Position Dist. Supt.Notary Public John C. WtakerRepresenting Skelly Oil Company
Company or Operator.My Commission expires Aug. 14, 1952Address Hobbs, New Mexico