



U.S. Department of the Interior  
BUREAU OF LAND MANAGEMENT

# Operator Certification Data Report

03/17/2025

## Operator

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

**NAME:** RONI MATHEW

**Signed on:** 07/31/2024

**Title:** REGULATORY SPECIALIST

**Street Address:** 5 Greenway Plaza, Suite 110

**City:** Houston

**State:** TX

**Zip:** 77210

**Phone:** (713)215-7827

**Email address:** RONI\_MATHEW@OXY.COM

## Field

**Representative Name:** JIM WILSON

**Street Address:** 6001 DEAUVILLE BLVD.

**City:** MIDLAND

**State:** TX

**Zip:** 79710

**Phone:** (575)631-2442

**Email address:** JIM\_WILSON@OXY.COM



U.S. Department of the Interior  
BUREAU OF LAND MANAGEMENT

## Application Data

03/17/2025

APD ID: 10400100179

Submission Date: 07/31/2024

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 34H

Well Type: OIL WELL

Well Work Type: Drill

Highlighted data  
reflects the most  
recent changes  
[Show Final Text](#)

### Section 1 - General

APD ID: 10400100179

Tie to previous NOS? N

Submission Date: 07/31/2024

BLM Office: Carlsbad

User: RONI MATHEW

Title: REGULATORY SPECIALIST

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM21640

Lease Acres:

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? N

Permitting Agent? NO

APD Operator: OXY USA INCORPORATED

Operator letter of

### Operator Info

Operator Organization Name: OXY USA INCORPORATED

Operator Address: P.O. BOX 1002

Zip: 93276-1002

Operator PO Box:

Operator City: TUPMAN

State: CA

Operator Phone: (661)763-6046

Operator Internet Address:

### Section 2 - Well Information

Well in Master Development Plan? NO

Master Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 34H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: INGLE WELLS

Pool Name: BONE SPRING

**Operator Name:** OXY USA INCORPORATED**Well Name:** PRECIOUS 30-18 FEDERAL COM**Well Number:** 34H**Is the proposed well in an area containing other mineral resources?** USEABLE WATER,NATURAL GAS,OIL,POTASH**Is the proposed well in a Helium production area?** N**Use Existing Well Pad?** Y**New surface disturbance?** N**Type of Well Pad:** MULTIPLE WELL**Multiple Well Pad Name:**  
SNDDNS**Number:** 3116**Well Class:** HORIZONTAL**Number of Legs:** 1**Well Work Type:** Drill**Well Type:** OIL WELL**Describe Well Type:****Well sub-Type:** INFILL**Describe sub-type:****Distance to town:** 15 Miles**Distance to nearest well:** 30 FT**Distance to lease line:** 100 FT**Reservoir well spacing assigned acres Measurement:** 800 Acres**Well plat:** PRECIOUS30\_18FEDCOM34H\_C102\_20240730105811.pdf

PRECIOUS30\_18FEDCOM34H\_SitePlan\_20240730105811.pdf

**Well work start Date:** 08/11/2025**Duration:** 45 DAYS**Section 3 - Well Location Table****Survey Type:** RECTANGULAR**Describe Survey Type:****Datum:** NAD83**Vertical Datum:** NAVD88**Survey number:****Reference Datum:** GROUND LEVEL

| Wellbore   | NS-Foot | NS Indicator | EW-Foot | EW Indicator | Twsp | Range | Section | Aliquot/Lot/Tract | Latitude  | Longitude  | County | State       | Meridian    | Lease Type | Lease Number   | Elevation | MD   | TVD  | Will this well produce from this |
|------------|---------|--------------|---------|--------------|------|-------|---------|-------------------|-----------|------------|--------|-------------|-------------|------------|----------------|-----------|------|------|----------------------------------|
| SHL Leg #1 | 100     | FNL          | 1145    | FEL          | 23S  | 31E   | 31      | Aliquot NENE      | 32.267901 | -103.81206 | EDD Y  | NEW MEXI CO | NEW MEXI CO | F          | NMNM 054673 2A | 3345      | 0    | 0    | N                                |
| KOP Leg #1 | 50      | FSL          | 700     | FEL          | 23S  | 31E   | 30      | Aliquot SESE      | 32.268313 | -103.81062 | EDD Y  | NEW MEXI CO | NEW MEXI CO | F          | NMNM 21640     | -6609     | 9987 | 9954 | N                                |

**Operator Name:** OXY USA INCORPORATED**Well Name:** PRECIOUS 30-18 FEDERAL COM**Well Number:** 34H

| Wellbore     | NS-Foot | NS Indicator | EW-Foot | EW Indicator | Twsp | Range | Section | Aliquot/Lot/Tract | Latitude  | Longitude    | County | State       | Meridian    | Lease Type | Lease Number | Elevation | MD    | TVD   | Will this well produce from this |
|--------------|---------|--------------|---------|--------------|------|-------|---------|-------------------|-----------|--------------|--------|-------------|-------------|------------|--------------|-----------|-------|-------|----------------------------------|
| PPP Leg #1-1 | 100     | FSL          | 700     | FEL          | 23S  | 31E   | 30      | Aliquot SESE      | 32.268451 | - 103.810621 | EDD Y  | NEW MEXI CO | NEW MEXI CO | F          | NMNM 21640   | - 7135    | 10847 | 10480 | Y                                |
| PPP Leg #1-2 | 2642    | FSL          | 700     | FEL          | 23S  | 31E   | 30      | Aliquot SENE      | 32.275436 | - 103.810627 | EDD Y  | NEW MEXI CO | NEW MEXI CO | F          | NMNM 0533177 | - 7135    | 12856 | 10480 | Y                                |
| PPP Leg #1-3 | 1321    | FSL          | 701     | FEL          | 23S  | 31E   | 19      | Aliquot NESE      | 32.286328 | - 103.810636 | EDD Y  | NEW MEXI CO | NEW MEXI CO | F          | NMNM 21639   | - 7135    | 16819 | 10480 | Y                                |
| PPP Leg #1-4 | 1318    | FNL          | 699     | FEL          | 23S  | 31E   | 19      | Aliquot NENE      | 32.29358  | - 103.810643 | EDD Y  | NEW MEXI CO | NEW MEXI CO | F          | NMNM 17057   | - 7135    | 19458 | 10480 | Y                                |
| EXIT Leg #1  | 2545    | FSL          | 700     | FEL          | 23S  | 31E   | 18      | Aliquot NESE      | 32.304196 | - 103.810652 | EDD Y  | NEW MEXI CO | NEW MEXI CO | F          | NMNM 0546237 | - 7135    | 23321 | 10480 | Y                                |
| BHL Leg #1   | 2625    | FSL          | 700     | FEL          | 23S  | 31E   | 18      | Aliquot NESE      | 32.304416 | - 103.810652 | EDD Y  | NEW MEXI CO | NEW MEXI CO | F          | NMNM 0546237 | - 7135    | 23401 | 10480 | N                                |





U.S. Department of the Interior  
BUREAU OF LAND MANAGEMENT

# Drilling Plan Data Report

03/17/2025

APD ID: 10400100179

Submission Date: 07/31/2024

Highlighted data  
reflects the most  
recent changes

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 34H

Well Type: OIL WELL

Well Work Type: Drill

[Show Final Text](#)

## Section 1 - Geologic Formations

| Formation ID | Formation Name  | Elevation | True Vertical | Measured Depth | Lithologies                        | Mineral Resources                              | Producing Formatio |
|--------------|-----------------|-----------|---------------|----------------|------------------------------------|------------------------------------------------|--------------------|
| 15155117     | RUSTLER         | 3345      | 377           | 377            | ANHYDRITE, DOLOMITE, SHALE         | USEABLE WATER                                  | N                  |
| 15155116     | SALADO          | 2642      | 703           | 703            | ANHYDRITE, DOLOMITE, HALITE, SHALE | OTHER : SALT                                   | N                  |
| 15155114     | CASTILE         | 744       | 2601          | 2601           | ANHYDRITE                          | OTHER : SALT                                   | N                  |
| 15155118     | DELAWARE        | -730      | 4075          | 4075           | LIMESTONE, SANDSTONE, SILTSTONE    | NATURAL GAS, OIL, OTHER : BRINE                | Y                  |
| 15155119     | BELL CANYON     | -769      | 4114          | 4114           | SANDSTONE, SILTSTONE               | NATURAL GAS, OIL, OTHER, USEABLE WATER : BRINE | Y                  |
| 15155120     | CHERRY CANYON   | -1651     | 4996          | 4996           | SANDSTONE, SILTSTONE               | NATURAL GAS, OIL, OTHER : BRINE                | Y                  |
| 15155121     | BRUSHY CANYON   | -2932     | 6277          | 6277           | LIMESTONE, SANDSTONE, SILTSTONE    | OTHER : LOSSES                                 | N                  |
| 15155115     | BONE SPRING     | -4615     | 7960          | 7963           | LIMESTONE, SANDSTONE, SILTSTONE    | NATURAL GAS, OIL                               | Y                  |
| 15155132     | BONE SPRING 1ST | -5648     | 8993          | 9011           | LIMESTONE, SANDSTONE, SILTSTONE    | NATURAL GAS, OIL                               | Y                  |
| 15155133     | BONE SPRING 2ND | -6289     | 9634          | 9662           | LIMESTONE, SANDSTONE, SILTSTONE    | NATURAL GAS, OIL                               | Y                  |

## Section 2 - Blowout Prevention

Pressure Rating (PSI): 10M

Rating Depth: 10480

Equipment: 13-5/8" 5/10M Annular, Blind Ram, Double Ram

Requesting Variance? YES

Variance request: Request for the use of a flexible choke line from the BOP to Choke Manifold.

**Testing Procedure:** BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per 43 CFR part 3170 Subpart 3172 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. OXY requests permission to adjust the BOP

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COMWell Number: 34H

break testing requirements as per the agreement reached in the OXY/BLM meeting on September 5, 2019. See the attached BOP Break Testing variance.

Choke Diagram Attachment:

PRECIOUS30\_18FEDCOM34H\_ChkManifolds\_20240730111047.pdf

BOP Diagram Attachment:

- PRECIOUS30\_18FEDCOM34H\_BOP\_20240730111107.pdf
- PRECIOUS30\_18FEDCOM34H\_13inADAPT\_4S\_10x15\_20240730111112.pdf
- PRECIOUS30\_18FEDCOM34H\_FlexHoseCert\_20250205073104.pdf

Section 3 - Casing

| Casing ID | String Type  | Hole Size | Csg Size | Condition | Standard | Tapered String | Top Set MD | Bottom Set MD | Top Set TVD | Bottom Set TVD | Top Set MSL | Bottom Set MSL | Calculated casing length MD | Grade  | Weight | Joint Type        | Collapse SF | Burst SF | Joint SF Type | Joint SF | Body SF Type | Body SF |
|-----------|--------------|-----------|----------|-----------|----------|----------------|------------|---------------|-------------|----------------|-------------|----------------|-----------------------------|--------|--------|-------------------|-------------|----------|---------------|----------|--------------|---------|
| 1         | SURFACE      | 17.5      | 13.375   | NEW       | API      | N              | 0          | 437           | 0           | 437            | 3345        | 2908           | 437                         | J-55   | 54.5   | BUTT              | 1           | 1.1      | BUOY          | 1.4      | BUOY         | 1.4     |
| 2         | OTHER        | 12.25     | 10.75    | NEW       | API      | N              | 0          | 4075          | 0           | 4075           |             | -730           | 4075                        | HCL-80 | 45.5   | OTHER - BTC-SC    | 1           | 1.1      | BUOY          | 1.4      | BUOY         | 1.4     |
| 3         | INTERMEDIATE | 9.875     | OTHE R   | NEW       | API      | N              | 0          | 10847         | 0           | 10480          | 0           | -7135          | 10847                       | HCL-80 | 26.4   | OTHER - BTC       | 1           | 1.1      | BUOY          | 1.4      | BUOY         | 1.4     |
| 4         | PRODUCTI ON  | 6.75      | 5.5      | NEW       | API      | N              | 0          | 23401         | 0           | 10480          | 3345        | -7135          | 23401                       | P-110  | 20     | OTHER - SPRINT-SF | 1           | 1.1      | BUOY          | 1.4      | BUOY         | 1.4     |

Casing Attachments

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COMWell Number: 34H

Casing Attachments

Casing ID: 1StringSURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

PRECIOUS30\_18FEDCOM34H\_CsgCriteria\_20240730113111.pdf

Casing ID: 2StringOTHER- SALT

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

PRECIOUS30\_18FEDCOM34H\_CsgCriteria\_20240730112922.pdf

PRECIOUS30\_18FEDCOM34H\_API\_BTC\_SC\_10.750in\_45.50ppf\_L80IC\_20250205091808.pdf

Casing ID: 3StringINTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

PRECIOUS30\_18FEDCOM34H\_CsgCriteria\_20240730113016.pdf

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 34H

Casing Attachments

Casing ID: 4StringPRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

- PRECIOUS30\_18FEDCOM34H\_CsgCriteria\_20240730112847.pdf
- PRECIOUS30\_18FEDCOM34H\_VAM\_SPRINT\_SF\_5.5in\_20ppf\_P110RY\_20250205073917.pdf

Section 4 - Cement

| String Type  | Lead/Tail | Stage Tool Depth | Top MD | Bottom MD | Quantity(sx) | Yield | Density | Cu Ft | Excess% | Cement type | Additives            |
|--------------|-----------|------------------|--------|-----------|--------------|-------|---------|-------|---------|-------------|----------------------|
| SURFACE      | Lead      |                  | 0      | 437       | 456          | 1.33  | 14.8    | 606   | 100     | Class C     | Accelerator          |
| OTHER        | Lead      |                  | 0      | 3575      | 572          | 1.73  | 12.9    | 990   | 50      | Class Pozz  | Retarder             |
| OTHER        | Tail      |                  | 3575   | 4075      | 85           | 1.33  | 14.8    | 113   | 20      | Class C     | Accelerator          |
| INTERMEDIATE | Lead      | 2                | 3575   | 6527      | 450          | 1.71  | 13.3    | 770   | 25      | Class C     | Accelerator          |
| INTERMEDIATE | Lead      | 2                | 6527   | 10847     | 580          | 1.68  | 13.2    | 974   | 5       | Class C     | Retarder, Dispersant |
| PRODUCTION   | Lead      |                  | 10347  | 23401     | 739          | 1.84  | 13.3    | 1360  | 25      | Class C     | Retarder             |

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 34H

### Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

**Describe what will be on location to control well or mitigate other conditions:** Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times. The following is a general list of products: Barite, Bentonite, Gypsum, Lime, Soda Ash, Caustic Soda, Nut Plug, Cedar Fiber, Cotton Seed Hulls, Drilling Paper, Salt Water Clay, CACL2. Oxy will use a closed mud system.

Describe the mud monitoring system utilized: PVT/MD Totco/Visual Monitoring

### Circulating Medium Table

| Top Depth | Bottom Depth | Mud Type                                           | Min Weight (lbs/gal) | Max Weight (lbs/gal) | Density (lbs/cu ft) | Gel Strength (lbs/100 sqft) | PH | Viscosity (CP) | Salinity (ppm) | Filtration (cc) | Additional Characteristics |
|-----------|--------------|----------------------------------------------------|----------------------|----------------------|---------------------|-----------------------------|----|----------------|----------------|-----------------|----------------------------|
| 4075      | 1084<br>7    | OTHER : Water-Based and/or Oil-Based mud           | 8                    | 10                   |                     |                             |    |                |                |                 |                            |
| 437       | 4075         | OTHER : Saturated Brine Based Mud or Oil Based Mud | 8                    | 10                   |                     |                             |    |                |                |                 |                            |
| 0         | 437          | WATER-BASED MUD                                    | 8.6                  | 8.8                  |                     |                             |    |                |                |                 |                            |
| 1084<br>7 | 2340<br>1    | OTHER : WATER-BASED OR OIL-BASED MUD               | 9.5                  | 12.5                 |                     |                             |    |                |                |                 |                            |

**Operator Name:** OXY USA INCORPORATED**Well Name:** PRECIOUS 30-18 FEDERAL COM**Well Number:** 34H

## Section 6 - Test, Logging, Coring

**List of production tests including testing procedures, equipment and safety measures:**

- GR from TD to surface (horizontal well - vertical portion of hole).
- Mud Log from Bone Spring to TD.
- CBL (Production String) to be run by completions.

**List of open and cased hole logs run in the well:**

GAMMA RAY LOG,MUD LOG/GEOLOGIC LITHOLOGY LOG,MUD LOG/GEOLOGICAL LITHOLOGY LOG,CEMENT BOND LOG,DIRECTIONAL SURVEY,

**Coring operation description for the well:**

No coring is planned at this time.

## Section 7 - Pressure

**Anticipated Bottom Hole Pressure:** 6812**Anticipated Surface Pressure:** 4506**Anticipated Bottom Hole Temperature(F):** 164**Anticipated abnormal pressures, temperatures, or potential geologic hazards?** NO**Describe:****Contingency Plans geohazards description:****Contingency Plans geohazards****Hydrogen Sulfide drilling operations plan required?** YES**Hydrogen sulfide drilling operations**

PRECIOUS30\_18FEDCOM34H\_H2S1\_20240730113558.pdf

PRECIOUS30\_18FEDCOM34H\_H2S2\_20240730113558.pdf

## Section 8 - Other Information

**Proposed horizontal/directional/multi-lateral plan submission:**

PRECIOUS30\_18FEDCOM34H\_DirectPlan\_20240730113612.pdf

**Other proposed operations facets description:****Other proposed operations facets attachment:**

PRECIOUS30\_18FEDCOM34H\_SpudRigData\_20240730113626.pdf

PRECIOUS30\_18FEDCOM34H\_NGMP\_WMP\_20240731065541.pdf

PRECIOUS30\_18FEDCOM34H\_2024\_KPLA\_Addendum\_WellboreSchematics\_20250205075954.pdf

PRECIOUS30\_18FEDCOM34H\_DrillPlan\_20250205080008.pdf

**Other Variance attachment:**

PRECIOUS30\_18FEDCOM34H\_Variance5MAAnnBOP\_20240730113704.pdf

PRECIOUS30\_18FEDCOM34H\_VarianceBradenheadCBL\_20240730113705.pdf

PRECIOUS30\_18FEDCOM34H\_VarianceOfflineCement\_20240730113705.pdf

**Operator Name:** OXY USA INCORPORATED

**Well Name:** PRECIOUS 30-18 FEDERAL COM

**Well Number:** 34H

PRECIOUS30\_18FEDCOM34H\_VarianceBOPBreakTesting\_20240730113705.pdf

PRECIOUS30\_18FEDCOM34H\_13inADAPT\_4S\_10x15\_20240730113713.pdf



U.S. Department of the Interior  
BUREAU OF LAND MANAGEMENT

## SUPO Data Report

03/17/2025

APD ID: 10400100179

Submission Date: 07/31/2024

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 34H

Well Type: OIL WELL

Well Work Type: Drill

Highlighted data  
reflects the most  
recent changes  
[Show Final Text](#)

### Section 1 - Existing Roads

Will existing roads be used? YES

Existing Road Map:

PRECIOUS30\_18FEDCOM34H\_ExistRoads\_20240730113746.pdf

Existing Road Purpose: ACCESS,FLUID TRANSPORT

Row(s) Exist? NO

#### ROW ID(s)

ID:

Do the existing roads need to be improved? NO

Existing Road Improvement Description:

Existing Road Improvement Attachment:

### Section 2 - New or Reconstructed Access Roads

Will new roads be needed? YES

New Road Map:

PRECIOUS30\_18FEDCOM34H\_NewRoads\_20240730113801.pdf

New road type: LOCAL

Length: 683

Feet

Width (ft.): 30

Max slope (%): 0

Max grade (%): 0

Army Corp of Engineers (ACOE) permit required? N

ACOE Permit Number(s):

New road travel width: 20

New road access erosion control: Watershed Diversion every 200' if needed.

New road access plan or profile prepared? N

New road access plan



**Operator Name:** OXY USA INCORPORATED**Well Name:** PRECIOUS 30-18 FEDERAL COM**Well Number:** 34H**Access road engineering design?** N**Access road engineering design****Turnout?** N**Access surfacing type:** OTHER**Access topsoil source:** ONSITE**Access surfacing type description:** Caliche**Access onsite topsoil source depth:** 0**Offsite topsoil source description:****Onsite topsoil removal process:** If available**Access other construction information:** None**Access miscellaneous information:****Number of access turnouts:****Access turnout map:**

### Drainage Control

**New road drainage crossing:** CULVERT**Drainage Control comments:** Watershed Diversion every 200' if needed.**Road Drainage Control Structures (DCS) description:** Watershed Diversion every 200' if needed.**Road Drainage Control Structures (DCS) attachment:**

### Access Additional Attachments

### Section 3 - Location of Existing Wells

**Existing Wells Map?** YES**Attach Well map:**

PRECIOUS30\_18FEDCOM34H\_ExistWells\_20240730113829.pdf

### Section 4 - Location of Existing and/or Proposed Production Facilities

**Submit or defer a Proposed Production Facilities plan?** SUBMIT**Production Facilities description:****Production Facilities map:**

PRECIOUS30\_18FEDCOM34H\_LeaseFacInfo\_20240730113841.pdf

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COMWell Number: 34H

Section 5 - Location and Types of Water Supply

Water Source Table

Water source type: GW WELL

Water source use type:

SURFACE CASING  
INTERMEDIATE/PRODUCTION CASING  
OTHER

Describe use type: Drilling

Source latitude:

Source longitude:

Source datum:

Water source permit type:

WATER WELL

Water source transport method:

PIPELINE  
TRUCKING

Source land ownership: COMMERCIAL

Source transportation land ownership: COMMERCIAL

Water source volume (barrels): 2000

Source volume (acre-feet): 0.25778618

Source volume (gal): 84000

**Water source and transportation**

PRECIOUS30\_18FEDCOM34H\_WtrCalichMap\_20240730113858.pdf

PRECIOUS30\_18FEDCOM34H\_WtrSrcMesq\_20240730113858.pdf

PRECIOUS30\_18FEDCOM34H\_WtrSrcGRR\_20240730113858.pdf

**Water source comments:** This well will be drilled using a combination of water mud systems. It will be obtained from commercial water stations (Gregory Rockhouse, Mesquite) in the area and will be hauled to location by transport truck using existing and proposed roads.

**New water well?** N

New Water Well Info

Well latitude:

Well Longitude:

Well datum:

Well target aquifer:

Est. depth to top of aquifer(ft):

Est thickness of aquifer:

Aquifer comments:

Aquifer documentation:

Well depth (ft):

Well casing type:

**Operator Name:** OXY USA INCORPORATED**Well Name:** PRECIOUS 30-18 FEDERAL COM**Well Number:** 34H**Well casing outside diameter (in.):****Well casing inside diameter (in.):****New water well casing?****Used casing source:****Drilling method:****Drill material:****Grout material:****Grout depth:****Casing length (ft.):****Casing top depth (ft.):****Well Production type:****Completion Method:****Water well additional information:****State appropriation permit:****Additional information attachment:**

## Section 6 - Construction Materials

**Using any construction materials:** YES

**Construction Materials description:** Primary - All caliche utilized for the drilling pad and proposed access road will be obtained from an existing BLM/State/Fee approved pit or from prevailing deposits found on the location. Will use BLM recommended extra caliche from other locations close by for roads, if available. Secondary - The secondary way of obtaining caliche to build locations and roads will be by turning over the location. This means, caliche will be obtained from the actual well site. A caliche permit will be obtained from BLM prior to pushing up any caliche. 2400 cubic yards is max amount of caliche needed for pad and roads. Amount will vary for each pad. The procedure below has been approved by BLM personnel: a. The top 6 of topsoil is pushed off and stockpiled along the side of the location. b. An approximate 120 X 120 area is used within the proposed well site to remove caliche. c. Subsoil is removed and piled alongside the 120 X 120 within the pad site. d. When caliche is found, material will be stockpiled within the pad site to build the location and road. e. Then subsoil is pushed back in the hole and caliche is spread accordingly across entire location and road. f. Once the well is drilled the stockpiled top soil will be used for interim reclamation and spread along areas where caliche is picked up and the location size is reduced. Neither caliche nor subsoil will be stockpiled outside of the well pad. Topsoil will be stockpiled along the edge of the pad.

**Construction Materials source location**

PRECIOUS30\_18FEDCOM34H\_WtrCalichMap\_20240730113913.pdf

## Section 7 - Methods for Handling

**Waste type:** DRILLING**Waste content description:** Water-Based Cuttings, Water-Based Mud, Oil-Based Cuttings, Oil-Based Mud, Produced Water**Amount of waste:** 1815 barrels**Waste disposal frequency :** Daily**Safe containment description:** Haul-Off Bins**Safe containmant attachment:****Waste disposal type:** HAUL TO COMMERCIAL FACILITY**Disposal location ownership:** COMMERCIAL**Disposal type description:**

**Disposal location description:** An approved facility that can process drill cuttings, drill fluids, flowback water, produced water, contaminated soils, and other non-hazardous wastes. Methods of Handling Waste Material: a. A closed loop system will be utilized consisting of above ground steel tanks and haul-off bins. Disposal of liquids, drilling fluids and cuttings will be disposed of at an approved facility. Solids-CRI, Liquids-

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 34H

Laguna b. All trash, junk and other waste material will be contained in trash cages or bins to prevent scattering. When the job is completed, all contents will be removed and disposed of in an approved sanitary landfill. c. The supplier, including broken sacks, will pick up slats remaining after completion of well. d. A Porto-john will be provided for the rig crews. This equipment will be properly maintained during the drilling and completion operations and will be removed when all operations are complete. e. Disposal of fluids to be transported will be by the following companies. TFH Ltd, Laguna SWD Facility

Reserve Pit

Reserve Pit being used? NO

Temporary disposal of produced water into reserve pit? NO

Reserve pit length (ft.)

Reserve pit width (ft.)

Reserve pit depth (ft.)

Reserve pit volume (cu. yd.)

Is at least 50% of the reserve pit in cut?

Reserve pit liner

Reserve pit liner specifications and installation description

Cuttings Area

Cuttings Area being used? NO

Are you storing cuttings on location? Y

Description of cuttings location A closed loop system will be utilized consisting of above ground steel tanks and haul-off bins. Disposal of liquids, drilling fluids and cuttings will be disposed of at an approved facility.

Cuttings area length (ft.)

Cuttings area width (ft.)

Cuttings area depth (ft.)

Cuttings area volume (cu. yd.)

Is at least 50% of the cuttings area in cut?

WCuttings area liner

Cuttings area liner specifications and installation description

Section 8 - Ancillary

Are you requesting any Ancillary Facilities?: N

Ancillary Facilities

Comments:

**Operator Name:** OXY USA INCORPORATED**Well Name:** PRECIOUS 30-18 FEDERAL COM**Well Number:** 34H

## Section 9 - Well Site

### Well Site Layout Diagram:

PRECIOUS30\_18FEDCOM34H\_WellsiteCL\_20240730113938.pdf

**Comments:**

## Section 10 - Plans for Surface Reclamation

**Type of disturbance:** New Surface Disturbance**Multiple Well Pad Name:** SNDDNS**Multiple Well Pad Number:** 3116

### Recontouring

PRECIOUS30\_18FEDCOM34H\_CutFill\_20240730113953.pdf

PRECIOUS30\_18FEDCOM34H\_SitePlan\_20240730113953.pdf

**Drainage/Erosion control construction:** Reclamation to be wind rowed as needed to control erosion**Drainage/Erosion control reclamation:** Reclamation to be wind rowed as needed to control erosion

|                                                     |                                                      |                                                     |
|-----------------------------------------------------|------------------------------------------------------|-----------------------------------------------------|
| <b>Well pad proposed disturbance (acres):</b> 7.58  | <b>Well pad interim reclamation (acres):</b> 1.66    | <b>Well pad long term disturbance (acres):</b> 5.91 |
| <b>Road proposed disturbance (acres):</b> 0.47      | <b>Road interim reclamation (acres):</b> 0.16        | <b>Road long term disturbance (acres):</b> 0.31     |
| <b>Powerline proposed disturbance (acres):</b> 7.92 | <b>Powerline interim reclamation (acres):</b> 7.92   | <b>Powerline long term disturbance (acres):</b> 0   |
| <b>Pipeline proposed disturbance (acres):</b> 25.11 | <b>Pipeline interim reclamation (acres):</b> 16.74   | <b>Pipeline long term disturbance (acres):</b> 8.37 |
| <b>Other proposed disturbance (acres):</b> 0        | <b>Other interim reclamation (acres):</b> 0          | <b>Other long term disturbance (acres):</b> 0       |
| <b>Total proposed disturbance:</b> 41.08            | <b>Total interim reclamation:</b> 26.479999999999997 | <b>Total long term disturbance:</b> 14.59           |

**Disturbance Comments:** See Below

**Reconstruction method:** If the well is deemed commercially productive, caliche from the areas of the pad site not required for operations will be reclaimed. The original topsoil will be returned to the area of the drill pad not necessary to operate the well. These unused areas of the drill pad will be contoured, as close as possible, to match the original topography, and the area will be seeded with an approved BLM mixture to re-establish vegetation. After concluding the drilling and/or completion operations, if the well is found non-commercial, the caliche will be removed from the pad and transported to the original caliche pit or used for other drilling locations. The road will be reclaimed as directed by the BLM. The original topsoil will again be returned to the pad and contoured, as close as possible, to the original topography, and the area will be seeded with an approved BLM mixture to re-establish vegetation.

**Topsoil redistribution:** The original topsoil will be returned to the area of the drill pad not necessary to operate the well.**Soil treatment:** To be determined by the BLM.**Existing Vegetation at the well pad:** To be determined by the BLM at Onsite.**Existing Vegetation at the well pad**

**Operator Name:** OXY USA INCORPORATED**Well Name:** PRECIOUS 30-18 FEDERAL COM**Well Number:** 34H**Existing Vegetation Community at the road:** To be determined by the BLM at Onsite.**Existing Vegetation Community at the road****Existing Vegetation Community at the pipeline:** To be determined by the BLM at Onsite.**Existing Vegetation Community at the pipeline****Existing Vegetation Community at other disturbances:** To be determined by the BLM at Onsite.**Existing Vegetation Community at other disturbances****Non native seed used?** N**Non native seed description:****Seedling transplant description:****Will seedlings be transplanted for this project?** N**Seedling transplant description****Will seed be harvested for use in site reclamation?** N**Seed harvest description:****Seed harvest description attachment:****Seed****Seed Table****Seed Summary****Total pounds/Acre:****Seed Type****Pounds/Acre****Seed reclamation****Operator Contact/Responsible Official****First Name:** JIM**Last Name:** WILSON**Phone:** (575)631-2442**Email:** JIM\_WILSON@OXY.COM**Seedbed prep:****Seed BMP:****Seed method:****Existing invasive species?** N**Existing invasive species treatment description:**

**Operator Name:** OXY USA INCORPORATED

**Well Name:** PRECIOUS 30-18 FEDERAL COM

**Well Number:** 34H

**Existing invasive species treatment**

**Weed treatment plan description:** To be determined by the BLM.

**Weed treatment plan**

**Monitoring plan description:** To be determined by the BLM.

**Monitoring plan**

**Success standards:** To be determined by the BLM.

**Pit closure description:** NA

**Pit closure attachment:**

## Section 11 - Surface Ownership

**Disturbance type:** WELL PAD

**Describe:**

**Surface Owner:** BUREAU OF LAND MANAGEMENT

**Other surface owner description:**

**BIA Local Office:**

**BOR Local Office:**

**COE Local Office:**

**DOD Local Office:**

**NPS Local Office:**

**State Local Office:**

**Military Local Office:**

**USFWS Local Office:**

**Other Local Office:**

**USFS Region:**

**USFS Forest/Grassland:**

**USFS Ranger District:**

**Disturbance type:** PIPELINE

**Describe:**

**Surface Owner:** BUREAU OF LAND MANAGEMENT

**Other surface owner description:**

**BIA Local Office:**

**Operator Name:** OXY USA INCORPORATED

**Well Name:** PRECIOUS 30-18 FEDERAL COM

**Well Number:** 34H

**BOR Local Office:**

**COE Local Office:**

**DOD Local Office:**

**NPS Local Office:**

**State Local Office:**

**Military Local Office:**

**USFWS Local Office:**

**Other Local Office:**

**USFS Region:**

**USFS Forest/Grassland:**

**USFS Ranger District:**

**Disturbance type:** OTHER

**Describe:** Electric Line

**Surface Owner:** BUREAU OF LAND MANAGEMENT

**Other surface owner description:**

**BIA Local Office:**

**BOR Local Office:**

**COE Local Office:**

**DOD Local Office:**

**NPS Local Office:**

**State Local Office:**

**Military Local Office:**

**USFWS Local Office:**

**Other Local Office:**

**USFS Region:**

**USFS Forest/Grassland:**

**USFS Ranger District:**



**Operator Name:** OXY USA INCORPORATED**Well Name:** PRECIOUS 30-18 FEDERAL COM**Well Number:** 34H**Disturbance type:** NEW ACCESS ROAD**Describe:****Surface Owner:** BUREAU OF LAND MANAGEMENT**Other surface owner description:****BIA Local Office:****BOR Local Office:****COE Local Office:****DOD Local Office:****NPS Local Office:****State Local Office:****Military Local Office:****USFWS Local Office:****Other Local Office:****USFS Region:****USFS Forest/Grassland:****USFS Ranger District:**

## Section 12 - Other

**Right of Way needed?** Y**Use APD as ROW?** Y**ROW Type(s):** 281001 ROW - ROADS,285003 ROW – POWER TRANS,288100 ROW – O&G Pipeline,289001 ROW- O&G Well Pad**ROW****SUPO Additional Information:** Permian Basin MOA - To be submitted after APD acceptance. GIS Shapefiles available for BLM download from shared FTP site after APD submittal.**Use a previously conducted onsite?** N**Previous Onsite information:****Other SUPO**

PRECIOUS30\_18FEDCOM34H\_StakeForm\_20240730114036.pdf

PRECIOUS30\_18FEDCOM34H\_NGMP\_WMP\_20240730114036.pdf

**Operator Name:** OXY USA INCORPORATED

**Well Name:** PRECIOUS 30-18 FEDERAL COM

**Well Number:** 34H

PRECIOUS30\_18FEDCOM34H\_AM\_20240730114036.pdf

PRECIOUS30\_18FEDCOM34H\_VM\_20240730114036.pdf



U.S. Department of the Interior  
BUREAU OF LAND MANAGEMENT

## PWD Data Report

03/17/2025

APD ID: 10400100179

Submission Date: 07/31/2024

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 34H

Well Type: OIL WELL

Well Work Type: Drill

### Section 1 - General

Would you like to address long-term produced water disposal? NO

### Section 2 - Lined

Would you like to utilize Lined Pit PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit

Pit liner description:

Pit liner manufacturers

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule

Lined pit reclamation description:

Lined pit reclamation

Leak detection system description:

Leak detection system

**Operator Name:** OXY USA INCORPORATED

**Well Name:** PRECIOUS 30-18 FEDERAL COM

**Well Number:** 34H

**Lined pit Monitor description:**

**Lined pit Monitor**

**Lined pit: do you have a reclamation bond for the pit?**

**Is the reclamation bond a rider under the BLM bond?**

**Lined pit bond number:**

**Lined pit bond amount:**

**Additional bond information**

### Section 3 - Unlined

**Would you like to utilize Unlined Pit PWD options?** N

**Produced Water Disposal (PWD) Location:**

**PWD disturbance (acres):**

**PWD surface owner:**

**Unlined pit PWD on or off channel:**

**Unlined pit PWD discharge volume (bbl/day):**

**Unlined pit**

**Precipitated solids disposal:**

**Describe precipitated solids disposal:**

**Precipitated solids disposal**

**Unlined pit precipitated solids disposal schedule:**

**Unlined pit precipitated solids disposal schedule**

**Unlined pit reclamation description:**

**Unlined pit reclamation**

**Unlined pit Monitor description:**

**Unlined pit Monitor**

**Do you propose to put the produced water to beneficial use?**

**Beneficial use user**

**Estimated depth of the shallowest aquifer (feet):**

**Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?**

**TDS lab results:**

**Geologic and hydrologic**

**State**

**Unlined Produced Water Pit Estimated**

**Unlined pit: do you have a reclamation bond for the pit?**

**Operator Name:** OXY USA INCORPORATED**Well Name:** PRECIOUS 30-18 FEDERAL COM**Well Number:** 34H**Is the reclamation bond a rider under the BLM bond?****Unlined pit bond number:****Unlined pit bond amount:****Additional bond information****Section 4 -****Would you like to utilize Injection PWD options?** N**Produced Water Disposal (PWD) Location:****PWD surface owner:****PWD disturbance (acres):****Injection PWD discharge volume (bbl/day):****Injection well mineral owner:****Injection well type:****Injection well number:****Injection well name:****Assigned injection well API number?****Injection well API number:****Injection well new surface disturbance (acres):****Minerals protection information:****Mineral protection****Underground Injection Control (UIC) Permit?****UIC Permit****Section 5 - Surface****Would you like to utilize Surface Discharge PWD options?** N**Produced Water Disposal (PWD) Location:****PWD surface owner:****PWD disturbance (acres):****Surface discharge PWD discharge volume (bbl/day):****Surface Discharge NPDES Permit?****Surface Discharge NPDES Permit attachment:****Surface Discharge site facilities information:****Surface discharge site facilities map:****Section 6 -****Would you like to utilize Other PWD options?** N**Produced Water Disposal (PWD) Location:****PWD surface owner:****PWD disturbance (acres):****Other PWD discharge volume (bbl/day):**

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 34H

Other PWD type description:

Other PWD type

Have other regulatory requirements been met?

Other regulatory requirements



U.S. Department of the Interior  
BUREAU OF LAND MANAGEMENT

## Bond Info Data

03/17/2025

APD ID: 10400100179

Submission Date: 07/31/2024

Operator Name: OXY USA INCORPORATED

Well Name: PRECIOUS 30-18 FEDERAL COM

Well Number: 34H

Well Type: OIL WELL

Well Work Type: Drill

Highlighted data  
reflects the most  
recent changes  
[Show Final Text](#)

### Bond

Federal/Indian APD: FED

BLM Bond number: ESB000226

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information

Form 3160-3  
(June 2015)FORM APPROVED  
OMB No. 1004-0137  
Expires: January 31, 2018

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
**APPLICATION FOR PERMIT TO DRILL OR REENTER**

|                                                                                                                                                                                                                                                                                                                                                                                                 |                                                            |                                                                                                                                                                                                                              |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER<br>1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other<br>1c. Type of Completion: <input type="checkbox"/> Hydraulic Fracturing <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone |                                                            | 5. Lease Serial No.<br><b>NMNM21640</b><br>6. If Indian, Allottee or Tribe Name<br><br>7. If Unit or CA Agreement, Name and No.<br><br>8. Lease Name and Well No.<br><br><b>PRECIOUS 30-18 FEDERAL COM</b><br><br><b>34H</b> |
| 2. Name of Operator<br><b>OXY USA INCORPORATED</b>                                                                                                                                                                                                                                                                                                                                              |                                                            | 9. API Well No.<br><br><b>30-015-56417</b>                                                                                                                                                                                   |
| 3a. Address<br><b>P.O. BOX 1002, TUPMAN, CA 93276-1002</b>                                                                                                                                                                                                                                                                                                                                      | 3b. Phone No. (include area code)<br><b>(661) 763-6046</b> | 10. Field and Pool, or Exploratory<br><b>INGLE WELLS/BONE SPRING</b>                                                                                                                                                         |
| 4. Location of Well (Report location clearly and in accordance with any State requirements. *)<br>At surface <b>NENE / 100 FNL / 1145 FEL / LAT 32.267901 / LONG -103.81206</b><br>At proposed prod. zone <b>NESE / 2625 FSL / 700 FEL / LAT 32.304416 / LONG -103.810652</b>                                                                                                                   |                                                            | 11. Sec., T. R. M. or Blk. and Survey or Area<br><b>SEC 31/T23S/R31E/NMP</b>                                                                                                                                                 |
| 14. Distance in miles and direction from nearest town or post office*<br><b>15 miles</b>                                                                                                                                                                                                                                                                                                        |                                                            | 12. County or Parish<br><b>EDDY</b>                                                                                                                                                                                          |
| 15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) <b>100 feet</b>                                                                                                                                                                                                                                                           |                                                            | 16. No of acres in lease<br><br>17. Spacing Unit dedicated to this well<br><b>800.0</b>                                                                                                                                      |
| 18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. <b>30 feet</b>                                                                                                                                                                                                                                                                       |                                                            | 20. BLM/BIA Bond No. in file<br><b>FED: ESB000226</b>                                                                                                                                                                        |
| 21. Elevations (Show whether DF, KDB, RT, GL, etc.)<br><b>3345 feet</b>                                                                                                                                                                                                                                                                                                                         | 22. Approximate date work will start*<br><b>08/11/2025</b> | 23. Estimated duration<br><b>45 days</b>                                                                                                                                                                                     |
| 24. Attachments                                                                                                                                                                                                                                                                                                                                                                                 |                                                            |                                                                                                                                                                                                                              |

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- |                                                                                                                                                                                                                           |                                                                                                                                                                                                                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1. Well plat certified by a registered surveyor.<br>2. A Drilling Plan.<br>3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).<br>5. Operator certification.<br>6. Such other site specific information and/or plans as may be requested by the BLM. |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|                                                                                                        |                                                                 |                           |
|--------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|---------------------------|
| 25. Signature<br>(Electronic Submission)                                                               | Name (Printed/Typed)<br><b>RONI MATHEW / Ph: (713) 366-5716</b> | Date<br><b>07/31/2024</b> |
| Title<br><b>REGULATORY SPECIALIST</b>                                                                  |                                                                 |                           |
| Approved by (Signature)<br>(Electronic Submission)                                                     | Name (Printed/Typed)<br><b>CODY LAYTON / Ph: (575) 234-5959</b> | Date<br><b>03/05/2025</b> |
| Title<br><b>Assistant Field Manager Lands &amp; Minerals</b><br>Office<br><b>Carlsbad Field Office</b> |                                                                 |                           |

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.  
 Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

\*(Instructions on page 2)





## Additional Operator Remarks

### Location of Well

0. SHL: NENE / 100 FNL / 1145 FEL / TWSP: 23S / RANGE: 31E / SECTION: 31 / LAT: 32.267901 / LONG: -103.81206 ( TVD: 0 feet, MD: 0 feet )  
PPP: SENE / 2642 FSL / 700 FEL / TWSP: 23S / RANGE: 31E / SECTION: 30 / LAT: 32.275436 / LONG: -103.810627 ( TVD: 10480 feet, MD: 12856 feet )  
PPP: NENE / 1318 FNL / 699 FEL / TWSP: 23S / RANGE: 31E / SECTION: 19 / LAT: 32.29358 / LONG: -103.810643 ( TVD: 10480 feet, MD: 19458 feet )  
PPP: SESE / 100 FSL / 700 FEL / TWSP: 23S / RANGE: 31E / SECTION: 30 / LAT: 32.268451 / LONG: -103.810621 ( TVD: 10480 feet, MD: 10847 feet )  
PPP: NESE / 1321 FSL / 701 FEL / TWSP: 23S / RANGE: 31E / SECTION: 19 / LAT: 32.286328 / LONG: -103.810636 ( TVD: 10480 feet, MD: 16819 feet )  
BHL: NESE / 2625 FSL / 700 FEL / TWSP: 23S / RANGE: 31E / SECTION: 18 / LAT: 32.304416 / LONG: -103.810652 ( TVD: 10480 feet, MD: 23401 feet )

### BLM Point of Contact

Name: TENILLE C MOLINA  
Title: Land Law Examiner  
Phone: (575) 234-2224  
Email: TCMOLINA@BLM.GOV

|                                                          |                                                                                                     |                                                                                                                                         |                      |  |
|----------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|----------------------|--|
| C-102<br><br>Submit Electronically<br>Via OCD Permitting | State of New Mexico<br>Energy, Minerals & Natural Resources Department<br>OIL CONSERVATION DIVISION |                                                                                                                                         | Revised July 9, 2024 |  |
|                                                          | Submittal<br>Type:                                                                                  | <input checked="" type="checkbox"/> Initial Submittal<br><input type="checkbox"/> Amended Report<br><input type="checkbox"/> As Drilled |                      |  |
|                                                          |                                                                                                     |                                                                                                                                         |                      |  |

## WELL LOCATION INFORMATION

|                                                                                                                                                        |                                                |                                              |                                                                                                                                                        |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| API Number<br>30-015 -56417                                                                                                                            | Pool Code<br>33740                             | Pool Name<br><b>INGLE WELLS; BONE SPRING</b> |                                                                                                                                                        |  |
| Property Code<br>326187                                                                                                                                | Property Name<br><b>PRECIOUS 30_18 FED COM</b> |                                              | Well Number<br>34H                                                                                                                                     |  |
| OGRID No.<br>16696                                                                                                                                     | Operator Name<br><b>OXY USA INC.</b>           |                                              | Ground Level Elevation<br>3345.1'                                                                                                                      |  |
| Surface Owner: <input type="checkbox"/> State <input type="checkbox"/> Fee <input type="checkbox"/> Tribal <input checked="" type="checkbox"/> Federal |                                                |                                              | Mineral Owner: <input type="checkbox"/> State <input type="checkbox"/> Fee <input type="checkbox"/> Tribal <input checked="" type="checkbox"/> Federal |  |

## Surface Location

|                |                      |                        |                     |     |                                 |                                  |                              |                                 |                       |
|----------------|----------------------|------------------------|---------------------|-----|---------------------------------|----------------------------------|------------------------------|---------------------------------|-----------------------|
| UL<br><b>A</b> | Section<br><b>31</b> | Township<br><b>23S</b> | Range<br><b>31E</b> | Lot | Ft. from N/S<br><b>100' FNL</b> | Ft. from E/W<br><b>1145' FEL</b> | Latitude<br><b>32.267901</b> | Longitude<br><b>-103.812060</b> | County<br><b>EDDY</b> |
|----------------|----------------------|------------------------|---------------------|-----|---------------------------------|----------------------------------|------------------------------|---------------------------------|-----------------------|

## Bottom Hole Location

|                |                      |                        |                     |     |                                  |                                 |                              |                                 |                       |
|----------------|----------------------|------------------------|---------------------|-----|----------------------------------|---------------------------------|------------------------------|---------------------------------|-----------------------|
| UL<br><b>I</b> | Section<br><b>18</b> | Township<br><b>23S</b> | Range<br><b>31E</b> | Lot | Ft. from N/S<br><b>2625' FSL</b> | Ft. from E/W<br><b>700' FEL</b> | Latitude<br><b>32.304416</b> | Longitude<br><b>-103.810652</b> | County<br><b>EDDY</b> |
|----------------|----------------------|------------------------|---------------------|-----|----------------------------------|---------------------------------|------------------------------|---------------------------------|-----------------------|

|                               |                                          |                                          |                                                                                                    |                    |
|-------------------------------|------------------------------------------|------------------------------------------|----------------------------------------------------------------------------------------------------|--------------------|
| Dedicated Acres<br><b>800</b> | Infill or Defining Well<br><b>INFILL</b> | Defining Well API<br><b>30-015-46448</b> | Overlapping Spacing Unit (Y/N)<br><b>NO</b>                                                        | Consolidation Code |
| Order Numbers.                |                                          |                                          | Well setbacks are under Common Ownership: <input type="checkbox"/> Yes <input type="checkbox"/> No |                    |

## Kick Off Point (KOP)

|                |                      |                        |                     |     |                                |                                 |                              |                                 |                       |
|----------------|----------------------|------------------------|---------------------|-----|--------------------------------|---------------------------------|------------------------------|---------------------------------|-----------------------|
| UL<br><b>P</b> | Section<br><b>30</b> | Township<br><b>23S</b> | Range<br><b>31E</b> | Lot | Ft. from N/S<br><b>50' FSL</b> | Ft. from E/W<br><b>700' FEL</b> | Latitude<br><b>32.268313</b> | Longitude<br><b>-103.810620</b> | County<br><b>EDDY</b> |
|----------------|----------------------|------------------------|---------------------|-----|--------------------------------|---------------------------------|------------------------------|---------------------------------|-----------------------|

## First Take Point (FTP)

|                |                      |                        |                     |     |                                 |                                 |                              |                                 |                       |
|----------------|----------------------|------------------------|---------------------|-----|---------------------------------|---------------------------------|------------------------------|---------------------------------|-----------------------|
| UL<br><b>P</b> | Section<br><b>30</b> | Township<br><b>23S</b> | Range<br><b>31E</b> | Lot | Ft. from N/S<br><b>100' FSL</b> | Ft. from E/W<br><b>700' FEL</b> | Latitude<br><b>32.268451</b> | Longitude<br><b>-103.810621</b> | County<br><b>EDDY</b> |
|----------------|----------------------|------------------------|---------------------|-----|---------------------------------|---------------------------------|------------------------------|---------------------------------|-----------------------|

## Last Take Point (LTP)

|                |                      |                        |                     |     |                                  |                                 |                              |                                 |                       |
|----------------|----------------------|------------------------|---------------------|-----|----------------------------------|---------------------------------|------------------------------|---------------------------------|-----------------------|
| UL<br><b>I</b> | Section<br><b>18</b> | Township<br><b>23S</b> | Range<br><b>31E</b> | Lot | Ft. from N/S<br><b>2545' FSL</b> | Ft. from E/W<br><b>700' FEL</b> | Latitude<br><b>32.304196</b> | Longitude<br><b>-103.810652</b> | County<br><b>EDDY</b> |
|----------------|----------------------|------------------------|---------------------|-----|----------------------------------|---------------------------------|------------------------------|---------------------------------|-----------------------|


|                                           |                                                                                                    |                                           |
|-------------------------------------------|----------------------------------------------------------------------------------------------------|-------------------------------------------|
| Unitized Area or Area of Uniform Interest | Spacing Unit Type <input checked="" type="checkbox"/> Horizontal <input type="checkbox"/> Vertical | Ground Floor Elevation:<br><b>3345.1'</b> |
|-------------------------------------------|----------------------------------------------------------------------------------------------------|-------------------------------------------|

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <b>OPERATOR CERTIFICATIONS</b><br><br><i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</i><br><br><i>If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.</i><br><br><i>Sara Guthrie</i> 3/18/2025<br>Signature      Date<br><b>Sara Guthrie</b><br>Printed Name<br>sara_guthrie@oxy.com<br>Email Address |  | <b>SURVEYOR CERTIFICATIONS</b><br><br><i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</i><br><br>MAY 11, 2023<br>Date of Survey<br>Signature and Seal of Professional Surveyor:<br><br>Signature and Seal of Professional Surveyor<br>Certificate Number<br><b>23782</b><br>Date of Survey<br><b>May 11, 2023</b><br>Certificate Number: |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|

Note: No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

This grid represents a standard section. You may superimpose a non-standard section, or larger area, over this grid. Operators must outline the dedicated acreage in a red box, clearly show the well surface location and bottom hole location, if it is directionally drilled, with the dimensions from the section lines in the cardinal directions. If this is a horizontal wellbore show on this plat the location of the First Take Point and Last Take Point, and the point within the Completed interval (other than the First Take Point or Last Take Point) that is closest to any outer boundary of the tract.

Surveyors shall use the latest United States government survey or dependent resurvey. Well locations will be in reference to the New Mexico Principal Meridian. If the land is not surveyed, contact the OCD Engineering Bureau. Independent subdivision surveys will not be acceptable.

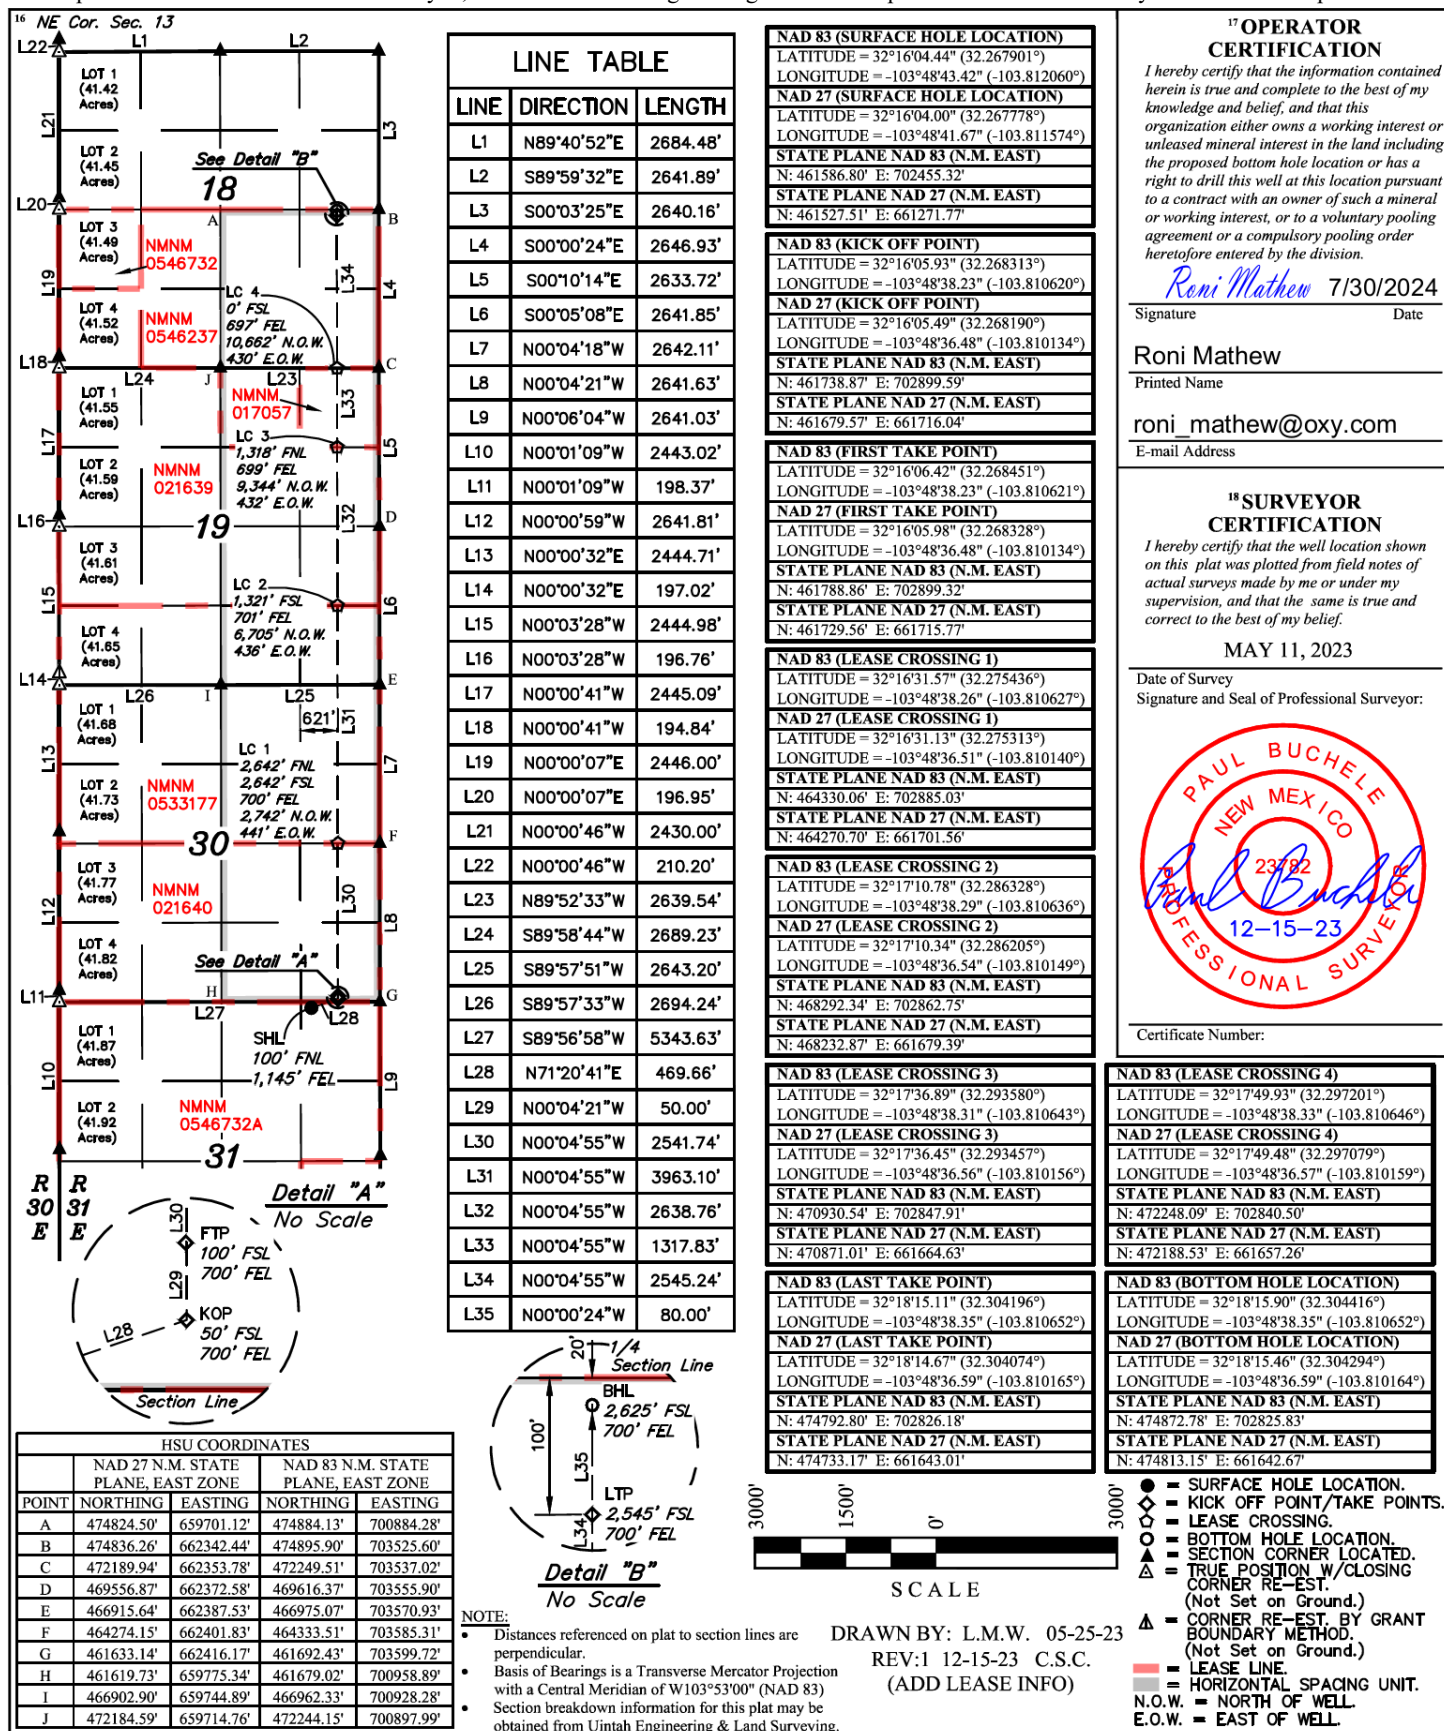

State of New Mexico  
Energy, Minerals and Natural Resources Department

Submit Electronically  
Via E-permitting

Oil Conservation Division  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

## NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

### Section 1 – Plan Description

Effective May 25, 2021

**I. Operator:** OXY USA INC. **OGRID:** 16696 **Date:** 0 6/ 2 5/ 2 4

**II. Type:** ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: \_\_\_\_\_

**III. Well(s):** Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

| Well Name    | API | ULSTR | Footages | Anticipated Oil BBL/D | Anticipated Gas MCF/D | Anticipated Produced Water BBL/D |
|--------------|-----|-------|----------|-----------------------|-----------------------|----------------------------------|
| SEE ATTACHED |     |       |          |                       |                       |                                  |
|              |     |       |          |                       |                       |                                  |

**IV. Central Delivery Point Name:** PRECIOUS CTB [See 19.15.27.9(D)(1) NMAC]

**V. Anticipated Schedule:** Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

| Well Name    | API | Spud Date | TD Reached Date | Completion Commencement Date | Initial Flow Back Date | First Production Date |
|--------------|-----|-----------|-----------------|------------------------------|------------------------|-----------------------|
| SEE ATTACHED |     |           |                 |                              |                        |                       |
|              |     |           |                 |                              |                        |                       |

**VI. Separation Equipment:** ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

**VII. Operational Practices:** ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

**VIII. Best Management Practices:** ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

**Section 2 – Enhanced Plan**  
**EFFECTIVE APRIL 1, 2022**

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

**IX. Anticipated Natural Gas Production:**

| Well | API | Anticipated Average Natural Gas Rate MCF/D | Anticipated Volume of Natural Gas for the First Year MCF |
|------|-----|--------------------------------------------|----------------------------------------------------------|
|      |     |                                            |                                                          |
|      |     |                                            |                                                          |

**X. Natural Gas Gathering System (NGGS):**

| Operator | System | ULSTR of Tie-in | Anticipated Gathering Start Date | Available Maximum Daily Capacity of System Segment Tie-in |
|----------|--------|-----------------|----------------------------------|-----------------------------------------------------------|
|          |        |                 |                                  |                                                           |
|          |        |                 |                                  |                                                           |

**XI. Map.** ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

**XII. Line Capacity.** The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

**XIII. Line Pressure.** Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

**XIV. Confidentiality:** ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

### **Section 3 - Certifications**

**Effective May 25, 2021**

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

***If Operator checks this box, Operator will select one of the following:***

**Well Shut-In.** ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

**Venting and Flaring Plan.** ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

### **Section 4 - Notices**

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.



Page 8

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

|                                                                                                  |
|--------------------------------------------------------------------------------------------------|
| Signature: <i>Roni Mathew</i>                                                                    |
| Printed Name: Roni Mathew                                                                        |
| Title: Regulatory Advisor                                                                        |
| E-mail Address: roni_mathew@oxy.com                                                              |
| Date: 06/25/2024                                                                                 |
| Phone: 713-215-7827                                                                              |
| <b>OIL CONSERVATION DIVISION</b><br><b>(Only applicable when submitted as a standalone form)</b> |
| Approved By:                                                                                     |
| Title:                                                                                           |
| Approval Date:                                                                                   |
| Conditions of Approval:                                                                          |

## III. Well(s)

| WELL NAME                   | API     | WELL LOCATION (U | FOOTAGES           | ANTICIPATED<br>OIL BBL/D | ANTICIPATED<br>GAS MCF/D | ANTICIPATED<br>PROD WATER BBL/D |
|-----------------------------|---------|------------------|--------------------|--------------------------|--------------------------|---------------------------------|
| PRECIOUS 30_18 FED COM 11H  | PENDING | C-31-23S-31E     | 128 FNL X 2361 FWL | 1100                     | 3000                     | 3300                            |
| PRECIOUS 30_18 FED COM 12H  | PENDING | C-31-23S-31E     | 128 FNL X 2391 FWL | 1100                     | 3000                     | 3300                            |
| PRECIOUS 30_18 FED COM 13H  | PENDING | B-31-23S-31E     | 339 FNL X 2151 FEL | 1100                     | 3000                     | 3300                            |
| PRECIOUS 30_18 FED COM 14H  | PENDING | B-31-23S-31E     | 369 FNL X 2151 FEL | 1100                     | 3000                     | 3300                            |
| PRECIOUS 30_18 FED COM 173H | PENDING | C-31-23S-31E     | 128 FNL X 2221 FWL | 2300                     | 3400                     | 4100                            |
| PRECIOUS 30_18 FED COM 174H | PENDING | C-31-23S-31E     | 128 FNL X 2251 FWL | 2300                     | 3400                     | 4100                            |
| PRECIOUS 30_18 FED COM 21H  | PENDING | 1-31-23S-31E     | 569 FNL X 380 FWL  | 1600                     | 7,500                    | 4600                            |
| PRECIOUS 30_18 FED COM 22H  | PENDING | 1-31-23S-31E     | 569 FNL X 410 FWL  | 1600                     | 7,500                    | 4600                            |
| PRECIOUS 30_18 FED COM 23H  | PENDING | 1-31-23S-31E     | 569 FNL X 440 FWL  | 1600                     | 7,500                    | 4600                            |
| PRECIOUS 30_18 FED COM 24H  | PENDING | A-31-23S-31E     | 100 FNL X 1035 FEL | 1600                     | 7,500                    | 4600                            |
| PRECIOUS 30_18 FED COM 25H  | PENDING | A-31-23S-31E     | 100 FNL X 1005 FEL | 1600                     | 7,500                    | 4600                            |
| PRECIOUS 30_18 FED COM 26H  | PENDING | A-31-23S-31E     | 100 FNL X 975 FEL  | 1600                     | 7,500                    | 4600                            |
| PRECIOUS 30_18 FED COM 33H  | PENDING | A-31-23S-31E     | 100 FNL X 1175 FEL | 2300                     | 3400                     | 4100                            |
| PRECIOUS 30_18 FED COM 34H  | PENDING | A-31-23S-31E     | 100 FNL X 1145 FEL | 2300                     | 3400                     | 4100                            |
| PRECIOUS 30_18 FED COM 41H  | PENDING | 1-31-23S-31E     | 570 FNL X 1070 FWL | 850                      | 6,500                    | 4200                            |
| PRECIOUS 30_18 FED COM 42H  | PENDING | 1-31-23S-31E     | 570 FNL X 1100 FWL | 850                      | 6,500                    | 4200                            |
| PRECIOUS 30_18 FED COM 45H  | PENDING | A-31-23S-31E     | 519 FNL X 1235 FEL | 850                      | 6,500                    | 4200                            |
| PRECIOUS 30_18 FED COM 46H  | PENDING | A-31-23S-31E     | 519 FNL X 1205 FEL | 850                      | 6,500                    | 4200                            |
| PRECIOUS 30_18 FED COM 51H  | PENDING | 1-31-23S-31E     | 130 FNL X 726 FWL  | 850                      | 6,500                    | 4200                            |
| PRECIOUS 30_18 FED COM 52H  | PENDING | 1-31-23S-31E     | 130 FNL X 756 FWL  | 850                      | 6,500                    | 4200                            |
| PRECIOUS 30_18 FED COM 53H  | PENDING | C-31-23S-31E     | 568 FNL X 2503 FWL | 850                      | 6,500                    | 4200                            |
| PRECIOUS 30_18 FED COM 54H  | PENDING | C-31-23S-31E     | 568 FNL X 2563 FWL | 850                      | 6,500                    | 4200                            |
| PRECIOUS 30_18 FED COM 55H  | PENDING | 1-31-23S-31E     | 130 FNL X 786 FWL  | 850                      | 6,500                    | 4200                            |
| PRECIOUS 30_18 FED COM 56H  | PENDING | C-31-23S-31E     | 568 FNL X 2533 FWL | 850                      | 6,500                    | 4200                            |



**V. Anticipated Schedule**

| Well Name                   | API     | Spud Date  | TD Reached Date | Completion Commencement Date | Initial Flow Back Date | First Production Date |
|-----------------------------|---------|------------|-----------------|------------------------------|------------------------|-----------------------|
| PRECIOUS 30_18 FED COM 11H  | PENDING | TBD        | TBD             | TBD                          | TBD                    | TBD                   |
| PRECIOUS 30_18 FED COM 12H  | PENDING | TBD        | TBD             | TBD                          | TBD                    | TBD                   |
| PRECIOUS 30_18 FED COM 13H  | PENDING | TBD        | TBD             | TBD                          | TBD                    | TBD                   |
| PRECIOUS 30_18 FED COM 14H  | PENDING | TBD        | TBD             | TBD                          | TBD                    | TBD                   |
| PRECIOUS 30_18 FED COM 173H | PENDING | TBD        | TBD             | TBD                          | TBD                    | TBD                   |
| PRECIOUS 30_18 FED COM 174H | PENDING | TBD        | TBD             | TBD                          | TBD                    | TBD                   |
| PRECIOUS 30_18 FED COM 21H  | PENDING | 7/20/2025  | TBD             | TBD                          | TBD                    | TBD                   |
| PRECIOUS 30_18 FED COM 22H  | PENDING | 7/20/2025  | TBD             | TBD                          | TBD                    | TBD                   |
| PRECIOUS 30_18 FED COM 23H  | PENDING | 7/20/2025  | TBD             | TBD                          | TBD                    | TBD                   |
| PRECIOUS 30_18 FED COM 24H  | PENDING | 7/20/2025  | TBD             | TBD                          | TBD                    | TBD                   |
| PRECIOUS 30_18 FED COM 25H  | PENDING | 7/20/2025  | TBD             | TBD                          | TBD                    | TBD                   |
| PRECIOUS 30_18 FED COM 26H  | PENDING | 7/20/2025  | TBD             | TBD                          | TBD                    | TBD                   |
| PRECIOUS 30_18 FED COM 33H  | PENDING | TBD        | TBD             | TBD                          | TBD                    | TBD                   |
| PRECIOUS 30_18 FED COM 34H  | PENDING | TBD        | TBD             | TBD                          | TBD                    | TBD                   |
| PRECIOUS 30_18 FED COM 41H  | PENDING | TBD        | TBD             | TBD                          | TBD                    | TBD                   |
| PRECIOUS 30_18 FED COM 42H  | PENDING | TBD        | TBD             | TBD                          | TBD                    | TBD                   |
| PRECIOUS 30_18 FED COM 45H  | PENDING | 10/11/2024 | TBD             | TBD                          | TBD                    | TBD                   |
| PRECIOUS 30_18 FED COM 46H  | PENDING | 10/12/2024 | TBD             | TBD                          | TBD                    | TBD                   |
| PRECIOUS 30_18 FED COM 51H  | PENDING | 10/10/2024 | TBD             | TBD                          | TBD                    | TBD                   |
| PRECIOUS 30_18 FED COM 52H  | PENDING | 10/10/2024 | TBD             | TBD                          | TBD                    | TBD                   |
| PRECIOUS 30_18 FED COM 53H  | PENDING | 10/10/2024 | TBD             | TBD                          | TBD                    | TBD                   |
| PRECIOUS 30_18 FED COM 54H  | PENDING | TBD        | TBD             | TBD                          | TBD                    | TBD                   |
| PRECIOUS 30_18 FED COM 55H  | PENDING | TBD        | TBD             | TBD                          | TBD                    | TBD                   |
| PRECIOUS 30_18 FED COM 56H  | PENDING | TBD        | TBD             | TBD                          | TBD                    | TBD                   |

## **Part VI. Separation Equipment**

Operator will size the flowback separator to handle 12,000 Bbls of fluid and 6-10MMscfd which is more than the expected peak rates for these wells. Each separator is rated to 1440psig, and pressure control valves and automated communication will cause the wells to shut in in the event of an upset at the facility, therefore no gas will be flared on pad during an upset. Current Oxy practices avoid use of flare or venting on pad, therefore if there is an upset or emergency condition at the facility, the wells will immediately shut down, and reassume production once the condition has cleared.

## **VII. Operational Practices**

### **Gathering System and Pipeline Notification**

Well(s) will be connected to a production facility after flowback operations are complete, where a gas transporter system is in place. The gas produced from production facility is dedicated to Enterprise Field Services, LLC ("Enterprise") and is connected to Enterprise low/high pressure gathering system located in Eddy County, New Mexico. OXY USA INC. ("OXY") provides (periodically) to Enterprise a drilling, completion and estimated first production date for wells that are scheduled to be drilled in the foreseeable future. In addition, OXY and Enterprise have periodic conference calls to discuss changes to drilling and completion schedules. Gas from these wells will be processed at Enterprise's Processing Plant located in Sec. 36, Twn. 24S, Rng. 30E, Eddy County, New Mexico. The actual flow of the gas will be based on compression operating parameters and gathering system pressures.

### **Flowback Strategy**

After the fracture treatment/completion operations, well(s) will be produced to temporary production tanks and gas will be flared or vented. During flowback, the fluids and sand content will be monitored. When the produced fluids contain minimal sand, the wells will be turned to production facilities. Gas sales should start as soon as the wells start flowing through the production facilities, unless there are operational issues on Enterprise system at that time. Based on current information, it is OXY's belief the system can take this gas upon completion of the well(s).

Safety requirements during cleanout operations from the use of underbalanced air cleanout systems may necessitate that sand and non-pipeline quality gas be vented and/or flared rather than sold on a temporary basis.

#### **VIII. Best Management Practices**

Below are alternatives considered from a conceptual standpoint to reduce the amount of gas flared.

- Power Generation – On lease

- oOnly a portion of gas is consumed operating the generator, remainder of gas will be flared


- Compressed Natural Gas – On lease

- oGas flared would be minimal, but might be uneconomical to operate when gas volume declines

- NGL Removal – On lease

- oPlants are expensive, residue gas is still flared, and uneconomical to operate when gas volume declines

|          | SOUTH BONESPRING |             |
|----------|------------------|-------------|
|          | Oil (bbl/d)      | Gas (mcf/d) |
| Jan-2024 | 1,250            | 5,135       |
| Feb-2024 | 1,184            | 6,041       |
| Mar-2024 | 933              | 5,849       |
| Apr-2024 | 670              | 5,349       |
| May-2024 | 517              | 4,893       |
| Jun-2024 | 421              | 4,401       |
| Jul-2024 | 355              | 3,994       |
| Aug-2024 | 306              | 3,652       |
| Sep-2024 | 270              | 3,368       |
| Oct-2024 | 240              | 3,125       |
| Nov-2024 | 217              | 2,915       |
| Dec-2024 | 197              | 2,731       |
| Jan-2025 | 181              | 2,566       |
| Feb-2025 | 167              | 2,426       |
| Mar-2025 | 155              | 2,301       |
| Apr-2025 | 145              | 2,184       |
| May-2025 | 136              | 2,078       |
| Jun-2025 | 127              | 1,982       |
| Jul-2025 | 120              | 1,894       |
| Aug-2025 | 114              | 1,812       |
| Sep-2025 | 108              | 1,739       |
| Oct-2025 | 102              | 1,670       |
| Nov-2025 | 98               | 1,607       |
| Dec-2025 | 93               | 1,549       |
| Jan-2026 | 89               | 1,493       |
| Feb-2026 | 85               | 1,444       |
| Mar-2026 | 82               | 1,398       |
| Apr-2026 | 79               | 1,353       |
| May-2026 | 76               | 1,311       |
| Jun-2026 | 73               | 1,271       |
| Jul-2026 | 71               | 1,234       |
| Aug-2026 | 68               | 1,198       |
| Sep-2026 | 66               | 1,165       |
| Oct-2026 | 64               | 1,133       |
| Nov-2026 | 62               | 1,104       |
| Dec-2026 | 60               | 1,075       |

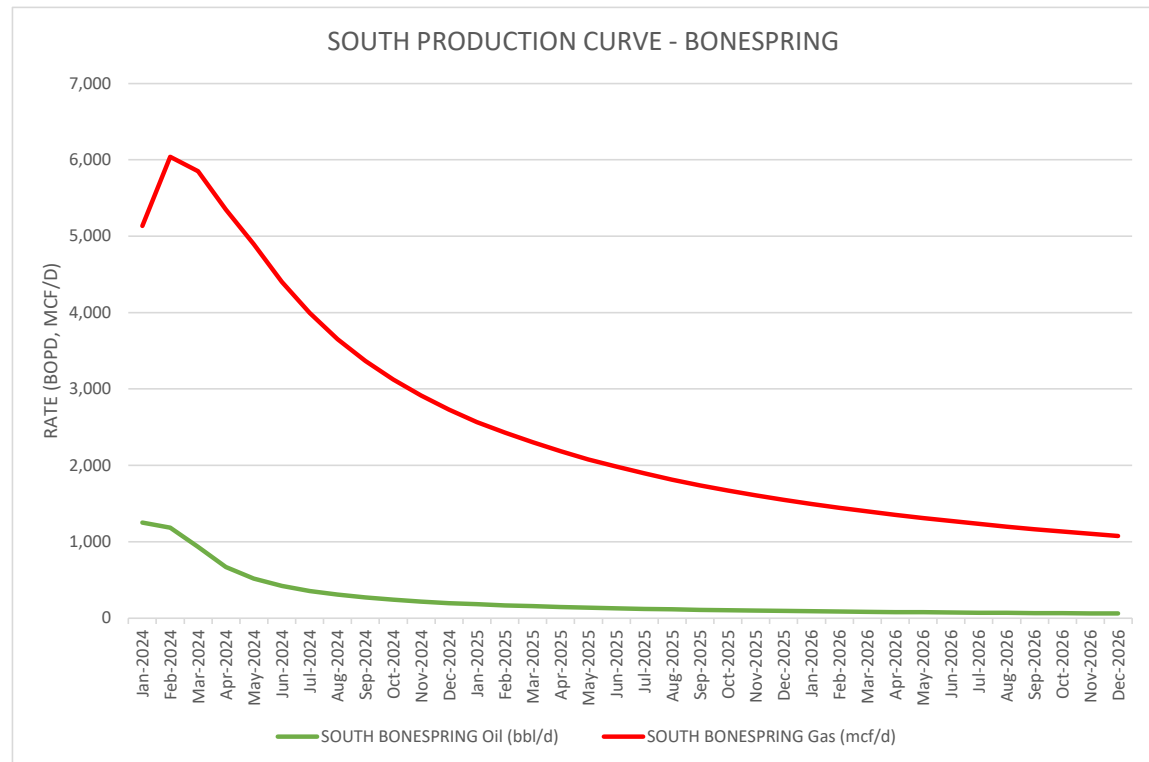

# Oxy USA Inc. - PRECIOUS 30\_18 FED COM 34H

## Drill Plan

### 1. Geologic Formations

|                            |       |                                    |     |
|----------------------------|-------|------------------------------------|-----|
| TVD of Target (ft):        | 10480 | Pilot Hole Depth (ft):             |     |
| Total Measured Depth (ft): | 23401 | Deepest Expected Fresh Water (ft): | 377 |

### Delaware Basin

| Formation       | MD-RKB (ft) | TVD-RKB (ft) | Expected Fluids |
|-----------------|-------------|--------------|-----------------|
| Rustler         | 377         | 377          |                 |
| Salado          | 703         | 703          | Salt            |
| Castile         | 2601        | 2601         | Salt            |
| Delaware        | 4075        | 4075         | Oil/Gas/Brine   |
| Bell Canyon     | 4114        | 4114         | Oil/Gas/Brine   |
| Cherry Canyon   | 4996        | 4996         | Oil/Gas/Brine   |
| Brushy Canyon   | 6277        | 6277         | Losses          |
| Bone Spring     | 7963        | 7960         | Oil/Gas         |
| Bone Spring 1st | 9011        | 8993         | Oil/Gas         |
| Bone Spring 2nd | 9662        | 9634         | Oil/Gas         |
| Bone Spring 3rd |             |              | Oil/Gas         |
| Wolfcamp        |             |              | Oil/Gas         |
| Penn            |             |              | Oil/Gas         |
| Strawn          |             |              | Oil/Gas         |

\*H2S, water flows, loss of circulation, abnormal pressures, etc.

### 2. Casing Program

| Section      | Hole Size (in) | MD        |         | TVD       |         | Csg. OD (in) | Csg Wt. (ppf) | Grade   | Conn.     |
|--------------|----------------|-----------|---------|-----------|---------|--------------|---------------|---------|-----------|
|              |                | From (ft) | To (ft) | From (ft) | To (ft) |              |               |         |           |
| Surface      | 17.5           | 0         | 437     | 0         | 437     | 13.375       | 54.5          | J-55    | BTC       |
| Salt         | 12.25          | 0         | 4075    | 0         | 4075    | 10.75        | 45.5          | L-80 HC | BTC-SC    |
| Intermediate | 9.875          | 0         | 10847   | 0         | 10480   | 7.625        | 26.4          | L-80 HC | BTC       |
| Production   | 6.75           | 0         | 23401   | 0         | 10480   | 5.5          | 20            | P-110   | Sprint-SF |

All casing strings will be tested in accordance with 43 CFR part 3170 Subpart 3172

| All Casing SF Values will meet or exceed those below |          |                 |                  |
|------------------------------------------------------|----------|-----------------|------------------|
| SF Collapse                                          | SF Burst | Body SF Tension | Joint SF Tension |
| 1.00                                                 | 1.100    | 1.4             | 1.4              |

|                                                                                                                                                     | Y or N |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| Is casing new? If used, attach certification as required in 43 CFR 3160                                                                             | Y      |
| Does casing meet API specifications? If no, attach casing specification sheet.                                                                      | Y      |
| Is premium or uncommon casing planned? If yes attach casing specification sheet.                                                                    | Y      |
| Does the above casing design meet or exceed BLM's minimum standards?<br>If not provide justification (loading assumptions, casing design criteria). | Y      |
| Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?                   | Y      |
|                                                                                                                                                     |        |
| Is well located within Capitan Reef?                                                                                                                | N      |
| If yes, does production casing cement tie back a minimum of 50' above the Reef?                                                                     |        |
| Is well within the designated 4 string boundary.                                                                                                    |        |
|                                                                                                                                                     |        |
| Is well located in SOPA but not in R-111-Q?                                                                                                         | N      |
| If yes, are the first 2 strings cemented to surface and 3 <sup>rd</sup> string cement tied back 500' into previous casing?                          |        |
|                                                                                                                                                     |        |
| Is well located in R-111-Q and SOPA?                                                                                                                | Y      |
| If yes, are the first three strings cemented to surface?                                                                                            | Y      |
| Is 2 <sup>nd</sup> string set 100' to 600' below the base of salt?                                                                                  | Y      |
|                                                                                                                                                     |        |
| Is well located in high Cave/Karst?                                                                                                                 | N      |
| If yes, are there two strings cemented to surface?                                                                                                  |        |
| (For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?                                                              |        |
|                                                                                                                                                     |        |
| Is well located in critical Cave/Karst?                                                                                                             | N      |
| If yes, are there three strings cemented to surface?                                                                                                |        |

**3. Cementing Program**

| Section | Stage | Slurry:                   | Sacks | Yield<br>(ft <sup>3</sup> /ft) | Density<br>(lb/gal) | Excess: | TOC    | Placement            | Description           |
|---------|-------|---------------------------|-------|--------------------------------|---------------------|---------|--------|----------------------|-----------------------|
| Surface | 1     | Surface - Tail            | 456   | 1.33                           | 14.8                | 100%    | -      | Circulate            | Class C+Accel.        |
| Int.1   | 1     | Intermediate - Tail       | 85    | 1.33                           | 14.8                | 20%     | 3,575  | Circulate            | Class C+Accel.        |
| Int.1   | 1     | Intermediate - Lead       | 572   | 1.73                           | 12.9                | 50%     | -      | Circulate            | Class Pozz+Ret.       |
| Int. 2  | 1     | Intermediate 1S - Tail    | 580   | 1.68                           | 13.2                | 5%      | 6,527  | Circulate            | Class C+Ret., Disper. |
| Int. 2  | 2     | Intermediate 2S - Tail BH | 450   | 1.71                           | 13.3                | 25%     | 3,575  | Bradenhead Post-Frac | Class C+Accel.        |
| Prod.   | 1     | Production - Tail         | 739   | 1.84                           | 13.3                | 25%     | 10,347 | Circulate            | Class C+Ret.          |

**Offline Cementing Request**

Oxy requests a variance to cement the 9.625" and/or 7.625" intermediate casing strings offline in accordance to the approved variance, EC Tran 461365. Please see Offline Cementing Variance attachment for further details.

**Bradenhead CBL Request**

Oxy requests permission to adjust the CBL requirement after bradenhead cement jobs, on 7-5/8" intermediate casings, as per the agreement reached in the OXY/BLM meeting on September 5, 2019. Please see Bradenhead CBL Variance attachment for further details.



**4. Pressure Control Equipment**

| BOP installed and tested before drilling which hole? | Size?   | Min. Required WP | Type       | ✓ | Tested to:               | TVD Depth (ft) per Section: |
|------------------------------------------------------|---------|------------------|------------|---|--------------------------|-----------------------------|
| 12.25" Hole                                          | 13-5/8" | 5M               | Annular    | ✓ | 70% of working pressure  | 4075                        |
|                                                      |         | 5M               | Blind Ram  | ✓ | 250 psi / 5000 psi       |                             |
|                                                      |         |                  | Pipe Ram   |   |                          |                             |
|                                                      |         |                  | Double Ram | ✓ |                          |                             |
|                                                      |         |                  | Other*     |   |                          |                             |
| 9.875" Hole                                          | 13-5/8" | 5M               | Annular    | ✓ | 70% of working pressure  | 10480                       |
|                                                      |         | 5M               | Blind Ram  | ✓ | 250 psi / 5000 psi       |                             |
|                                                      |         |                  | Pipe Ram   |   |                          |                             |
|                                                      |         |                  | Double Ram | ✓ |                          |                             |
|                                                      |         |                  | Other*     |   |                          |                             |
| 6.75" Hole                                           | 13-5/8" | 5M               | Annular    | ✓ | 100% of working pressure | 10480                       |
|                                                      |         | 10M              | Blind Ram  | ✓ | 250 psi / 10000 psi      |                             |
|                                                      |         |                  | Pipe Ram   |   |                          |                             |
|                                                      |         |                  | Double Ram | ✓ |                          |                             |
|                                                      |         |                  | Other*     |   |                          |                             |

\*Specify if additional ram is utilized

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per 43 CFR part 3170 Subpart 3172 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold.

**5M Annular BOP Request**

Per BLM's Memorandum No. NM-2017-008: *Decision and Rationale for a Variance Allowing the Use of a 5M Annular Preventer with a 10M BOP Stack*, Oxy requests to employ a 5M annular with a 10M BOPE stack in the pilot and lateral sections of the well and will ensure that two barriers to flow are maintained at all times. Please see Annular BOP Variance attachment for further details.

|   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|   | Formation integrity test will be performed per 43 CFR part 3170 Subpart 3172.<br>On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with 43 CFR part 3170 Subpart 3172.                                                                                                                                                                                                                                                                                                                                                                   |
|   | A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Y | Are anchors required by manufacturer?                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|   | A multibowl or a unionized multibowl wellhead system will be employed. The wellhead and connection to the BOPE will meet all API 6A requirements. The BOP will be tested per 43 CFR part 3170 Subpart 3172 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested. We will test the flange connection of the wellhead with a test port that is directly in the flange. We are proposing that we will run the wellhead through the rotary prior to cementing surface casing as discussed with the BLM on October 8, 2015.<br><br>See attached schematics. |

### BOP Break Testing Request

Oxy requests permission to adjust the BOP break testing requirements as per the agreement reached in the OXY/BLM meeting on September 5, 2019. Please see BOP Break Testing Variance attachment for further details.

**Oxy will use Cameron ADAPT wellhead system that uses an OEC top flange connection. This connection has been fully vetted and verified by API to Spec 6A and carries an API monogram.**

**5. Mud Program**

| Section        | Depth     |         | Depth - TVD |         | Type                                   | Weight (ppg) | Viscosity | Water Loss |
|----------------|-----------|---------|-------------|---------|----------------------------------------|--------------|-----------|------------|
|                | From (ft) | To (ft) | From (ft)   | To (ft) |                                        |              |           |            |
| Surface        | 0         | 437     | 0           | 437     | Water-Based Mud                        | 8.6 - 8.8    | 40-60     | N/C        |
| Intermediate 1 | 437       | 4075    | 437         | 4075    | Saturated Brine-Based or Oil-Based Mud | 8.0 - 10.0   | 35-45     | N/C        |
| Intermediate 2 | 4075      | 10847   | 4075        | 10480   | Water-Based or Oil-Based Mud           | 8.0 - 10.0   | 38-50     | N/C        |
| Production     | 10847     | 23401   | 10480       | 10480   | Water-Based or Oil-Based Mud           | 9.5 - 12.5   | 38-50     | N/C        |

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times. The following is a general list of products: Barite, Bentonite, Gypsum, Lime, Soda Ash, Caustic Soda, Nut Plug, Cedar Fiber, Cotton Seed Hulls, Drilling Paper, Salt Water Clay, CACL2. Oxy will use a closed mud system.

|                                                         |                                |
|---------------------------------------------------------|--------------------------------|
| What will be used to monitor the loss or gain of fluid? | PVT/MD Totco/Visual Monitoring |
|---------------------------------------------------------|--------------------------------|

**6. Logging and Testing Procedures**

| Logging, Coring and Testing. |                                                                              |                   |
|------------------------------|------------------------------------------------------------------------------|-------------------|
| Yes                          | Will run GR from TD to surface (horizontal well – vertical portion of hole). |                   |
|                              | Stated logs run will be in the Completion Report and submitted to the BLM.   |                   |
| No                           | Logs are planned based on well control or offset log information.            |                   |
| No                           | Drill stem test? If yes, explain                                             |                   |
| No                           | Coring? If yes, explain                                                      |                   |
| Additional logs planned      |                                                                              | Interval          |
| No                           | Resistivity                                                                  |                   |
| No                           | Density                                                                      |                   |
| Yes                          | CBL                                                                          | Production string |
| Yes                          | Mud log                                                                      | Bone Spring – TD  |
| No                           | PEX                                                                          |                   |

**7. Drilling Conditions**

| Condition                     | Specify what type and where? |
|-------------------------------|------------------------------|
| BH Pressure at deepest TVD    | 6812 psi                     |
| Abnormal Temperature          | No                           |
| BH Temperature at deepest TVD | 164°F                        |

Pump high viscosity sweeps as needed for hole cleaning. The mud system will be monitored visually/manually as well as with an electronic PVT. The necessary mud products for additional weight and fluid loss control will be on location at all times. Appropriately weighted mud will be used to isolate potential gas, oil, and water zones until such time as casing can be cemented into place for zonal

Hydrogen Sulfide (H2S) monitors will be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of 43 CFR part 3170 Subpart 3172. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.

|   |                   |
|---|-------------------|
| N | H2S is present    |
| Y | H2S Plan attached |


**8. Other facets of operation**

|                                                                                                                                                                                                                                                                                                                                                                                                                                 | Yes/No |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| Will the well be drilled with a walking/skidding operation? If yes, describe.<br>We plan to drill the 2 well pad in batch by section: all surface sections, intermediate sections and production sections. The wellhead will be secured with a night cap whenever the rig is not over the well.                                                                                                                                 | Yes    |
| Will more than one drilling rig be used for drilling operations? If yes, describe.<br>Oxy requests the option to contract a Surface Rig to drill, set surface casing, and cement for this well. If the timing between rigs is such that Oxy would not be able to preset surface, the Primary Rig will MIRU and drill the well in its entirety per the APD. Please see the attached document for information on the spudder rig. | Yes    |

**Total Estimated Cuttings Volume:** 1858 bbls

Revision Date – May 21, 2024

## 4-String Design – Open Int 1 x Int 2 Annulus

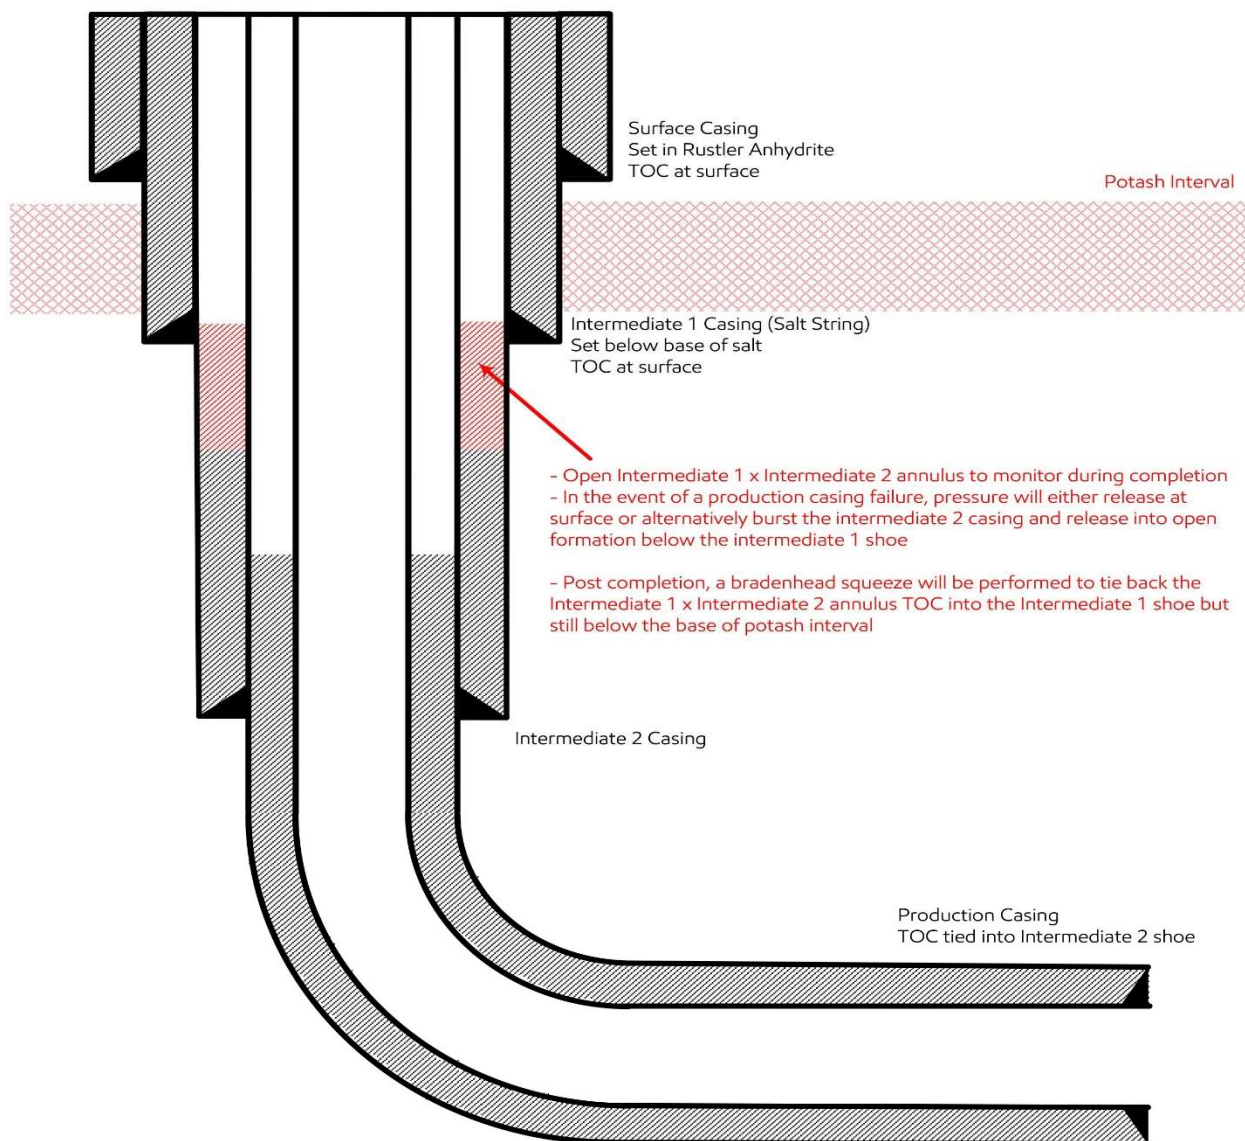


### Update May 2024:

OXY is aware of the R111-Q update and will comply with these requirements including (but not limited to):

- 1) Alignment with KPLA requirements per schematic above, leaving open annulus for pressure monitoring during frac and utilizing new casing that meets API standards
- 2) Contingency plans in place to divert formation fluids away from salt interval in event of production casing failure
- 3) Bradenhead squeeze to be completed within 180days to tie back TOC to salt string at least 500ft but with top below Marker Bed 126
- 4) Production cement to be tied back no less than 500ft inside previous casing shoe
- 5) While drilling salt interval, separation distance to any active/inactive producing offset well will be ensured such that  $SF > 1.0$ ; Anti-Collision Reports will be provided with APD Packages for review where  $SF < 1.5$  against any applicable offset well, or where center-to-center separation against a blind or inclination only surveyed offset well is less than 500ft

Revision Date – May 21, 2024

### 3-String Design – Open Production Casing Annulus

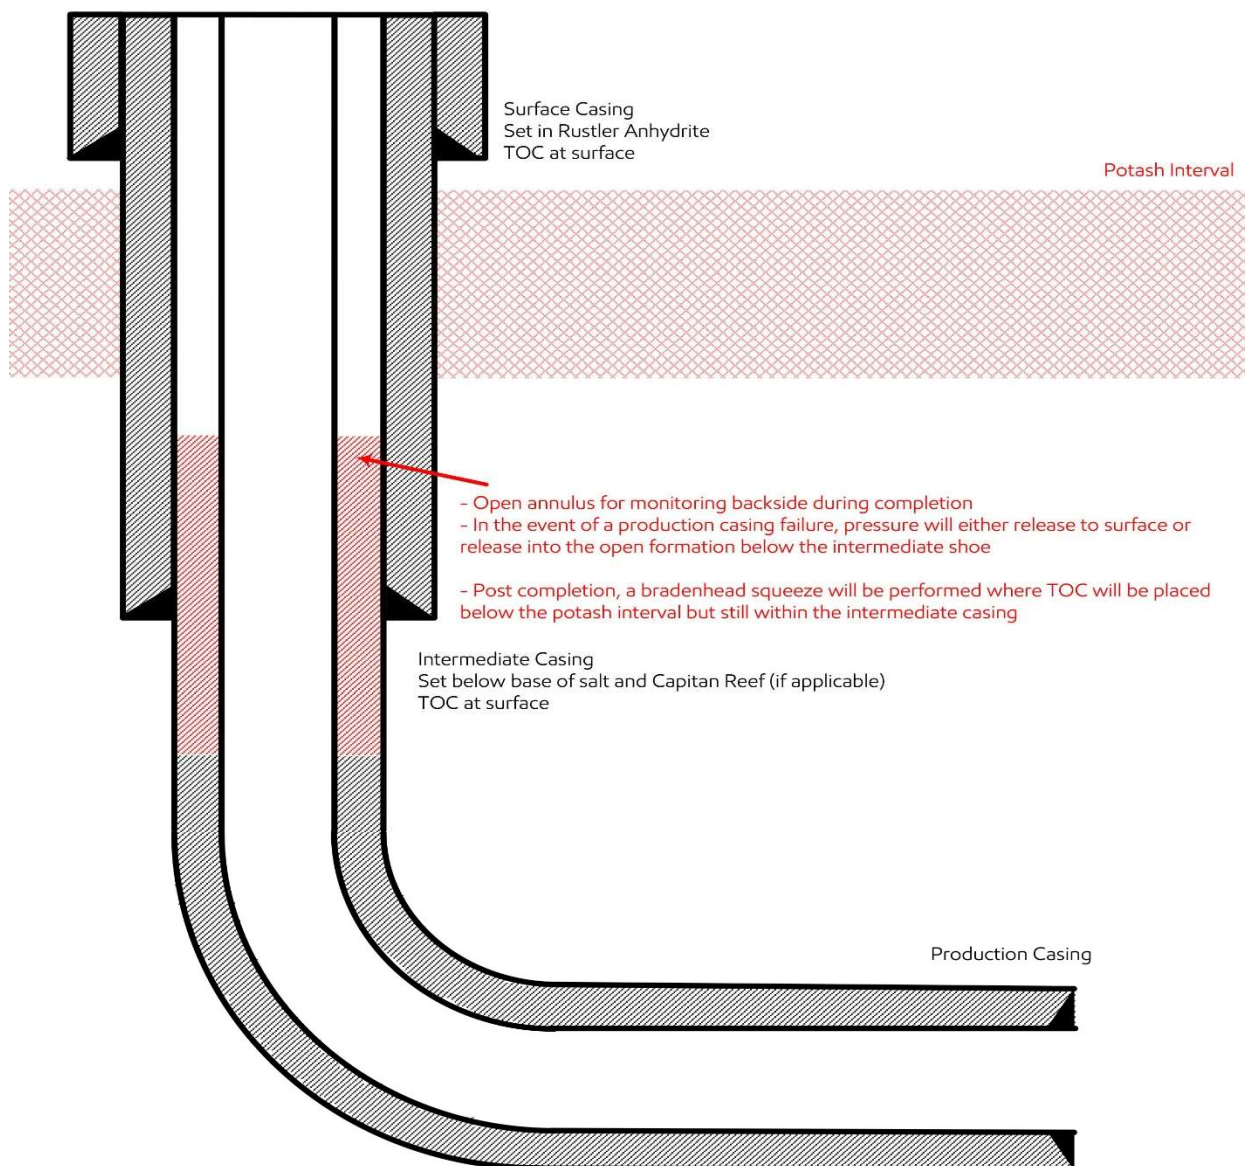

#### Update May 2024:

OXY is aware of the R111-Q update and will comply with these requirements including (but not limited to):

- 1) Alignment with KPLA requirements per schematic above, leaving open annulus for pressure monitoring during frac and utilizing new casing that meets API standards
- 2) Contingency plans in place to divert formation fluids away from salt interval in event of production casing failure
- 3) Bradenhead squeeze for Production cement to be completed within 180days to tie back TOC to previous casing string at least 500ft but with top below Marker Bed 126
- 4) While drilling salt interval, separation distance to any active/inactive producing offset well will be ensured such that  $SF > 1.0$ ; Anti-Collision Reports will be provided with APD Packages for review where  $SF < 1.5$  against any applicable offset well, or where center-to-center separation against a blind or inclination only surveyed offset well is less than 500ft



**OXY USA Inc**  
**APD ATTACHMENT: SPUDDER RIG DATA**

**OPERATOR NAME / NUMBER:** OXY USA Inc

**1. SUMMARY OF REQUEST:**


Oxy USA respectfully requests approval for the following operations for the surface hole in the drill plan:

1. Utilize a spudder rig to pre-set surface casing for time and cost savings.

**2. Description of Operations**

1. Spudder rig will move in to drill the surface hole and pre-set surface casing on the well.
  - a. After drilling the surface hole section, the spudder rig will run casing and cement following all of the applicable rules and regulations (43 CFR part 3170 Subpart 3172, all COAs and NMOCD regulations).
  - b. The spudder rig will utilize fresh water-based mud to drill the surface hole to TD. Solids control will be handled entirely on a closed loop basis. No earth pits will be used.
2. The wellhead will be installed and tested as soon as the surface casing is cut off and the WOC time has been reached.
3. A blind flange at the same pressure rating as the wellhead will be installed to seal the wellbore. Pressure will be monitored with needle valves installed on two wingvalves.
  - a. A means for intervention will be maintained while the drilling rig is not over the well.
4. Spudder rig operations are expected to take 2-3 days per well on the pad.
5. The BLM will be contacted and notified 24 hours prior to commencing spudder rig operations.
6. Drilling operations will begin with a larger rig and a BOP stack equal to or greater than the pressure rating that was permitted will be nipped up and tested on the wellhead before drilling operations resume on each well.
  - a. The larger rig will move back onto the location within 90 days from the point at which the wells are secured and the spudder rig is moved off location.
  - b. The BLM will be contacted / notified 24 hours before the larger rig moves back on the pre-set locations.
7. Oxy will have supervision on the rig to ensure compliance with all BLM and NMOCD regulations and to oversee operations.
8. Once the rig is removed, Oxy will secure the wellhead area by placing a guard rail around the cellar area.

# Spudder Rig Layout

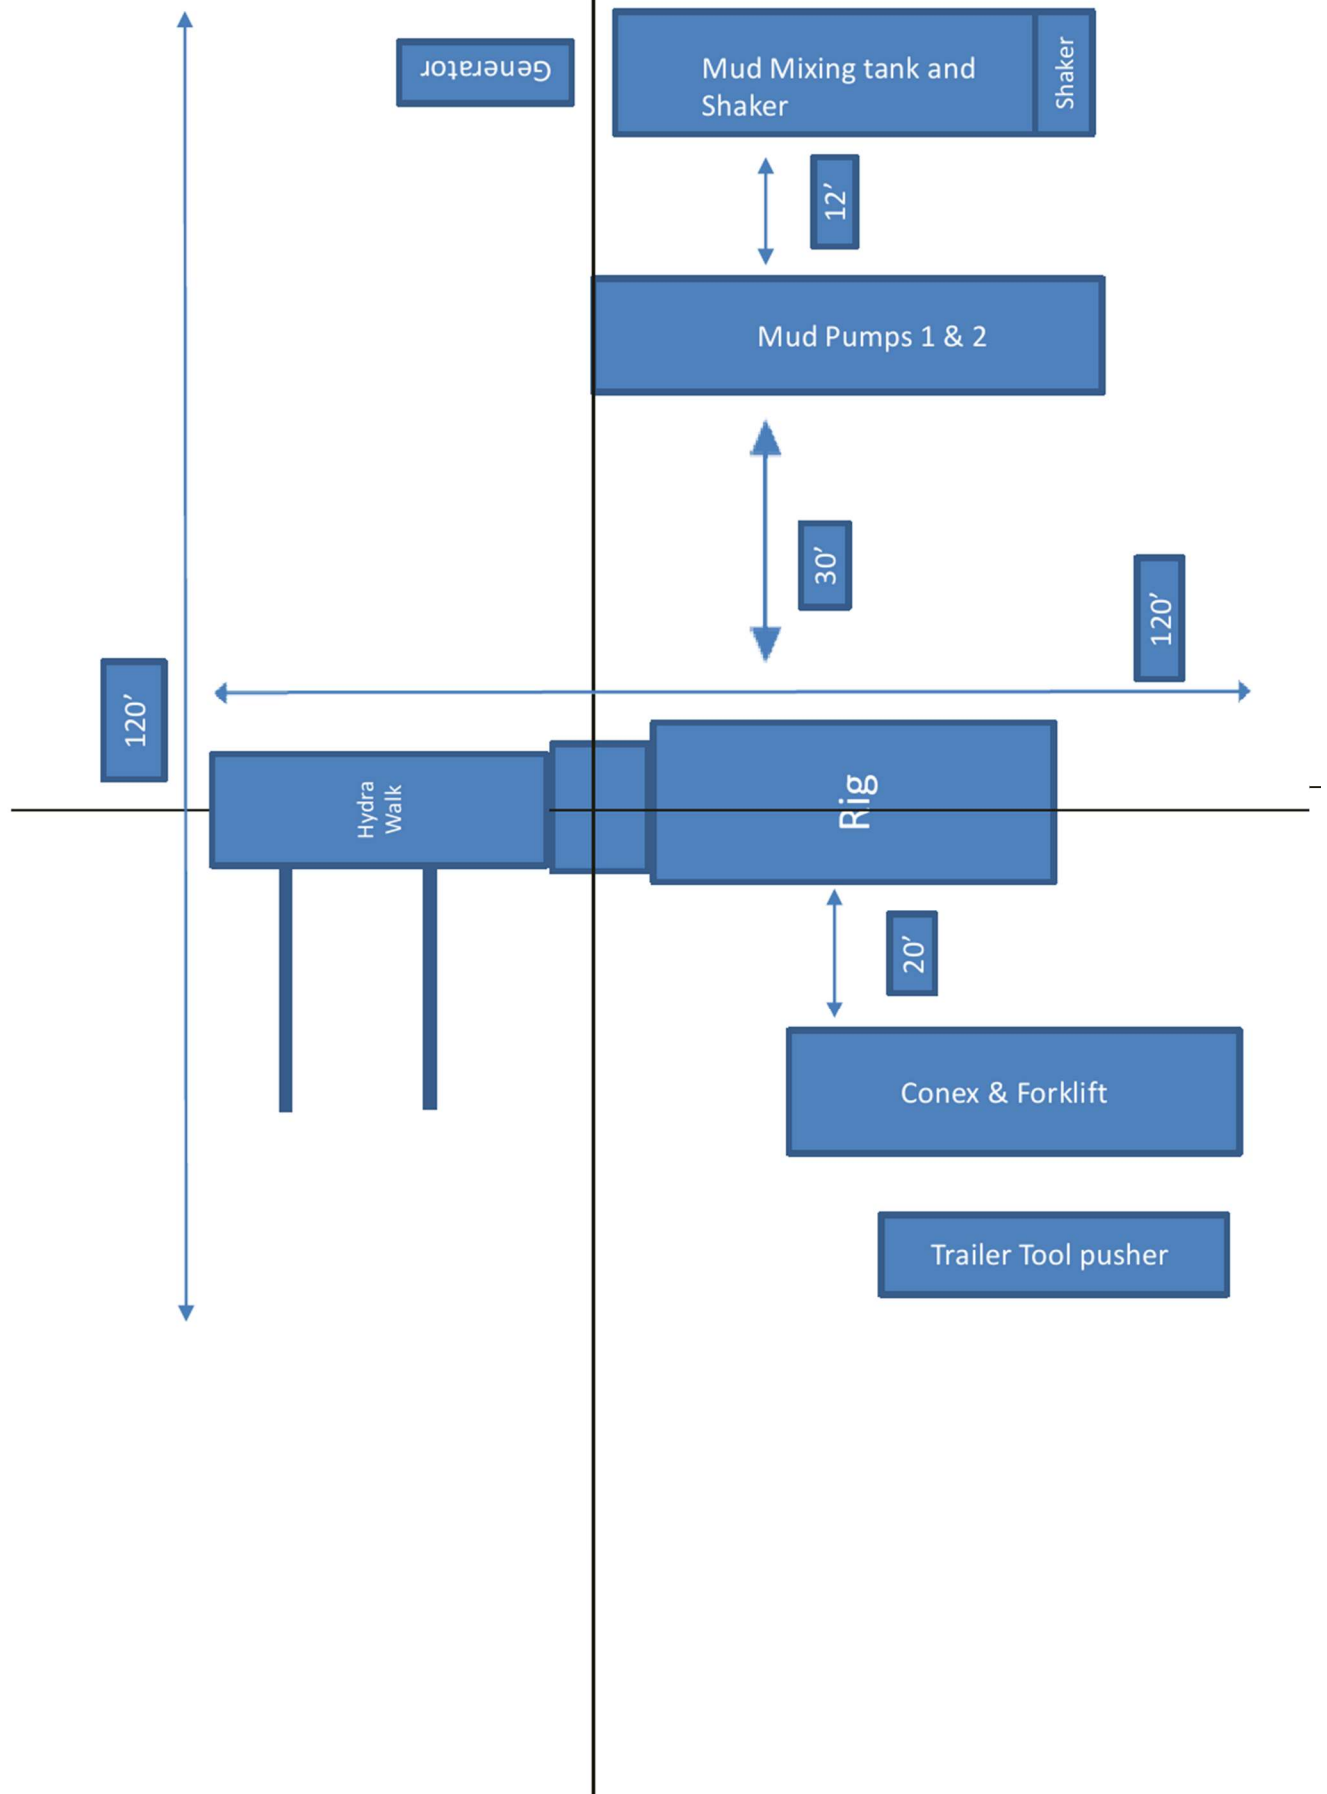





CONNECTION DATA SHEET

OD: 5.500 in.


Grade: P110 RY

Weight: 20.00 lb/ft

Drift: 4.653 in. (API)

Wall Th.: 0.361 in.

VAM<sup>®</sup> SPRINT-SF

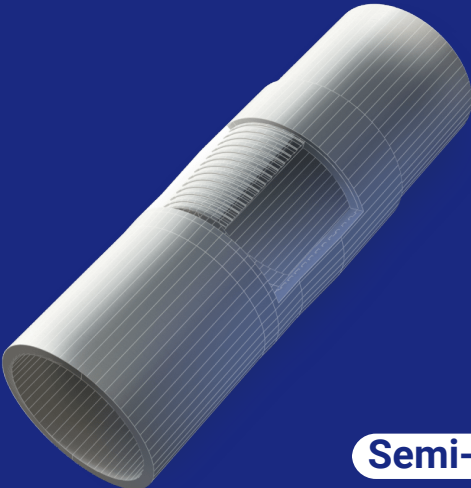

Semi-Flush

Field Torque Values

Make-up Torque (ft-lb)

20,000 MIN

22,500 OPTI

25,000 MAX

Torque with Sealability (ft-lb)

36,000 MTS

Locked Flank Torque (ft-lb)

4,500 MIN

15,750 MAX

(2) MTS: Maximum Torque with Sealability.

PIPE BODY PROPERTIES

|                                   |                  |       |
|-----------------------------------|------------------|-------|
| Nominal OD                        | 5.500            | in.   |
| Nominal ID                        | 4.778            | in.   |
| Nominal Wall Thickness            | 0.361            | in.   |
| Minimum Wall Thickness            | 87.5             | %     |
| Nominal Weight (API)              | 20.00            | lb/ft |
| Plain End Weight                  | 19.83            | lb/ft |
| Drift                             | 4.653            | in.   |
| Grade Type                        | Controlled Yield |       |
| Minimum Yield Strength            | 110              | ksi   |
| Maximum Yield Strength            | 125              | ksi   |
| Minimum Ultimate Tensile Strength | 140              | ksi   |
| Pipe Body Yield Strength          | 641              | klb   |
| Internal Yield Pressure           | 12,640           | psi   |
| Collapse Pressure                 | 11,110           | psi   |

CONNECTION PROPERTIES

|                              |                       |             |
|------------------------------|-----------------------|-------------|
| Connection Type              | Semi-Premium Integral |             |
| Nominal Connection OD        | 5.783                 | in.         |
| Nominal Connection ID        | 4.718                 | in.         |
| Make-up Loss                 | 5.965                 | in.         |
| Tension Efficiency           | 90                    | % Pipe Body |
| Compression Efficiency       | 90                    | % Pipe Body |
| Internal Pressure Efficiency | 100                   | % Pipe Body |
| External Pressure Efficiency | 100                   | % Pipe Body |

JOINT PERFORMANCES

|                                      |        |          |
|--------------------------------------|--------|----------|
| Tension Strength                     | 577    | klb      |
| Compression Strength                 | 577    | klb      |
| Internal Pressure Resistance         | 12,640 | psi      |
| External Pressure Resistance         | 11,110 | psi      |
| Maximum Bending, Structural          | 78     | °/100 ft |
| Maximum Bending, with Sealability(1) | 30     | °/100 ft |

(1) Sealability rating demonstrated as per API RP 5C5 / ISO 13679



BOOST YOUR EFFICIENCY, REDUCE COSTS  
AND ENSURE 100% WELL INTEGRITY WITH

VAM<sup>®</sup> FIELD SERVICE

Scan the QR code  
to contact us




The information available on this Site ("Information") is offered for general information. It is supposed to be correct at the time of publishing on the Site but is not intended to constitute professional advice and is provided 'as is'. Vallourec does not guarantee the completeness and accuracy of this Information. Under no circumstances will Vallourec be liable for damage, liability of any kind, or any loss or injury that may result from the credibility given to this Information or its use. The Information may be amended, corrected, at any time by Vallourec without warning. Vallourec's products and services are subject to Vallourec's The Information may be amended, corrected, and/or supplemented at any time by Vallourec without warning. Standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services.

Released to Imaging: 4/10/2025 11:23:28 AM

# REQUEST FOR A VARIANCE TO BREAK TEST THE BOP

Permian Resources New Mexico

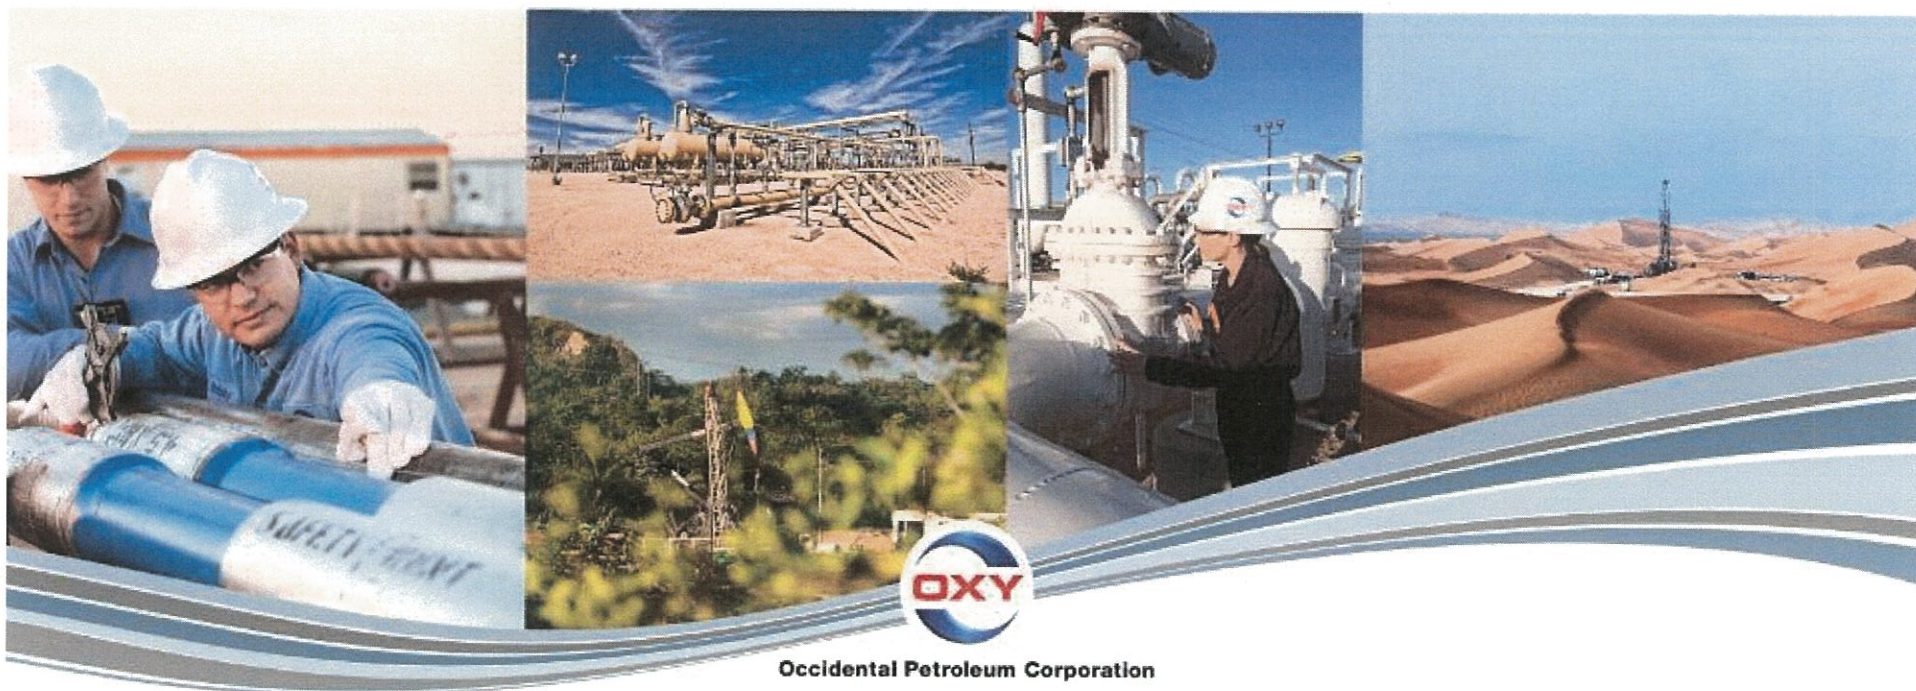



# Request for Variance

OXY USA Inc. (OXY) requests a variance to allow break testing of the Blowout Preventer (BOP) stack when skidding a drilling rig between wells on multi-well pads

- This practice entails retesting only the connections of the BOP stack that have been disconnected during this operation and not a complete BOP test.
- As the choke manifold remains stationary during the skidding operation and the only break to the manifold is tested, no further testing of the manifold is done until the next full BOP test.
- This request is being made as per Section IV of the *Onshore Oil and Gas Order (OOGO) No. 2*

# Rationale for Allowing BOP Break Testing

American Petroleum Institute (API) standards, specifications and recommended practices are considered industry standards and are consistently utilized and referenced by the industry

- API Standard 53, *Blowout Prevention Equipment Systems for Drilling Wells* (Fourth Edition, November 2012, Addendum 1, July 2016) recognizes break testing as an acceptable practice.
- Specifically, API Standard 53, Section 6.5.3.4.1.b states “Pressure tests on the well control equipment shall be conducted after the disconnection or repair of any pressure containment seal in the BOP stack, choke line, kill line, choke manifold, or wellhead assembly but limited to the affected component.”





# Rationale for Allowing BOP Break Testing

The Bureau of Safety and Environmental Enforcement (BSEE), Department of Interior, has also utilized the API standards, specifications and best practices in the development of its offshore oil and gas regulations and incorporates them by reference within its regulations.

- BSEE issued new offshore regulations in July 2016 under 30 CFR Part 250, *Oil and Gas and Sulphur Operations in the Outer Continental Shelf - Blowout Preventer Systems and Well Control*. Within these regulations is language adopted from API Standard 53 which also supports break testing.
- Specifically, Section 250.737(d.8) states “Pressure test affected BOP components following the disconnection or repair of any well-pressure containment seal in the wellhead or BOP stack assembly.”



# Rationale for Allowing BOP Break Testing

Break testing has been approved by the BLM in the past

- The Farmington Field Office approved a Sundry Notice (SN) to allow break testing in 2015
- This SN granted permission for the operator to break test when skidding its Aztec 1000 rig on multi-well pads

Oxy feels break testing and our current procedures meet or exceed the intent of OOGO No. 2

- As skidding operations take place within the 30-day full BOPE test window, the BOP shell and components such as the pipe rams and check valve get tested to the full rated working pressure more often
- Oxy's standard requires complete BOP tests more often than that of OOGO No. 2
- Oxy performs a choke drill prior to drilling out every casing shoe. As a crew's training is a vital part of well control, this procedure to simulate step one of the Driller's Method exceeds the requirements of OOGO No. 2



# Break Testing Procedures

- 1) OXY to submit the break testing plan in the APD or Sundry Notice (SN) and receive approval prior to implementing
- 2) OXY would perform BOP break testing on multi-well pads where multiple intermediate sections can be drilled and cased within the full BOP test window
- 3) After performing a complete BOP test on the first well and drilling and casing the hole section, three breaks would be made on the BOP.
  - Between the check valve and the kill line
  - Between the HCR valve and the co-flex hose or the co-flex hose and the manifold
  - Between the BOP flange and the wellhead
- 4) The BOP is then lifted and removed from the wellhead by the hydraulic winch system
- 5) After skidding to the next well, the BOP is moved to the wellhead by the hydraulic winch system and installed
- 6) The choke line and kill line are reconnected
- 7) A test plug is installed in the wellhead with a joint of drill pipe and the internal parts of the check valve are removed



## Break Testing Procedures

- 8) A shell test is performed against the upper pipe rams testing all three breaks
- 9) The internal parts of the check valve are reinstalled and the HCR valve is closed.  
A second test is performed on them
- 10) These tests consist of a 250 psi low test and a high test to the value submitted in the APD or SN (e.g., 5000 psi)
- 11) Perform a function test of components not pressure tested to include the lower pipe rams, the blind rams and the annular
- 12) If this were a three well pad, the same three breaks on the BOP would be made and steps 4 through 11 would be repeated
- 13) A second break test would only be done if the third hole section could be completed within the 30-day BOP test window
- 14) If a second break test is performed, additional components that were not tested on the first break test will be tested






# Break Testing Procedures and Tests

1. After performing a complete BOP test on the first well, the BOP is removed, the rig is skidded and the BOP is installed on the second well


2. A test plug is installed in the wellhead on drill pipe and the inner components of the check valve are removed

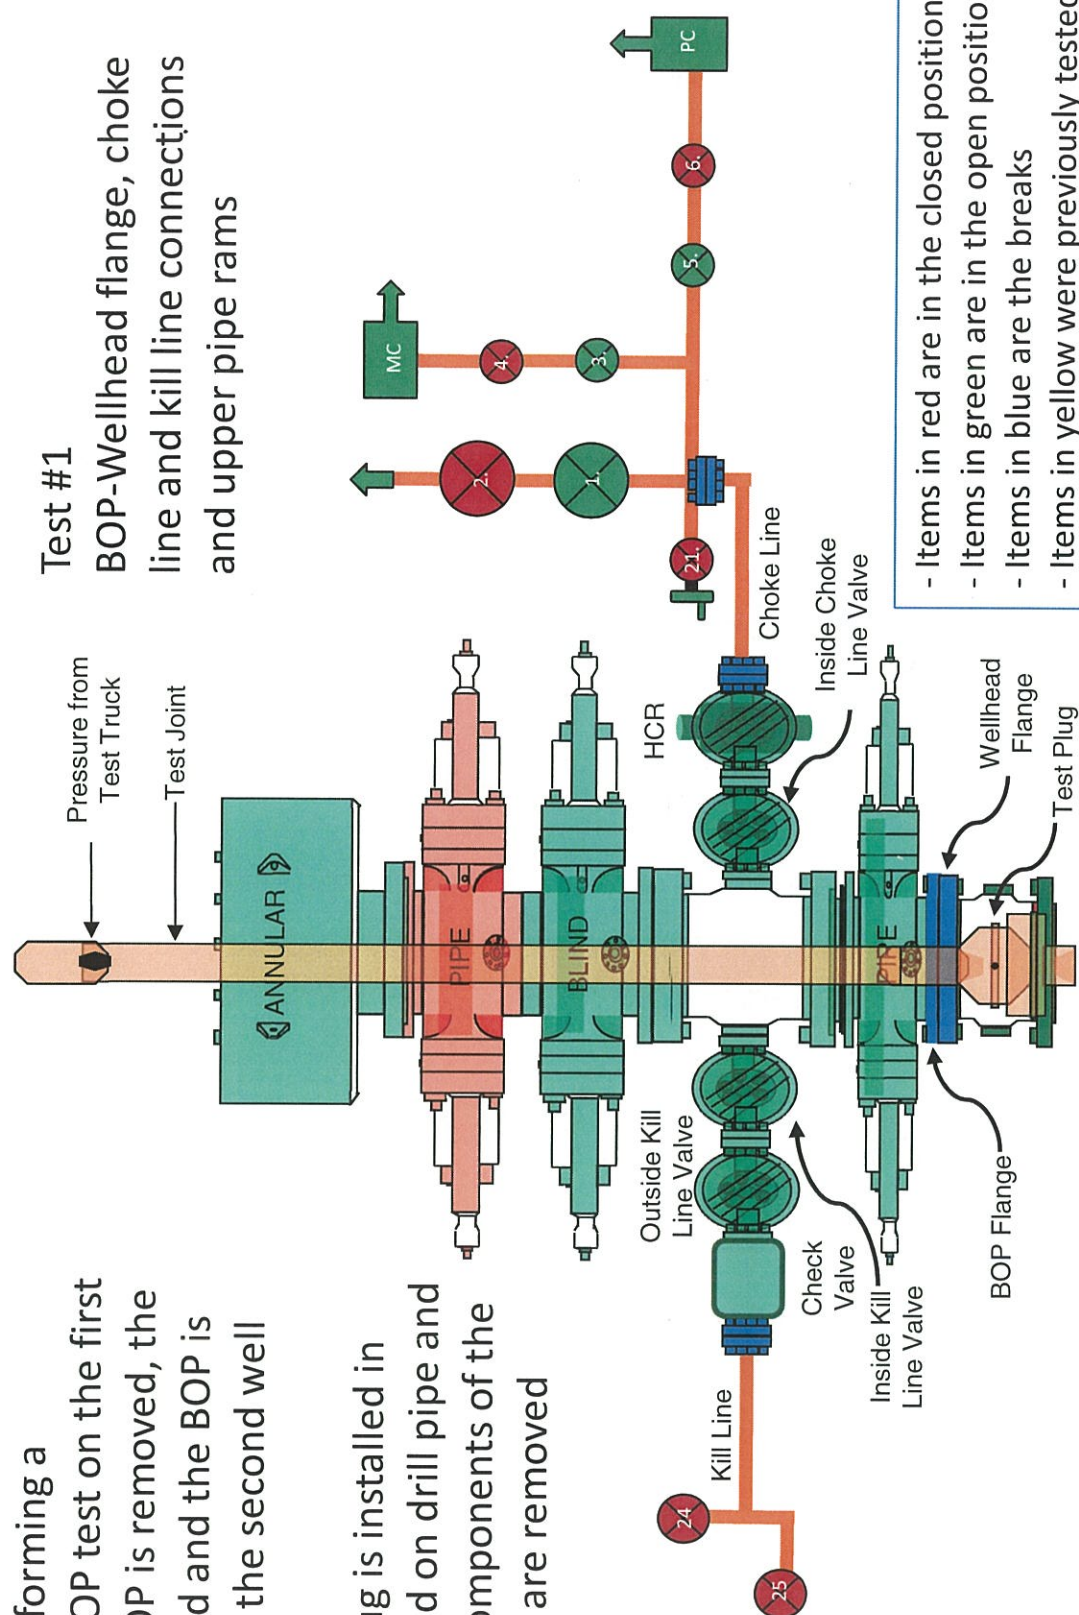



# Break Testing Procedures and Tests

3. After Test #1, the inner components of the check valve are reinstalled and the HCR valve is closed

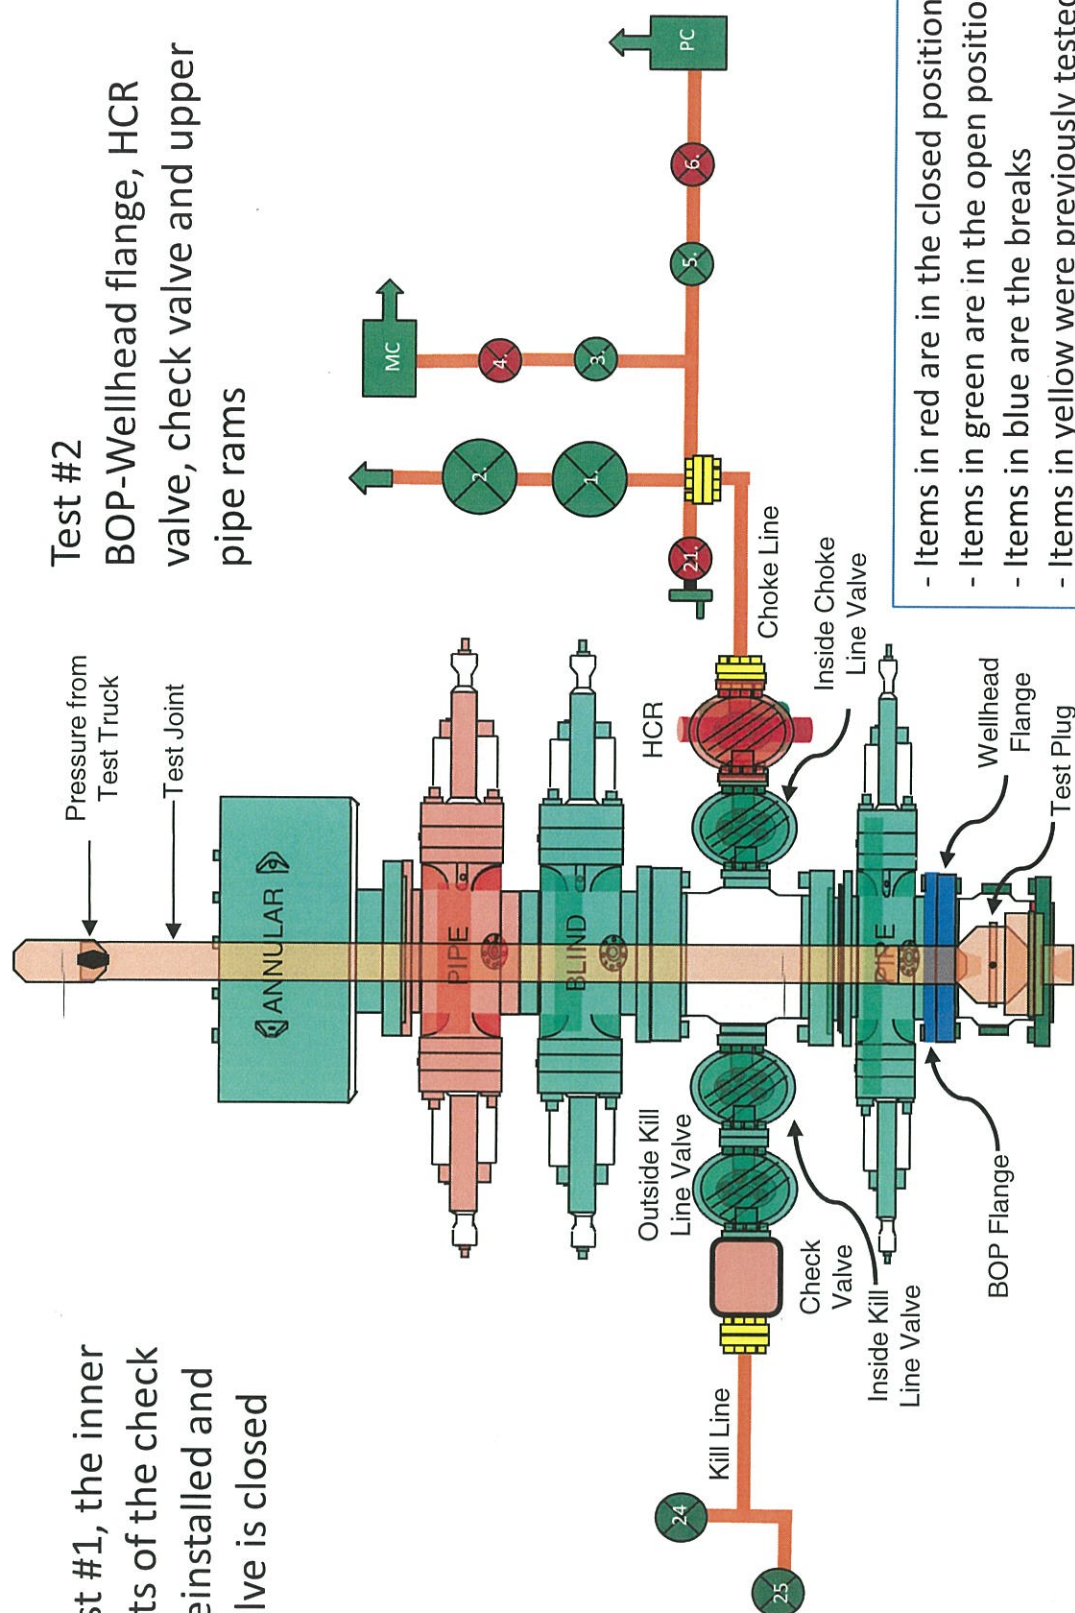




# Second Break Testing Procedures and Tests

Procedures 1 and 2 and Test #1 will be completed as in the first break test (see slide 8)

3. After Test #1, the inner components of the check valve are reinstalled and the inside choke line valve is closed

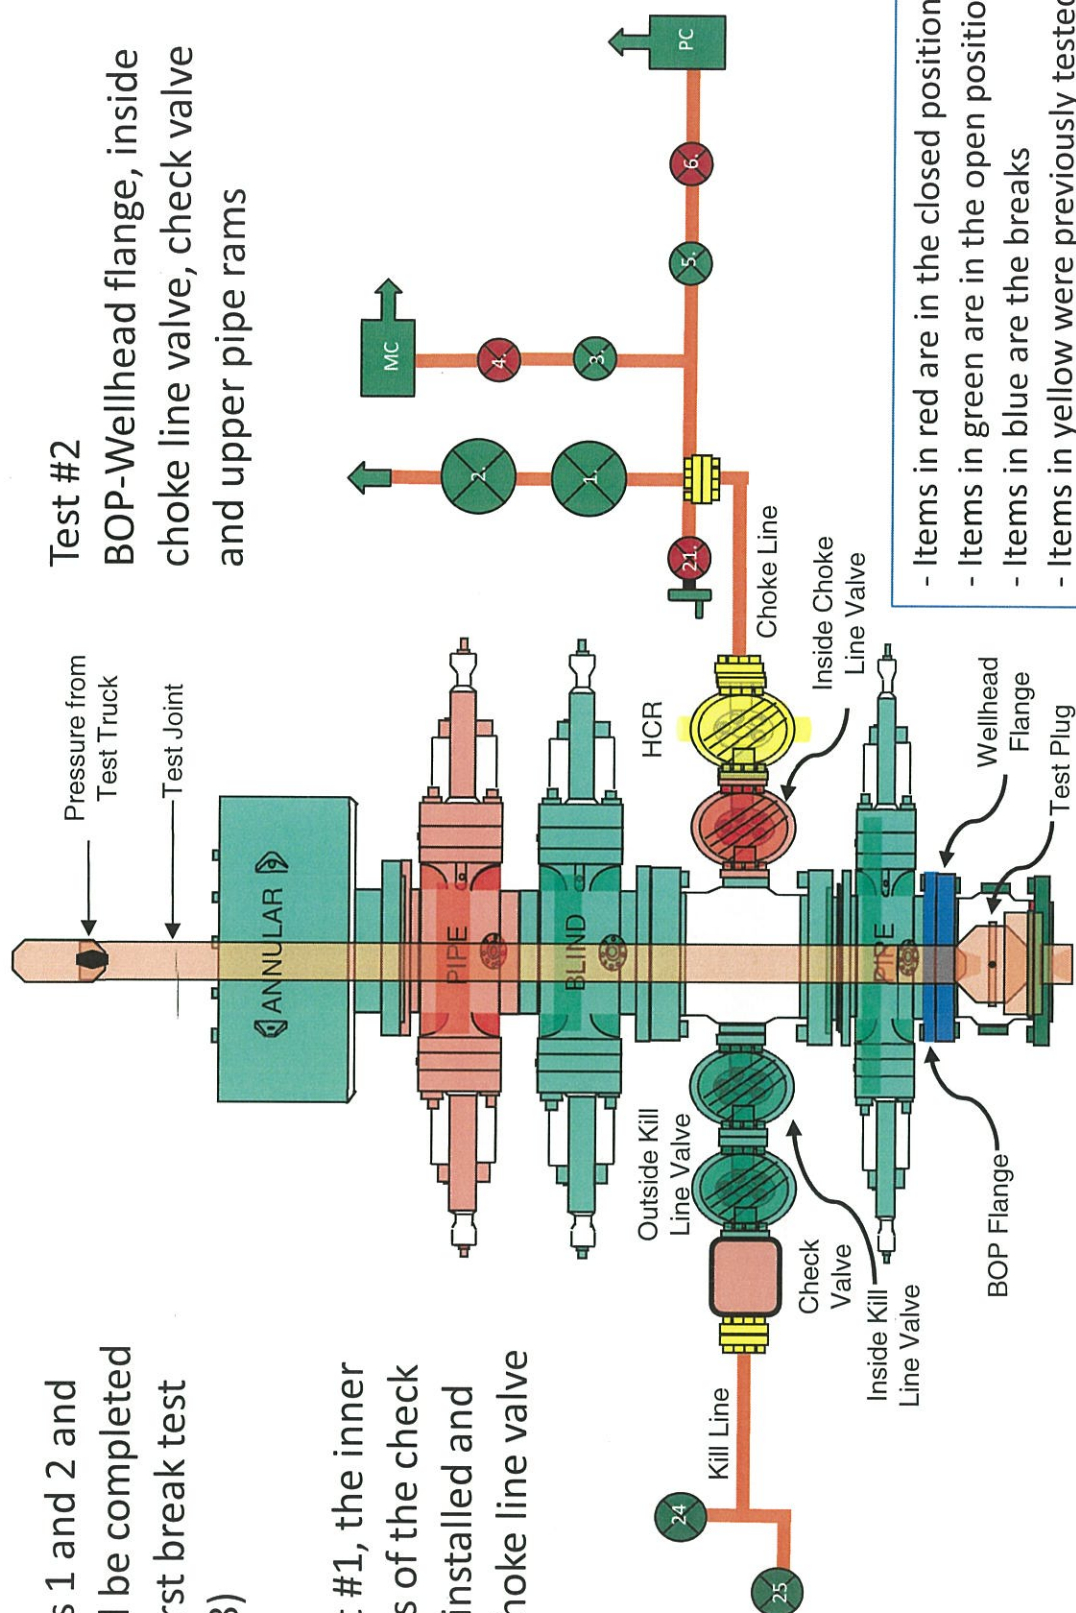



# BOP Handling System



Hydraulic winch system which moves the BOP from its carrier to the wellhead

BOP standing in its carrier








12

# BOP Handling System

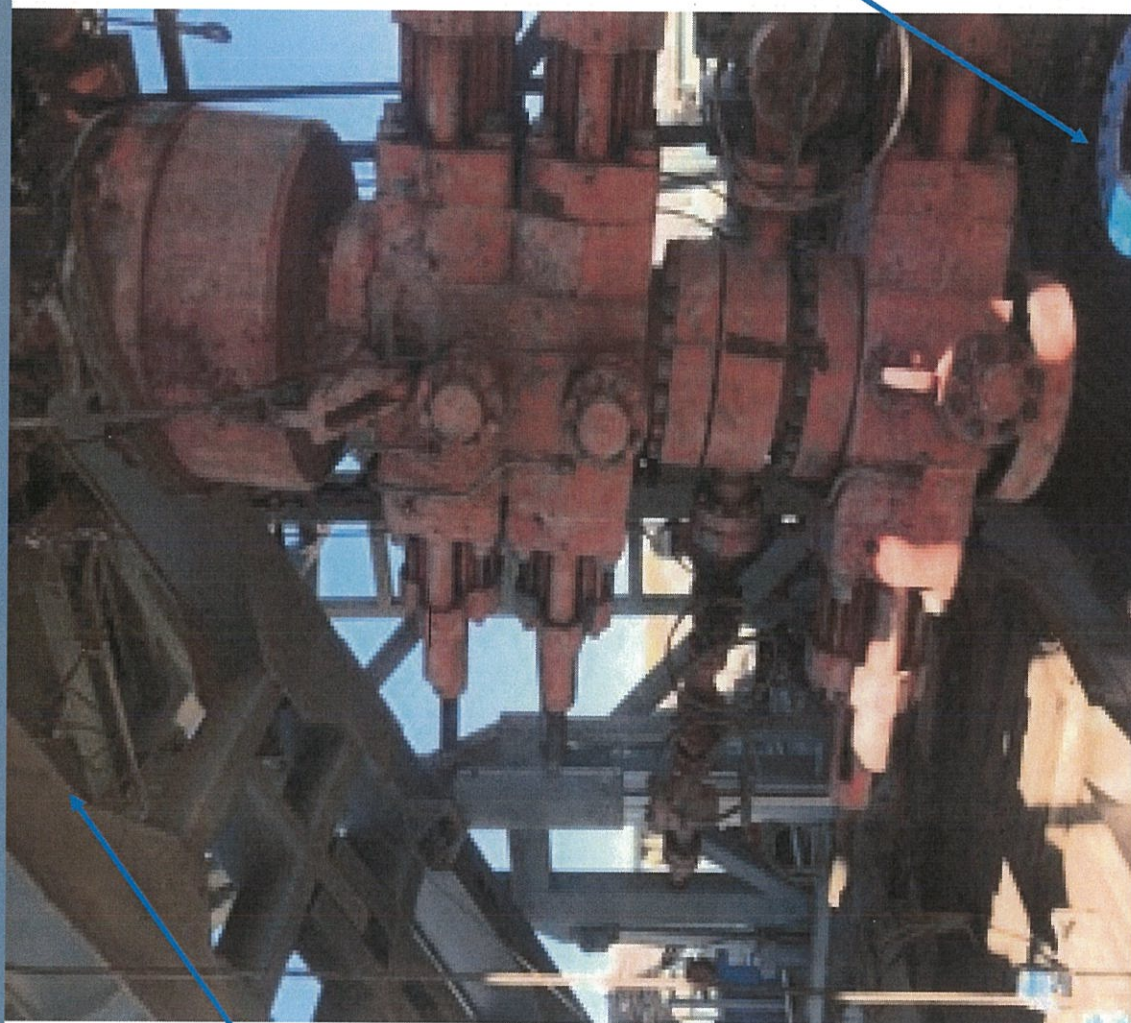

Hydraulic winch  
system moving  
the BOP over to  
the wellhead

Wellhead



## Summary for Variance Request for Break Testing

- API standards, specifications and recommended practices are considered industry standards
  - OOGO No. 2 recognized API Recommended Practices (RP) 53 in its original development
  - API Standard 53 recognizes break testing as an acceptable practice
  - The Bureau of Safety and Environmental Enforcement has utilized API standards, specifications and best practices in the development of its offshore oil and gas regulations
  - API Standard 53 recognizes break testing as an acceptable practice
- OXY feels break testing meets the intent of OOGO No. 2 to protect public health and safety and the environment



## 5M Annular BOP Variance Request

Per BLM's Memorandum No. NM-2017-008: *Decision and Rationale for a Variance Allowing the Use of a 5M Annular Preventer with a 10M BOP Stack*, Oxy requests to employ a 5M annular with a 10M BOPE stack in the pilot and lateral sections of the well and will ensure that two barriers to flow are maintained at all times. Please see Well Control Plan below.

### Oxy Well Control Plan

#### A. Component and Preventer Compatibility Table

The table below, which covers the drilling and casing of the >5M MASP portion of the well, outlines the tubulars and the compatible preventers in use. This table, combined with the mud program, documents that two barriers to flow can be maintained at all times, independent of the rating of the annular preventer.

Pilot hole and Lateral sections, 10M requirement

| Component                   | OD              | Preventer                                            | RWP |
|-----------------------------|-----------------|------------------------------------------------------|-----|
| Drillpipe                   | 4-1/2"-5"       | Lower 3-1/2 - 5-1/2" VBR<br>Upper 3-1/2 - 5-1/2" VBR | 10M |
| HWDP                        | 4-1/2"-5"       | Lower 3-1/2 - 5-1/2" VBR<br>Upper 3-1/2 - 5-1/2" VBR | 10M |
| Drill collars and MWD tools | 4-3/4" – 5-1/2" | Lower 3-1/2 - 5-1/2" VBR<br>Upper 3-1/2 - 5-1/2" VBR | 10M |
| Mud Motor                   | 4-3/4"          | Lower 3-1/2 - 5-1/2" VBR<br>Upper 3-1/2 - 5-1/2" VBR | 10M |
| Production casing           | 5-1/2"          | Lower 3-1/2 - 5-1/2" VBR<br>Upper 3-1/2 - 5-1/2" VBR | 10M |
| ALL                         | 0" - 13-5/8"    | Annular                                              | 5M  |
| Open-hole                   | 6-3/4"          | Blind Rams                                           | 10M |

VBR = Variable Bore Ram. Compatible range listed in chart.

HWDP = Heavy Weight Drill Pipe

MWD = Measurement While Drilling

#### B. Well Control Procedures

Well control procedures are specific to the rig equipment and the operation at the time the kick occurs. Below are the minimal high-level tasks prescribed to assure a proper shut-in while drilling, tripping, running casing, pipe out of the hole (open hole), and moving the Bottom Hole Assembly (BHA) through the Blowout Preventers (BOP). The pressure at which control is swapped from the annular to another compatible ram will occur when the anticipated pressure is approaching or envisioned to exceed 70% of the 5M annular Rated Working Pressure (RWP) or 3500 PSI.

#### General Procedure While Drilling

1. Sound alarm (alert crew)
2. Space out drill string
3. Shut down pumps (stop pumps and rotary)
4. Shut-in Well (uppermost applicable BOP, typically annular preventer first. The Hydraulic Control Remote (HCR) valve and choke will already be in the closed position).
5. Confirm shut-in
6. Notify tool pusher/company representative
7. Read and record the following:
  - a. SIDPP and SICP
  - b. Pit gain
  - c. Time
8. Regroup and identify forward plan
9. If pressure has built or expected to reach 70% of the annular RWP during kill operations, crew will reconfirm spacing and swap to the upper pipe ram

#### General Procedure While Tripping

1. Sound alarm (alert crew)
2. Stab full opening safety valve and close
3. Space out drill string
4. Shut-in (uppermost applicable BOP, typically annular preventer first. The HCR and choke will already be in the closed position)
5. Confirm shut-in
6. Notify tool pusher/company representative
7. Read and record the following
  - a. SIDPP and SICP
  - b. Pit gain
  - c. Time
  - d. Regroup and identify forward plan
  - e. If pressure has built or is anticipated during the kill to reach the RWP of the annular preventer, confirm spacing and swap to the upper pipe ram

#### General Procedure While Running Casing

1. Sound alarm (alert crew)
2. Stab crossover and full opening safety valve and close
3. Space out string
4. Shut-in (uppermost applicable BOP, typically annular preventer first. The HCR and choke will already be in the closed position).
5. Confirm shut-in
6. Notify tool pusher/company representative
7. Read and record the following:
  - a. SIDPP and SICP
  - b. Pit gain
  - c. Time
  - d. Regroup and identify forward plan.
  - e. If pressure has built or is anticipated during the kill to reach the RWP of the annular preventer, confirm spacing and swap to compatible pipe ram.

General Procedure With No Pipe In Hole (Open Hole)

1. Sound alarm (alert crew)
2. Shut-in with blind rams or BSR. (The HCR and choke will already be in the closed position)
3. Confirm shut-in
4. Notify tool pusher/company representative
5. Read and record the following:
  - a. SICP
  - b. Pit gain
  - c. Time
6. Regroup and identify forward plan

General Procedures While Pulling BHA thru Stack

1. PRIOR to pulling last joint of drill pipe thru the stack.
  - a. Perform flow check, if flowing:
  - b. Sound alarm (alert crew)
  - c. Stab full opening safety valve and close
  - d. Space out drill string with tool joint just beneath the upper pipe ram
  - e. Shut-in using upper pipe ram. (The HCR and choke will already be in the closed position)
  - f. Confirm shut-in
  - g. Notify tool pusher/company representative
  - h. Read and record the following:
    - i. SIDPP and SICP
    - ii. Pit gain
    - iii. Time
    - iv. Regroup and identify forward plan
2. With BHA in the stack and compatible ram preventer and pipe combo immediately available.
  - a. Sound alarm (alert crew)
  - b. Stab crossover and full opening safety valve and close
  - c. Space out drill string with upset just beneath the compatible pipe ram
  - d. Shut-in using compatible pipe ram. (The HCR and choke will already be in the closed position.)
  - e. Confirm shut-in
  - f. Notify tool pusher/company representative
  - g. Read and record the following:
    - i. SIDPP and SICP
    - ii. Pit gain
    - iii. Time
    - iv. Regroup and identify forward plan
3. With BHA in the stack and NO compatible ram preventer and pipe combo immediately available.

- a. Sound alarm (alert crew)
- b. If possible to pick up high enough, pull string clear of the stack and follow “Open Hole” scenario
- c. If impossible to pick up high enough to pull the string clear of the stack
- d. Stab crossover, make up one joint/stand of drill pipe, and full opening safety valve and close
- e. Space out drill string with tool joint just beneath the upper pipe ram
- f. Shut-in using upper pipe ram. (The HCR and choke will already be in the closed position)
- g. Confirm shut-in
- h. Notify tool pusher/company representative
- i. Read and record the following:
  - i. SIDPP and SICP
  - ii. Pit gain
  - iii. Time
- j. Regroup and identify forward plan

## **Bradenhead Cement CBL Variance Request**

Oxy requests permission to adjust the CBL requirement after bradenhead cement jobs, on 7-5/8" intermediate casings, as per the agreement reached in the OXY/BLM meeting on September 5, 2019.

### **Three string wells:**

- CBL will be required on one well per pad
- If the pumped volume of cement is less than permitted in the APD, BLM will be notified and a CBL may be run
- Echometer will be used after bradenhead cement job to determine TOC before pumping top-out cement

### **Four string wells:**

- CBL is not required
- If the pumped volume of cement is less than permitted in the APD, BLM will be notified and a CBL may be run
- Echometer will be used after bradenhead cement job to determine TOC before pumping top-out cement



## Offline Cementing Variance Request

Oxy requests a variance to cement the 9.625" and/or 7.625" intermediate casing strings offline in accordance to the approved variance, EC Tran 461365.

### 1. Cement Program

No changes to the cement program will take place for offline cementing.


### 2. Offline Cementing Procedure

The operational sequence will be as follows:

1. Run casing as per normal operations. While running casing, conduct negative pressure test and confirm integrity of the float equipment (float collar and shoe)
2. Land casing with mandrel
3. Fill pipe with kill weight fluid, do not circulate through floats and confirm well is static
4. Set annular packoff shown below and pressure test to confirm integrity of the seal.  
Pressure ratings of wellhead components and valves is 5,000 psi


Annular packoff with both external and internal seals



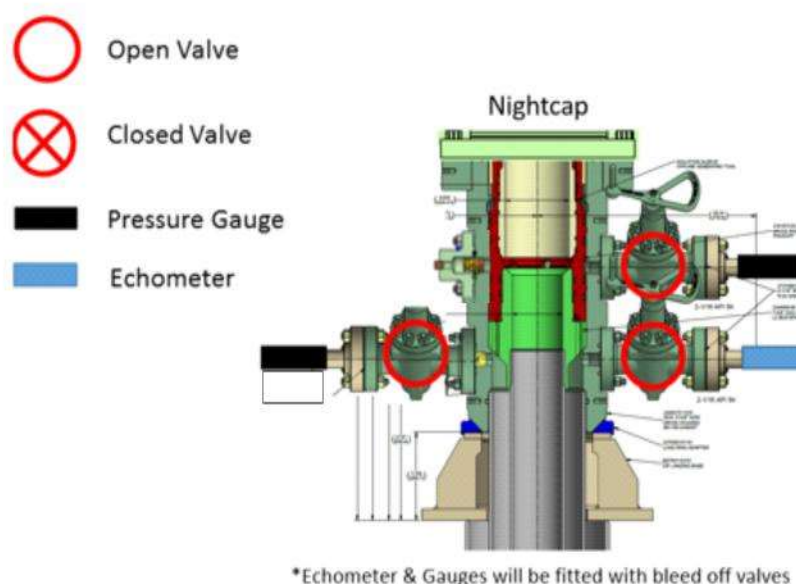

Wellhead diagram during skidding operations

5. After confirmation of both annular barriers and internal barriers, nipple down BOP and install cap flange.
  - a. If any barrier fails to test, the BOP stack will not be nipped down until after the cement job is completed with cement 500ft above the highest formation capable of flow with kill weight mud above or after it has achieved 50 psi compressive strength if cannot be verified.
6. Skid rig to next well on pad.
7. Confirm well is static before removing cap flange, flange will not be removed and offline cementing operations will not commence until well is under control. If well is not static, casing outlet valves will provide access to both the casing ID and annulus. Rig or third party pump truck will kill well prior to cementing or nipping up for further remediation.
  - a. Well Control Plan
    - i. The Drillers Method will be the primary well control method to regain control of the wellbore prior to cementing, if wellbore conditions do not permit the drillers method other methods of well control may be used
    - ii. Rig pumps or a 3<sup>rd</sup> party pump will be tied into the upper casing valve to pump down the casing ID
    - iii. A high pressure return line will be rigged up to lower casing valve and run to choke manifold to control annular pressure
    - iv. Once influx is circulated out of the hole, kill weight mud will be circulated
    - v. Well will be confirmed static
    - vi. Once confirmed static, cap flange will be removed to allow for offline cementing operations to commence
8. Install offline cement tool
9. Rig up cement equipment

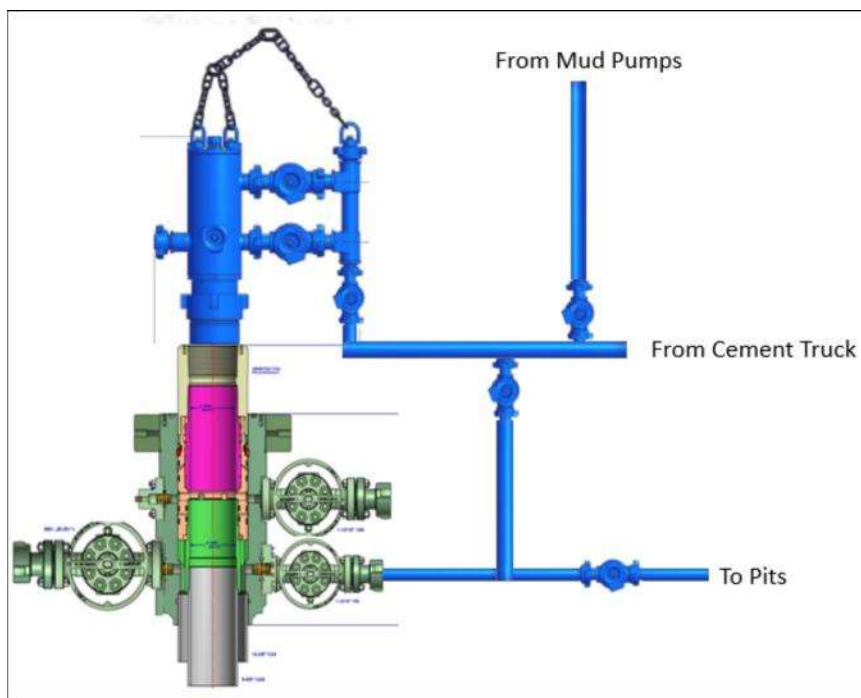

Wellhead diagram during offline cementing operations

10. Circulate bottoms up with cement truck
  - a. If gas is present on bottoms up, well will be shut in and returns rerouted through gas buster to handle entrained gas
  - b. Max anticipated time before circulating with cement truck is 6 hrs
11. Perform cement job taking returns from the annulus wellhead valve
12. Confirm well is static and floats are holding after cement job
13. Remove cement equipment, offline cement tools and install night cap with pressure gauge for monitoring.

## BOP Break Testing Request

Oxy requests permission to adjust the BOP break testing requirements as per the agreement reached in the OXY/BLM meeting on September 5, 2019.

BOP break test under the following conditions:

- After a full BOP test is conducted
- When skidding to drill an intermediate section where ICP is set into the third Bone Spring or shallower.
- When skidding to drill a production section that does not penetrate into the third Bone Spring or deeper.

If the kill line is broken prior to skid, two tests will be performed.

- 1) Wellhead flange, co-flex hose, kill line connections and upper pipe rams
- 2) Wellhead flange, HCR valve, check valve, upper pipe rams

If the kill line is not broken prior to skid, only one test will be performed.

- 1) Wellhead flange, co-flex hose, check valve, upper pipe rams

See supporting information below:

**Subject:** Request for a Variance Allowing Break Testing of a Blowout Preventer Stack

OXY USA Inc. (OXY) requests a variance to allow break testing of the Blowout Preventer (BOP) stack when skidding a drilling rig between wells on multi-well pads. This practice entails retesting only the connections of the **BOP** stack that have been disconnected during this operation and not a complete **BOP** test.

### Background

43 CFR part 3170 Subpart 3172 states that a **BOP** test must be performed whenever any seal subject to test pressure is broken. The current interpretation of the Bureau of Land Management (BLM) is this requires a complete **BOP** test and not just a test of the affected component. 43 CFR part 3170 Subpart 3172, Section I.D.2. states, "Some situations may exist either on a well-by-well basis or field-wide basis whereby it is commonly accepted practice to vary a particular minimum standard(s) established in this Order. This situation can be resolved by requesting a variance...". OXY feels the practice of break testing the **BOP** stack is such a situation. Therefore, as per 43 CFR part 3170 Subpart 3172, Section IV., OXY submits this request for the variance.

### Supporting Rationale

43 CFR part 3170 Subpart 3172 became effective on December 19, 1988, and has remained the standard for regulating BLM onshore drilling operations for almost 30 years. During this time there have been significant changes in drilling technology. **BLM** continues to use the variance request process to allow for the use of modern technology and acceptable engineering practices that have arisen since 43 CFR part 3170 Subpart 3172 was originally released. The drilling rig fleet OXY utilizes in New Mexico was built with many modern upgrades. One of which allows the rigs to skid between wells on multi-well pads. A part of this rig package is a hydraulic winch system which safely installs and removes the BOP from the wellhead and carries it during skidding operations. This technology has made break testing a safe and reliable procedure.

American Petroleum Institute (API) standards, specifications and recommended practices are considered industry standards and are consistently utilized and referenced by the industry. 43 CFR part 3170 Subpart 3172 recognized API Recommended Practices (RP) 53 in its original development. API Standard 53,

*Blowout Prevention Equipment Systems for Drilling Wells* (Fourth Edition, November 2012, Addendum 1, July 2016) recognizes break testing as an acceptable practice. Specifically, API Standard 53, Section 6.5.3.4.1.b states "Pressure tests on the well control equipment shall be conducted after the disconnection or repair of any pressure containment seal in the **BOP** stack, choke line, kill line, choke manifold, or wellhead assembly but limited to the affected component."

The Bureau of Safety and Environmental Enforcement (BSEE), Department of Interior, has also utilized the API standards, specifications and best practices in the development of its offshore oil and gas regulations and incorporates them by reference within its regulations. BSEE issued new offshore regulations under 30 CFR Part 250, *Oil and Gas and Sulphur Operations in the Outer Continental Shelf - Blowout Preventer Systems and Well Control*, which became effective on July 28, 2016. Section 250.737(d.1) states "Follow the testing requirements of API Standard 53". In addition, Section 250.737(d.8) has adopted language from **API** Standard 53 as it states "Pressure test affected **BOP** components following the disconnection or repair of any well-pressure containment seal in the wellhead or **BOP** stack assembly".

Break testing has been approved by the BLM in the past. See the Appendix for a Sundry Notice that was approved in 2015 by the Farmington Field Office. This approval granted permission for the operator to break test when skidding its Aztec 1000 rig on multi-well pads.



Oxy feels break testing and our current procedures meet the intent of 43 CFR part 3170 Subpart 3172 and often exceed it. We have not seen any evidence that break testing results in more components failing tests than seen on full BOP tests. As skidding operations take place within the 30-day full BOPE test window, the BOP shell and components such as the pipe rams and check valve get tested to the full rated working pressure more often. Therefore, there are more opportunities to ensure components are in good working order. Also, Oxy's standard requires complete BOP tests more often than that of 43 CFR part 3170 Subpart 3172. In addition to function testing the annular at least weekly and the pipe and blind rams on each trip, Oxy also performs a choke drill prior to drilling out every casing shoe. As a crew's training is a vital part of well control, this procedure to simulate step one of the Driller's Method exceeds the requirements of 43 CFR part 3170 Subpart 3172.

### Procedures

- 1) OXY to submit the break testing plan in the APD or Sundry Notice (SN) and receive approval prior to implementing (See Appendix for examples)
- 2) OXY would perform BOP break testing on multi-well pads where multiple intermediate sections can be drilled and cased within the 30-day BOP test window
- 3) After performing a complete BOP test on the first well and drilling and casing the hole section, three breaks would be made on the BOP.
  - Between the check valve and the kill line
  - Between the HCR valve and the co-flex hose or the co-flex hose and the manifold
  - Between the BOP flange and the wellhead
- 4) The BOP is then lifted and removed from the wellhead by the hydraulic winch system
- 5) After skidding to the next well, the BOP is moved to the wellhead by the hydraulic winch system and installed
- 6) The choke line and kill line are reconnected
- 7) A test plug is installed in the wellhead with a joint of drill pipe and the internal parts of the check valve are removed
- 8) A shell test is performed against the upper pipe rams testing all three breaks
- 9) The internal parts of the check valve are reinstalled and the HCR valve is closed. A second test is performed on them
- 10) These tests consist of a 250 psi low test and a high test to the value submitted in the APD or SN (e.g., 5000 psi)
- 11) Perform a function test of components not pressure tested to include the lower pipe rams, the blind rams and the annular
- 12) If this were a three well pad, the same three breaks on the BOP would be made and steps 4 through 11 would be repeated
- 13) A second break test would only be done if the third hole section could be completed within the 30-day BOP test window
- 14) If a second break test is performed, additional components that were not tested on the initial break test will be tested on this break test

### Notes:

- a. If any parts of the BOP are changed out or any additional breaks are made during the skidding operation, these affected components would also be tested as in step 10.
- b. As the choke manifold remains stationary during the skidding operation and the only break to the manifold is tested in step 8 above, no further testing of the manifold is done until the next full BOP test.

## **Summary**

OXY requests a variance to allow break testing of the BOP stack when skidding drilling rigs between wells on multi-well pads. API standards, specifications and recommended practices are considered industry standards and are consistently utilized and referenced by the industry and the BLM. API Standard 53 recognizes break testing as an acceptable practice and BSEE adopted language from this standard into its newly created 30 CFR Part 250 which also supports break testing. Due to this, OXY feels this request meets the intent of 43 CFR part 3170

# **OXY**

**PRD NM DIRECTIONAL PLANS (NAD 1983)**

**Precious 30\_18**

**Precious 30\_18 Fed Com 34H**

**Wellbore #1**

**Plan: Permitting Plan**

## **Standard Planning Report**

**14 December, 2023**

OXY  
Planning Report

|           |                                     |                              |                                 |
|-----------|-------------------------------------|------------------------------|---------------------------------|
| Database: | HOPSPP                              | Local Co-ordinate Reference: | Well Precious 30_18 Fed Com 34H |
| Company:  | ENGINEERING DESIGNS                 | TVD Reference:               | Assume RKB = 25' @ 3370.10ft    |
| Project:  | PRD NM DIRECTIONAL PLANS (NAD 1983) | MD Reference:                | Assume RKB = 25' @ 3370.10ft    |
| Site:     | Precious 30_18                      | North Reference:             | Grid                            |
| Well:     | Precious 30_18 Fed Com 34H          | Survey Calculation Method:   | Minimum Curvature               |
| Wellbore: | Wellbore #1                         |                              |                                 |
| Design:   | Permitting Plan                     |                              |                                 |

|             |                                     |               |                             |
|-------------|-------------------------------------|---------------|-----------------------------|
| Project     | PRD NM DIRECTIONAL PLANS (NAD 1983) |               |                             |
| Map System: | US State Plane 1983                 | System Datum: | Mean Sea Level              |
| Geo Datum:  | North American Datum 1983           |               |                             |
| Map Zone:   | New Mexico Eastern Zone             |               | Using geodetic scale factor |

|                       |                |              |                 |
|-----------------------|----------------|--------------|-----------------|
| Site                  | Precious 30_18 |              |                 |
| Site Position:        |                | Northing:    | 461,098.38 usft |
| From:                 | Map            | Easting:     | 698,809.83 usft |
| Position Uncertainty: | 0.00 ft        | Slot Radius: | 13.200 in       |
|                       |                | Latitude:    | 32.266607       |
|                       |                | Longitude:   | -103.823862     |

|                      |                            |         |                     |
|----------------------|----------------------------|---------|---------------------|
| Well                 | Precious 30_18 Fed Com 34H |         |                     |
| Well Position        | +N/-S                      | 0.00 ft | Northing:           |
|                      | +E/-W                      | 0.00 ft | Easting:            |
| Position Uncertainty |                            | 2.00 ft | Wellhead Elevation: |
| Grid Convergence:    |                            | 0.28 °  | Ground Level:       |
|                      |                            |         | 3,345.10 ft         |

|           |             |             |                 |               |                     |
|-----------|-------------|-------------|-----------------|---------------|---------------------|
| Wellbore  | Wellbore #1 |             |                 |               |                     |
| Magnetics | Model Name  | Sample Date | Declination (°) | Dip Angle (°) | Field Strength (nT) |
|           | HDGM_FILE   | 12/14/2023  | 6.40            | 59.83         | 47,479.30000000     |

|                   |                       |            |               |               |
|-------------------|-----------------------|------------|---------------|---------------|
| Design            | Permitting Plan       |            |               |               |
| Audit Notes:      |                       |            |               |               |
| Version:          | Phase:                | PROTOTYPE  | Tie On Depth: | 0.00          |
| Vertical Section: | Depth From (TVD) (ft) | +N/-S (ft) | +E/-W (ft)    | Direction (°) |
|                   | 0.00                  | 0.00       | 0.00          | 1.60          |

|                          |               |                   |                               |                 |
|--------------------------|---------------|-------------------|-------------------------------|-----------------|
| Plan Survey Tool Program | Date          | 12/14/2023        |                               |                 |
| Depth From (ft)          | Depth To (ft) | Survey (Wellbore) | Tool Name                     | Remarks         |
| 1                        | 0.00          | 23,401.04         | Permitting Plan (Wellbore #1) | B001Mb_MWD+HRGM |
|                          |               |                   |                               | OWSG MWD + HRGM |

|                     |                 |             |                     |            |            |                       |                      |                     |         |                |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|----------------------|---------------------|---------|----------------|
| Plan Sections       |                 |             |                     |            |            |                       |                      |                     |         |                |
| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) | TFO (°) | Target         |
| 0.00                | 0.00            | 0.00        | 0.00                | 0.00       | 0.00       | 0.00                  | 0.00                 | 0.00                | 0.00    |                |
| 7,470.00            | 0.00            | 0.00        | 7,470.00            | 0.00       | 0.00       | 0.00                  | 0.00                 | 0.00                | 0.00    |                |
| 7,970.02            | 10.00           | 65.86       | 7,967.49            | 17.80      | 39.72      | 2.00                  | 2.00                 | 0.00                | 65.86   |                |
| 9,987.30            | 10.00           | 65.86       | 9,954.12            | 161.05     | 359.41     | 0.00                  | 0.00                 | 0.00                | 0.00    |                |
| 10,847.09           | 90.00           | 359.68      | 10,480.10           | 733.07     | 441.05     | 10.00                 | 9.30                 | -7.70               | -66.51  |                |
| 23,401.04           | 90.00           | 359.68      | 10,480.10           | 13,286.82  | 370.53     | 0.00                  | 0.00                 | 0.00                | 0.00    | PBHL (Precious |

# OXY

## Planning Report

|                  |                                     |                                     |                                 |
|------------------|-------------------------------------|-------------------------------------|---------------------------------|
| <b>Database:</b> | HOPSPP                              | <b>Local Co-ordinate Reference:</b> | Well Precious 30_18 Fed Com 34H |
| <b>Company:</b>  | ENGINEERING DESIGNS                 | <b>TVD Reference:</b>               | Assume RKB = 25' @ 3370.10ft    |
| <b>Project:</b>  | PRD NM DIRECTIONAL PLANS (NAD 1983) | <b>MD Reference:</b>                | Assume RKB = 25' @ 3370.10ft    |
| <b>Site:</b>     | Precious 30_18                      | <b>North Reference:</b>             | Grid                            |
| <b>Well:</b>     | Precious 30_18 Fed Com 34H          | <b>Survey Calculation Method:</b>   | Minimum Curvature               |
| <b>Wellbore:</b> | Wellbore #1                         |                                     |                                 |
| <b>Design:</b>   | Permitting Plan                     |                                     |                                 |

| Planned Survey      |                 |             |                     |            |            |                       |                       |                      |                     |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|-----------------------|----------------------|---------------------|
| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
| 0.00                | 0.00            | 0.00        | 0.00                | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 100.00              | 0.00            | 0.00        | 100.00              | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 200.00              | 0.00            | 0.00        | 200.00              | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 300.00              | 0.00            | 0.00        | 300.00              | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 400.00              | 0.00            | 0.00        | 400.00              | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 500.00              | 0.00            | 0.00        | 500.00              | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 600.00              | 0.00            | 0.00        | 600.00              | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 700.00              | 0.00            | 0.00        | 700.00              | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 800.00              | 0.00            | 0.00        | 800.00              | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 900.00              | 0.00            | 0.00        | 900.00              | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 1,000.00            | 0.00            | 0.00        | 1,000.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 1,100.00            | 0.00            | 0.00        | 1,100.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 1,200.00            | 0.00            | 0.00        | 1,200.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 1,300.00            | 0.00            | 0.00        | 1,300.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 1,400.00            | 0.00            | 0.00        | 1,400.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 1,500.00            | 0.00            | 0.00        | 1,500.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 1,600.00            | 0.00            | 0.00        | 1,600.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 1,700.00            | 0.00            | 0.00        | 1,700.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 1,800.00            | 0.00            | 0.00        | 1,800.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 1,900.00            | 0.00            | 0.00        | 1,900.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 2,000.00            | 0.00            | 0.00        | 2,000.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 2,100.00            | 0.00            | 0.00        | 2,100.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 2,200.00            | 0.00            | 0.00        | 2,200.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 2,300.00            | 0.00            | 0.00        | 2,300.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 2,400.00            | 0.00            | 0.00        | 2,400.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 2,500.00            | 0.00            | 0.00        | 2,500.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 2,600.00            | 0.00            | 0.00        | 2,600.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 2,700.00            | 0.00            | 0.00        | 2,700.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 2,800.00            | 0.00            | 0.00        | 2,800.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 2,900.00            | 0.00            | 0.00        | 2,900.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 3,000.00            | 0.00            | 0.00        | 3,000.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 3,100.00            | 0.00            | 0.00        | 3,100.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 3,200.00            | 0.00            | 0.00        | 3,200.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 3,300.00            | 0.00            | 0.00        | 3,300.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 3,400.00            | 0.00            | 0.00        | 3,400.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 3,500.00            | 0.00            | 0.00        | 3,500.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 3,600.00            | 0.00            | 0.00        | 3,600.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 3,700.00            | 0.00            | 0.00        | 3,700.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 3,800.00            | 0.00            | 0.00        | 3,800.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 3,900.00            | 0.00            | 0.00        | 3,900.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 4,000.00            | 0.00            | 0.00        | 4,000.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 4,100.00            | 0.00            | 0.00        | 4,100.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 4,200.00            | 0.00            | 0.00        | 4,200.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 4,300.00            | 0.00            | 0.00        | 4,300.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 4,400.00            | 0.00            | 0.00        | 4,400.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 4,500.00            | 0.00            | 0.00        | 4,500.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 4,600.00            | 0.00            | 0.00        | 4,600.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 4,700.00            | 0.00            | 0.00        | 4,700.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 4,800.00            | 0.00            | 0.00        | 4,800.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 4,900.00            | 0.00            | 0.00        | 4,900.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 5,000.00            | 0.00            | 0.00        | 5,000.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 5,100.00            | 0.00            | 0.00        | 5,100.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 5,200.00            | 0.00            | 0.00        | 5,200.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 5,300.00            | 0.00            | 0.00        | 5,300.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 5,400.00            | 0.00            | 0.00        | 5,400.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |



# OXY

## Planning Report

|                  |                                     |                                     |                                 |
|------------------|-------------------------------------|-------------------------------------|---------------------------------|
| <b>Database:</b> | HOPSPP                              | <b>Local Co-ordinate Reference:</b> | Well Precious 30_18 Fed Com 34H |
| <b>Company:</b>  | ENGINEERING DESIGNS                 | <b>TVD Reference:</b>               | Assume RKB = 25' @ 3370.10ft    |
| <b>Project:</b>  | PRD NM DIRECTIONAL PLANS (NAD 1983) | <b>MD Reference:</b>                | Assume RKB = 25' @ 3370.10ft    |
| <b>Site:</b>     | Precious 30_18                      | <b>North Reference:</b>             | Grid                            |
| <b>Well:</b>     | Precious 30_18 Fed Com 34H          | <b>Survey Calculation Method:</b>   | Minimum Curvature               |
| <b>Wellbore:</b> | Wellbore #1                         |                                     |                                 |
| <b>Design:</b>   | Permitting Plan                     |                                     |                                 |

| Planned Survey      |                 |             |                     |            |            |                       |                       |                      |                     |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|-----------------------|----------------------|---------------------|
| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
| 5,500.00            | 0.00            | 0.00        | 5,500.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 5,600.00            | 0.00            | 0.00        | 5,600.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 5,700.00            | 0.00            | 0.00        | 5,700.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 5,800.00            | 0.00            | 0.00        | 5,800.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 5,900.00            | 0.00            | 0.00        | 5,900.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 6,000.00            | 0.00            | 0.00        | 6,000.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 6,100.00            | 0.00            | 0.00        | 6,100.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 6,200.00            | 0.00            | 0.00        | 6,200.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 6,300.00            | 0.00            | 0.00        | 6,300.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 6,400.00            | 0.00            | 0.00        | 6,400.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 6,500.00            | 0.00            | 0.00        | 6,500.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 6,600.00            | 0.00            | 0.00        | 6,600.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 6,700.00            | 0.00            | 0.00        | 6,700.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 6,800.00            | 0.00            | 0.00        | 6,800.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 6,900.00            | 0.00            | 0.00        | 6,900.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 7,000.00            | 0.00            | 0.00        | 7,000.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 7,100.00            | 0.00            | 0.00        | 7,100.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 7,200.00            | 0.00            | 0.00        | 7,200.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 7,300.00            | 0.00            | 0.00        | 7,300.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 7,400.00            | 0.00            | 0.00        | 7,400.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 7,470.00            | 0.00            | 0.00        | 7,470.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 7,500.00            | 0.60            | 65.86       | 7,500.00            | 0.06       | 0.14       | 0.07                  | 2.00                  | 2.00                 | 0.00                |
| 7,600.00            | 2.60            | 65.86       | 7,599.96            | 1.21       | 2.69       | 1.28                  | 2.00                  | 2.00                 | 0.00                |
| 7,700.00            | 4.60            | 65.86       | 7,699.75            | 3.77       | 8.42       | 4.01                  | 2.00                  | 2.00                 | 0.00                |
| 7,800.00            | 6.60            | 65.86       | 7,799.27            | 7.76       | 17.33      | 8.24                  | 2.00                  | 2.00                 | 0.00                |
| 7,900.00            | 8.60            | 65.86       | 7,898.39            | 13.17      | 29.39      | 13.99                 | 2.00                  | 2.00                 | 0.00                |
| 7,970.02            | 10.00           | 65.86       | 7,967.49            | 17.80      | 39.72      | 18.90                 | 2.00                  | 2.00                 | 0.00                |
| 8,000.00            | 10.00           | 65.86       | 7,997.01            | 19.93      | 44.47      | 21.16                 | 0.00                  | 0.00                 | 0.00                |
| 8,100.00            | 10.00           | 65.86       | 8,095.49            | 27.03      | 60.32      | 28.70                 | 0.00                  | 0.00                 | 0.00                |
| 8,200.00            | 10.00           | 65.86       | 8,193.97            | 34.13      | 76.17      | 36.24                 | 0.00                  | 0.00                 | 0.00                |
| 8,300.00            | 10.00           | 65.86       | 8,292.45            | 41.23      | 92.01      | 43.78                 | 0.00                  | 0.00                 | 0.00                |
| 8,400.00            | 10.00           | 65.86       | 8,390.93            | 48.33      | 107.86     | 51.32                 | 0.00                  | 0.00                 | 0.00                |
| 8,500.00            | 10.00           | 65.86       | 8,489.41            | 55.43      | 123.71     | 58.86                 | 0.00                  | 0.00                 | 0.00                |
| 8,600.00            | 10.00           | 65.86       | 8,587.89            | 62.54      | 139.56     | 66.40                 | 0.00                  | 0.00                 | 0.00                |
| 8,700.00            | 10.00           | 65.86       | 8,686.37            | 69.64      | 155.40     | 73.94                 | 0.00                  | 0.00                 | 0.00                |
| 8,800.00            | 10.00           | 65.86       | 8,784.85            | 76.74      | 171.25     | 81.48                 | 0.00                  | 0.00                 | 0.00                |
| 8,900.00            | 10.00           | 65.86       | 8,883.34            | 83.84      | 187.10     | 89.02                 | 0.00                  | 0.00                 | 0.00                |
| 9,000.00            | 10.00           | 65.86       | 8,981.82            | 90.94      | 202.94     | 96.56                 | 0.00                  | 0.00                 | 0.00                |
| 9,100.00            | 10.00           | 65.86       | 9,080.30            | 98.04      | 218.79     | 104.10                | 0.00                  | 0.00                 | 0.00                |
| 9,200.00            | 10.00           | 65.86       | 9,178.78            | 105.14     | 234.64     | 111.64                | 0.00                  | 0.00                 | 0.00                |
| 9,300.00            | 10.00           | 65.86       | 9,277.26            | 112.24     | 250.49     | 119.18                | 0.00                  | 0.00                 | 0.00                |
| 9,400.00            | 10.00           | 65.86       | 9,375.74            | 119.35     | 266.33     | 126.72                | 0.00                  | 0.00                 | 0.00                |
| 9,500.00            | 10.00           | 65.86       | 9,474.22            | 126.45     | 282.18     | 134.26                | 0.00                  | 0.00                 | 0.00                |
| 9,600.00            | 10.00           | 65.86       | 9,572.70            | 133.55     | 298.03     | 141.80                | 0.00                  | 0.00                 | 0.00                |
| 9,700.00            | 10.00           | 65.86       | 9,671.18            | 140.65     | 313.88     | 149.35                | 0.00                  | 0.00                 | 0.00                |
| 9,800.00            | 10.00           | 65.86       | 9,769.66            | 147.75     | 329.72     | 156.89                | 0.00                  | 0.00                 | 0.00                |
| 9,900.00            | 10.00           | 65.86       | 9,868.14            | 154.85     | 345.57     | 164.43                | 0.00                  | 0.00                 | 0.00                |
| 9,987.30            | 10.00           | 65.86       | 9,954.12            | 161.05     | 359.41     | 171.01                | 0.00                  | 0.00                 | 0.00                |
| 10,000.00           | 10.57           | 59.50       | 9,966.61            | 162.09     | 361.42     | 172.11                | 10.00                 | 4.49                 | -50.09              |
| 10,100.00           | 17.77           | 29.90       | 10,063.62           | 180.02     | 376.96     | 190.46                | 10.00                 | 7.20                 | -29.60              |
| 10,200.00           | 26.80           | 18.31       | 10,156.10           | 214.74     | 391.69     | 225.58                | 10.00                 | 9.03                 | -11.60              |
| 10,300.00           | 36.31           | 12.36       | 10,241.24           | 265.19     | 405.14     | 276.38                | 10.00                 | 9.51                 | -5.95               |
| 10,400.00           | 46.01           | 8.64        | 10,316.45           | 329.84     | 416.91     | 341.34                | 10.00                 | 9.70                 | -3.72               |
| 10,500.00           | 55.80           | 5.97        | 10,379.44           | 406.73     | 426.64     | 418.47                | 10.00                 | 9.79                 | -2.66               |
| 10,600.00           | 65.63           | 3.87        | 10,428.31           | 493.52     | 434.04     | 505.43                | 10.00                 | 9.83                 | -2.10               |

# OXY

## Planning Report

|                  |                                     |                                     |                                 |
|------------------|-------------------------------------|-------------------------------------|---------------------------------|
| <b>Database:</b> | HOPSPP                              | <b>Local Co-ordinate Reference:</b> | Well Precious 30_18 Fed Com 34H |
| <b>Company:</b>  | ENGINEERING DESIGNS                 | <b>TVD Reference:</b>               | Assume RKB = 25' @ 3370.10ft    |
| <b>Project:</b>  | PRD NM DIRECTIONAL PLANS (NAD 1983) | <b>MD Reference:</b>                | Assume RKB = 25' @ 3370.10ft    |
| <b>Site:</b>     | Precious 30_18                      | <b>North Reference:</b>             | Grid                            |
| <b>Well:</b>     | Precious 30_18 Fed Com 34H          | <b>Survey Calculation Method:</b>   | Minimum Curvature               |
| <b>Wellbore:</b> | Wellbore #1                         |                                     |                                 |
| <b>Design:</b>   | Permitting Plan                     |                                     |                                 |

| Planned Survey      |                 |             |                     |            |            |                       |                       |                      |                     |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|-----------------------|----------------------|---------------------|
| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
| 10,700.00           | 75.48           | 2.07        | 10,461.56           | 587.57     | 438.87     | 599.58                | 10.00                 | 9.86                 | -1.80               |
| 10,800.00           | 85.35           | 0.43        | 10,478.19           | 686.03     | 441.00     | 698.05                | 10.00                 | 9.87                 | -1.64               |
| 10,847.09           | 90.00           | 359.68      | 10,480.10           | 733.07     | 441.05     | 745.08                | 10.00                 | 9.87                 | -1.60               |
| 10,900.00           | 90.00           | 359.68      | 10,480.10           | 785.97     | 440.75     | 797.95                | 0.00                  | 0.00                 | 0.00                |
| 11,000.00           | 90.00           | 359.68      | 10,480.10           | 885.97     | 440.19     | 897.90                | 0.00                  | 0.00                 | 0.00                |
| 11,100.00           | 90.00           | 359.68      | 10,480.10           | 985.97     | 439.63     | 997.84                | 0.00                  | 0.00                 | 0.00                |
| 11,200.00           | 90.00           | 359.68      | 10,480.10           | 1,085.97   | 439.06     | 1,097.79              | 0.00                  | 0.00                 | 0.00                |
| 11,300.00           | 90.00           | 359.68      | 10,480.10           | 1,185.97   | 438.50     | 1,197.73              | 0.00                  | 0.00                 | 0.00                |
| 11,400.00           | 90.00           | 359.68      | 10,480.10           | 1,285.96   | 437.94     | 1,297.67              | 0.00                  | 0.00                 | 0.00                |
| 11,500.00           | 90.00           | 359.68      | 10,480.10           | 1,385.96   | 437.38     | 1,397.62              | 0.00                  | 0.00                 | 0.00                |
| 11,600.00           | 90.00           | 359.68      | 10,480.10           | 1,485.96   | 436.82     | 1,497.56              | 0.00                  | 0.00                 | 0.00                |
| 11,700.00           | 90.00           | 359.68      | 10,480.10           | 1,585.96   | 436.26     | 1,597.50              | 0.00                  | 0.00                 | 0.00                |
| 11,800.00           | 90.00           | 359.68      | 10,480.10           | 1,685.96   | 435.69     | 1,697.45              | 0.00                  | 0.00                 | 0.00                |
| 11,900.00           | 90.00           | 359.68      | 10,480.10           | 1,785.96   | 435.13     | 1,797.39              | 0.00                  | 0.00                 | 0.00                |
| 12,000.00           | 90.00           | 359.68      | 10,480.10           | 1,885.96   | 434.57     | 1,897.34              | 0.00                  | 0.00                 | 0.00                |
| 12,100.00           | 90.00           | 359.68      | 10,480.10           | 1,985.95   | 434.01     | 1,997.28              | 0.00                  | 0.00                 | 0.00                |
| 12,200.00           | 90.00           | 359.68      | 10,480.10           | 2,085.95   | 433.45     | 2,097.22              | 0.00                  | 0.00                 | 0.00                |
| 12,300.00           | 90.00           | 359.68      | 10,480.10           | 2,185.95   | 432.88     | 2,197.17              | 0.00                  | 0.00                 | 0.00                |
| 12,400.00           | 90.00           | 359.68      | 10,480.10           | 2,285.95   | 432.32     | 2,297.11              | 0.00                  | 0.00                 | 0.00                |
| 12,500.00           | 90.00           | 359.68      | 10,480.10           | 2,385.95   | 431.76     | 2,397.06              | 0.00                  | 0.00                 | 0.00                |
| 12,600.00           | 90.00           | 359.68      | 10,480.10           | 2,485.95   | 431.20     | 2,497.00              | 0.00                  | 0.00                 | 0.00                |
| 12,700.00           | 90.00           | 359.68      | 10,480.10           | 2,585.94   | 430.64     | 2,596.94              | 0.00                  | 0.00                 | 0.00                |
| 12,800.00           | 90.00           | 359.68      | 10,480.10           | 2,685.94   | 430.08     | 2,696.89              | 0.00                  | 0.00                 | 0.00                |
| 12,900.00           | 90.00           | 359.68      | 10,480.10           | 2,785.94   | 429.51     | 2,796.83              | 0.00                  | 0.00                 | 0.00                |
| 13,000.00           | 90.00           | 359.68      | 10,480.10           | 2,885.94   | 428.95     | 2,896.78              | 0.00                  | 0.00                 | 0.00                |
| 13,100.00           | 90.00           | 359.68      | 10,480.10           | 2,985.94   | 428.39     | 2,996.72              | 0.00                  | 0.00                 | 0.00                |
| 13,200.00           | 90.00           | 359.68      | 10,480.10           | 3,085.94   | 427.83     | 3,096.66              | 0.00                  | 0.00                 | 0.00                |
| 13,300.00           | 90.00           | 359.68      | 10,480.10           | 3,185.93   | 427.27     | 3,196.61              | 0.00                  | 0.00                 | 0.00                |
| 13,400.00           | 90.00           | 359.68      | 10,480.10           | 3,285.93   | 426.71     | 3,296.55              | 0.00                  | 0.00                 | 0.00                |
| 13,500.00           | 90.00           | 359.68      | 10,480.10           | 3,385.93   | 426.14     | 3,396.50              | 0.00                  | 0.00                 | 0.00                |
| 13,600.00           | 90.00           | 359.68      | 10,480.10           | 3,485.93   | 425.58     | 3,496.44              | 0.00                  | 0.00                 | 0.00                |
| 13,700.00           | 90.00           | 359.68      | 10,480.10           | 3,585.93   | 425.02     | 3,596.38              | 0.00                  | 0.00                 | 0.00                |
| 13,800.00           | 90.00           | 359.68      | 10,480.10           | 3,685.93   | 424.46     | 3,696.33              | 0.00                  | 0.00                 | 0.00                |
| 13,900.00           | 90.00           | 359.68      | 10,480.10           | 3,785.93   | 423.90     | 3,796.27              | 0.00                  | 0.00                 | 0.00                |
| 14,000.00           | 90.00           | 359.68      | 10,480.10           | 3,885.92   | 423.34     | 3,896.21              | 0.00                  | 0.00                 | 0.00                |
| 14,100.00           | 90.00           | 359.68      | 10,480.10           | 3,985.92   | 422.77     | 3,996.16              | 0.00                  | 0.00                 | 0.00                |
| 14,200.00           | 90.00           | 359.68      | 10,480.10           | 4,085.92   | 422.21     | 4,096.10              | 0.00                  | 0.00                 | 0.00                |
| 14,300.00           | 90.00           | 359.68      | 10,480.10           | 4,185.92   | 421.65     | 4,196.05              | 0.00                  | 0.00                 | 0.00                |
| 14,400.00           | 90.00           | 359.68      | 10,480.10           | 4,285.92   | 421.09     | 4,295.99              | 0.00                  | 0.00                 | 0.00                |
| 14,500.00           | 90.00           | 359.68      | 10,480.10           | 4,385.92   | 420.53     | 4,395.93              | 0.00                  | 0.00                 | 0.00                |
| 14,600.00           | 90.00           | 359.68      | 10,480.10           | 4,485.91   | 419.97     | 4,495.88              | 0.00                  | 0.00                 | 0.00                |
| 14,700.00           | 90.00           | 359.68      | 10,480.10           | 4,585.91   | 419.40     | 4,595.82              | 0.00                  | 0.00                 | 0.00                |
| 14,800.00           | 90.00           | 359.68      | 10,480.10           | 4,685.91   | 418.84     | 4,695.77              | 0.00                  | 0.00                 | 0.00                |
| 14,900.00           | 90.00           | 359.68      | 10,480.10           | 4,785.91   | 418.28     | 4,795.71              | 0.00                  | 0.00                 | 0.00                |
| 15,000.00           | 90.00           | 359.68      | 10,480.10           | 4,885.91   | 417.72     | 4,895.65              | 0.00                  | 0.00                 | 0.00                |
| 15,100.00           | 90.00           | 359.68      | 10,480.10           | 4,985.91   | 417.16     | 4,995.60              | 0.00                  | 0.00                 | 0.00                |
| 15,200.00           | 90.00           | 359.68      | 10,480.10           | 5,085.90   | 416.60     | 5,095.54              | 0.00                  | 0.00                 | 0.00                |
| 15,300.00           | 90.00           | 359.68      | 10,480.10           | 5,185.90   | 416.03     | 5,195.49              | 0.00                  | 0.00                 | 0.00                |
| 15,400.00           | 90.00           | 359.68      | 10,480.10           | 5,285.90   | 415.47     | 5,295.43              | 0.00                  | 0.00                 | 0.00                |
| 15,500.00           | 90.00           | 359.68      | 10,480.10           | 5,385.90   | 414.91     | 5,395.37              | 0.00                  | 0.00                 | 0.00                |
| 15,600.00           | 90.00           | 359.68      | 10,480.10           | 5,485.90   | 414.35     | 5,495.32              | 0.00                  | 0.00                 | 0.00                |
| 15,700.00           | 90.00           | 359.68      | 10,480.10           | 5,585.90   | 413.79     | 5,595.26              | 0.00                  | 0.00                 | 0.00                |
| 15,800.00           | 90.00           | 359.68      | 10,480.10           | 5,685.90   | 413.23     | 5,695.20              | 0.00                  | 0.00                 | 0.00                |
| 15,900.00           | 90.00           | 359.68      | 10,480.10           | 5,785.89   | 412.66     | 5,795.15              | 0.00                  | 0.00                 | 0.00                |
| 16,000.00           | 90.00           | 359.68      | 10,480.10           | 5,885.89   | 412.10     | 5,895.09              | 0.00                  | 0.00                 | 0.00                |

# OXY

## Planning Report

|                  |                                     |                                     |                                 |
|------------------|-------------------------------------|-------------------------------------|---------------------------------|
| <b>Database:</b> | HOPSPP                              | <b>Local Co-ordinate Reference:</b> | Well Precious 30_18 Fed Com 34H |
| <b>Company:</b>  | ENGINEERING DESIGNS                 | <b>TVD Reference:</b>               | Assume RKB = 25' @ 3370.10ft    |
| <b>Project:</b>  | PRD NM DIRECTIONAL PLANS (NAD 1983) | <b>MD Reference:</b>                | Assume RKB = 25' @ 3370.10ft    |
| <b>Site:</b>     | Precious 30_18                      | <b>North Reference:</b>             | Grid                            |
| <b>Well:</b>     | Precious 30_18 Fed Com 34H          | <b>Survey Calculation Method:</b>   | Minimum Curvature               |
| <b>Wellbore:</b> | Wellbore #1                         |                                     |                                 |
| <b>Design:</b>   | Permitting Plan                     |                                     |                                 |

| Planned Survey      |                 |             |                     |            |            |                       |                       |                      |                     |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|-----------------------|----------------------|---------------------|
| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
| 16,100.00           | 90.00           | 359.68      | 10,480.10           | 5,985.89   | 411.54     | 5,995.04              | 0.00                  | 0.00                 | 0.00                |
| 16,200.00           | 90.00           | 359.68      | 10,480.10           | 6,085.89   | 410.98     | 6,094.98              | 0.00                  | 0.00                 | 0.00                |
| 16,300.00           | 90.00           | 359.68      | 10,480.10           | 6,185.89   | 410.42     | 6,194.92              | 0.00                  | 0.00                 | 0.00                |
| 16,400.00           | 90.00           | 359.68      | 10,480.10           | 6,285.89   | 409.86     | 6,294.87              | 0.00                  | 0.00                 | 0.00                |
| 16,500.00           | 90.00           | 359.68      | 10,480.10           | 6,385.88   | 409.29     | 6,394.81              | 0.00                  | 0.00                 | 0.00                |
| 16,600.00           | 90.00           | 359.68      | 10,480.10           | 6,485.88   | 408.73     | 6,494.76              | 0.00                  | 0.00                 | 0.00                |
| 16,700.00           | 90.00           | 359.68      | 10,480.10           | 6,585.88   | 408.17     | 6,594.70              | 0.00                  | 0.00                 | 0.00                |
| 16,800.00           | 90.00           | 359.68      | 10,480.10           | 6,685.88   | 407.61     | 6,694.64              | 0.00                  | 0.00                 | 0.00                |
| 16,900.00           | 90.00           | 359.68      | 10,480.10           | 6,785.88   | 407.05     | 6,794.59              | 0.00                  | 0.00                 | 0.00                |
| 17,000.00           | 90.00           | 359.68      | 10,480.10           | 6,885.88   | 406.49     | 6,894.53              | 0.00                  | 0.00                 | 0.00                |
| 17,100.00           | 90.00           | 359.68      | 10,480.10           | 6,985.87   | 405.92     | 6,994.48              | 0.00                  | 0.00                 | 0.00                |
| 17,200.00           | 90.00           | 359.68      | 10,480.10           | 7,085.87   | 405.36     | 7,094.42              | 0.00                  | 0.00                 | 0.00                |
| 17,300.00           | 90.00           | 359.68      | 10,480.10           | 7,185.87   | 404.80     | 7,194.36              | 0.00                  | 0.00                 | 0.00                |
| 17,400.00           | 90.00           | 359.68      | 10,480.10           | 7,285.87   | 404.24     | 7,294.31              | 0.00                  | 0.00                 | 0.00                |
| 17,500.00           | 90.00           | 359.68      | 10,480.10           | 7,385.87   | 403.68     | 7,394.25              | 0.00                  | 0.00                 | 0.00                |
| 17,600.00           | 90.00           | 359.68      | 10,480.10           | 7,485.87   | 403.12     | 7,494.20              | 0.00                  | 0.00                 | 0.00                |
| 17,700.00           | 90.00           | 359.68      | 10,480.10           | 7,585.87   | 402.55     | 7,594.14              | 0.00                  | 0.00                 | 0.00                |
| 17,800.00           | 90.00           | 359.68      | 10,480.10           | 7,685.86   | 401.99     | 7,694.08              | 0.00                  | 0.00                 | 0.00                |
| 17,900.00           | 90.00           | 359.68      | 10,480.10           | 7,785.86   | 401.43     | 7,794.03              | 0.00                  | 0.00                 | 0.00                |
| 18,000.00           | 90.00           | 359.68      | 10,480.10           | 7,885.86   | 400.87     | 7,893.97              | 0.00                  | 0.00                 | 0.00                |
| 18,100.00           | 90.00           | 359.68      | 10,480.10           | 7,985.86   | 400.31     | 7,993.91              | 0.00                  | 0.00                 | 0.00                |
| 18,200.00           | 90.00           | 359.68      | 10,480.10           | 8,085.86   | 399.75     | 8,093.86              | 0.00                  | 0.00                 | 0.00                |
| 18,300.00           | 90.00           | 359.68      | 10,480.10           | 8,185.86   | 399.18     | 8,193.80              | 0.00                  | 0.00                 | 0.00                |
| 18,400.00           | 90.00           | 359.68      | 10,480.10           | 8,285.85   | 398.62     | 8,293.75              | 0.00                  | 0.00                 | 0.00                |
| 18,500.00           | 90.00           | 359.68      | 10,480.10           | 8,385.85   | 398.06     | 8,393.69              | 0.00                  | 0.00                 | 0.00                |
| 18,600.00           | 90.00           | 359.68      | 10,480.10           | 8,485.85   | 397.50     | 8,493.63              | 0.00                  | 0.00                 | 0.00                |
| 18,700.00           | 90.00           | 359.68      | 10,480.10           | 8,585.85   | 396.94     | 8,593.58              | 0.00                  | 0.00                 | 0.00                |
| 18,800.00           | 90.00           | 359.68      | 10,480.10           | 8,685.85   | 396.38     | 8,693.52              | 0.00                  | 0.00                 | 0.00                |
| 18,900.00           | 90.00           | 359.68      | 10,480.10           | 8,785.85   | 395.81     | 8,793.47              | 0.00                  | 0.00                 | 0.00                |
| 19,000.00           | 90.00           | 359.68      | 10,480.10           | 8,885.84   | 395.25     | 8,893.41              | 0.00                  | 0.00                 | 0.00                |
| 19,100.00           | 90.00           | 359.68      | 10,480.10           | 8,985.84   | 394.69     | 8,993.35              | 0.00                  | 0.00                 | 0.00                |
| 19,200.00           | 90.00           | 359.68      | 10,480.10           | 9,085.84   | 394.13     | 9,093.30              | 0.00                  | 0.00                 | 0.00                |
| 19,300.00           | 90.00           | 359.68      | 10,480.10           | 9,185.84   | 393.57     | 9,193.24              | 0.00                  | 0.00                 | 0.00                |
| 19,400.00           | 90.00           | 359.68      | 10,480.10           | 9,285.84   | 393.01     | 9,293.19              | 0.00                  | 0.00                 | 0.00                |
| 19,500.00           | 90.00           | 359.68      | 10,480.10           | 9,385.84   | 392.44     | 9,393.13              | 0.00                  | 0.00                 | 0.00                |
| 19,600.00           | 90.00           | 359.68      | 10,480.10           | 9,485.84   | 391.88     | 9,493.07              | 0.00                  | 0.00                 | 0.00                |
| 19,700.00           | 90.00           | 359.68      | 10,480.10           | 9,585.83   | 391.32     | 9,593.02              | 0.00                  | 0.00                 | 0.00                |
| 19,800.00           | 90.00           | 359.68      | 10,480.10           | 9,685.83   | 390.76     | 9,692.96              | 0.00                  | 0.00                 | 0.00                |
| 19,900.00           | 90.00           | 359.68      | 10,480.10           | 9,785.83   | 390.20     | 9,792.90              | 0.00                  | 0.00                 | 0.00                |
| 20,000.00           | 90.00           | 359.68      | 10,480.10           | 9,885.83   | 389.64     | 9,892.85              | 0.00                  | 0.00                 | 0.00                |
| 20,100.00           | 90.00           | 359.68      | 10,480.10           | 9,985.83   | 389.07     | 9,992.79              | 0.00                  | 0.00                 | 0.00                |
| 20,200.00           | 90.00           | 359.68      | 10,480.10           | 10,085.83  | 388.51     | 10,092.74             | 0.00                  | 0.00                 | 0.00                |
| 20,300.00           | 90.00           | 359.68      | 10,480.10           | 10,185.82  | 387.95     | 10,192.68             | 0.00                  | 0.00                 | 0.00                |
| 20,400.00           | 90.00           | 359.68      | 10,480.10           | 10,285.82  | 387.39     | 10,292.62             | 0.00                  | 0.00                 | 0.00                |
| 20,500.00           | 90.00           | 359.68      | 10,480.10           | 10,385.82  | 386.83     | 10,392.57             | 0.00                  | 0.00                 | 0.00                |
| 20,600.00           | 90.00           | 359.68      | 10,480.10           | 10,485.82  | 386.27     | 10,492.51             | 0.00                  | 0.00                 | 0.00                |
| 20,700.00           | 90.00           | 359.68      | 10,480.10           | 10,585.82  | 385.70     | 10,592.46             | 0.00                  | 0.00                 | 0.00                |
| 20,800.00           | 90.00           | 359.68      | 10,480.10           | 10,685.82  | 385.14     | 10,692.40             | 0.00                  | 0.00                 | 0.00                |
| 20,900.00           | 90.00           | 359.68      | 10,480.10           | 10,785.81  | 384.58     | 10,792.34             | 0.00                  | 0.00                 | 0.00                |
| 21,000.00           | 90.00           | 359.68      | 10,480.10           | 10,885.81  | 384.02     | 10,892.29             | 0.00                  | 0.00                 | 0.00                |
| 21,100.00           | 90.00           | 359.68      | 10,480.10           | 10,985.81  | 383.46     | 10,992.23             | 0.00                  | 0.00                 | 0.00                |
| 21,200.00           | 90.00           | 359.68      | 10,480.10           | 11,085.81  | 382.90     | 11,092.18             | 0.00                  | 0.00                 | 0.00                |
| 21,300.00           | 90.00           | 359.68      | 10,480.10           | 11,185.81  | 382.33     | 11,192.12             | 0.00                  | 0.00                 | 0.00                |
| 21,400.00           | 90.00           | 359.68      | 10,480.10           | 11,285.81  | 381.77     | 11,292.06             | 0.00                  | 0.00                 | 0.00                |
| 21,500.00           | 90.00           | 359.68      | 10,480.10           | 11,385.81  | 381.21     | 11,392.01             | 0.00                  | 0.00                 | 0.00                |

OXY

Planning Report

|           |                                     |                              |                                 |
|-----------|-------------------------------------|------------------------------|---------------------------------|
| Database: | HOPSPP                              | Local Co-ordinate Reference: | Well Precious 30_18 Fed Com 34H |
| Company:  | ENGINEERING DESIGNS                 | TVD Reference:               | Assume RKB = 25' @ 3370.10ft    |
| Project:  | PRD NM DIRECTIONAL PLANS (NAD 1983) | MD Reference:                | Assume RKB = 25' @ 3370.10ft    |
| Site:     | Precious 30_18                      | North Reference:             | Grid                            |
| Well:     | Precious 30_18 Fed Com 34H          | Survey Calculation Method:   | Minimum Curvature               |
| Wellbore: | Wellbore #1                         |                              |                                 |
| Design:   | Permitting Plan                     |                              |                                 |

| Planned Survey      |                 |             |                     |            |            |                       |                       |                      |                     |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|-----------------------|----------------------|---------------------|
| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
| 21,600.00           | 90.00           | 359.68      | 10,480.10           | 11,485.80  | 380.65     | 11,491.95             | 0.00                  | 0.00                 | 0.00                |
| 21,700.00           | 90.00           | 359.68      | 10,480.10           | 11,585.80  | 380.09     | 11,591.90             | 0.00                  | 0.00                 | 0.00                |
| 21,800.00           | 90.00           | 359.68      | 10,480.10           | 11,685.80  | 379.53     | 11,691.84             | 0.00                  | 0.00                 | 0.00                |
| 21,900.00           | 90.00           | 359.68      | 10,480.10           | 11,785.80  | 378.96     | 11,791.78             | 0.00                  | 0.00                 | 0.00                |
| 22,000.00           | 90.00           | 359.68      | 10,480.10           | 11,885.80  | 378.40     | 11,891.73             | 0.00                  | 0.00                 | 0.00                |
| 22,100.00           | 90.00           | 359.68      | 10,480.10           | 11,985.80  | 377.84     | 11,991.67             | 0.00                  | 0.00                 | 0.00                |
| 22,200.00           | 90.00           | 359.68      | 10,480.10           | 12,085.79  | 377.28     | 12,091.61             | 0.00                  | 0.00                 | 0.00                |
| 22,300.00           | 90.00           | 359.68      | 10,480.10           | 12,185.79  | 376.72     | 12,191.56             | 0.00                  | 0.00                 | 0.00                |
| 22,400.00           | 90.00           | 359.68      | 10,480.10           | 12,285.79  | 376.16     | 12,291.50             | 0.00                  | 0.00                 | 0.00                |
| 22,500.00           | 90.00           | 359.68      | 10,480.10           | 12,385.79  | 375.59     | 12,391.45             | 0.00                  | 0.00                 | 0.00                |
| 22,600.00           | 90.00           | 359.68      | 10,480.10           | 12,485.79  | 375.03     | 12,491.39             | 0.00                  | 0.00                 | 0.00                |
| 22,700.00           | 90.00           | 359.68      | 10,480.10           | 12,585.79  | 374.47     | 12,591.33             | 0.00                  | 0.00                 | 0.00                |
| 22,800.00           | 90.00           | 359.68      | 10,480.10           | 12,685.78  | 373.91     | 12,691.28             | 0.00                  | 0.00                 | 0.00                |
| 22,900.00           | 90.00           | 359.68      | 10,480.10           | 12,785.78  | 373.35     | 12,791.22             | 0.00                  | 0.00                 | 0.00                |
| 23,000.00           | 90.00           | 359.68      | 10,480.10           | 12,885.78  | 372.79     | 12,891.17             | 0.00                  | 0.00                 | 0.00                |
| 23,100.00           | 90.00           | 359.68      | 10,480.10           | 12,985.78  | 372.22     | 12,991.11             | 0.00                  | 0.00                 | 0.00                |
| 23,200.00           | 90.00           | 359.68      | 10,480.10           | 13,085.78  | 371.66     | 13,091.05             | 0.00                  | 0.00                 | 0.00                |
| 23,300.00           | 90.00           | 359.68      | 10,480.10           | 13,185.78  | 371.10     | 13,191.00             | 0.00                  | 0.00                 | 0.00                |
| 23,400.00           | 90.00           | 359.68      | 10,480.10           | 13,285.78  | 370.54     | 13,290.94             | 0.00                  | 0.00                 | 0.00                |
| 23,401.04           | 90.00           | 359.68      | 10,480.10           | 13,286.82  | 370.53     | 13,291.99             | 0.00                  | 0.00                 | 0.00                |

| Design Targets                                                                                                                |               |              |           |            |            |                 |                |           |             |
|-------------------------------------------------------------------------------------------------------------------------------|---------------|--------------|-----------|------------|------------|-----------------|----------------|-----------|-------------|
| Target Name                                                                                                                   | Dip Angle (°) | Dip Dir. (°) | TVD (ft)  | +N/-S (ft) | +E/-W (ft) | Northing (usft) | Easting (usft) | Latitude  | Longitude   |
| KOP (Precious 30_18<br>- hit/miss target<br>- Shape<br>- Point                                                                | 0.00          | 0.00         | 0.00      | 152.08     | 444.30     | 461,738.87      | 702,899.59     | 32.268313 | -103.810621 |
| - plan misses target center by 469.61ft at 0.00ft MD (0.00 TVD, 0.00 N, 0.00 E)                                               |               |              |           |            |            |                 |                |           |             |
| PBHL (Precious 30_18<br>- plan hits target center<br>- Point                                                                  | 0.00          | 0.00         | 10,480.10 | 13,286.82  | 370.53     | 474,872.78      | 702,825.83     | 32.304416 | -103.810652 |
| FTP (Precious 30_18<br>- plan misses target center by 208.65ft at 10407.51ft MD (10321.63 TVD, 335.22 N, 417.72 E)<br>- Point | 0.00          | 0.00         | 10,480.10 | 202.07     | 444.03     | 461,788.86      | 702,899.32     | 32.268451 | -103.810621 |

| Formations          |                     |                 |           |         |                   |  |
|---------------------|---------------------|-----------------|-----------|---------|-------------------|--|
| Measured Depth (ft) | Vertical Depth (ft) | Name            | Lithology | Dip (°) | Dip Direction (°) |  |
| 377.10              | 377.10              | RUSTLER         |           |         |                   |  |
| 703.10              | 703.10              | SALADO          |           |         |                   |  |
| 2,601.10            | 2,601.10            | CASTILE         |           |         |                   |  |
| 4,075.10            | 4,075.10            | DELAWARE        |           |         |                   |  |
| 4,114.10            | 4,114.10            | BELL CANYON     |           |         |                   |  |
| 4,996.10            | 4,996.10            | CHERRY CANYON   |           |         |                   |  |
| 6,277.10            | 6,277.10            | BRUSHY CANYON   |           |         |                   |  |
| 7,962.52            | 7,960.10            | BONE SPRING     |           |         |                   |  |
| 9,011.46            | 8,993.10            | BONE SPRING 1ST |           |         |                   |  |
| 9,662.35            | 9,634.10            | BONE SPRING 2ND |           |         |                   |  |

OXY

Planning Report

|           |                                     |                              |                                 |
|-----------|-------------------------------------|------------------------------|---------------------------------|
| Database: | HOPSPP                              | Local Co-ordinate Reference: | Well Precious 30_18 Fed Com 34H |
| Company:  | ENGINEERING DESIGNS                 | TVD Reference:               | Assume RKB = 25' @ 3370.10ft    |
| Project:  | PRD NM DIRECTIONAL PLANS (NAD 1983) | MD Reference:                | Assume RKB = 25' @ 3370.10ft    |
| Site:     | Precious 30_18                      | North Reference:             | Grid                            |
| Well:     | Precious 30_18 Fed Com 34H          | Survey Calculation Method:   | Minimum Curvature               |
| Wellbore: | Wellbore #1                         |                              |                                 |
| Design:   | Permitting Plan                     |                              |                                 |

| Plan Annotations          |                           |                   |               |                     |  |
|---------------------------|---------------------------|-------------------|---------------|---------------------|--|
| Measured<br>Depth<br>(ft) | Vertical<br>Depth<br>(ft) | Local Coordinates |               | Comment             |  |
|                           |                           | +N/-S<br>(ft)     | +E/-W<br>(ft) |                     |  |
| 7,470.00                  | 7,470.00                  | 0.00              | 0.00          | Build 2°/100'       |  |
| 7,970.02                  | 7,967.49                  | 17.80             | 39.72         | Hold 10° Tangent    |  |
| 9,987.30                  | 9,954.12                  | 161.05            | 359.41        | KOP, Build 10°/100' |  |
| 10,847.09                 | 10,480.10                 | 733.07            | 441.05        | Landing Point       |  |
| 23,401.04                 | 10,480.10                 | 13,286.82         | 370.53        | TD at 23401.04' MD  |  |



## PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

|                                                                                                      |
|------------------------------------------------------------------------------------------------------|
| <b>OPERATOR'S NAME:</b> OXY USA INC.                                                                 |
| <b>WELL NAME &amp; NO.:</b> PRECIOUS 30-18 FEDERAL COM 34H                                           |
| <b>LOCATION:</b> Sec31, T23S, R31E                                                                   |
| <b>COUNTY:</b> <span style="border: 1px solid black; padding: 2px;">Eddy County, New Mexico</span> ▼ |

COA

| H <sub>2</sub> S           | <input type="radio"/> No <span style="float: right;"><input checked="" type="radio"/> Yes</span> |                                                       |                                                                    |                                                                                                                                                         |
|----------------------------|--------------------------------------------------------------------------------------------------|-------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Potash / WIPP</b>       | <input type="radio"/> None                                                                       | <input type="radio"/> Secretary                       | <input checked="" type="radio"/> R-111-Q                           | <input checked="" type="checkbox"/> Open Annulus<br>4-String Design: Open 1st Int x 2nd Annulus (ICP 2 below Relief Zone) <input type="checkbox"/> WIPP |
| <b>Cave / Karst</b>        | <input checked="" type="radio"/> Low                                                             | <input type="radio"/> Medium                          | <input type="radio"/> High                                         | <input type="radio"/> Critical                                                                                                                          |
| <b>Wellhead</b>            | <input type="radio"/> Conventional                                                               | <input checked="" type="radio"/> Multibowl            | <input type="radio"/> Both                                         | <input type="radio"/> Diverter                                                                                                                          |
| <b>Cementing</b>           | <input checked="" type="checkbox"/> Primary Squeeze                                              | <input type="checkbox"/> Cont. Squeeze                | <input checked="" type="checkbox"/> EchoMeter                      | <input type="checkbox"/> DV Tool                                                                                                                        |
| <b>Special Req</b>         | <input type="checkbox"/> Capitan Reef                                                            | <input type="checkbox"/> Water Disposal               | <input checked="" type="checkbox"/> COM                            | <input type="checkbox"/> Unit                                                                                                                           |
| <b>Waste Prev.</b>         | <input type="radio"/> Self-Certification                                                         | <input type="radio"/> Waste Min. Plan                 | <input checked="" type="radio"/> APD Submitted prior to 06/10/2024 |                                                                                                                                                         |
| <b>Additional Language</b> | <input checked="" type="checkbox"/> Flex Hose                                                    | <input checked="" type="checkbox"/> Casing Clearance  | <input type="checkbox"/> Pilot Hole                                | <input checked="" type="checkbox"/> Break Testing                                                                                                       |
|                            | <input checked="" type="checkbox"/> Four-String                                                  | <input checked="" type="checkbox"/> Offline Cementing | <input type="checkbox"/> Fluid-Filled                              |                                                                                                                                                         |

### A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H<sub>2</sub>S) Drilling Plan shall be activated AT SPUD. As a result, the Hydrogen Sulfide area must meet all requirements from 43 CFR 3176, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

***APD is within the R-111-Q defined boundary. Operator must follow all procedures and requirements listed within the updated order.***

### B. CASING

***Set points in COA reflects requirements from BLM Geology. Please review.***

1. The 13-3/8 inch surface casing shall be set at approximately **447** feet (a minimum of 70 feet (Eddy County) into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.
  - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.

- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or **500 pounds compressive strength**, whichever is greater. (This is to include the lead cement)
  - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
  - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The **10-3/4** inch intermediate salt protection casing shall be set at approximately **4025** feet **TVD**. *For R111Q, please set salt protection string prior to entering hydrocarbon bearing zone( Delaware.)* The minimum required fill of cement behind the **10-3/4** inch intermediate casing is:

**Option 1 (Single Stage):**

- Cement to surface. If cement does not circulate see B.1.a, c-d above. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst, Capitan Reef, or potash.**
3. The **7-5/8** inch second intermediate casing shall be set at approximately **10,847** feet. The minimum required fill of cement behind the **7-5/8** inch intermediate casing is:

**Option 1 (Primary + Post Frac Bradenhead):**

- Cement should tie-back **500 feet** into the previous casing but not higher than USGS Marker Bed No. 126. **Operator must verify top of cement per R-111-Q requirements.** Submit results to the BLM. If cement does not circulate, contact the appropriate BLM office. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst, Capitan Reef, or potash.**
- ❖ **A monitored open annulus will be incorporated during completion by leaving the Intermediate Casing 1 x Intermediate Casing 2 annulus un-cemented and monitored inside the Intermediate String.** Operator must follow monitoring requirements listed within R-111-Q. Tieback requirements shall be met within **180 days**.

Operator has proposed to pump down **intermediate 1 x intermediate 2** annulus post completion. **Operator must run Echo-meter to verify Cement Slurry/Fluid top in the annulus OR operator shall run a CBL from TD of the intermediate 2 casing to surface after the second stage BH to verify TOC.** Submit results to the BLM. No displacement fluid/wash out shall be utilized at the top of the cement slurry during second stage bradenhead when running Echo-meter if cement is required to surface. Adjust cement volume and excess based on a fluid caliper or similar method that reflects the as-drilled size of the wellbore.

Operator has proposed an open annulus completion in R-111-Q. Operator shall provide a method of verification pre-completion top of cement. **Submit results to the BLM. Pressure**

**monitoring device and Pressure Safety Valves must be installed at surface on both the intermediate annulus and the production annulus for the life of the well.**

**In the event of a casing failure during completion, the operator must contact the BLM at (575-706-2779) and (575-361-2822 Eddy County).**

4. The 5-1/2 inch production casing shall be set at approximately **23,401** feet. The minimum required fill of cement behind the 5-1/2 inch production casing is:

**Option 1 (Single Stage):**

- Cement should tie-back **500 feet** into the previous casing but not higher than USGS Marker Bed No. 126. **Operator must verify top of cement per R-111-Q requirements.** Submit results to the BLM. If cement does not circulate, contact the appropriate BLM office. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst, Capitan Reef, or potash.**

**C. PRESSURE CONTROL**

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).
1. Operator has proposed a multi-bowl wellhead assembly. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **10,000 (10M) psi. Variance is approved to use a 5000 (5M) Annular which shall be tested to 3500 psi.**
  - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
  - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
  - c. Manufacturer representative shall install the test plug for the initial BOP test.
  - d. If the cement does not circulate and one-inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
  - e. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172 must be followed.

**D. SPECIAL REQUIREMENT (S)**

**Communitization Agreement**

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- The operator will submit an as-drilled survey well plat of the well completion, but are not limited to, those specified in 43 CFR 3171 and 3172.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

### **BOPE Break Testing Variance**

- BOPE Break Testing is ONLY permitted for intervals utilizing a 5M BOPE or less. **(Annular preventer must be tested to a minimum of 70% of BOPE working pressure and shall be higher than the MASP.)**
- BOPE Break Testing is NOT permitted to drilling the production hole section.
- Variance only pertains to the intermediate hole-sections and no deeper than the Bone Springs formation.
- While in transfer between wells, the BOPE shall be secured by the hydraulic carrier or cradle.
- Any well control event while drilling require notification to the BLM Petroleum Engineer **(575-706-2779)** prior to the commencement of any BOPE Break Testing operations.
- A full BOPE test is required prior to drilling the first deep intermediate hole section. If any subsequent hole interval is deeper than the first, a full BOPE test will be required. (200' TVD tolerance between intermediate shoes is allowable).
- The BLM is to be contacted (575-361-2822 Eddy County) 4 hours prior to BOPE tests.
- As a minimum, a full BOPE test shall be performed at 21-day intervals.
- In the event any repairs or replacement of the BOPE is required, the BOPE shall test as per **43 CFR 3172.**
- If in the event break testing is not utilized, then a full BOPE test would be conducted.

### **Offline Cementing**

Approved for surface and intermediate intervals. Notify the BLM prior to the commencement of any offline cementing procedure.

### **Casing Clearance**

Overlap clearance OK.

## GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

### Contact Eddy County Petroleum Engineering Inspection Staff:

Email or call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220;

[BLM\\_NM\\_CFO\\_DrillingNotifications@BLM.GOV](mailto:BLM_NM_CFO_DrillingNotifications@BLM.GOV); (575) 361-2822

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
  - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
  - b. When the operator proposes to set surface casing with Spudder Rig
    - i. Notify the BLM when moving in and removing the Spudder Rig.
    - ii. Notify the BLM when moving in the 2<sup>nd</sup> Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
    - iii. BOP/BOPE test to be conducted per **43 CFR 3172** as soon as 2<sup>nd</sup> Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. For intervals in which cement to surface is required, cement to surface should be verified with a visual check and density or pH check to differentiate cement from spacer and drilling mud. The results should be documented in the driller's log and daily reports.

### A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.



2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends of both lead and tail cement, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-Q potash area, the NMOCD requirements shall be followed.

## **B. PRESSURE CONTROL**

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in **43 CFR 3172**.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's

requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.

3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
  - i. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
  - ii. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
  - iii. Manufacturer representative shall install the test plug for the initial BOP test.
  - iv. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.
  - v. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
  - i. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
  - ii. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve

- open. (only applies to single stage cement jobs, prior to the cement setting up.)
- iii. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for 8 hours or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
  - iv. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
  - v. The results of the test shall be reported to the appropriate BLM office.
  - vi. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
  - vii. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
  - viii. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per **43 CFR 3172**.

### **C. DRILLING MUD**

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

### **D. WASTE MATERIAL AND FLUIDS**

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be

disposed of on the well location or surrounding area. Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

**KPI -7/15/2024**




## **Permian Drilling Hydrogen Sulfide Drilling Operations Plan**

Open drill site. No homes or buildings are near the proposed location.

### **1. Escape**

Personnel shall escape upwind of wellbore in the event of an emergency gas release. Escape can take place through the lease road on the Southeast side of the location. Personnel need to move to a safe distance and block the entrance to location. If the primary route is not an option due to the wind direction, then a secondary egress route should be taken.

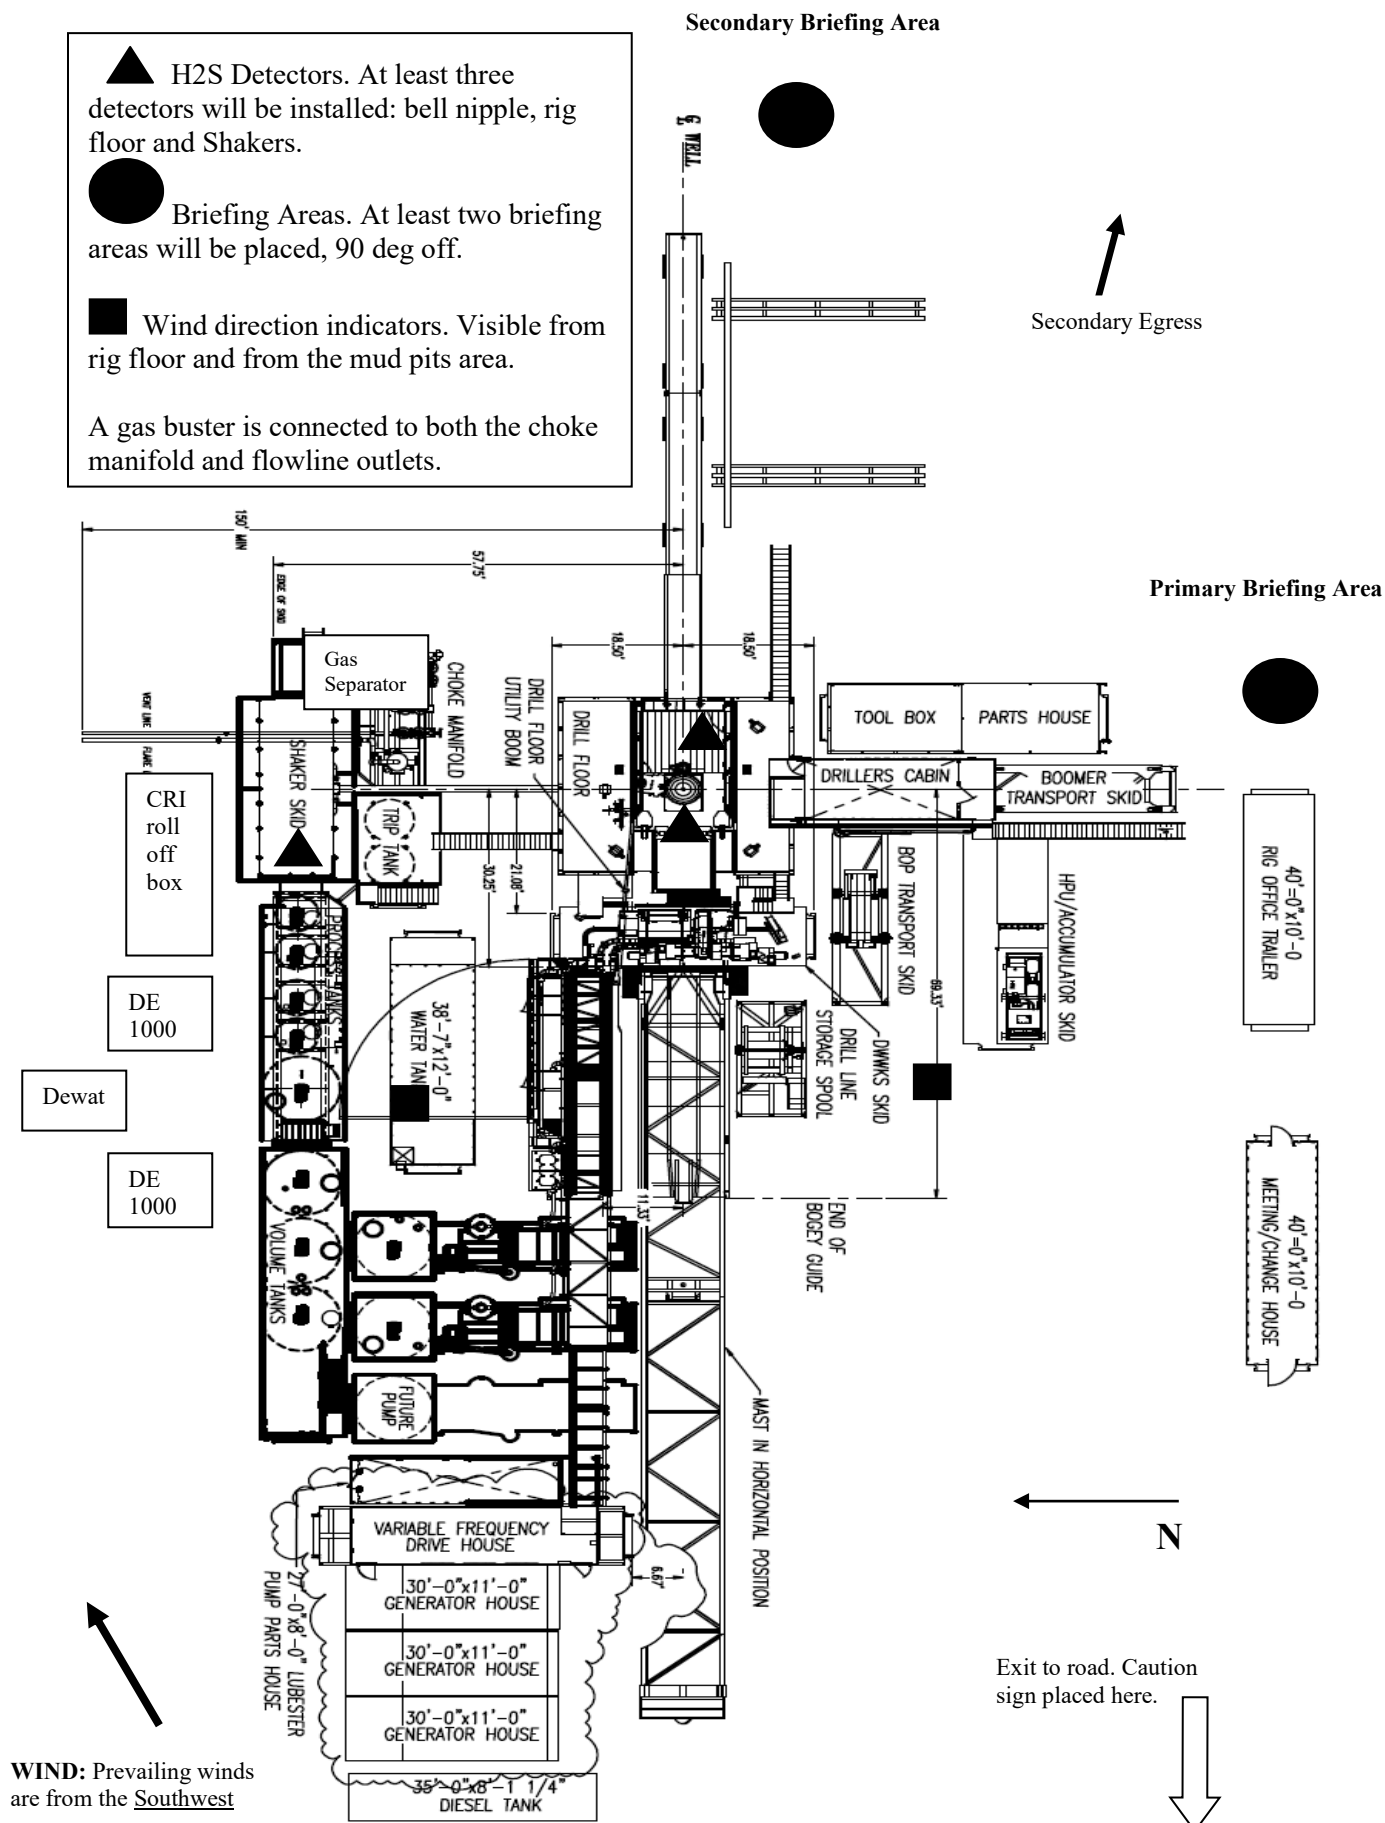





## **Permian Drilling Hydrogen Sulfide Drilling Operations Plan New Mexico**

### **Scope**

This contingency plan establishes guidelines for the public, all company employees, and contract employees who's work activities may involve exposure to hydrogen sulfide (H<sub>2</sub>S) gas.

While drilling this well, it is possible to encounter H<sub>2</sub>S bearing formations. At all times, the first barrier to control H<sub>2</sub>S emissions will be the drilling fluid, which will have a density high enough to control influx.

### **Objective**

1. Provide an immediate and predetermined response plan to any condition when H<sub>2</sub>S is detected. All H<sub>2</sub>S detections in excess of 10 parts per million (ppm) concentration are considered an Emergency.
2. Prevent any and all accidents, and prevent the uncontrolled release of hydrogen sulfide into the atmosphere.
3. Provide proper evacuation procedures to cope with emergencies.
4. Provide immediate and adequate medical attention should an injury occur.

### **Discussion**

|                                |                                                                                                               |
|--------------------------------|---------------------------------------------------------------------------------------------------------------|
| Implementation:                | This plan with all details is to be fully implemented before drilling to <u>commence</u> .                    |
| Emergency response Procedure:  | This section outlines the conditions and denotes steps to be taken in the event of an emergency.              |
| Emergency equipment Procedure: | This section outlines the safety and emergency equipment that will be required for the drilling of this well. |
| Training provisions:           | This section outlines the training provisions that must be adhered to prior to drilling.                      |
| Drilling emergency call lists: | Included are the telephone numbers of all persons to be contacted should an emergency exist.                  |
| Briefing:                      | This section deals with the briefing of all people involved in the drilling operation.                        |
| Public safety:                 | Public safety personnel will be made aware of any potential evacuation and any additional support needed.     |
| Check lists:                   | Status check lists and procedural check lists have been included to insure adherence to the plan.             |
| General information:           | A general information section has been included to supply support information.                                |

### **Hydrogen Sulfide Training**

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on the well:

1. The hazards and characteristics of H<sub>2</sub>S.
2. Proper use and maintenance of personal protective equipment and life support systems.
3. H<sub>2</sub>S detection.
4. Proper use of H<sub>2</sub>S detectors, alarms, warning systems, briefing areas, evacuation procedures and prevailing winds.
5. Proper techniques for first aid and rescue procedures.
6. Physical effects of hydrogen sulfide on the human body.
7. Toxicity of hydrogen sulfide and sulfur dioxide.
8. Use of SCBA and supplied air equipment.
9. First aid and artificial respiration.
10. Emergency rescue.

In addition, supervisory personnel will be trained in the following areas:

1. The effects of H<sub>2</sub>S on metal components. If high tensile strength tubular is to be used, personnel will be trained in their special maintenance requirements.
2. Corrective action and shut-in procedures when drilling a well, blowout prevention and well control procedures.
3. The contents and requirements of the H<sub>2</sub>S Drilling Operations Plan.

H<sub>2</sub>S training refresher must have been taken within one year prior to drilling the well. Specifics on the well to be drilled will be discussed during the pre-spud meeting. H<sub>2</sub>S and well control (choke) drills will be performed while drilling the well, at least on a weekly basis. This plan shall be available in the well site. All personnel will be required to carry the documentation proving that the H<sub>2</sub>S training has been taken.

#### **Service company and visiting personnel**

- A. Each service company that will be on this well will be notified if the zone contains H<sub>2</sub>S.
- B. Each service company must provide for the training and equipment of their employees before they arrive at the well site.
- C. Each service company will be expected to attend a well site

### **Emergency Equipment Requirements**

1. **Well control equipment**

The well shall have hydraulic BOP equipment for the anticipated pressures. Equipment is to be tested on installation and follow Oxy Well Control standard, as well as 43 CFR part 3170 Subpart 3172.

*Special control equipment:*

- A. Hydraulic BOP equipment with remote control on ground.  
Remotely operated choke.
- B. Rotating head
- C. Gas buster equipment shall be installed before drilling out of surface pipe.

2. **Protective equipment for personnel**

- A. Four (4) 30-minute positive pressure air packs (2 at each briefing area) on location.
- B. Adequate fire extinguishers shall be located at strategic locations.
- C. Radio / cell telephone communication will be available at the rig.
  - Rig floor and trailers.
  - Vehicle.

3. **Hydrogen sulfide sensors and alarms**

- A. H<sub>2</sub>S sensor with alarms will be located on the rig floor, at the bell nipple, and at the flow line. These monitors will be set to alarm at 10 ppm with strobe light, and audible alarm.
- B. Hand operated detectors with tubes.
- C. H<sub>2</sub>S monitor tester (to be provided by contract Safety Company.)
- D. There shall be one combustible gas detector on location at all times.

4. **Visual Warning Systems**

- A. One sign located at each location entrance with the following language:

**Caution – potential poison gas  
Hydrogen sulfide  
No admittance without authorization**

*Wind sock – wind streamers:*

- A. One 36” (in length) wind sock located at protection center, at height visible from rig floor.
- B. One 36” (in length) wind sock located at height visible from pit areas.

*Condition flags*

- A. One each condition flag to be displayed to denote conditions.

**green – normal conditions**

**yellow – potential danger**

**red – danger, H2S present**

- B. Condition flag shall be posted at each location sign entrance.

5. Mud Program

The mud program is designed to minimize the risk of having H2S and other formation fluids at surface. Proper mud weight and safe drilling practices will be applied. H2S scavengers will be used to minimize the hazards while drilling. Below is a summary of the drilling program.

*Mud inspection devices:*

Garrett gas train or hatch tester for inspection of sulfide concentration in mud system.

6. Metallurgy

- A. Drill string, casing, tubing, wellhead, blowout preventers, drilling spools or adapters, kill lines, choke manifold, lines and valves shall be suitable for the H2S service.
- B. All the elastomers, packing, seals and ring gaskets shall be suitable for H2S service.

7. Well Testing

No drill stem test will be performed on this well.

8. Evacuation plan

Evacuation routes should be established prior to well spud for each well and discussed with all rig personnel.

9. Designated area

- A. Parking and visitor area: all vehicles are to be parked at a predetermined safe distance from the wellhead.
- B. There will be a designated smoking area.
- C. Two briefing areas on either side of the location at the maximum allowable distance from the well bore so they offset prevailing winds perpendicularly, or at a 45-degree angle if wind direction tends to shift in the area.

**Emergency procedures**

- A. In the event of any evidence of H<sub>2</sub>S level above 10 ppm, take the following steps:
  - 1. The Driller will pick up off bottom, shut down the pumps, slow down the pipe rotation.
  - 2. Secure and don escape breathing equipment, report to the upwind designated safe briefing / muster area.
  - 3. All personnel on location will be accounted for and emergency search should begin for any missing, the Buddy System will be implemented.
  - 4. Order non-essential personnel to leave the well site, order all essential personnel out of the danger zone and upwind to the nearest designated safe briefing / muster area.
  - 5. Entrance to the location will be secured to a higher level than our usual "Meet and Greet" requirement, and the proper condition flag will be displayed at the entrance to the location.
  - 6. Take steps to determine if the H<sub>2</sub>S level can be corrected or suppressed and, if so, proceed as required.
- B. If uncontrollable conditions occur:
  - 1. Take steps to protect and/or remove any public in the down-wind area from the rig – partial evacuation and isolation. Notify necessary public safety personnel and appropriate regulatory entities (i.e. BLM) of the situation.



2. Remove all personnel to the nearest upwind designated safe briefing / muster area or off location.
3. Notify public safety personnel of safe briefing / muster area.
4. An assigned crew member will blockade the entrance to the location. No unauthorized personnel will be allowed entry to the location.
5. Proceed with best plan (at the time) to regain control of the well. Maintain tight security and safety procedures.

C. Responsibility:

1. Designated personnel.
  - a. Shall be responsible for the total implementation of this plan.
  - b. Shall be in complete command during any emergency.
  - c. Shall designate a back-up.

- All personnel:
1. On alarm, don escape unit and report to the nearest upwind designated safe briefing / muster area upw
  2. Check status of personnel (buddy system).
  3. Secure breathing equipment.
  4. Await orders from supervisor.

- Drill site manager:
1. Don escape unit if necessary and report to nearest upwind designated safe briefing / muster area.
  2. Coordinate preparations of individuals to return to point of release with tool pusher and driller (using the buddy system).
  3. Determine H<sub>2</sub>S concentrations.
  4. Assess situation and take control measures.

- Tool pusher:
1. Don escape unit Report to up nearest upwind designated safe briefing / muster area.
  2. Coordinate preparation of individuals to return to point of release with tool pusher drill site manager (using the buddy system).
  3. Determine H<sub>2</sub>S concentration.
  4. Assess situation and take control measures.

- Driller:
1. Don escape unit, shut down pumps, continue

- rotating DP.
  - 2. Check monitor for point of release.
  - 3. Report to nearest upwind designated safe briefing / muster area.
  - 4. Check status of personnel (in an attempt to rescue, use the buddy system).
  - 5. Assigns least essential person to notify Drill Site Manager and tool pusher by quickest means in case of their absence.
  - 6. Assumes the responsibilities of the Drill Site Manager and tool pusher until they arrive should they be absent.
- Derrick man
- Floor man #1
- Floor man #2
- Mud engineer:
- 1. Will remain in briefing / muster area until instructed by supervisor.
- 1. Report to nearest upwind designated safe briefing / muster area.
  - 2. When instructed, begin check of mud for ph and H2S level. (Garett gas train.)
- Safety personnel:
- 1. Mask up and check status of all personnel and secure operations as instructed by drill site manager.

### **Taking a kick**

When taking a kick during an H2S emergency, all personnel will follow standard Well control procedures after reporting to briefing area and masking up.

### **Open-hole logging**

All unnecessary personnel off floor. Drill Site Manager and safety personnel should monitor condition, advise status and determine need for use of air equipment.

### **Running casing or plugging**

Following the same “tripping” procedure as above. Drill Site Manager and safety personnel should determine if all personnel have access to protective equipment.

### **Ignition procedures**

The decision to ignite the well is the responsibility of the operator (Oxy Drilling Management). The decision should be made only as a last resort and in a situation where it is clear that:

1. Human life and property are endangered.
2. There is no hope controlling the blowout under the prevailing conditions at the well.

#### **Instructions for igniting the well**

1. Two people are required for the actual igniting operation. They must wear self-contained breathing units and have a safety rope attached. One man (tool pusher or safety engineer) will check the atmosphere for explosive gases with the gas monitor. The other man is responsible for igniting the well.
2. Primary method to ignite: 25 mm flare gun with range of approximately 500 feet.
3. Ignite upwind and do not approach any closer than is warranted.
4. Select the ignition site best for protection, and which offers an easy escape route.
5. Before firing, check for presence of combustible gas.
6. After lighting, continue emergency action and procedure as before.
7. All unassigned personnel will remain in briefing area until instructed by supervisor or directed by the Drill Site Manager.

**Remember:** After well is ignited, burning hydrogen sulfide will convert to sulfur dioxide, which is also highly toxic. **Do not assume the area is safe after the well is ignited.**

**Status check list**

Note: All items on this list must be completed before drilling to production casing point.

1. H2S sign at location entrance.
2. Two (2) wind socks located as required.
3. Four (4) 30-minute positive pressure air packs (2 at each Briefing area) on location for all rig personnel and mud loggers.
4. Air packs inspected and ready for use.
5. Cascade system and hose line hook-up as needed.
6. Cascade system for refilling air bottles as needed.
7. Condition flag on location and ready for use.
8. H2S detection system hooked up and tested.
9. H2S alarm system hooked up and tested.
10. Hand operated H2S detector with tubes on location.
11. 1 – 100' length of nylon rope on location.
12. All rig crew and supervisors trained as required.
13. All outside service contractors advised of potential H2S hazard on well.
14. No smoking sign posted and a designated smoking area identified.
15. Calibration of all H2S equipment shall be noted on the IADC report.

Checked by: \_\_\_\_\_ Date: \_\_\_\_\_

**Procedural check list during H2S events**

**Perform each tour:**

1. Check fire extinguishers to see that they have the proper charge.
2. Check breathing equipment to ensure that it is in proper working order.
3. Make sure all the H2S detection system is operative.

**Perform each week:**

1. Check each piece of breathing equipment to make sure that demand or forced air regulator is working. This requires that the bottle be opened and the mask assembly be put on tight enough so that when you inhale, you receive air or feel air flow.
2. BOP skills (well control drills).
3. Check supply pressure on BOP accumulator stand by source.
4. Check breathing equipment mask assembly to see that straps are loosened and turned back, ready to put on.
5. Check pressure on breathing equipment air bottles to make sure they are charged to full volume. ( Air quality checked for proper air grade "D" before bringing to location)
6. Confirm pressure on all supply air bottles.
7. Perform breathing equipment drills with on-site personnel.
8. Check the following supplies for availability.
  - A. Emergency telephone list.
  - B. Hand operated H2S detectors and tubes.

**General evacuation plan**

1. When the company approved supervisor (Drill Site Manager, consultant, rig pusher, or driller) determines the H2S gas cannot be limited to the well location and the public will be involved, he will activate the evacuation plan.
2. Drill Site Manager or designee will notify local government agency that a hazardous condition exists and evacuation needs to be implemented.
3. Company or contractor safety personnel that have been trained in the use of H2S detection equipment and self-contained breathing equipment will monitor H2S concentrations, wind directions, and area of exposure. They will delineate the outer perimeter of the hazardous gas area. Extension to the evacuation area will be determined from information gathered.
4. Law enforcement personnel (state police, police dept., fire dept., and sheriff's dept.) Will be called to aid in setting up and maintaining road blocks. Also, they will aid in evacuation of the public if necessary.
5. After the discharge of gas has been controlled, company safety personnel will determine when the area is safe for re-entry.

**Important: Law enforcement personnel will not be asked to come into a contaminated area. Their assistance will be limited to uncontaminated areas. Constant radio contact will be maintained with them.**



### **Emergency actions**

#### **Well blowout – if emergency**

1. Evacuate all personnel to “Safe Briefing / Muster Areas” or off location if needed.
2. If sour gas – evacuate rig personnel.
3. If sour gas – evacuate public within 3000 ft radius of exposure.
4. Don SCBA and shut well in if possible using the buddy system.
5. Notify Drilling Superintendent and call 911 for emergency help (fire dept and ambulance) if needed.
6. Implement the Blowout Contingency Plan, and Drilling Emergency Action Plan.
6. Give first aid as needed.

#### **Person down location/facility**

1. If immediately possible, contact 911. Give location and wait for confirmation.
2. Don SCBA and perform rescue operation using buddy system.

### Toxic effects of hydrogen sulfide

Hydrogen sulfide is extremely toxic. The acceptable ceiling concentration for eight-hour exposure is 10 ppm, which is .001% by volume. Hydrogen sulfide is heavier than air (specific gravity – 1.192) and colorless. It forms an explosive mixture with air between 4.3 and 46.0 percent by volume. Hydrogen sulfide is almost as toxic as hydrogen cyanide and is between five and six times more toxic than carbon monoxide. Toxicity data for hydrogen sulfide and various other gases are compared in table i. Physical effects at various hydrogen sulfide exposure levels are shown in table ii.

Table i  
Toxicity of various gases

| Common name      | Chemical formula | Specific gravity (sc=1) | Threshold limit (1) | Hazardous limit (2)         | Lethal concentration (3) |
|------------------|------------------|-------------------------|---------------------|-----------------------------|--------------------------|
| Hydrogen Cyanide | Hcn              | 0.94                    | 10 ppm              | 150 ppm/hr                  | 300 ppm                  |
| Hydrogen Sulfide | H2S              | 1.18                    | 10 ppm              | 250 ppm/hr                  | 600 ppm                  |
| Sulfur Dioxide   | So2              | 2.21                    | 5 ppm               | -                           | 1000 ppm                 |
| Chlorine         | Cl2              | 2.45                    | 1 ppm               | 4 ppm/hr                    | 1000 ppm                 |
| Carbon Monoxide  | Co               | 0.97                    | 50 ppm              | 400 ppm/hr                  | 1000 ppm                 |
| Carbon Dioxide   | Co2              | 1.52                    | 5000 ppm            | 5%                          | 10%                      |
| Methane          | Ch4              | 0.55                    | 90,000 ppm          | Combustible above 5% in air |                          |

- 1) threshold limit – concentration at which it is believed that all workers may be repeatedly exposed day after day without adverse effects.
- 2) hazardous limit – concentration that will cause death with short-term exposure.
- 3) lethal concentration – concentration that will cause death with short-term exposure.

### Toxic effects of hydrogen sulfide

Table ii  
Physical effects of hydrogen sulfide

| Percent (%) | Ppm | Concentration<br>Grains<br>100 std. Ft3* | Physical effects             |
|-------------|-----|------------------------------------------|------------------------------|
| 0.001       | <10 | 00.65                                    | Obvious and unpleasant odor. |

|       |      |       |                                                                                    |
|-------|------|-------|------------------------------------------------------------------------------------|
| 0.002 | 10   | 01.30 | Safe for 8 hours of exposure.                                                      |
| 0.010 | 100  | 06.48 | Kill smell in 3 – 15 minutes. May sting eyes and throat.                           |
| 0.020 | 200  | 12.96 | Kills smell shortly; stings eyes and throat.                                       |
| 0.050 | 500  | 32.96 | Dizziness; breathing ceases in a few minutes; needs prompt artificial respiration. |
| 0.070 | 700  | 45.36 | Unconscious quickly; death will result if not rescued promptly.                    |
| 0.100 | 1000 | 64.30 | Unconscious at once; followed by death within minutes.                             |

\*at 15.00 psia and 60'f.

**Use of self-contained breathing equipment (SCBA)**

1. Written procedures shall be prepared covering safe use of SCBA's in dangerous atmosphere, which might be encountered in normal operations or in emergencies. Personnel shall be familiar with these procedures and the available SCBA.
2. SCBA's shall be inspected frequently at random to insure that they are properly used, cleaned, and maintained.
3. Anyone who may use the SCBA's shall be trained in how to insure proper face-piece to face seal. They shall wear SCBA's in normal air and then wear them in a test atmosphere. (note: such items as facial hair {beard or sideburns} and eyeglasses will not allow proper seal.) Anyone that may be reasonably expected to wear SCBA's should have these items removed before entering a toxic atmosphere. A special mask must be obtained for anyone who must wear eyeglasses or contact lenses.
4. Maintenance and care of SCBA's:
  - a. A program for maintenance and care of SCBA's shall include the following:
    1. Inspection for defects, including leak checks.
    2. Cleaning and disinfecting.
    3. Repair.
    4. Storage.
  - b. Inspection, self-contained breathing apparatus for emergency use shall be inspected monthly.
    1. Fully charged cylinders.
    2. Regulator and warning device operation.
    3. Condition of face piece and connections.
    4. Rubber parts shall be maintained to keep them pliable and prevent deterioration.
  - c. Routinely used SCBA's shall be collected, cleaned and disinfected as frequently as necessary to insure proper protection is provided.
5. Persons assigned tasks that requires use of self-contained breathing equipment shall be certified physically fit (medically cleared) for breathing equipment usage at least annually.
6. SCBA's should be worn when:
  - A. Any employee works near the top or on top of any tank unless test reveals less than 10 ppm of H<sub>2</sub>S.

- B. When breaking out any line where H<sub>2</sub>S can reasonably be expected.
- C. When sampling air in areas to determine if toxic concentrations of H<sub>2</sub>S exists.
- D. When working in areas where over 10 ppm H<sub>2</sub>S has been detected.
- E. At any time there is a doubt as to the H<sub>2</sub>S level in the area to be entered.

**Rescue**  
**First aid for H<sub>2</sub>S poisoning**

Do not panic!

Remain calm – think!

1. Don SCBA breathing equipment.
2. Remove victim(s) utilizing buddy system to fresh air as quickly as possible. (go up-wind from source or at right angle to the wind. Not down wind.)
3. Briefly apply chest pressure – arm lift method of artificial respiration to clean the victim's lungs and to avoid inhaling any toxic gas directly from the victim's lungs.
4. Provide for prompt transportation to the hospital, and continue giving artificial respiration if needed.
5. Hospital(s) or medical facilities need to be informed, before-hand, of the possibility of H<sub>2</sub>S gas poisoning – no matter how remote the possibility is.
6. Notify emergency room personnel that the victim(s) has been exposed to H<sub>2</sub>S gas.


Besides basic first aid, everyone on location should have a good working knowledge of artificial respiration.

Revised CM 6/27/2012

NORTH

- 1. PRECIOUS 30\_18 FED COM 33H
- 2. PRECIOUS 30\_18 FED COM 34H
- 3. PRECIOUS 30\_18 FED COM 24H
- 4. PRECIOUS 30\_18 FED COM 25H
- 5. PRECIOUS 30\_18 FED COM 26H


- EXISTING WELLS
- 6. ARKENSTONE 31 FED 5H
  - 7. ARKENSTONE 31 FED 6H
  - 8. ARKENSTONE 31 FED 10H
  - 9. ARKENSTONE 31 FED 171H


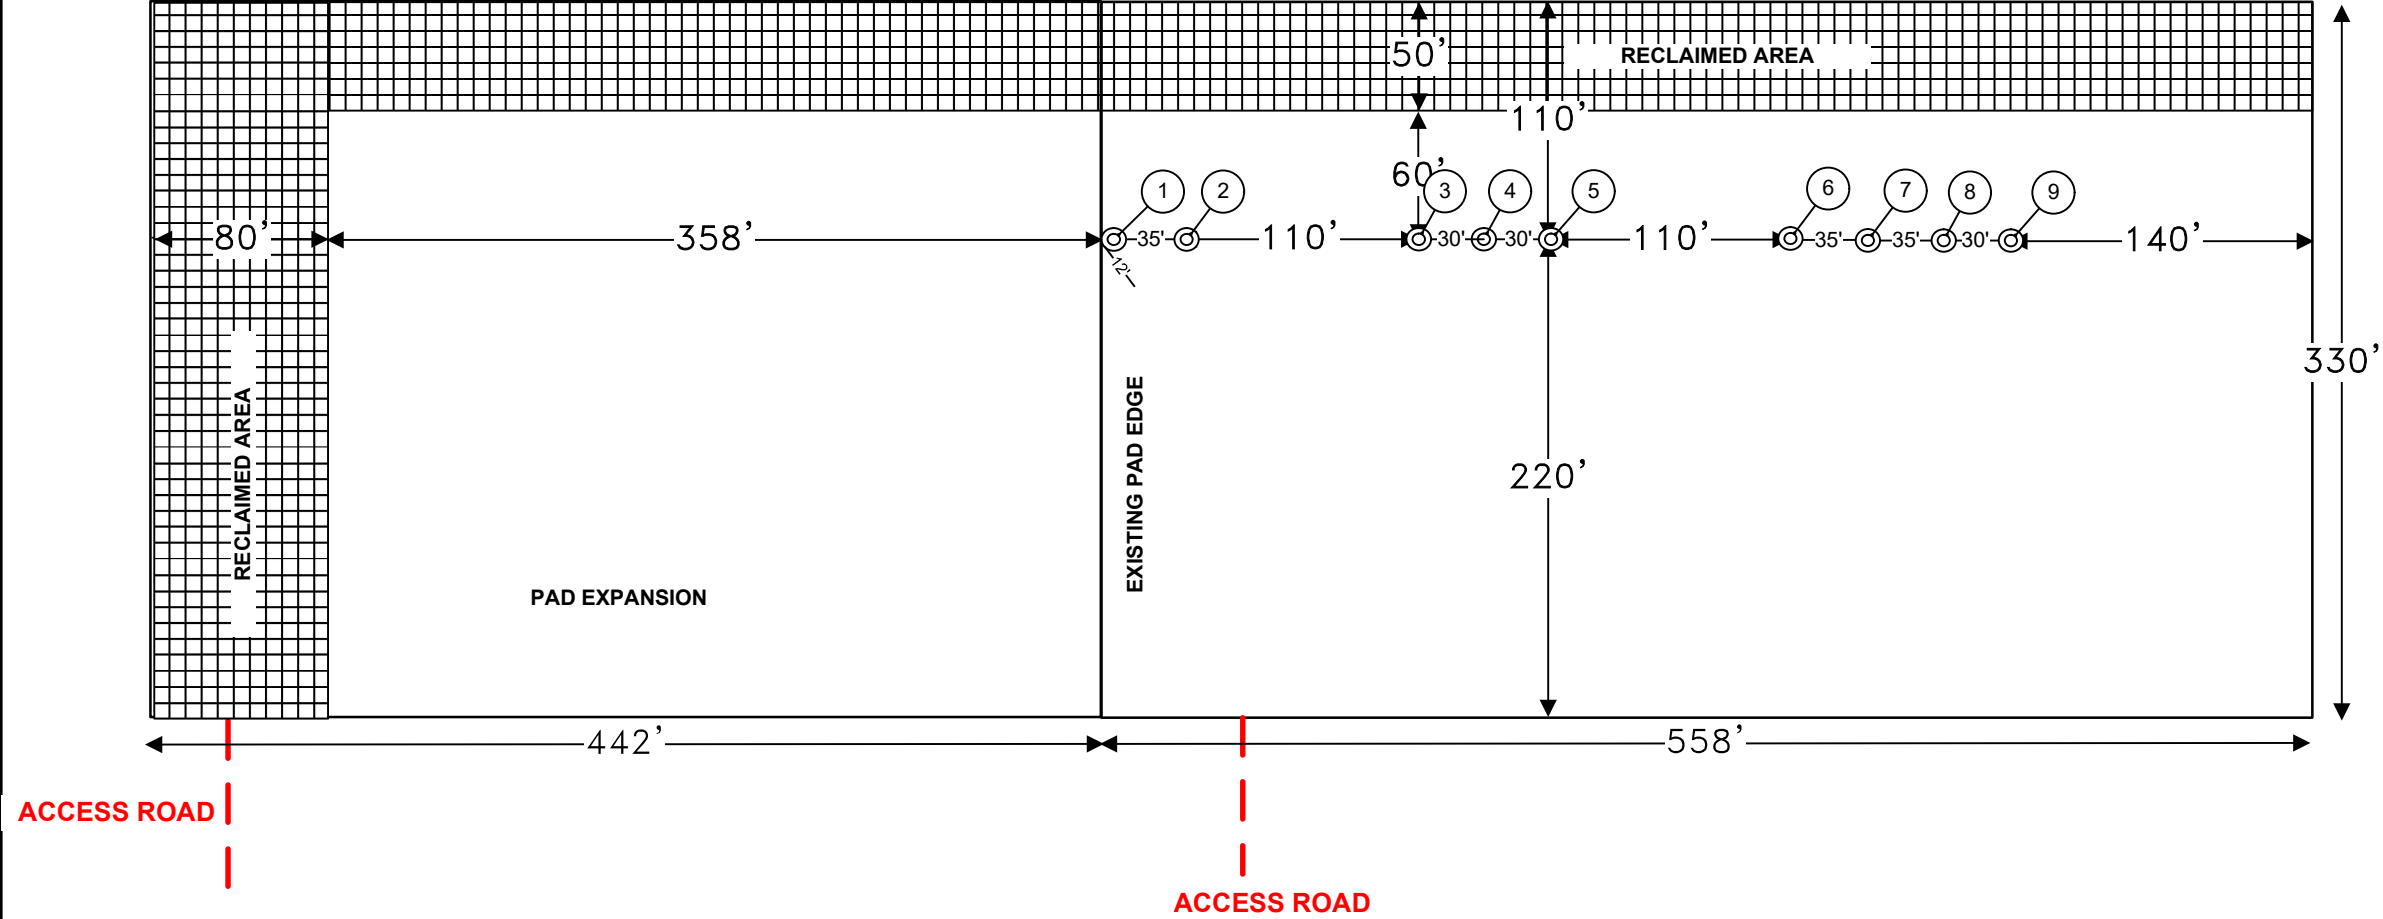



|                |      |             |    |     |     |                    |            |                                                                                                                                                                   |
|----------------|------|-------------|----|-----|-----|--------------------|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| REVISION BLOCK |      |             |    |     |     | ENGINEERING RECORD |            | SNDDNS 3116<br>PRECIOUS 30_18 FED COM 33H, 34H, 24H, 25H, 26H<br>EXISTING Wells: ARKENSTONE 31 FED 5H, 6H, 10H, 171H<br>Section 31, T23S, R31E<br>EDDY COUNTY, NM |
| NO.            | DATE | DESCRIPTION | BY | CHK | APP | BY                 | DATE       |                                                                                                                                                                   |
|                |      |             |    |     |     | CH                 | 08/10/2023 |                                                                                                                                                                   |



## Gas Separator Routing Flex III Rigs

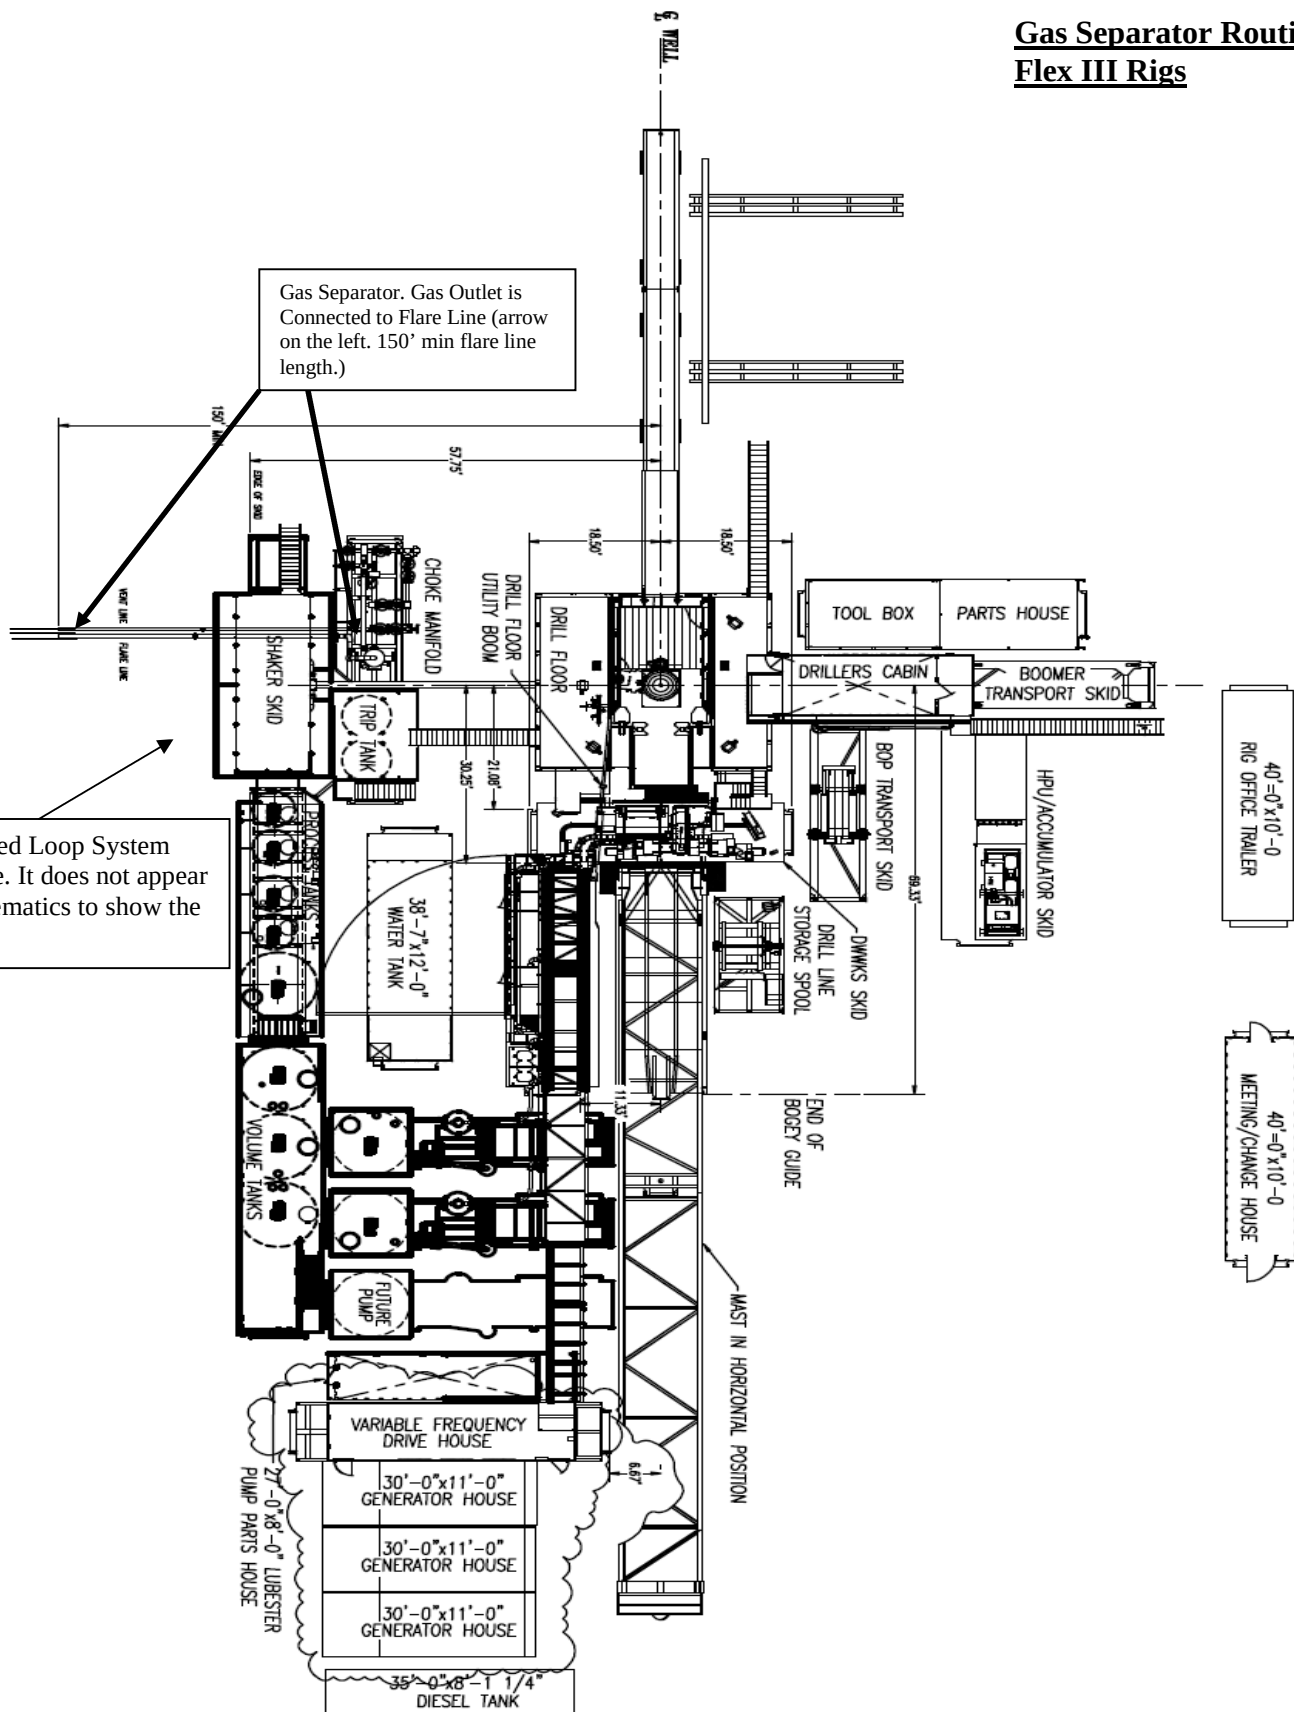

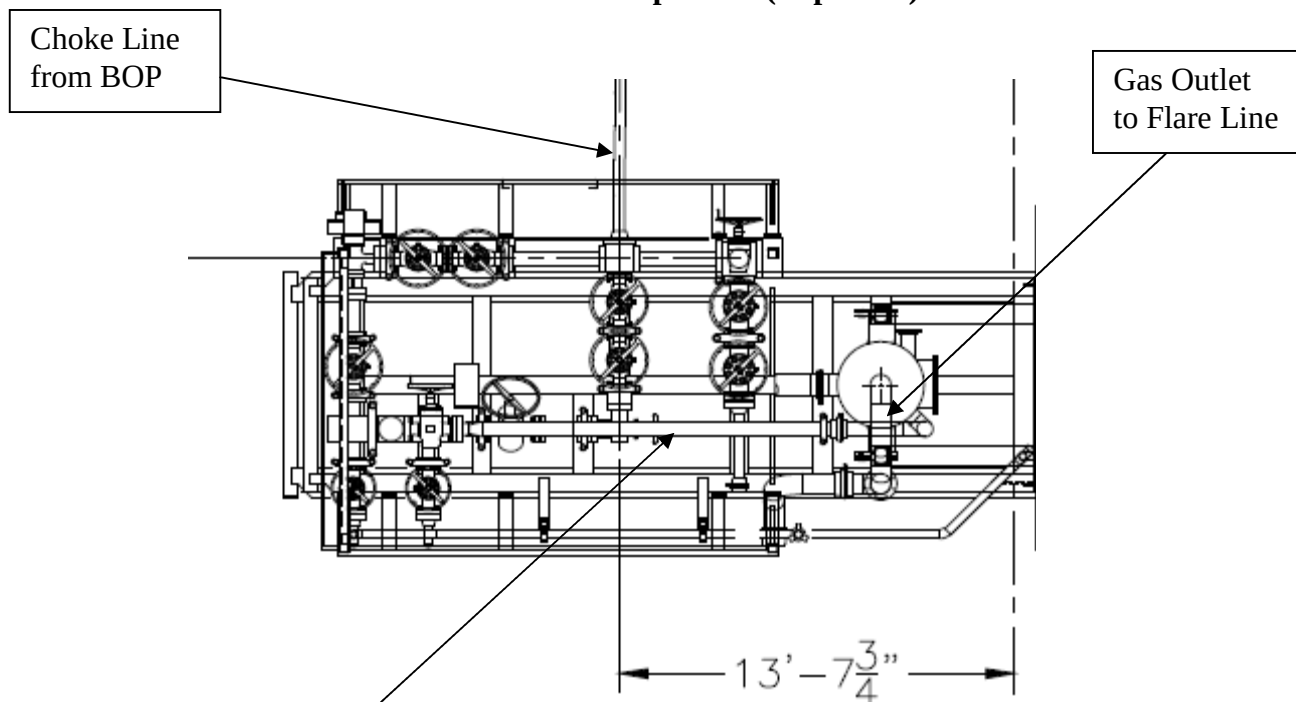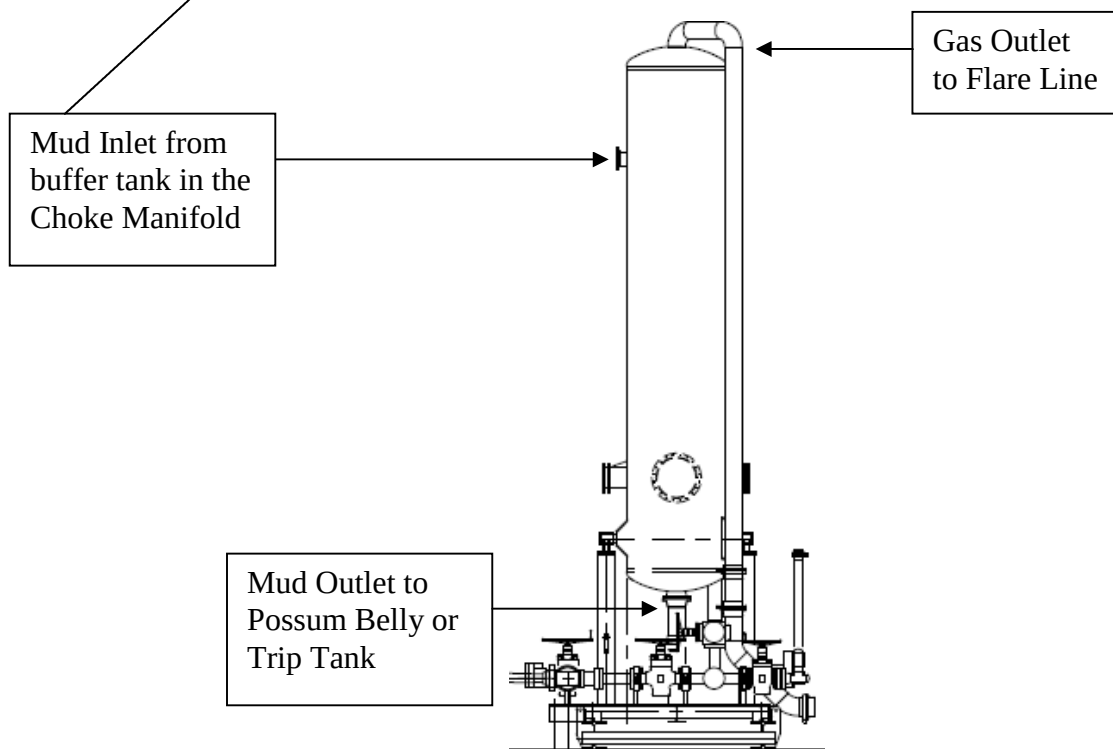**Choke Manifold – Gas Separator (Top View)****Choke Manifold – Gas Separator (Side View)**

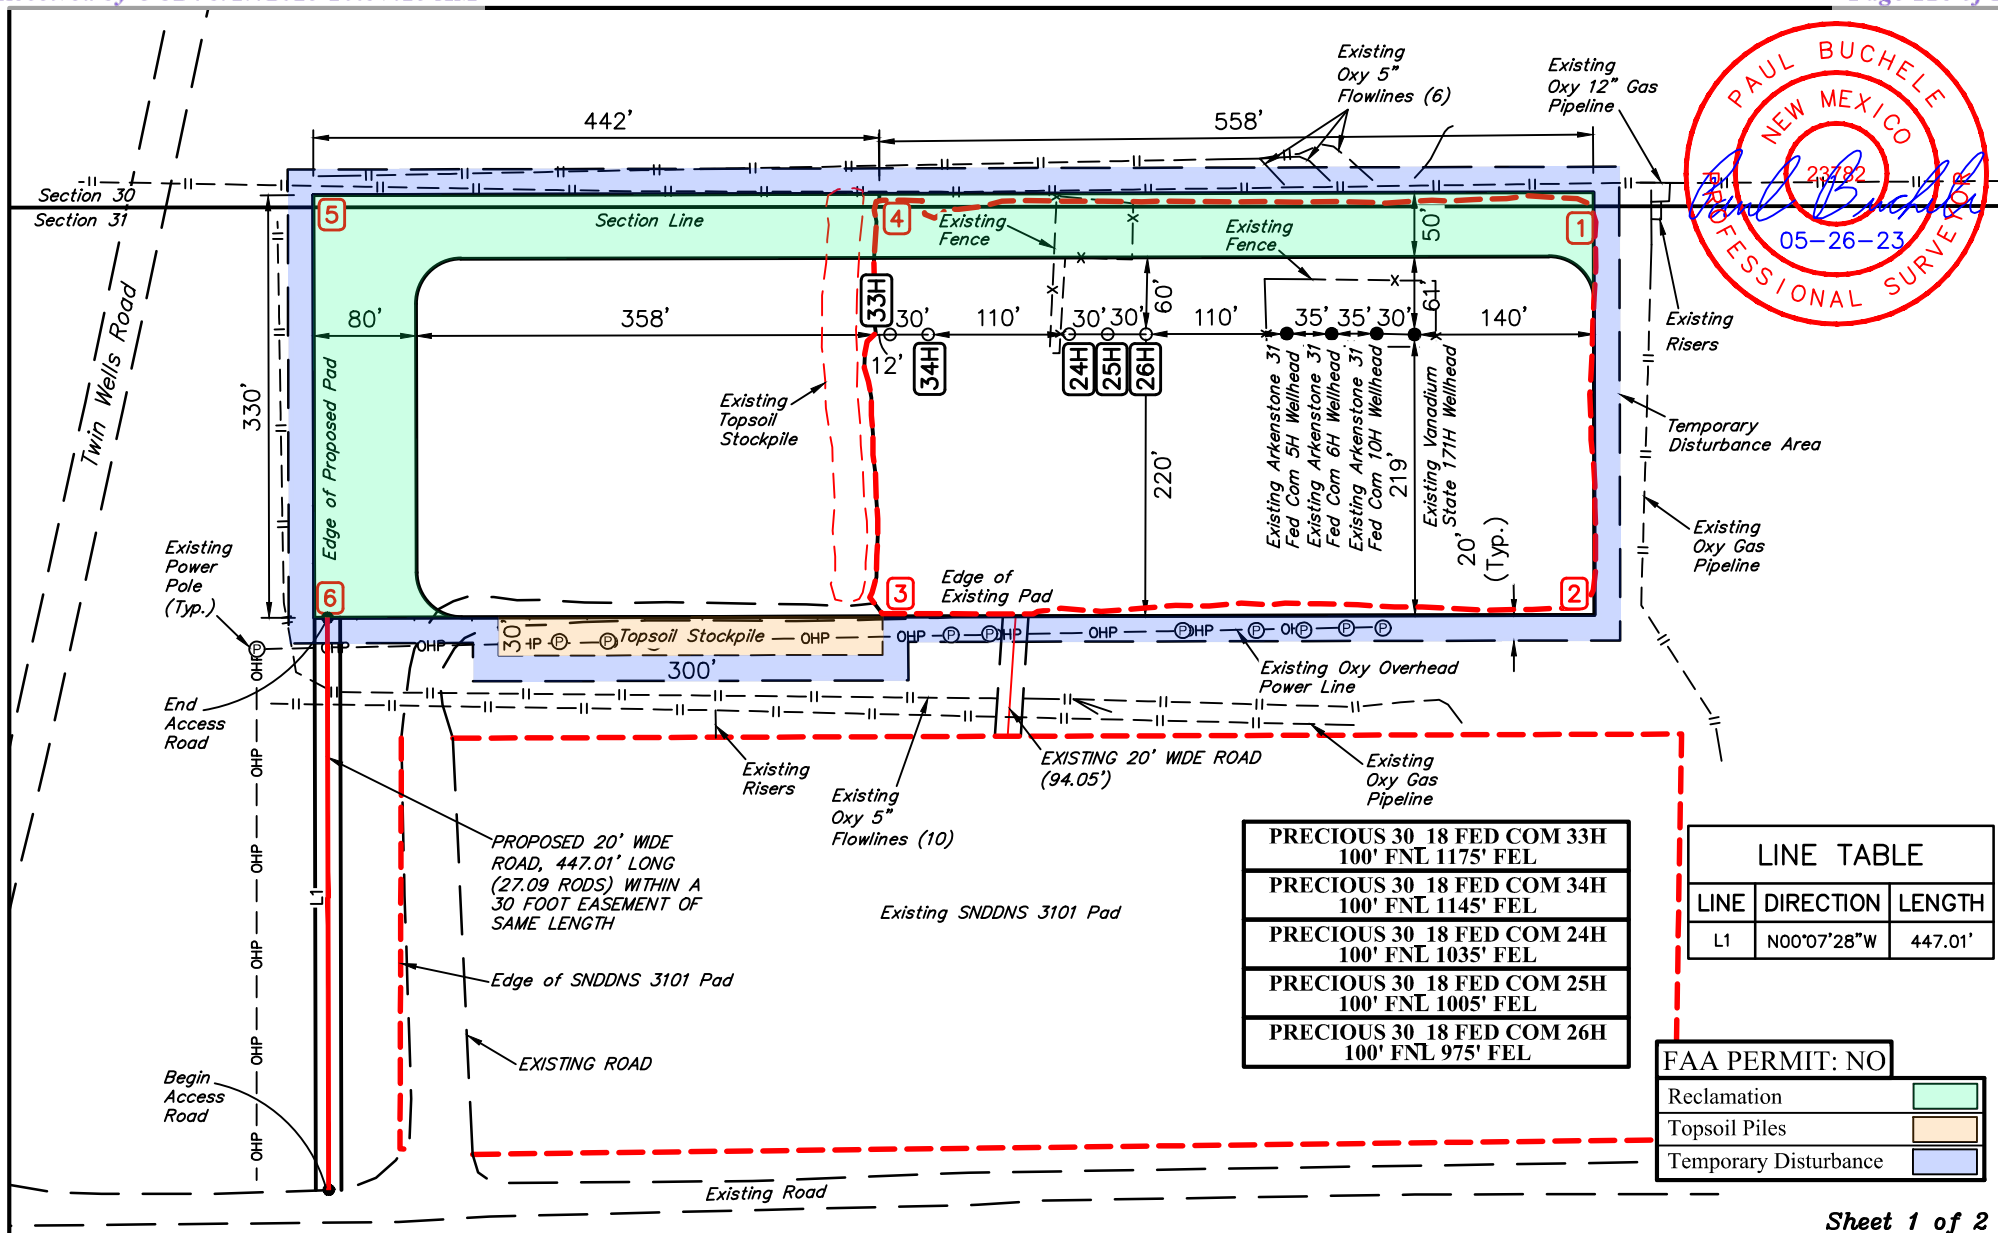


Sheet 1 of 2

**NOTES:**

- Underground utilities shown on this sheet are for visualization purposes only, actual locations to be determined prior to construction.
- Basis of Bearings is a Transverse Mercator Projection with a Central Meridian of W103°53'00" (NAD 83)



**UELS, LLC**  
 Corporate Office \* 85 South 200 East  
 Vernal, UT 84078 \* (435) 789-1017

**OXY USA INC.**

**SNDDNS 3116**  
**NE 1/4 NE 1/4, SECTION 31, T23S, R31E, N.M.P.M.**  
**EDDY COUNTY, NEW MEXICO**

|                  |            |          |           |
|------------------|------------|----------|-----------|
| SURVEYED BY      | C.T., J.N. | 05-11-23 | SCALE     |
| DRAWN BY         | L.M.W.     | 05-26-23 | 1" = 150' |
| <b>SITE PLAN</b> |            |          |           |

|                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>33H - EL: 3345.3'</b><br><b>NAD 83</b><br>LATITUDE = 32°16'04.44" (32.267901°)<br>LONGITUDE = -103°48'43.76" (-103.812157°)<br><b>NAD 27</b><br>LATITUDE = 32°16'04.00" (32.267778°)<br>LONGITUDE = -103°48'42.01" (-103.811671°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 461586.59' E: 702425.44'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 461527.30' E: 661241.89'             | <b>34H - EL: 3345.1'</b><br><b>NAD 83</b><br>LATITUDE = 32°16'04.44" (32.267901°)<br>LONGITUDE = -103°48'43.42" (-103.812060°)<br><b>NAD 27</b><br>LATITUDE = 32°16'04.00" (32.267778°)<br>LONGITUDE = -103°48'41.67" (-103.811574°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 461586.80' E: 702455.32'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 461527.51' E: 661271.77' | <b>24H - EL: 3345.2'</b><br><b>NAD 83</b><br>LATITUDE = 32°16'04.45" (32.267901°)<br>LONGITUDE = -103°48'42.14" (-103.811704°)<br><b>NAD 27</b><br>LATITUDE = 32°16'04.00" (32.267778°)<br>LONGITUDE = -103°48'40.38" (-103.811218°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 461587.41' E: 702565.35'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 461528.11' E: 661381.80' | <b>25H - EL: 3345.3'</b><br><b>NAD 83</b><br>LATITUDE = 32°16'04.45" (32.267902°)<br>LONGITUDE = -103°48'41.79" (-103.811607°)<br><b>NAD 27</b><br>LATITUDE = 32°16'04.00" (32.267779°)<br>LONGITUDE = -103°48'40.04" (-103.811121°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 461587.71' E: 702595.38'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 461528.41' E: 661411.83'               |
| <b>26H - EL: 3345.4'</b><br><b>NAD 83</b><br>LATITUDE = 32°16'04.45" (32.267902°)<br>LONGITUDE = -103°48'41.44" (-103.811510°)<br><b>NAD 27</b><br>LATITUDE = 32°16'04.00" (32.267779°)<br>LONGITUDE = -103°48'39.69" (-103.811024°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 461587.88' E: 702625.40'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 461528.58' E: 661441.85'             | <b>1 - EL: 3345.9'</b><br><b>NAD 83</b><br>LATITUDE = 32°16'05.42" (32.268171°)<br>LONGITUDE = -103°48'37.32" (-103.810367°)<br><b>NAD 27</b><br>LATITUDE = 32°16'04.97" (32.268048°)<br>LONGITUDE = -103°48'35.57" (-103.809880°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 461687.49' E: 702978.30'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 461628.19' E: 661794.74'   | <b>2 - EL: 3345.8'</b><br><b>NAD 83</b><br>LATITUDE = 32°16'02.28" (32.267299°)<br>LONGITUDE = -103°48'37.36" (-103.810377°)<br><b>NAD 27</b><br>LATITUDE = 32°16'01.83" (32.267176°)<br>LONGITUDE = -103°48'35.61" (-103.809891°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 461370.17' E: 702976.74'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 461310.88' E: 661793.18'   | <b>3 - EL: 3345.5'</b><br><b>NAD 83</b><br>LATITUDE = 32°16'02.29" (32.267302°)<br>LONGITUDE = -103°48'43.83" (-103.812176°)<br><b>NAD 27</b><br>LATITUDE = 32°16'01.85" (32.267179°)<br>LONGITUDE = -103°48'42.08" (-103.811690°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 461368.75' E: 702420.56'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 461309.46' E: 661237.00'                 |
| <b>4 - EL: 3344.7'</b><br><b>NAD 83</b><br>LATITUDE = 32°16'05.49" (32.268191°)<br>LONGITUDE = -103°48'43.86" (-103.812183°)<br><b>NAD 27</b><br>LATITUDE = 32°16'05.05" (32.268068°)<br>LONGITUDE = -103°48'42.11" (-103.811697°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 461692.17' E: 702416.90'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 461632.88' E: 661233.35'               | <b>5 - EL: 3344.1'</b><br><b>NAD 83</b><br>LATITUDE = 32°16'05.53" (32.268201°)<br>LONGITUDE = -103°48'49.01" (-103.813613°)<br><b>NAD 27</b><br>LATITUDE = 32°16'05.08" (32.268078°)<br>LONGITUDE = -103°48'47.26" (-103.813127°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 461693.69' E: 701974.84'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 461634.39' E: 660791.29'   | <b>6 - EL: 3345.9'</b><br><b>NAD 83</b><br>LATITUDE = 32°16'02.26" (32.267295°)<br>LONGITUDE = -103°48'49.00" (-103.813611°)<br><b>NAD 27</b><br>LATITUDE = 32°16'01.82" (32.267172°)<br>LONGITUDE = -103°48'47.25" (-103.813125°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 461363.76' E: 701976.95'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 461304.47' E: 660793.39'   | <b>BEGIN ACCESS ROAD - EL: 3350.8'</b><br><b>NAD 83</b><br>LATITUDE = 32°15'57.84" (32.266066°)<br>LONGITUDE = -103°48'48.87" (-103.813576°)<br><b>NAD 27</b><br>LATITUDE = 32°15'57.40" (32.265943°)<br>LONGITUDE = -103°48'47.12" (-103.813090°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 460916.91' E: 701989.90'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 460857.64' E: 660806.33' |
| <b>END ACCESS ROAD - EL: 3346.4'</b><br><b>NAD 83</b><br>LATITUDE = 32°16'02.26" (32.267294°)<br>LONGITUDE = -103°48'48.88" (-103.813579°)<br><b>NAD 27</b><br>LATITUDE = 32°16'01.82" (32.267171°)<br>LONGITUDE = -103°48'47.13" (-103.813092°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 461363.72' E: 701987.06'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 461304.43' E: 660803.50' |                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                    |

Sheet 2 of 2

## OXY USA INC.


SNDDNS 3116  
 NE 1/4 NE 1/4, SECTION 31, T23S, R31E, N.M.P.M.  
 EDDY COUNTY, NEW MEXICO

|                  |            |          |  |
|------------------|------------|----------|--|
| SURVEYED BY      | C.T., J.N. | 05-11-23 |  |
| DRAWN BY         | L.M.W.     | 05-26-23 |  |
| <b>SITE PLAN</b> |            |          |  |



UELS, LLC  
 Corporate Office \* 85 South 200 East  
 Vernal, UT 84078 \* (435) 789-1017

# 10M Choke Panel

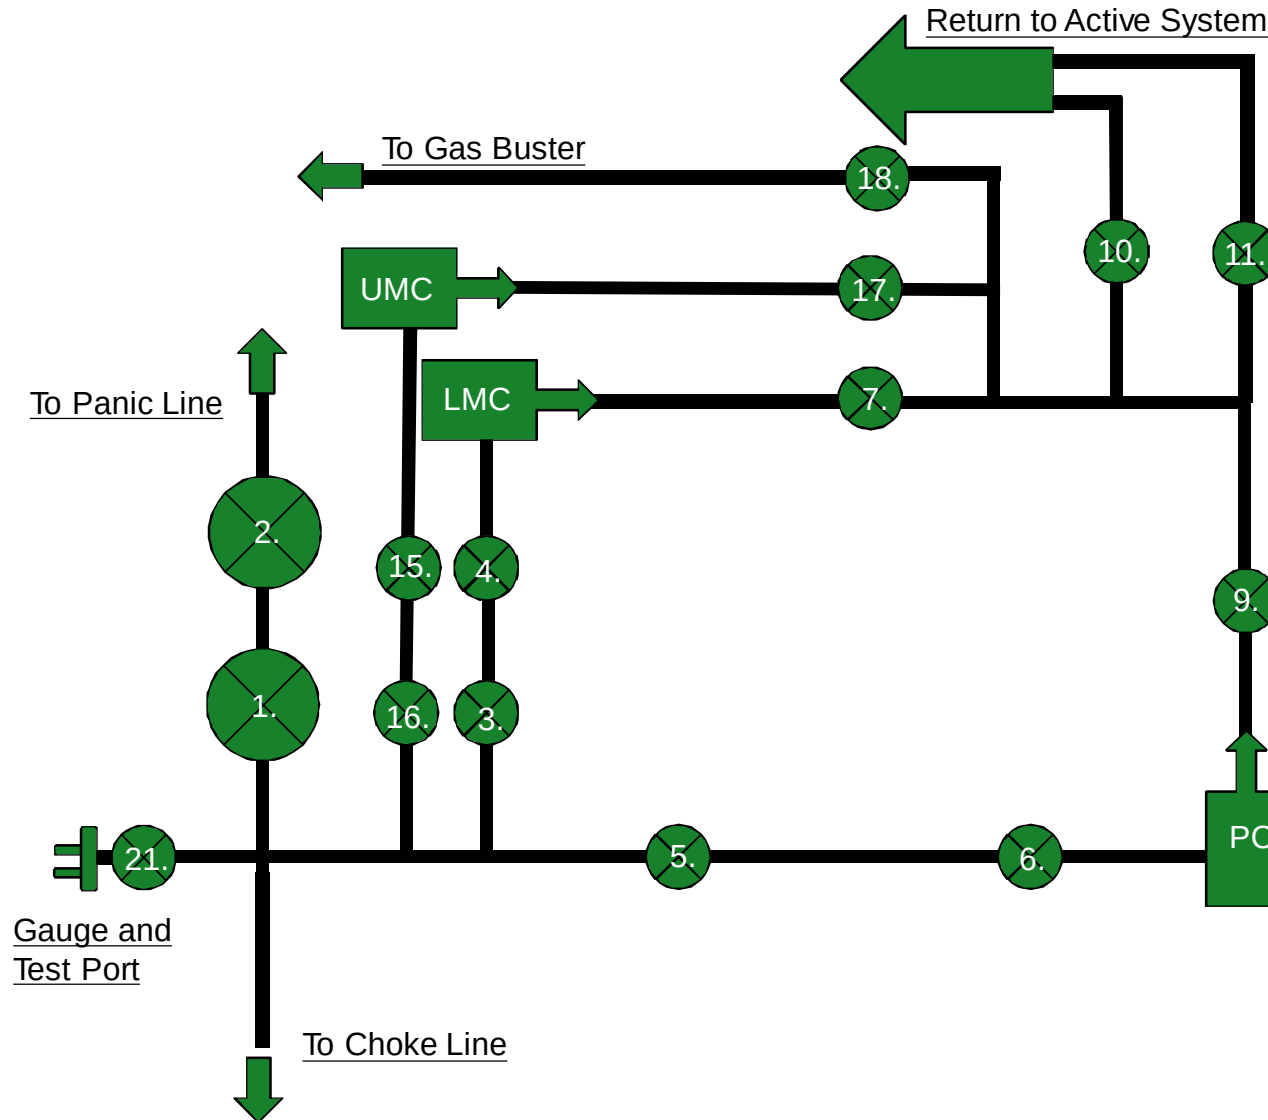


1. Choke Manifold Valve
2. Choke Manifold Valve
3. Choke Manifold Valve
4. Choke Manifold Valve
5. Choke Manifold Valve
6. Choke Manifold Valve
7. Choke Manifold Valve
8. PC – Power Choke
9. Choke Manifold Valve
10. Choke Manifold Valve
11. Choke Manifold Valve
12. LMC – Lower Manual Choke
13. UMC – Upper manual choke

15. Choke Manifold Valve
16. Choke Manifold Valve
17. Choke Manifold Valve
18. Choke Manifold Valve

21. Vertical Choke Manifold Valve


**\*All Valves 3" minimum**

# 10M REMOTE KILL LINE SCHEMATIC

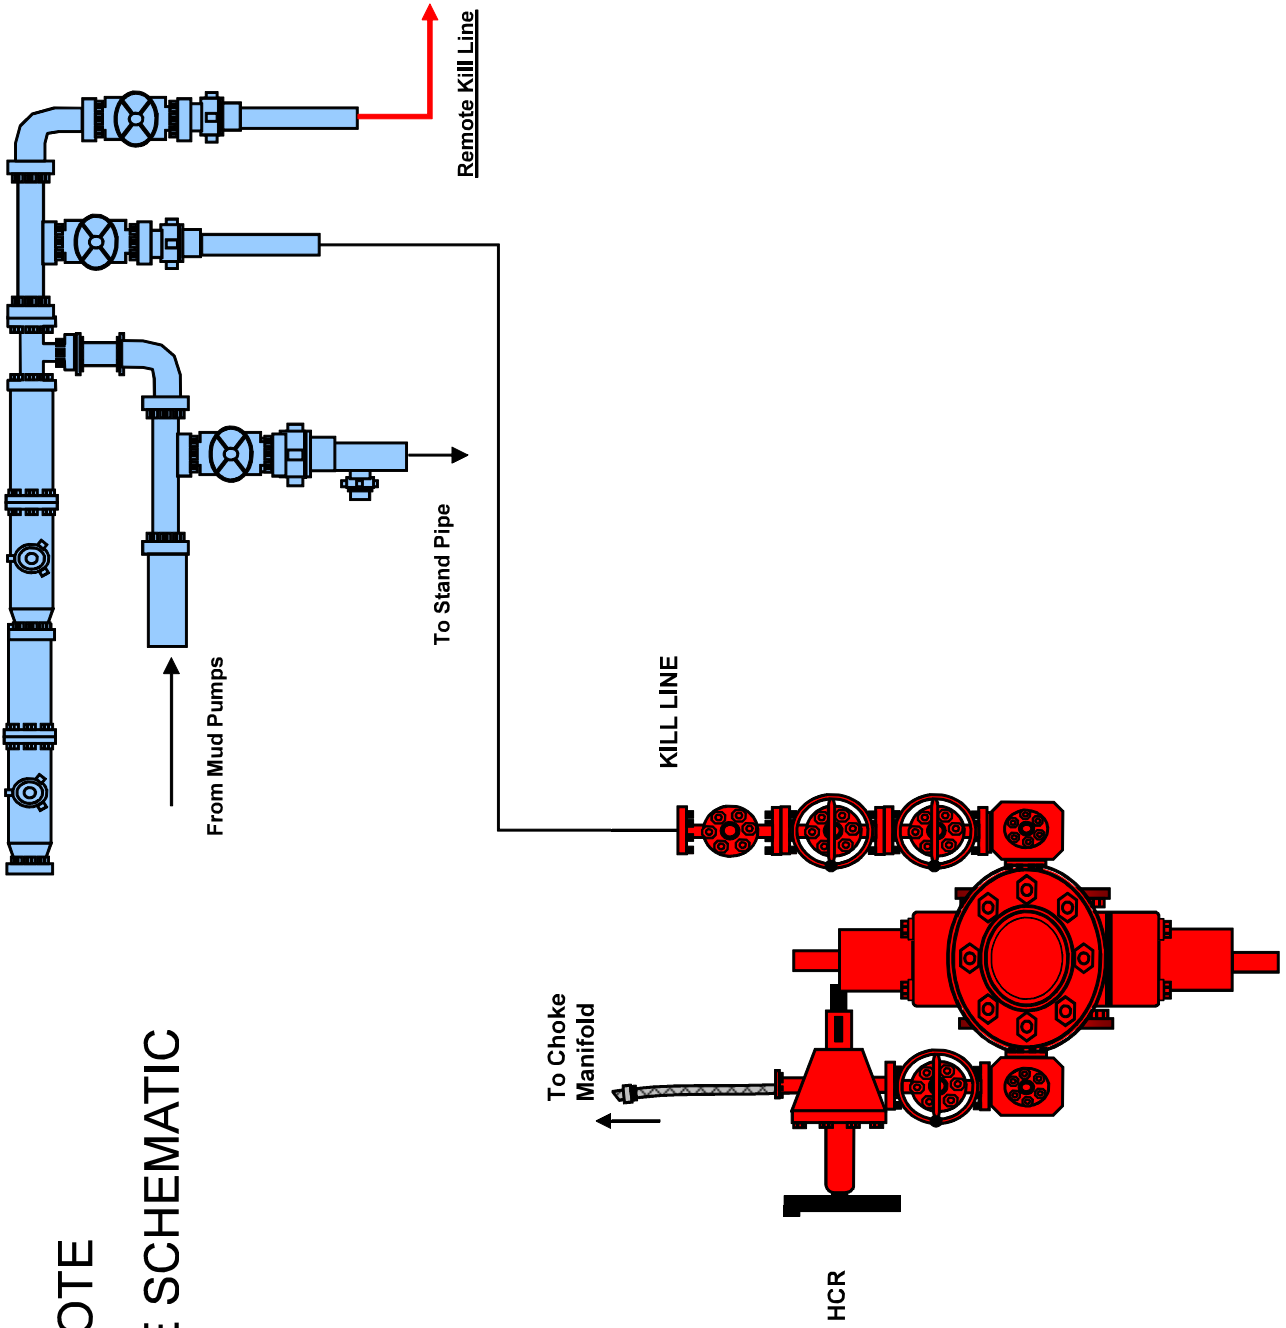





## Gas Separator Routing Flex III Rigs

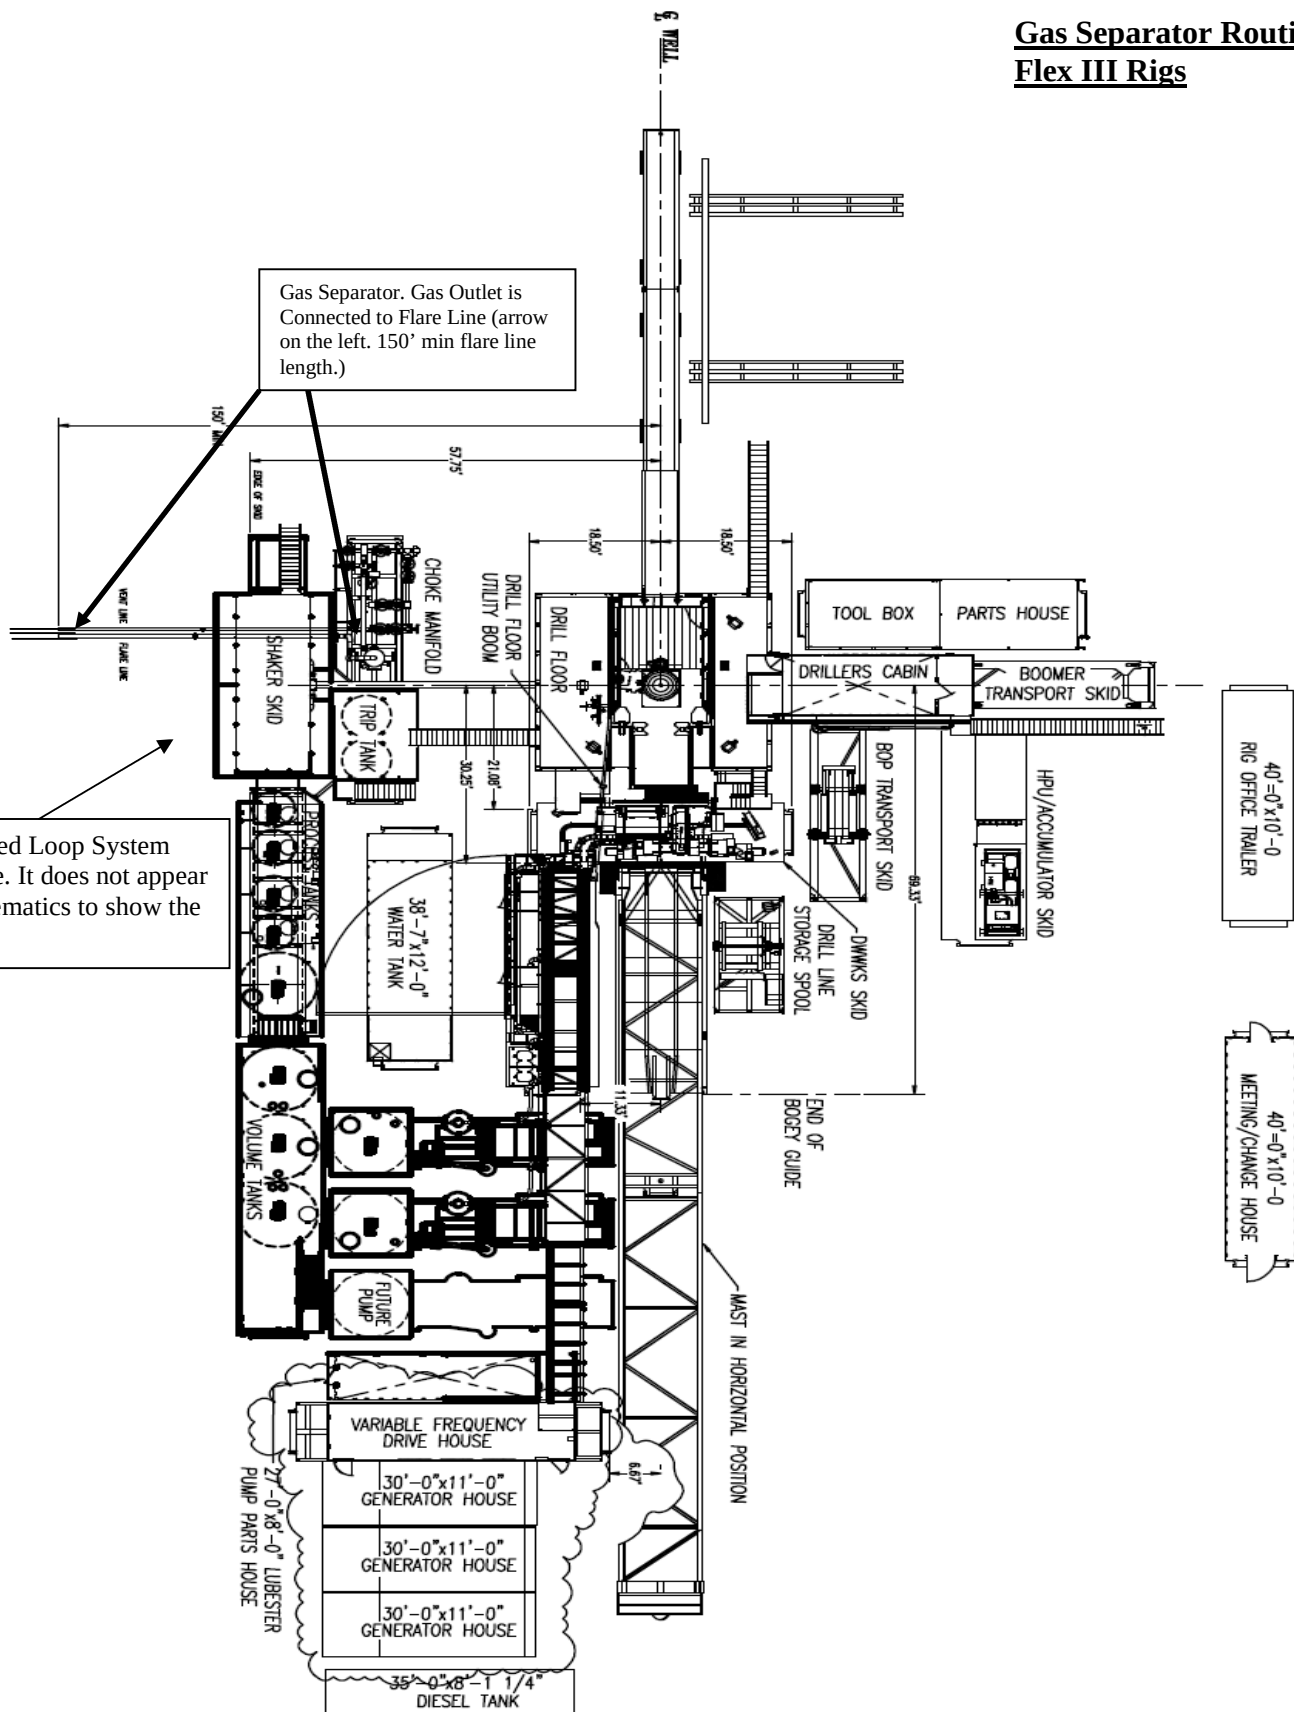


Choke Manifold – Gas Separator (Top View)

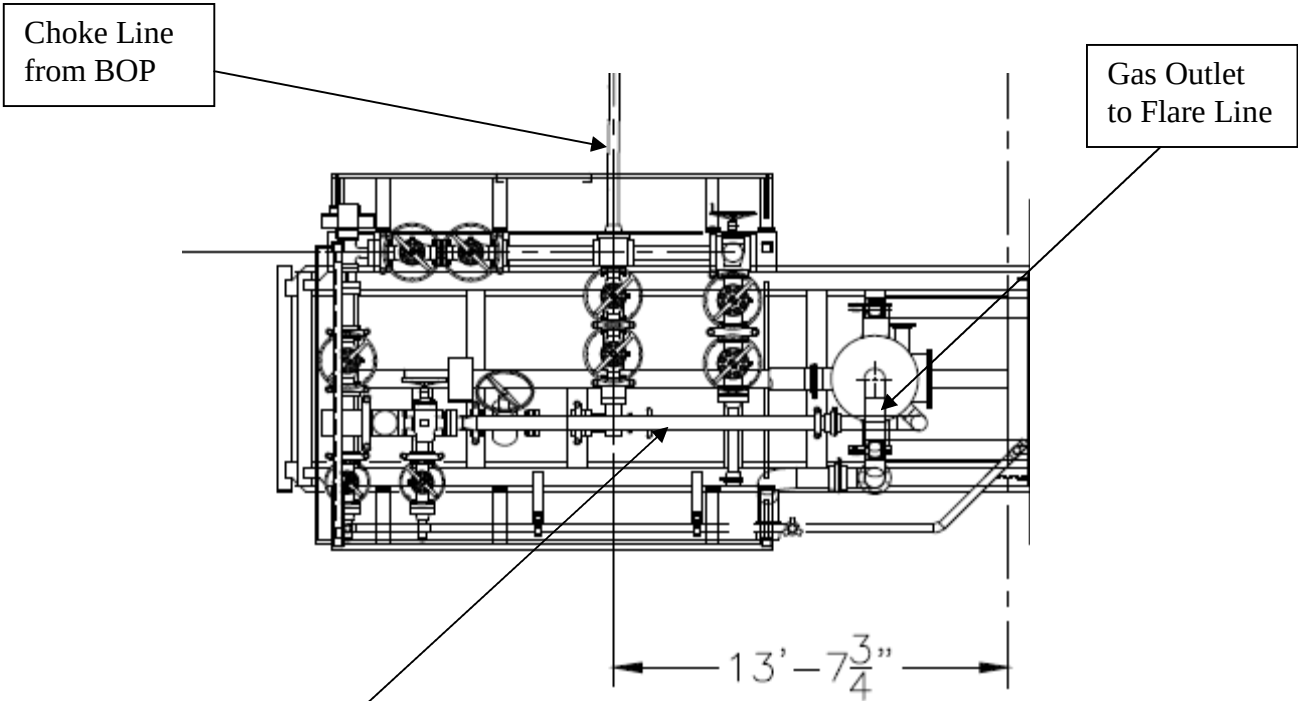


Choke Manifold – Gas Separator (Side View)

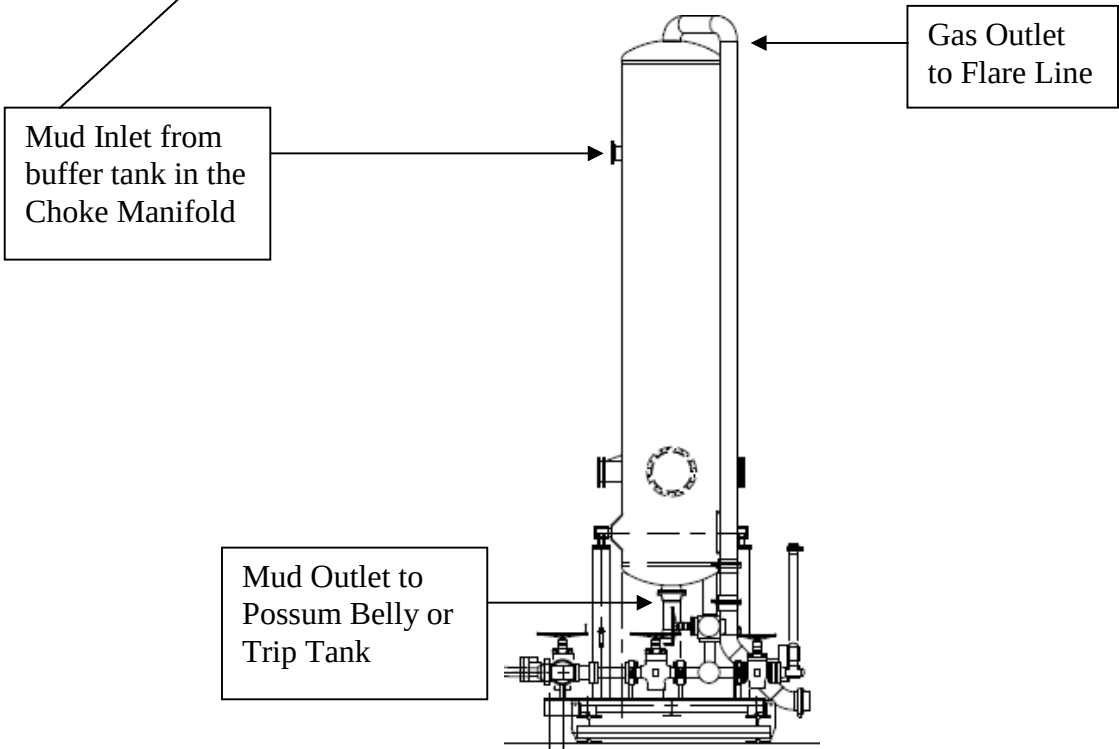

# 5/10M BOP Stack

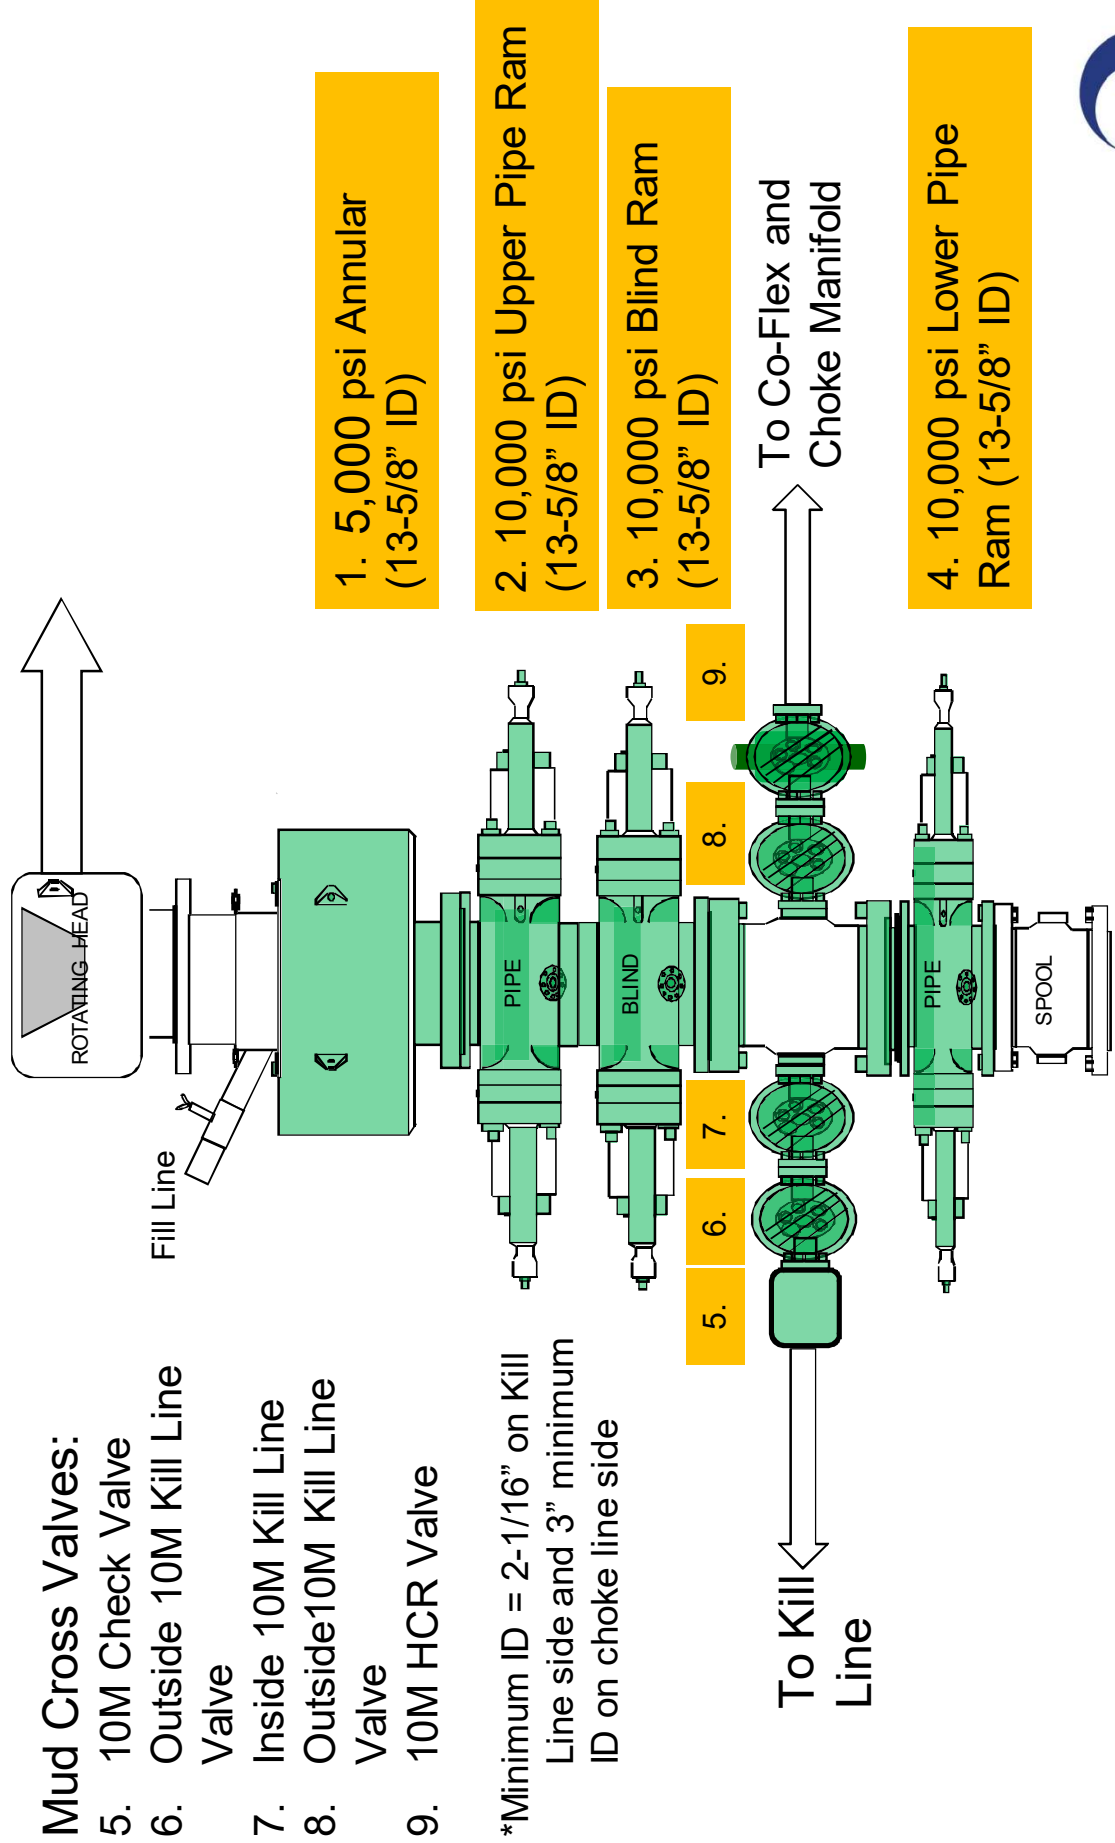

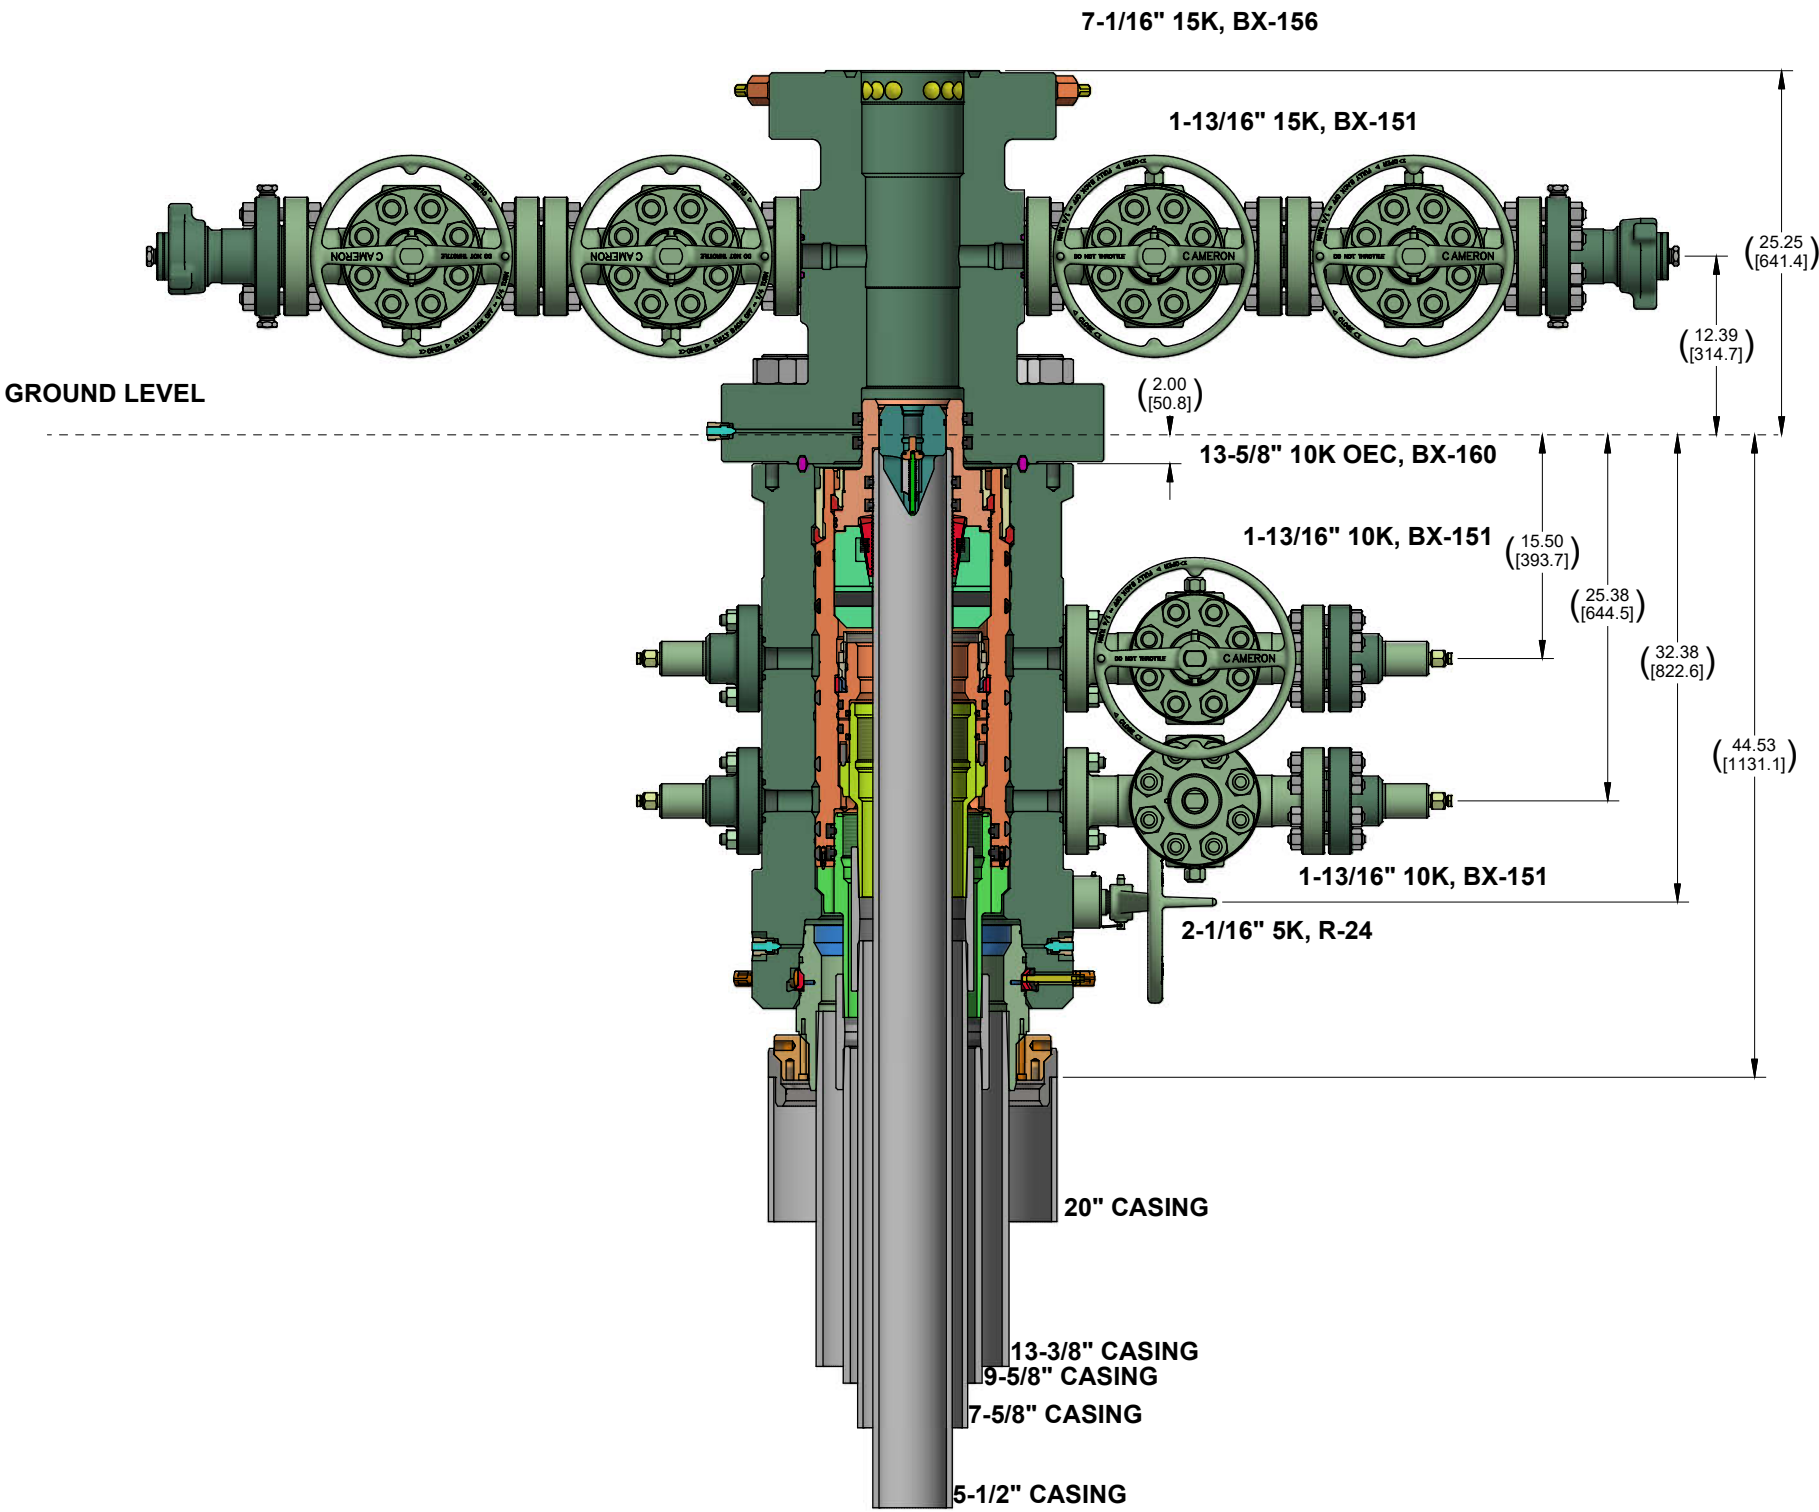

| CONFIDENTIAL                                        |              |           |                                                                                                                                |                 |  |              |
|-----------------------------------------------------|--------------|-----------|--------------------------------------------------------------------------------------------------------------------------------|-----------------|--|--------------|
| SURFACE TREATMENT                                   | DO NOT SCALE |           |  <b>CAMERON</b><br>A Schlumberger Company | SURFACE SYSTEMS |  |              |
|                                                     |              |           |                                                                                                                                |                 |  |              |
| MATERIAL & HEAT TREAT                               | DRAWN BY:    | DATE      | OXY<br>ADAPT NST 10K 3 STAGE WELLHEAD<br>STANDARD / EMERGENCY SYSTEM                                                           |                 |  |              |
|                                                     | A. SKLENKA   | 26 Apr 22 |                                                                                                                                |                 |  |              |
|                                                     | CHECKED BY:  | DATE      |                                                                                                                                |                 |  |              |
| ESTIMATED WEIGHT:                                   | APPROVED BY: | DATE      | SHEET                                                                                                                          | REV:            |  |              |
|                                                     | A. SKLENKA   | 26 Apr 22 |                                                                                                                                |                 |  |              |
| 7968.4 LBS (3614.4 KG) INITIAL USE B/M: IT# 7836394 |              |           |                                                                                                                                | 1 of 1          |  | 01           |
| LO-096232-62                                        |              |           |                                                                                                                                |                 |  | INVENTOR - D |



## Certificate of Conformity

ContiTech

|                                                                                         |                                       |                                                                                   |                                      |
|-----------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------------------------------------------------------|--------------------------------------|
| <b>Certificate Number</b><br>H100161                                                    | <b>COM Order Reference</b><br>1429702 | <b>Customer Name &amp; Address</b>                                                |                                      |
| <b>Customer Purchase Order No:</b><br>740382384                                         |                                       | HELMERICH & PAYNE DRILLING CO<br>1434 SOUTH BOULDER AVE<br>TULSA, OK 74119<br>USA |                                      |
| <b>Project:</b>                                                                         |                                       |                                                                                   |                                      |
| <b>Test Center Address</b>                                                              | <b>Accepted by COM Inspection</b>     |                                                                                   | <b>Accepted by Client Inspection</b> |
| ContiTech Oil & Marine Corp.<br>11535 Brittmoore Park Drive<br>Houston, TX 77041<br>USA | Signed:<br><br>Date: 06/27/22         | Gerson Mejia-Lazo<br>                                                             |                                      |

We certify that the items detailed below meet the requirements of the customer's Purchase Order referenced above, and are in conformance with the specifications given below.

| Item | Part No.        | Description                              | Qty | Serial Number | Specifications     |
|------|-----------------|------------------------------------------|-----|---------------|--------------------|
| 30   | RECERTIFICATION | 3" ID 10K Choke and Kill Hose x 35ft OAL | 1   | 70024         | ContiTech Standard |

ContiTech Oil Marine Corp.

11535 Brittmoore Park Drive Houston, TX 77041, USA

Internal

## Hydrostatic Test Certificate



ContiTech

|                                                                                                                       |                                                                                  |                                                                                                                         |
|-----------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| <b>Certificate Number</b><br>H100161                                                                                  | <b>COM Order Reference</b><br>1429702                                            | <b>Customer Name &amp; Address</b><br>HELMERICH & PAYNE DRILLING CO<br>1434 SOUTH BOULDER AVE<br>TULSA, OK 74119<br>USA |
| <b>Customer Purchase Order No:</b><br>740382384                                                                       |                                                                                  |                                                                                                                         |
| <b>Project:</b>                                                                                                       |                                                                                  |                                                                                                                         |
| <b>Test Center Address</b><br>ContiTech Oil & Marine Corp.<br>11535 Brittmoore Park Drive<br>Houston, TX 77041<br>USA | <b>Accepted by COM Inspection</b><br>Signed: Gerson Mejia-Lazo<br>Date: 06/27/22 | <b>Accepted by Client Inspection</b>                                                                                    |


We certify that the goods detailed hereon have been inspected as described below by our Quality Management System, and to the best of our knowledge are found to conform the requirements of the above referenced purchase order as issued to ContiTech Oil & Marine Corporation.

| Item | Part No. | Description | Qty | Serial Number | Work. Press. (psi) | Test Press. (psi) | Test Time (minutes) |
|------|----------|-------------|-----|---------------|--------------------|-------------------|---------------------|
|------|----------|-------------|-----|---------------|--------------------|-------------------|---------------------|

|    |                 |                                          |   |       |        |        |    |
|----|-----------------|------------------------------------------|---|-------|--------|--------|----|
| 30 | RECERTIFICATION | 3" ID 10K Choke and Kill Hose x 35ft OAL | 1 | 70024 | 10,000 | 15,000 | 60 |
|----|-----------------|------------------------------------------|---|-------|--------|--------|----|

| Record Information |                   |
|--------------------|-------------------|
| Start Time         | 6/8/2022 12:49:19 |
| End Time           | 6/8/2022 14:07:25 |
| Interval           | 00:01:00          |
| Number             | 79                |
| MaxValue           | 15762             |
| MinValue           | -7                |
| AvgValue           | 14395             |
| RecordName         | 70024-sh          |
| RecordNumber       | 235               |

| Gauge Information |              |
|-------------------|--------------|
| Model             | ADT680       |
| SN                | 21817380014  |
| Range             | (0-40000)psi |
| Unit              | psi          |

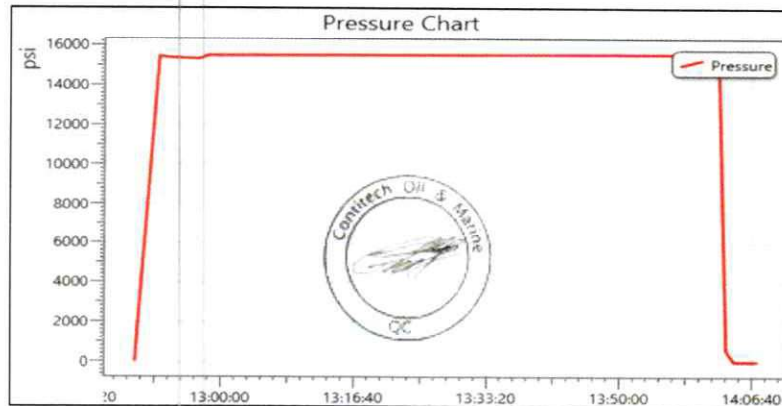

ContiTech Oil Marine Corp.

11535 Brittmoore Park Drive Houston, TX 77041, USA

Internal



SIGNATURE: *Norma Cobb*  
 TITLE: QUALITY ASSURANCE  
 DATE: 11/20/2019

CUSTOMER: A-7 AUSTIN INC DBA AUSTIN HOSE  
 CUSTOMERS P.O.#: 4128128 (RIG 1 PO 002773)  
 CUSTOMER P/N: 10KFR3.012.0CK411610KFIXXFLT SSA SC LE  
 PART DESCRIPTION: 3" X 12 FT GATES CHOKE & KILL HOSE ASSEMBLY WITH STAINLESS STEEL ARMOR C/W 4 1/16 10K FIX X FLOAT H2S SUITED FLANGES WITH BX 155 RING GROOVE SUPPLIED WITH SAFETY CLAMPS & SLINGS & LIFT EYE CLAMPS  
 SALES ORDER #: 516982  
 QUANTITY: 1  
 SERIAL #: H2-112019-4

This is to certify that all parts and materials included in this shipment have manufactured and/or processed in accordance with various Gates and API assembly and test specifications. Records of required tests are on-file and subject to examination. Test reports and subsequent test graphs have been made available with this shipment. Additional supporting documentation related to materials, welding, weld inspections, and heat-treatment activities are available upon request.

## CERTIFICATE OF CONFORMANCE

EMAIL: Troy.Schmidt@gates.com

FAX:

PHONE : (281) 602-4119

Houston, TX. 77086

7603 Prairie Oak Dr.

Gates Engineering & Services North America



THIS WROTE 23/22  
 IN USE  
 AS

02.9  
 130021  
 2019  
 CHOKES  
 HOSE



Revision 1\_022819

|                    |
|--------------------|
| PRODUCTION         |
| 11/20/2019         |
| <i>[Signature]</i> |

Production:  
Date :  
Signature :

|                    |
|--------------------|
| QUALITY            |
| 11/20/2019         |
| <i>[Signature]</i> |

F-PRD-005

Quality:  
Date :  
Signature :

**Gates Engineering & Services North America certifies that:**

The following hose assembly has successfully passed all pressure testing requirements set forth in Gates specifications: GTS-04-052 (for 5K assemblies) or GTS-04-053 (10K assemblies), which include reference to Specification API 16C (2nd Edition); sections 7.5.4, 7.5.9, and 10.8.7. A test graph will accompany this test certificate to illustrate conformity to test requirements. This hose assembly was pressure tested using equipment and instrumentation that has been calibrated in accordance with the requirements set forth in the GESNA management system.

|                                                                                                                                                                                                                             |                                                                                                                              |                                                                                                                                                                          |                          |               |            |            |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|---------------|------------|------------|
| Customer:<br>A-7 AUSTIN INC DBA AUSTIN HOSE                                                                                                                                                                                 | Customer Ref.:<br>4128128 (RIG 1 PO 002773)                                                                                  | Invoice No.:<br>516982                                                                                                                                                   |                          |               |            |            |
| Product Description:<br>3" X 12 FT GATES CHOKE & KILL HOSE ASSEMBLY WITH STAINLESS STEEL ARMOR C/W 4 1/16 10K FIX X FLOAT H25 SUITED FLANGES WITH BX 155 RING GROOVE SUPPLIED WITH SAFETY CLAMPS & SLINGS & LIFT EYE CLAMPS | End Fitting 1:<br>4 1/16 10K FLANGES FIXED                                                                                   | Oracle Star No.:<br>68903010-9879429                                                                                                                                     |                          |               |            |            |
|                                                                                                                                                                                                                             | Customer P/N:<br>10KFR3.012.0CK411610KFIXXFLT 55A 5C LE                                                                      |                                                                                                                                                                          |                          |               |            |            |
|                                                                                                                                                                                                                             | End Fitting 2:<br>Assembly Code:<br>Test Pressure:<br>Working Pressure:                                                      | <table border="1"> <tr> <td>4 1/16 10K FLANGES FLOAT</td> </tr> <tr> <td>L41242 113018</td> </tr> <tr> <td>15,000 PSI</td> </tr> <tr> <td>10,000 PSI</td> </tr> </table> | 4 1/16 10K FLANGES FLOAT | L41242 113018 | 15,000 PSI | 10,000 PSI |
| 4 1/16 10K FLANGES FLOAT                                                                                                                                                                                                    |                                                                                                                              |                                                                                                                                                                          |                          |               |            |            |
| L41242 113018                                                                                                                                                                                                               |                                                                                                                              |                                                                                                                                                                          |                          |               |            |            |
| 15,000 PSI                                                                                                                                                                                                                  |                                                                                                                              |                                                                                                                                                                          |                          |               |            |            |
| 10,000 PSI                                                                                                                                                                                                                  |                                                                                                                              |                                                                                                                                                                          |                          |               |            |            |
| Test Date:<br>Hose Serial No.:<br>Created By:                                                                                                                                                                               | <table border="1"> <tr> <td>11/20/2019</td> </tr> <tr> <td>H2-112019-4</td> </tr> <tr> <td>Norma Cabrera</td> </tr> </table> | 11/20/2019                                                                                                                                                               | H2-112019-4              | Norma Cabrera |            |            |
| 11/20/2019                                                                                                                                                                                                                  |                                                                                                                              |                                                                                                                                                                          |                          |               |            |            |
| H2-112019-4                                                                                                                                                                                                                 |                                                                                                                              |                                                                                                                                                                          |                          |               |            |            |
| Norma Cabrera                                                                                                                                                                                                               |                                                                                                                              |                                                                                                                                                                          |                          |               |            |            |


## PRESSURE TEST CERTIFICATE

PHONE: (281) 602 - 4119  
FAX:  
EMAIL: Troy.Schmidt@gates.com  
WEB: www.gates.com

GATES ENGINEERING &amp; SERVICES NORTH AMERICA

7603 Prairie Oak Dr.  
Houston, TX 77086



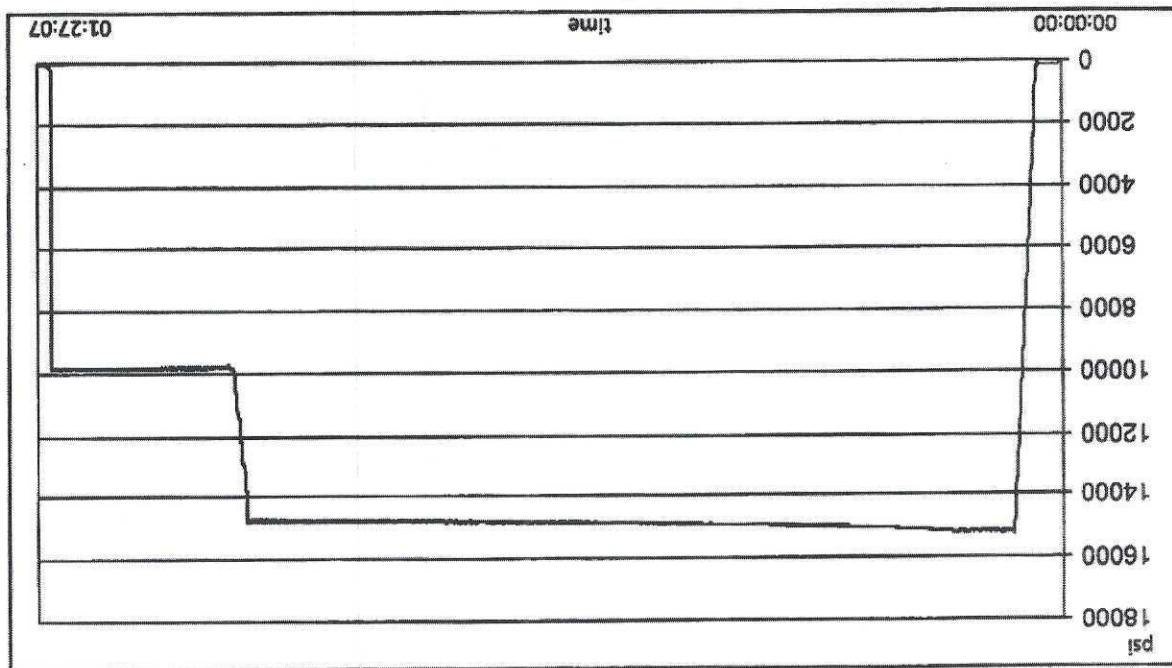

Test operator: Roderick Shambra

Length measurement result:

Pressure test result: PASS

Visual check:

Length difference:

0.24 inch

Length difference:

0.00 %

Work pressure hold:

900.00 sec

Work pressure:

9750.00 psi

Test pressure hold:

3600.00 sec

Test pressure:

15000.00 psi

Test procedure:

GTS-04-053

### TEST INFORMATION

Customer reference:

516982

Production description:

Austin Hose

Company:

### TEST OBJECT

Serial number:

H2-112019-4

Lot number:

L41242113018

Description:

3.0 10K MS C&K

Hose ID:

3.0 x 4-1/16 10K

Description:

3.0 x 4-1/16 10K

Fitting 2:

900.00 sec

Part number:

Length:

12

feet

Visual check:

Pressure test result: PASS

Length measurement result:

Test operator: Roderick Shambra


## TEST REPORT



11/20/2019 12:13:07 PM

H2-1987



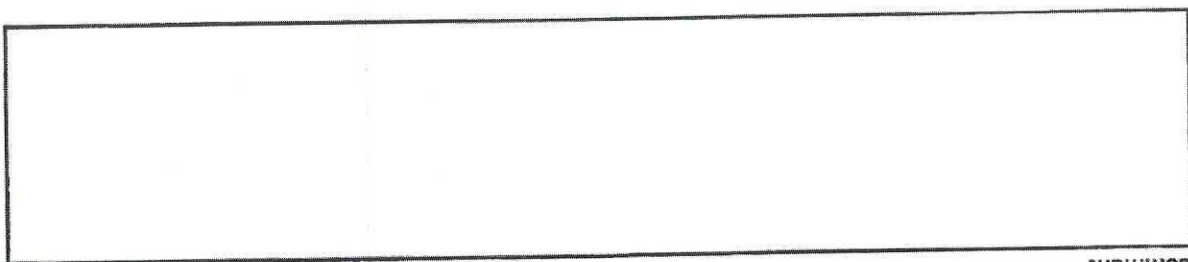

Comment

| Description | Serial number | Calibration date | Calibration due date |
|-------------|---------------|------------------|----------------------|
| S-25-A-W    | 110AMCLO      | 2019-03-17       | 2020-03-15           |
| S-25-A-W    | 110APO2K      | 2019-04-16       | 2020-04-14           |

GAUGE TRACEABILITY




# TEST REPORT

11/20/2019 12:13:07 PM

H2-1987

Rev Date: 12/17/2019

DW Industries Inc.  
Garrett Crawford, Director of Quality

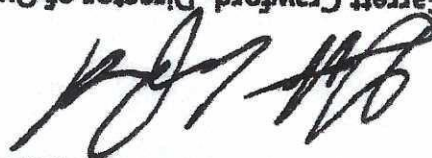

Certificate Issue Date: 2/27/2020


I DO HEREBY CERTIFY, AS THE AUTHORIZED REPRESENTATIVE OF DW INDUSTRIES, THAT THE PRODUCT LISTED ABOVE ARE OF THE QUALITY SPECIFIED AND CONFORM TO ALL REQUIREMENTS OF THE PURCHASE ORDER, INCLUDING: QUALITY CONTROL CLAUSES, DESIGN SPECIFICATIONS, DRAWINGS, PRESERVATION, PACKAGING, MARKING, AND PHYSICAL IDENTIFICATION REQUIREMENTS AND HAS BEEN PROCESSED IN ACCORDANCE WITH ISO-9001:2015, API Q1 AND API SPEC 7K.

| Purchase Order Information      |                               |                                  |                                                                    | Customer Name:               |                                       |
|---------------------------------|-------------------------------|----------------------------------|--------------------------------------------------------------------|------------------------------|---------------------------------------|
| Customer Part Number:           | OA-5640-4815-1002-4           | Part Description:                | 3" 10,000 psi WP CHOKE HOSE M X F 4" 1002 HAMMER UNIONS C/W CLAMPS | PAUL HOFFMAN<br>432-241-5360 | CITADEL DRILLING<br>Customer Contact: |
| QTY Ordered:                    | 1                             | Assembly Date:                   | 02/26/2020                                                         |                              |                                       |
| DW Industries Part Number:      | OA-5640-4815-1002-4           | Serial Number:                   | 022620DW-2                                                         |                              |                                       |
| Customer Purchase Order Number: | CONTACT PAUL HOFFMAN FOR INFO | DW Industries Work Order Number: | 20020163                                                           |                              |                                       |

DW INDUSTRIES INC.  
6287 Long Drive  
Houston, TX 77087  
Tel. 713 644-8372 Fax 713-644-4947

**COPY**

**Certificate of Performance**

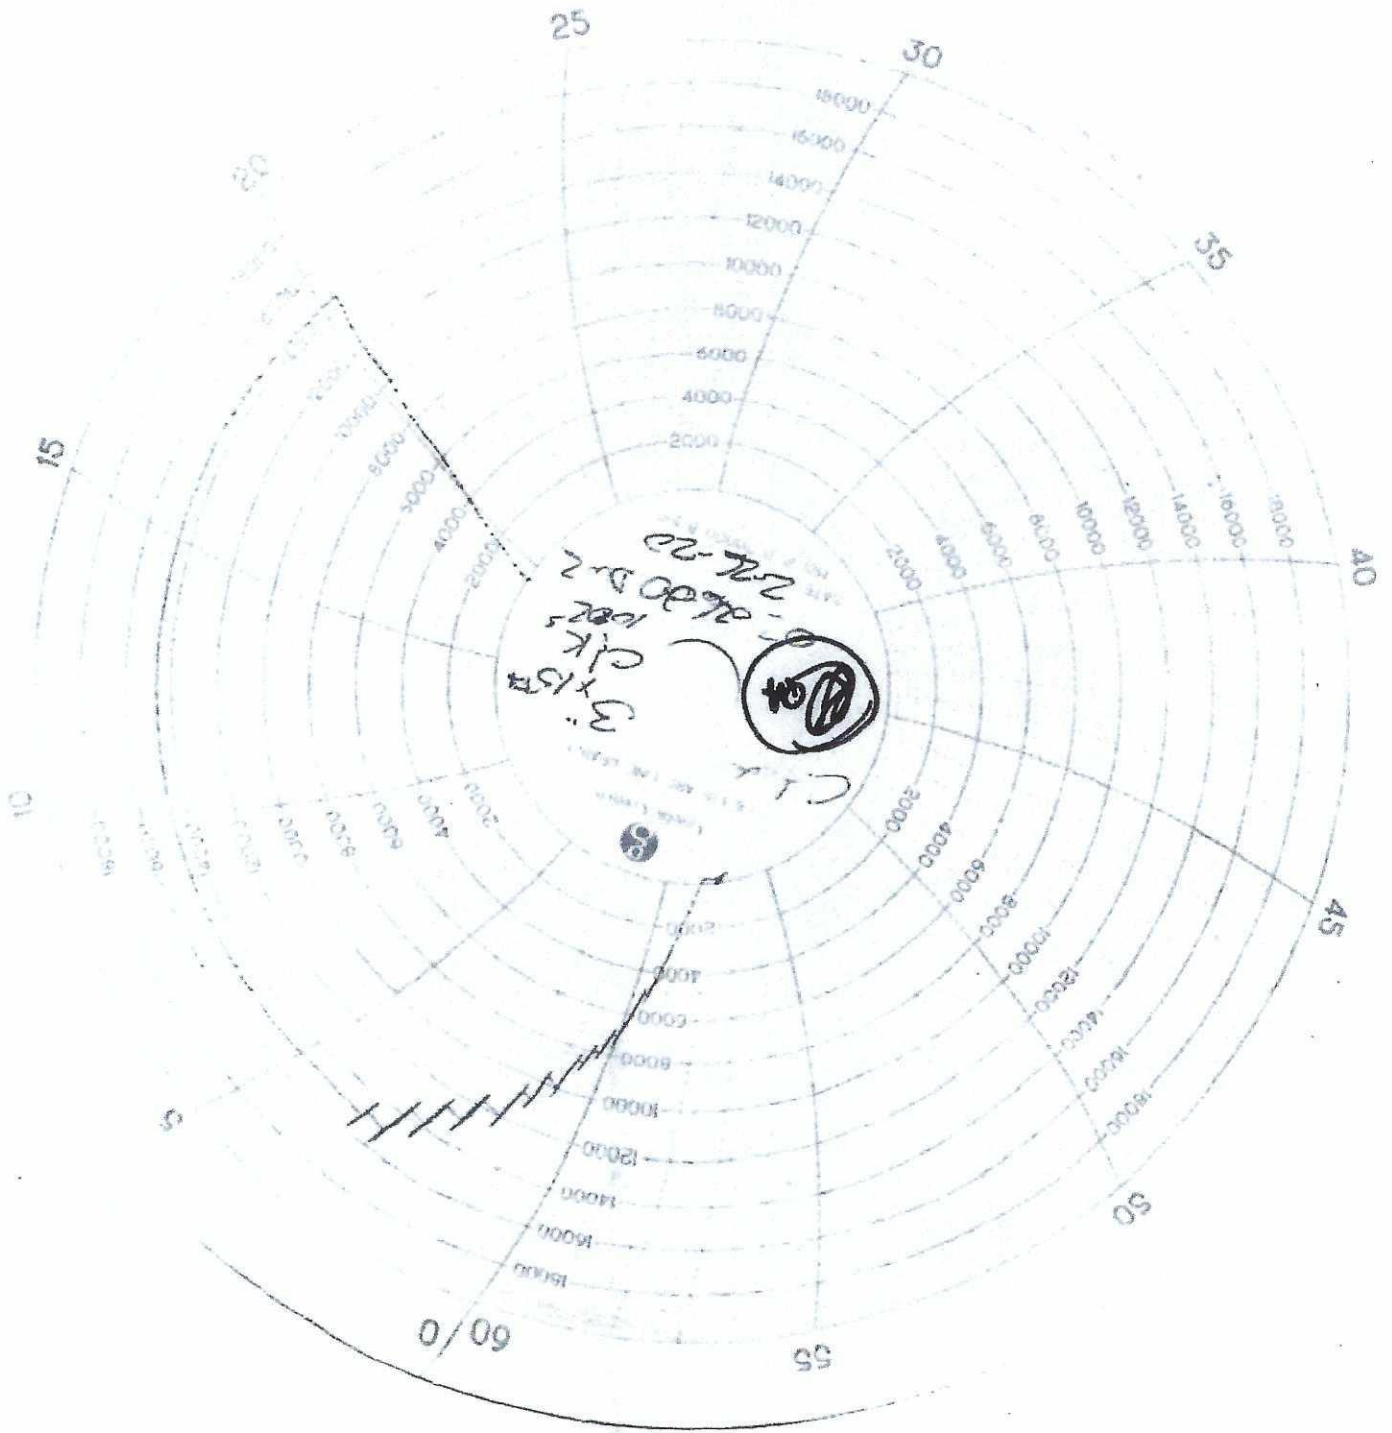

COPY



QP-018-OF, Rev New  
Rev Date: 12/17/2019Garrett Crawford, Director of Quality  
DW Industries Inc.


Certificate Issue Date: 2/27/2020

I DO HEREBY CERTIFY, AS THE AUTHORIZED REPRESENTATIVE OF DW INDUSTRIES, THAT THE PRODUCT LISTED ABOVE ARE OF THE QUALITY SPECIFIED AND CONFORM TO ALL REQUIREMENTS OF THE PURCHASE ORDER, INCLUDING: QUALITY CONTROL CLAUSES, DESIGN SPECIFICATIONS, DRAWINGS, PRESERVATION, PACKAGING, MARKING, AND PHYSICAL IDENTIFICATION REQUIREMENTS AND HAS BEEN PROCESSED IN ACCORDANCE WITH ISO-9001:2015, API Q1 AND API SPEC 7K.

| Purchase Order Information      |                               |                                  |                                                                                        | Customer Name:                                                        |  |
|---------------------------------|-------------------------------|----------------------------------|----------------------------------------------------------------------------------------|-----------------------------------------------------------------------|--|
| Customer Part Number:           | OA-5640-4822-4-1/16FXFL-ALE   | Part Description:                | 3" 10,000 PSI WP CHOKE HOSE 4-1/16" FIXED BY FLOAT FLANGES C/W SS ARMOR & LIFTING EYES | CITADEL DRILLING<br>Customer Contact:<br>PAUL HOFFMAN<br>432-241-5360 |  |
| QTY Ordered:                    | 1                             | Assembly Date:                   | 02/26/2020                                                                             |                                                                       |  |
| DW Industries Part Number:      | OA-5640-4822-4-1/16FXFL-ALE   | Serial Number:                   | 022620DW-1                                                                             |                                                                       |  |
| Customer Purchase Order Number: | CONTACT PAUL HOFFMAN FOR INFO | DW Industries Work Order Number: | 20020164                                                                               |                                                                       |  |

DW INDUSTRIES INC.  
6287 LONG DRIVE  
Houston, TX 77067  
Tel. 713 644-8372 Fax 713-644-4947

**COPY**  
**Certificate of Conformance**

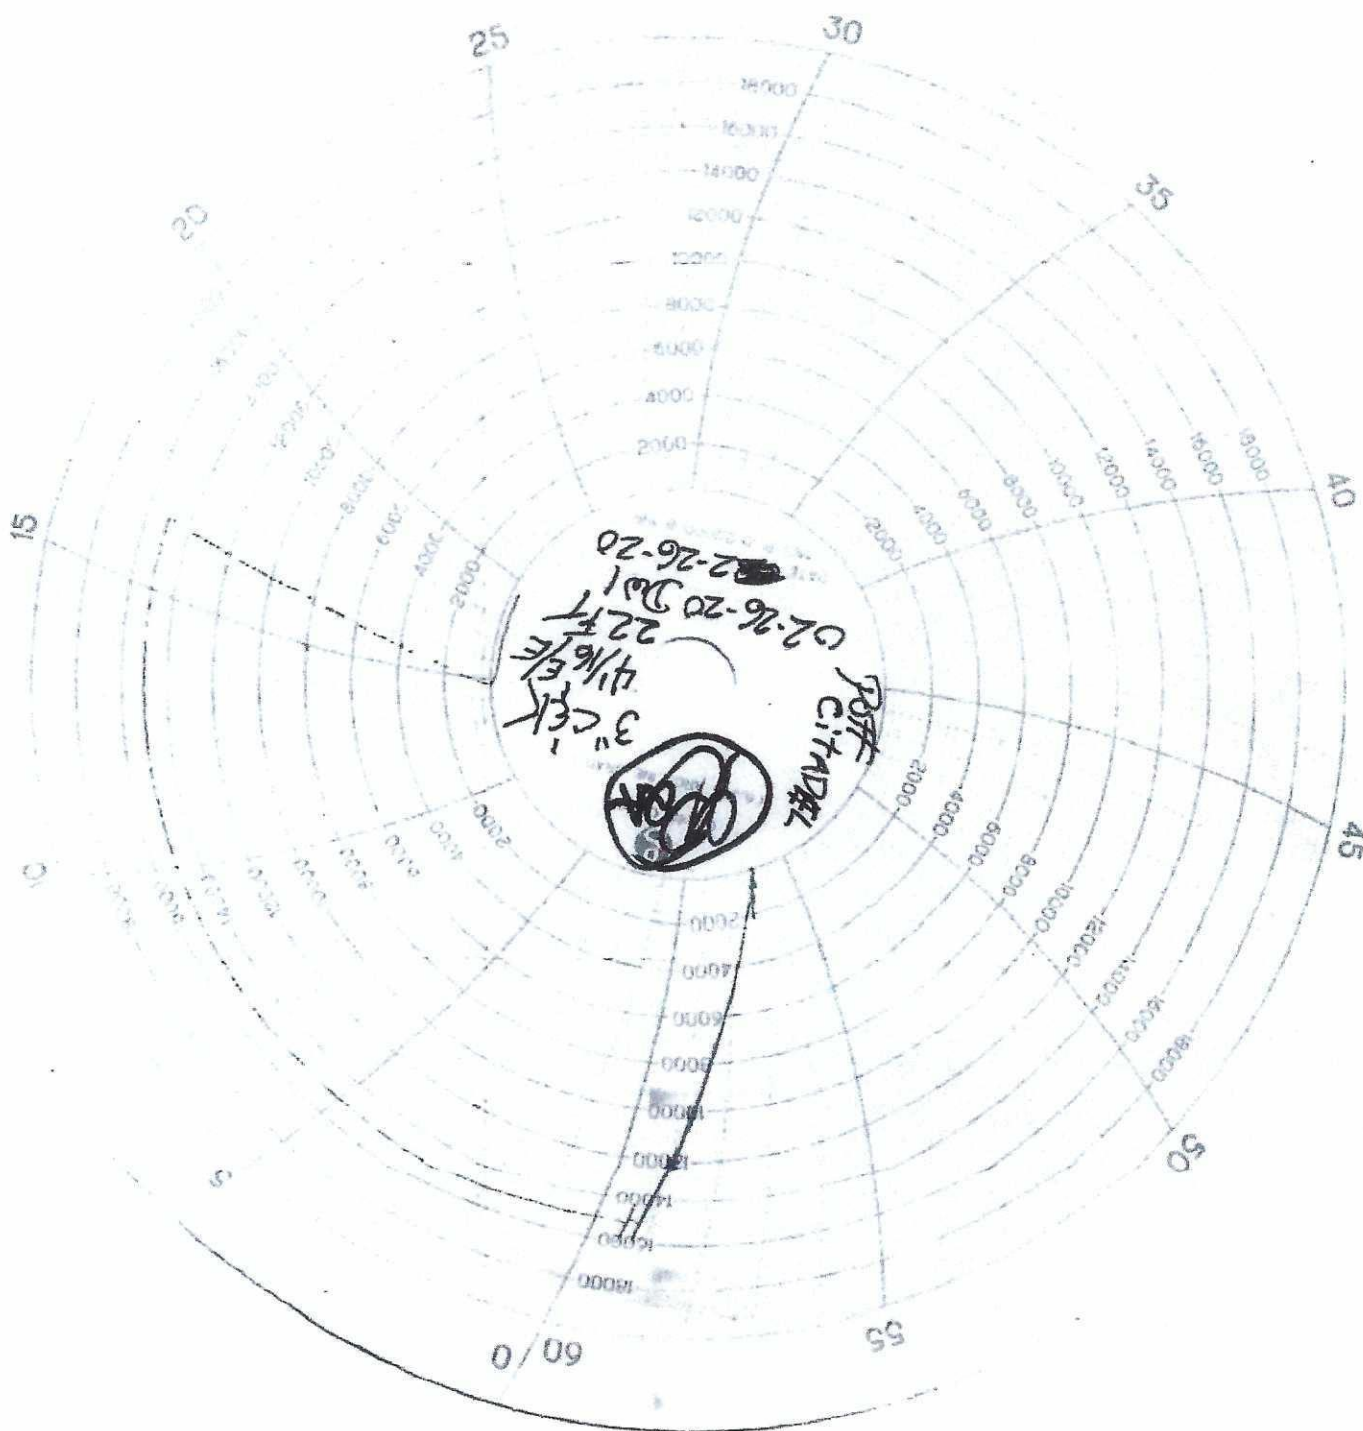

COPY



Quality Assurance,  
DW Industries, Inc.


Certificate Issue Date: 1/27/2023

I DO HEREBY CERTIFY, AS THE AUTHORIZED REPRESENTATIVE OF DW INDUSTRIES, THAT THE PRODUCT LISTED ABOVE ARE OF THE QUALITY SPECIFIED AND CONFORM TO ALL REQUIREMENTS OF THE PURCHASE ORDER, INCLUDING: QUALITY CONTROL CLAUSES, DESIGN SPECIFICATIONS, DRAWINGS, PRESERVATION, PACKAGING, MARKING, AND PHYSICAL IDENTIFICATION REQUIREMENTS AND HAS BEEN PROCESSED IN ACCORDANCE WITH ISO-9001:2015, API Q1 AND API SPEC 7K.

| Customer Name:             |                                 | ASUTIN HOSE          |                   | Customer Contact:                | JUDY LOERA |  |
|----------------------------|---------------------------------|----------------------|-------------------|----------------------------------|------------|--|
| Purchase Order Information | Customer Purchase Order Number: | 00704977             |                   | DW Industries Work Order Number: | 23010065   |  |
|                            | DW Industries Part Number:      | OA-PS5038-64154"-602 |                   | Serial Number:                   | 23010065   |  |
|                            | QTY Ordered:                    | 1                    |                   | Assembly Date:                   | 1/27/2023  |  |
|                            | Customer Part Number:           |                      | Part Description: | 4"X154" 3K W/4" FIG 602 MXF      |            |  |
|                            |                                 |                      |                   |                                  |            |  |

DW INDUSTRIES INC.  
6287 Long Drive  
Houston, TX 77087  
Tel. 713 644-8372 Fax 713-644-4947

Certificate of Conformance

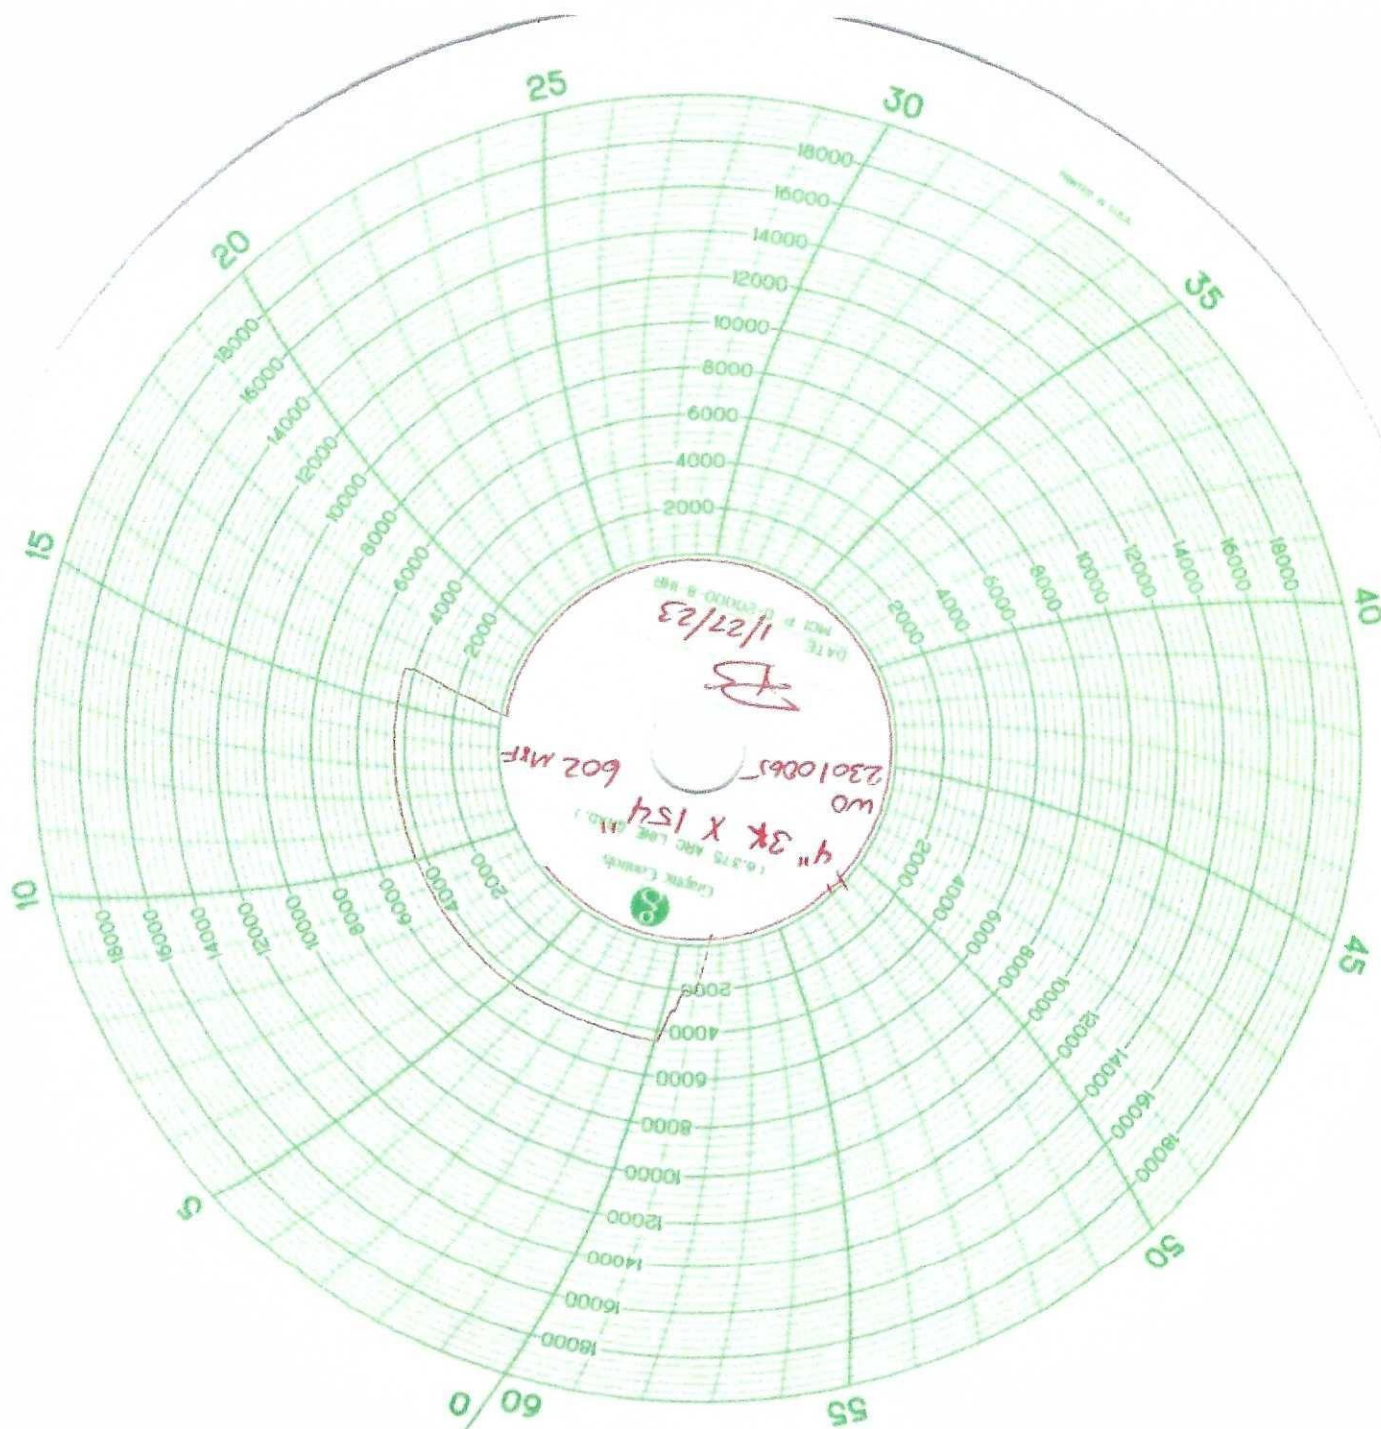



IN SERVICE  
12-20-21

**GATES ENGINEERING & SERVICES NORTH AMERICA**  
**7603 Prairie Oak Dr. Suite 190**  
**Houston, TX. 77086**

**PHONE: +1 (281) 602-4100**  
**FAX: +1 (281) 602-4147**  
**EMAIL: gesna.quality@gates.com**  
**WEB: www.gates.com/ollandgas**

## PRESSURE TEST CERTIFICATE

|                |                                |                  |             |
|----------------|--------------------------------|------------------|-------------|
| Customer:      | A-7 AUSTIN INC DBA AUSTIN HOSE | Test Date:       | 10/15/2021  |
| Customer Ref.: | 00595477                       | Hose Serial No.: | H3-101521-2 |
| Invoice No.:   | 521925                         | Created By:      | Micky Mhina |

Product Description: 3" X 35' GATES FIRE RATED CHOKE & KILL HOSE ASSEMBLY SUITED FOR H2S SERVICE C/W 4 1/16 10K FIXED X FLOAT HEAT TREATED FLANGES SUPPLIED WITH STAINLESS STEEL ARMOR SAFETY CLAMPS & LIFT EYES

|                  |                                       |                   |                                       |
|------------------|---------------------------------------|-------------------|---------------------------------------|
| End Fitting 1:   | 4 1/16 10K FIXED FLANGE               | End Fitting 2:    | 4 1/16 10K FLOAT HEAT TREATED FLANGES |
| Oracle Star No.: | 68703010-10074881                     | Assembly Code:    | L41975 091719                         |
| CUSTOMER P/N:    | 10K3.035.0CK411610KFIXXFLTW/SSA/SC/LE | Test Pressure:    | 15,000 PSI.                           |
|                  |                                       | Working Pressure: | 10,000 PSI.                           |

### Gates Engineering & Services North America certifies that:

The following hose assembly has successfully passed all pressure testing requirements set forth in Gates specifications: GTS-04-052 (for 5K assemblies) or GTS-04-053 (10K assemblies) or GTS-04-048 (15K assemblies), which include reference to Specification API 16C (2nd Edition); sections 7.5.4, 7.5.9, and 10.8.7. A test graph will accompany this test certificate to illustrate conformity to test requirements. This hose assembly was pressure tested using equipment and instrumentation that has been calibrated in accordance with the requirements set-forth in the GESNA management system.

|             |                    |
|-------------|--------------------|
| Quality:    | QUALITY            |
| Date :      | 10/15/2021         |
| Signature : | <i>Micky Mhina</i> |

F-PRD-005B

|             |                    |
|-------------|--------------------|
| Production: | PRODUCTION         |
| Date :      | 10/15/2021         |
| Signature : | <i>[Signature]</i> |

Revision 6\_05032021

**BLACK GOLD®**

**GATES ENGINEERING & SERVICES NORTH AMERICA**  
**7603 Prairie Oak Dr.**  
**Houston, TX. 77086**

**PHONE: +1 (281) 602-4100**  
**FAX: +1 (281) 602-4147**  
**EMAIL: gesna.quality@gates.com**  
**WEB: www.gates.com/ollandgas**

## CERTIFICATE OF CONFORMANCE

This is to certify that all parts and materials included in this shipment have manufactured and/or processed in accordance with various Gates and API assembly and test specifications. Records of required tests are on-file and subject to examination. Test reports and subsequent test graphs have been made available with this shipment. Additional supporting documentation related to materials, welding, weld inspections, and heat-treatment activities are available upon request.

**CUSTOMER:** A-7 AUSTIN INC DBA AUSTIN HOSE  
**CUSTOMER P.O.#:** 00595477  
**CUSTOMER P./N.#:** 10K3.035.0CK411610KFIXXFLTW/SSA/SC/LE  
**PART DESCRIPTION:** 3" X 35' GATES FIRE RATED CHOKE & KILL HOSE ASSEMBLY SUITED FOR H2S  
SERVICE C/W 4 1/16 10K FIXED X FLOAT HEAT TREATED FLANGES SUPPLIED WITH  
STAINLESS STEEL ARMOR SAFETY CLAMPS & LIFT EYES  
**SALES ORDER #:** 521925  
**QUANTITY:** 1  
**SERIAL #:** H3-101521-2

**SIGNATURE:** *Allyce Warr*  
**TITLE:** QUALITY ASSURANCE  
**DATE:** 10/15/2021





H3-6963

10/15/2021 10:15:57 AM

# TEST REPORT

**CUSTOMER**

Company: Austin Distributing

Production description:

Sales order #: 521925

Customer reference:

**TEST OBJECT**

Serial number: H3-101521-2

Lot number: L41975091719

Description:

Hose ID: 3" 10k ck

Part number:

**TEST INFORMATION**

Test procedure: GTS-04-053

Test pressure: 15000.00 psi

Test pressure hold: 3600.00 sec

Work pressure: 10000.00 psi

Work pressure hold: 900.00 sec

Length difference: 0.00 %

Length difference: 0.00 inch

Fitting 1: 3.0 x 4-1/16 10K

Part number:

Description:

Fitting 2: 3.0 x 4-1/16 10K

Part number:

Description:


Visual check:

Pressure test result: PASS

Length measurement result:

Length: 35 feet

Test operator: francisco

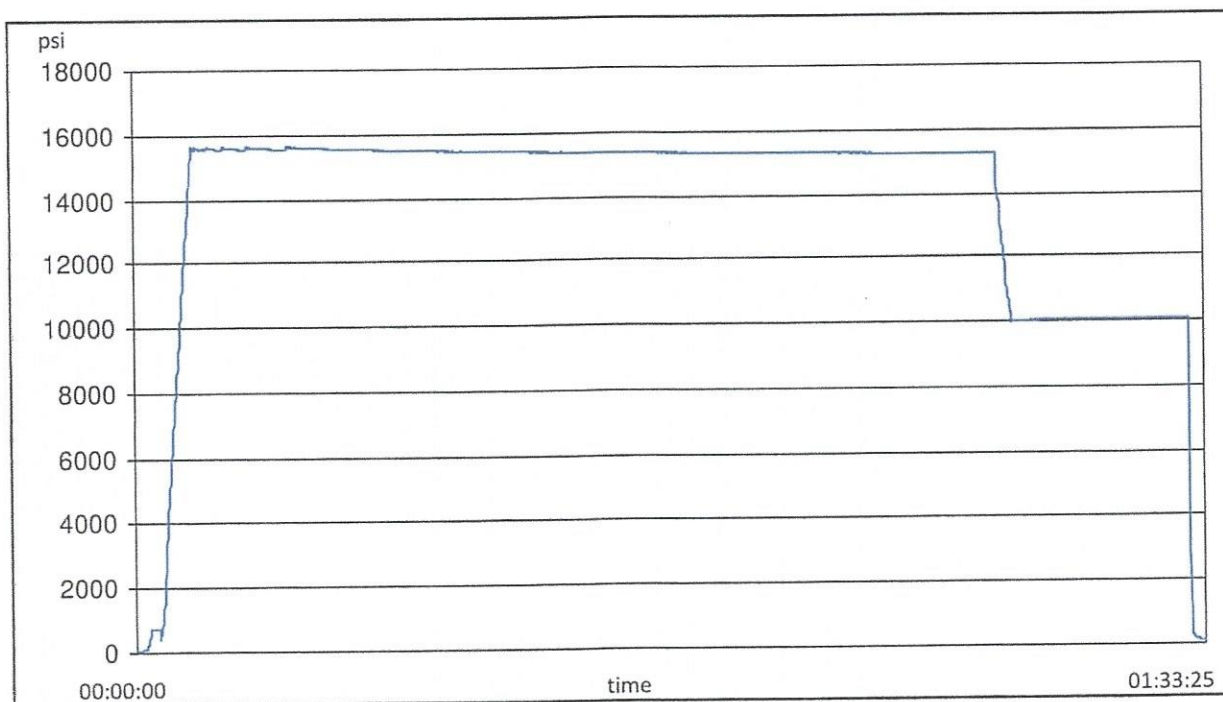



10/15/2021 10:15:57 AM

# TEST REPORT

| Description | Serial number | Calibration date | Calibration due date |
|-------------|---------------|------------------|----------------------|
| S-25-A-W    | 110AQA1S      | 2021-02-24       | 2022-02-24           |
| S-25-A-W    | 110D3PHQ      | 2021-03-11       | 2022-03-11           |

Comment

|  |
|--|
|  |
|--|

## Hydrostatic Test Certificate

ContiTech

|                                                                                                                       |  |                                                                                  |  |                                                                                                                         |  |
|-----------------------------------------------------------------------------------------------------------------------|--|----------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------------------------------------------|--|
| <b>Certificate Number</b><br>H100163                                                                                  |  | <b>COM Order Reference</b><br>1429702                                            |  | <b>Customer Name &amp; Address</b><br>HELMERICH & PAYNE DRILLING CO<br>1434 SOUTH BOULDER AVE<br>TULSA, OK 74119<br>USA |  |
| <b>Customer Purchase Order No:</b><br>740382384                                                                       |  |                                                                                  |  |                                                                                                                         |  |
| <b>Project:</b>                                                                                                       |  |                                                                                  |  |                                                                                                                         |  |
| <b>Test Center Address</b><br>ContiTech Oil & Marine Corp.<br>11535 Brittmoore Park Drive<br>Houston, TX 77041<br>USA |  | <b>Accepted by COM Inspection</b><br>Signed: Gerson Mejia-Lazo<br>Date: 07/14/22 |  | <b>Accepted by Client Inspection</b>                                                                                    |  |

We certify that the goods detailed hereon have been inspected as described below by our Quality Management System, and to the best of our knowledge are found to conform the requirements of the above referenced purchase order as issued to ContiTech Oil & Marine Corporation.

| Item | Part No. | Description | Qty | Serial Number | Work. Press. (psi) | Test Press. (psi) | Test Time (minutes) |
|------|----------|-------------|-----|---------------|--------------------|-------------------|---------------------|
|------|----------|-------------|-----|---------------|--------------------|-------------------|---------------------|

50 RECERTIFICATION

3" ID 10K Choke and Kill Hose x 35ft OAL

1

70025


10,000

15,000

60

| Record Information |                    |
|--------------------|--------------------|
| Start Time         | 6/14/2022 11:42:08 |
| End Time           | 6/14/2022 12:56:14 |
| Interval           | 00:01:00           |
| Number             | 75                 |
| MaxValue           | 15888              |
| MinValue           | -8                 |
| AvgValue           | 14184              |
| RecordName         | 70025-sh           |
| RecordNumber       | 237                |

| Gauge Information |              |
|-------------------|--------------|
| Model             | ADT680       |
| SN                | 21817380014  |
| Range             | (0-40000)psi |
| Unit              | psi          |

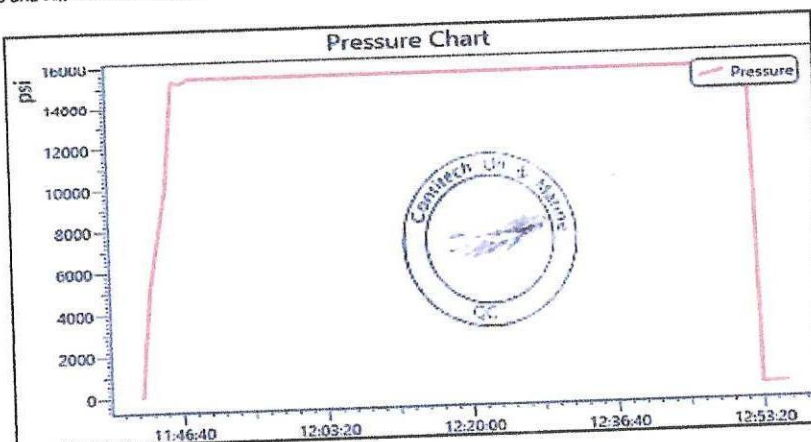

**Certificate of Conformity**

ContiTech

|                                                                                                                       |                                                                                                                                                                    |                                                                                                                         |  |
|-----------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|--|
| <b>Certificate Number</b><br>H100163                                                                                  | <b>COM Order Reference</b><br>1429702                                                                                                                              | <b>Customer Name &amp; Address</b><br>HELMERICH & PAYNE DRILLING CO<br>1434 SOUTH BOULDER AVE<br>TULSA, OK 74119<br>USA |  |
| <b>Customer Purchase Order No:</b> 740382384                                                                          |                                                                                                                                                                    |                                                                                                                         |  |
| <b>Project:</b>                                                                                                       |                                                                                                                                                                    |                                                                                                                         |  |
| <b>Test Center Address</b><br>ContiTech Oil & Marine Corp.<br>11535 Brittmoore Park Drive<br>Houston, TX 77041<br>USA | <b>Accepted by COM Inspection</b><br>Signed: Gerson Mejia-Lazo<br>Date: 07/14/22  | <b>Accepted by Client Inspection</b>                                                                                    |  |

We certify that the items detailed below meet the requirements of the customer's Purchase Order referenced above, and are in conformance with the specifications given below.

| Item | Part No.        | Description                              | Qty | Serial Number | Specifications     |
|------|-----------------|------------------------------------------|-----|---------------|--------------------|
| 50   | RECERTIFICATION | 3" ID 10K Choke and Kill Hose x 35ft OAL | 1   | 70025         | ContiTech Standard |

ARMORED CHOKE HOSE

Installed

4-29-22





ContiTech

|                                     |                       |
|-------------------------------------|-----------------------|
| CONTITECH RUBBER<br>Industrial Kft. | No: QC-DB- 120 / 2019 |
|                                     | Page: 16 / 91         |

|                                                                                                                                                                                                                                                                                                                                                                                                          |                                            |                                                                                                                   |                           |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|-------------------------------------------------------------------------------------------------------------------|---------------------------|
| <b>QUALITY CONTROL<br/>INSPECTION AND TEST CERTIFICATE</b>                                                                                                                                                                                                                                                                                                                                               |                                            | CERT. N°: 75819                                                                                                   |                           |
| PURCHASER: ContiTech Oil & Marine Corp.                                                                                                                                                                                                                                                                                                                                                                  |                                            | P.O. N°: 4501225327                                                                                               |                           |
| CONTITECH RUBBER order N°: 1127442                                                                                                                                                                                                                                                                                                                                                                       | HOSE TYPE: 3" ID Choke and Kill Hose       |                                                                                                                   |                           |
| HOSE SERIAL N°: 75819                                                                                                                                                                                                                                                                                                                                                                                    | NOMINAL / ACTUAL LENGTH: 10,67 m / 10,68 m |                                                                                                                   |                           |
| W.P. 69,0 MPa 10000 psi                                                                                                                                                                                                                                                                                                                                                                                  | T.P. 103,5 MPa 15000 psi                   | Duration: 60                                                                                                      | min.                      |
| Pressure test with water at ambient temperature                                                                                                                                                                                                                                                                                                                                                          |                                            |                                                                                                                   |                           |
| See attachment ( 1 page )                                                                                                                                                                                                                                                                                                                                                                                |                                            |                                                                                                                   |                           |
| COUPLINGS Type                                                                                                                                                                                                                                                                                                                                                                                           | Serial N°                                  | Quality                                                                                                           | Heat N°                   |
| 3" coupling with<br>4 1/16" 10K API Swivel Flange end<br>Hub                                                                                                                                                                                                                                                                                                                                             | 6026                                       | AISI 4130<br>AISI 4130<br>AISI 4130                                                                               | A0607J<br>040841<br>54194 |
| 3" coupling with<br>4 1/16" 10K API b.w. Flange end                                                                                                                                                                                                                                                                                                                                                      | 6016                                       | AISI 4130<br>AISI 4130                                                                                            | A0607J<br>040431          |
| <b>Not Designed For Well Testing</b>                                                                                                                                                                                                                                                                                                                                                                     |                                            | <b>API Spec 16 C 2<sup>nd</sup> Edition– FSL2</b>                                                                 |                           |
| <b>Temperature rate: "B"</b>                                                                                                                                                                                                                                                                                                                                                                             |                                            |                                                                                                                   |                           |
| All metal parts are flawless                                                                                                                                                                                                                                                                                                                                                                             |                                            |                                                                                                                   |                           |
| WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER<br>INSPECTED AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.                                                                                                                                                                                                                                       |                                            |                                                                                                                   |                           |
| STATEMENT OF CONFORMITY: We hereby certify that the above items/equipment supplied by us are in conformity with the terms,<br>conditions and specifications of the above Purchaser Order and that these items/equipment were fabricated inspected and tested in<br>accordance with the referenced standards, codes and specifications and meet the relevant acceptance criteria and design requirements. |                                            |                                                                                                                   |                           |
| COUNTRY OF ORIGIN HUNGARY/EU                                                                                                                                                                                                                                                                                                                                                                             |                                            |                                                                                                                   |                           |
| Date:<br><br>08. April 2019.                                                                                                                                                                                                                                                                                                                                                                             | Inspector                                  | Quality Control<br>ContiTech Rubber<br>Industrial Kft.<br>Quality Control Dept.<br>(1)<br><i>Soum</i> <i>Yacq</i> |                           |



## Hose Assembly Evaluation Sheet

|                         |                        |                                                                                                                 |                                                                   |         |                                                                        |
|-------------------------|------------------------|-----------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|---------|------------------------------------------------------------------------|
| Prepared by:            | Cristian Rivera        | Date:                                                                                                           | 8/27/2022                                                         | QIN:    | N/A                                                                    |
| Customer:               | HELMERICH & PAYNE, INC | Location:                                                                                                       | H&P INT'L DRILLING CO 210 MAGNOLIA DR GALENA PARK, TX, 77547-2738 |         |                                                                        |
| User contact:           | MITCH MCKINNIS         | Phone:                                                                                                          |                                                                   | e-mail: | <a href="mailto:mitch.mckinnis@hpinc.com">mitch.mckinnis@hpinc.com</a> |
|                         | <b>Parameters</b>      | <b>Hose Details</b>                                                                                             |                                                                   |         | <b>Test Status</b>                                                     |
| Application Information | PO                     | 740398454 (88000240   SN:70035)                                                                                 |                                                                   |         | PASS                                                                   |
|                         | Gates SO               | 525035                                                                                                          |                                                                   |         |                                                                        |
|                         | Serial #:              | 88000240   SN:70035                                                                                             |                                                                   |         |                                                                        |
|                         | As Tested Serial:      | H2-082722-1 RE-TEST                                                                                             |                                                                   |         |                                                                        |
|                         | Hose ID:               | 3 IN                                                                                                            |                                                                   |         |                                                                        |
|                         | Hose type:             | INSPECT AND RETEST CUSTOMER HOSE 3IN X 35FT CHOKE & KILL ASSEMBLY C/W 4-1/16 FLANGES BX155 RING GROOVE EACH END |                                                                   |         |                                                                        |
|                         | Working pressure:      | 10000 PSI.                                                                                                      |                                                                   |         |                                                                        |

### 1. Visual Examination

An API 16C, IN X 35FT CHOKE & KILL ASSEMBLY C/W 4-1/16 FLANGES BX155 RING GROOVE EACH END received from HELMERICH & PAYNE, INC for inspection, testing and external cosmetic repairs. The hydrostatic pressure testing was requested to 15000 PSI., by the customer HELMERICH & PAYNE, INC

Visual inspection and examination of external hose assembly showed some cosmetic dents and repairable damages to the external armor at distance 32ft 9in. from EF2. (Need to fix a part of the hose.)

Both external & internal hose body and couplings of the hose were examined. Visual Inspection photos are in Table 2, while post inspection/testing pictures are in Table 4.

The hose was hydrostatically tested at 15000 PSI. test pressure with an hour-long hold. On completion of hydrostatic testing, an internal baroscopic examination was carried out, to check the condition of internal hose areas, mainly hose tube and coupling hose interface.

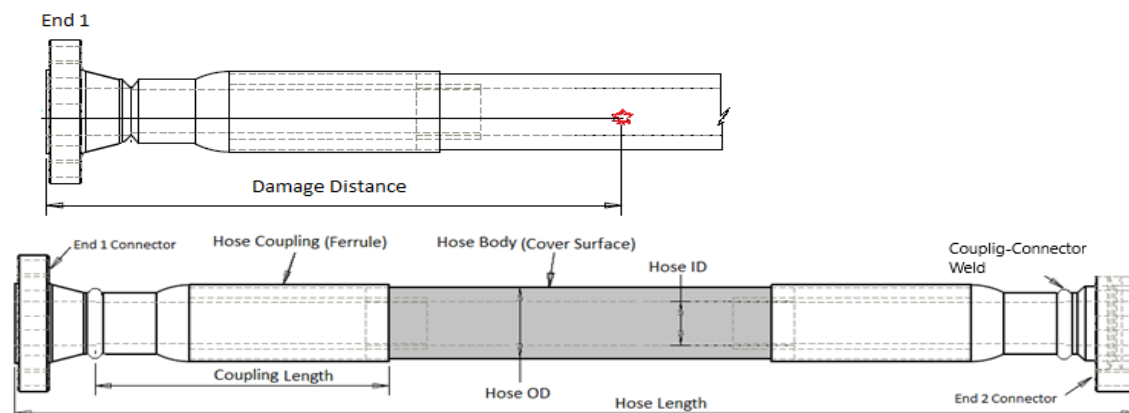


Figure 1: Generic Hose Assembly





Hose Assembly Evaluation Sheet

1.0 Observations and comments

|   | Comments                                                                                                                          |
|---|-----------------------------------------------------------------------------------------------------------------------------------|
| 1 | <div></div> <p>Photos: ID.</p>                  |
| 2 | <div></div> <p>Photo: Damaged armor areas</p> |



Hose Assembly Evaluation Sheet

|   |                                                                                                                                                                                                  |
|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3 | <div data-bbox="326 195 1252 873"></div> <p data-bbox="688 945 886 972">Photos: At Shipping.</p>               |
| 4 | <div data-bbox="319 1005 1289 1715"></div> <p data-bbox="639 1751 935 1776">Photos: Armor and Engraving.</p> |






## Hose Assembly Evaluation Sheet

|   |                                                                                                                                           |
|---|-------------------------------------------------------------------------------------------------------------------------------------------|
| 5 |  <p style="text-align: center;">Photo: In the Crate</p> |
|---|-------------------------------------------------------------------------------------------------------------------------------------------|

## 2. Hydro Static Pressure test

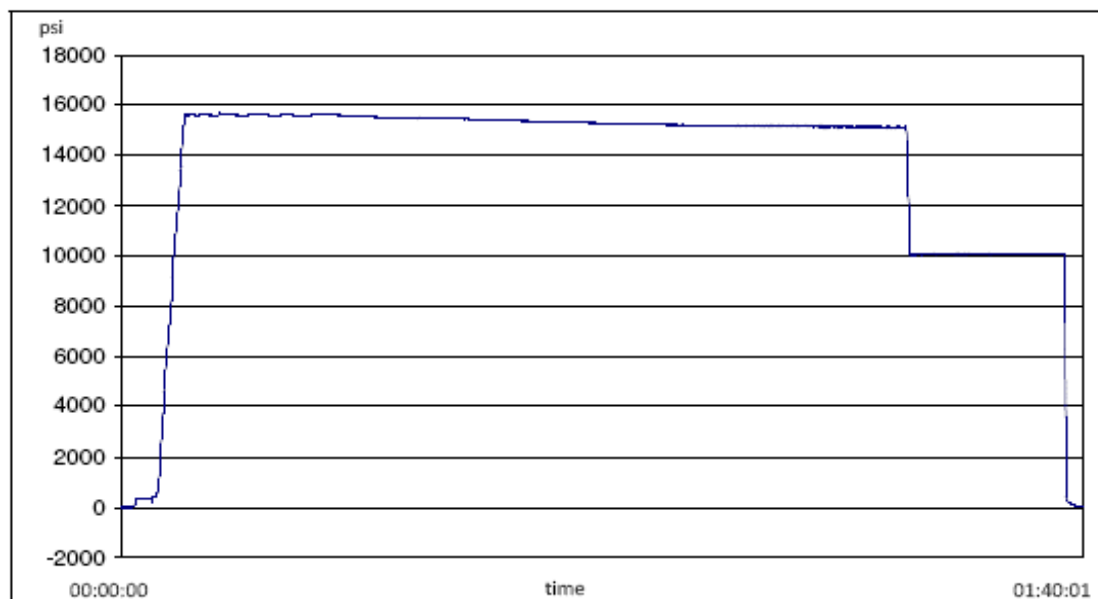

## 2.1 Hydrostatic Pressure test Procedures

|   | Hose Type                                  | Test Specification | Test Date  | Technician    |
|---|--------------------------------------------|--------------------|------------|---------------|
| 1 | IN X 35FT CHOKE & KILL ASSEMBLY C/W 4-1/16 | 3 10K C&K          | 2022-08-27 | Martin Orozco |

## 2.2 Gates Hydrostatic Pressure tester

|   | Test Equipment | Serial No | Last Cal Date | Cal Due Date |
|---|----------------|-----------|---------------|--------------|
| 1 | S-25-A-W       | 110AMCLO  | 2022-01-10    | 2023-01-10   |
| 2 | S-25-A-W       | 110BSEUZ  | 2022-03-09    | 2023-03-09   |



## Hose Assembly Evaluation Sheet

### 2.3 Hydro Static Test Pressure results

|   | Details                                 | Results |      |
|---|-----------------------------------------|---------|------|
| 1 | Hydrostatic Test Results <sup>(1)</sup> | Pass    | Fail |
| 2 | Failure Mode                            | None    |      |
| 3 | Hose Dispatched to the customer?        | Yes     | No   |

#### Note:

1. Hydrostatic Pressure report is given in Appendix 1


## 3. Hose borescope inspection

### 3.2 Internal Failure Details

|   | Type of Failure        | Location of Defect | Ref. Photo | Defect Details |
|---|------------------------|--------------------|------------|----------------|
| 1 | Liner breach/ collapse | None               |            | None           |
| 2 | Bulges/ Blisters       | None               |            | None           |
| 3 | Other breach/failures  | None               |            | None           |



Photos: Liner/Coupling Interface END 1

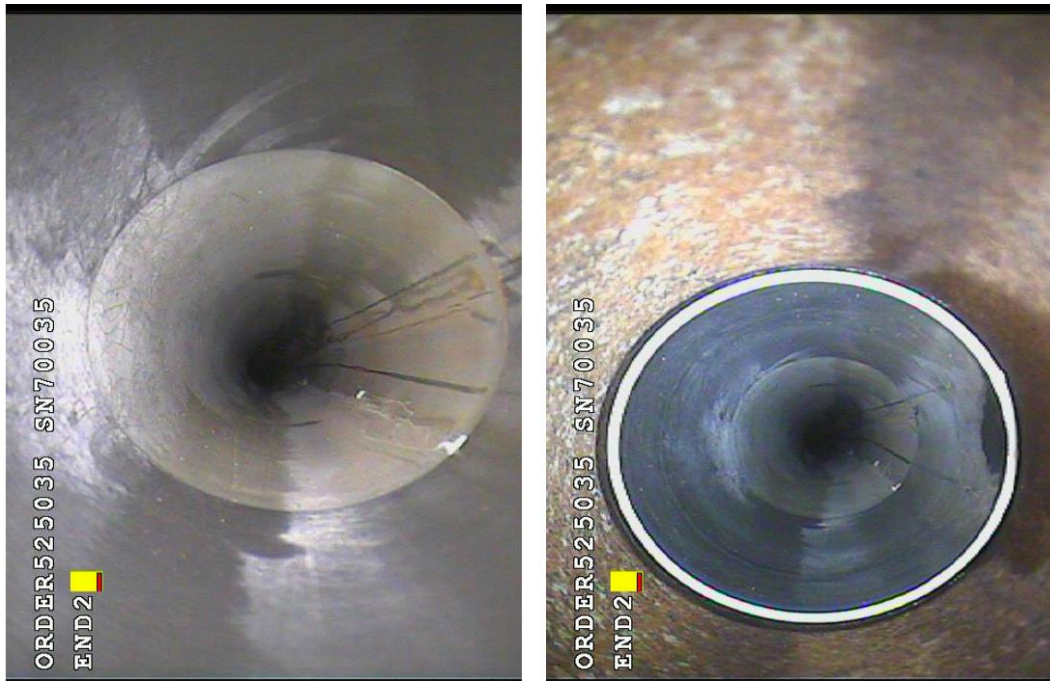**Hose Assembly Evaluation Sheet**

Photos: Liner/Coupling Interface END 2

**Note**

Borescope completed? Yes

**4. Summary**

Hose assembly successfully tested to requested test pressure of 15000 PSI. with an hour hold. It was then serialized and stamped, as H2-082722-1 RE-TEST. The bore scope showed no blisters or delamination in the internal lining/tube area. External damages were repaired as agreed with the customer.





## Hose Assembly Evaluation Sheet

APPENDIX 1:  
Pressure Chart

H2-8316

8/27/2022 8:51:22 AM

## TEST REPORT

## CUSTOMER

Company:

Production description:

Sales order #:

525035

Customer reference: 740398454 (88000240 |  
SN:70035)

## TEST OBJECT

Serial number:

H2-082722-1

Lot number:

Description:

Hose ID:

3 10k C&amp;K

Part number:

## TEST INFORMATION

Test procedure:

3 10K C&amp;K

Test pressure:

15000.00 psi

Test pressure hold:

3600.00 sec

Work pressure:

10000.00 psi

Work pressure hold:

900.00 sec

Length difference:

0.00 %

Length difference:

0.00 inch

Fitting 1:

3.0 x 4-1/16 10K

Part number:

Description:

Fitting 2:

3.0 x 4-1/16 10K

Part number:

Description:

Visual check:

Pressure test result:

PASS


Length measurement result:

Length:

35 feet

Test operator:

Martin

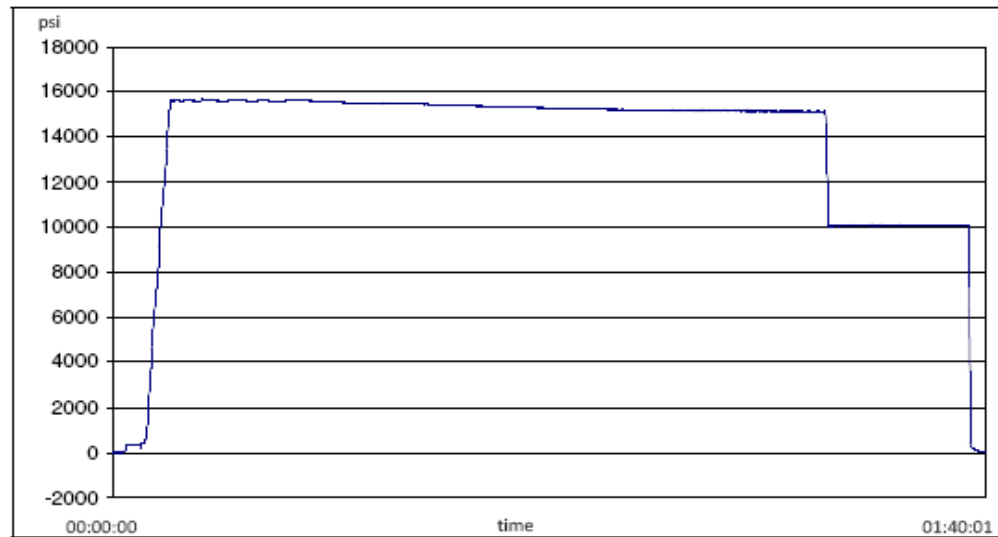

Filename: D:\Certificates\Report\_082722-H2-082722-1.pdf

Page 1/2

Hose Assembly Evaluation Sheet



H2-8316

8/27/2022 8:51:22 AM

TEST REPORT

GAUGE TRACEABILITY

| Description | Serial number | Calibration date | Calibration due date |
|-------------|---------------|------------------|----------------------|
| S-25-A-W    | 110AMCLO      | 2022-01-10       | 2023-01-10           |
| S-25-A-W    | 110BSEUZ      | 2022-03-09       | 2023-03-09           |

Comment

## Hose Assembly Evaluation Sheet

APPENDIX 2:  
Certificate of Conformance

**GATES ENGINEERING & SERVICES NORTH AMERICA**  
7603 Prairie Oak Dr.  
Houston, TX. 77086

PHONE: +1 (281) 602-4100  
FAX: +1 (281) 602-4147  
EMAIL: [geena.quality@gates.com](mailto:geena.quality@gates.com)  
WEB: [www.gates.com/oilandgas](http://www.gates.com/oilandgas)


**CERTIFICATE OF CONFORMANCE**

This is to verify that the items detailed below meet the requirements of the Customer's Purchase Order referenced herein, and are in Conformance with applicable specifications, and that Records of Required Tests are on file and subject to examination. The following items were inspected and hydrostatically tested at **Gates Engineering & Services North America** facilities in Houston, TX, USA.

**CUSTOMER:** HELMERICH & PAYNE, INC  
**CUSTOMER P.O.#:** 740398454 (88000240 | SN:70035)  
**CUSTOMER P/N:** 88000240 | SN:70035

**PART DESCRIPTION:** INSPECT AND RETEST CUSTOMER HOSE 3IN X 35FT CHOKE & KILL ASSEMBLY C/W 4-1/16  
FLANGES BX155 RING GROOVE EACH END

**SALES ORDER #:** 525035  
**QUANTITY:** 1  
**SERIAL #:** H2-082722-1 RE-TEST

**SIGNATURE:**   
**TITLE:** QUALITY ASSURANCE  
**DATE:** 8/27/2022

## OXY's Minimum Design Criteria

Burst, Collapse, and Tensile SF are calculated using Landmark's Stress Check (Casing Design) software. A sundry will be requested if any lesser grade or different size casing is substituted.

### 1) Casing Design Assumptions

#### a) Burst Loads

##### CSG Test (Surface)

- Internal: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both 43 CFR part 3170 Subpart 3172 and 19.15.16 of the OCD Rules.
- External: Pore pressure in open hole.

##### CSG Test (Intermediate)

- Internal: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both 43 CFR part 3170 Subpart 3172 and 19.15.16 of the OCD Rules.
- External: Mud Weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

##### CSG Test (Production)

- Internal:
  - For Drilling: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both 43 CFR part 3170 Subpart 3172 and 19.15.16 of the OCD Rules.
  - For Production: The design pressure test should be the greater of (1) the planned test pressure prior to stimulation down the casing. (2) the regulatory test pressure, and (3) the expected gas lift system pressure. The design test fluid should be the fluid associated with pressure test having the greatest pressure.
- External:
  - For Drilling: Mud Weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.
  - For Production: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

##### Gas Column (Surface)

- Internal: Assumes a full column of gas in the casing with a Gas/Oil Gradient of 0.1 psi/ft in the absence of better information. It is limited to the controlling pressure based on the fracture pressure at the shoe or the maximum expected pore pressure within the next drilling interval, whichever results in a lower surface pressure.
- External: Fluid gradient below TOC, pore pressure from the TOC to the Intermediate CSG shoe (if applicable), and MW of the drilling mud that was in the hole when the CSG was run from Intermediate CSG shoe to surface.

##### Bullheading (Surface / Intermediate)

- Internal: The string must be designed to withstand a pressure profile based on the fracture pressure at the casing shoe with a column of water above the shoe plus an additional surface pressure (in psi) of  $0.02 \times \text{MD of the shoe}$  to account for pumping friction pressure.
- External: Mud weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

**Gas Kick (Intermediate)**

- The string must be designed to at least a gas kick load case unless the rig is unable to detect a kick. For the gas kick load case, the internal pressure profile must be based on a minimum volume of 50 bbl or the minimum kick detection capability of the rig, whichever is greater, and a kick intensity of 2.0 ppg for Class 1, 1.0 ppg of Class 2, and 0.5 ppg for Class 3 and 4 wells.
- Internal: Influx depth of the maximum pore pressure of 0.55 "gas kick gravity" of gas to surface while drilling the next hole section.
- External: Mud weight to the TOC, cement mix water gradient below TOC, and pore pressure in open hole.

**Tubing Leak Near Surface While Producing (Production)**

- Internal: SITP plus a packer fluid gradient to the shoe or top of packer.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

**Tubing Leak Near Surface While Stimulating (Production)**

- Internal: Surface pressure or pressure-relief system pressure, whichever is lower plus packer fluid gradient.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

**Injection / Stimulation Down Casing (Production)**

- Internal: Surface pressure plus injection fluid gradient.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

**b) Collapse Loads****Lost Circulation (Surface / Intermediate)**

- Internal: Lost circulation at the TD of the next hole section, and the fluid level falls to a depth where the hydrostatic of the mud equals pore pressure at the depth of the lost circulation zone.
- External: MW of the drilling mud that was in the hole when the casing was run. Cementing (Surface / Intermediate / Production)

- Internal: Displacement fluid density.
- External: Mud weight from TOC to surface and cement slurry weight from TOC to casing shoe.

**Full Evacuation (Production)**

- Internal: Full void pipe.
- External: MW of drilling mud in the hole when the casing was run.

**c) Tension Loads****Running Casing (Surface / Intermediate / Production)**

- Axial: Buoyant weight of the string plus the lesser of 100,000 lb or the string weight in air.

**Green Cement (Surface / Intermediate / Production)**

- Axial: Buoyant weight of the string plus cement plug bump pressure load.





CONNECTION DATA SHEET

OD: 5.500 in.


Weight: 20.00 lb/ft

Wall Th.: 0.361 in.

Grade: P110 RY

Drift: 4.653 in. (API)

VAM<sup>®</sup> SPRINT-SF

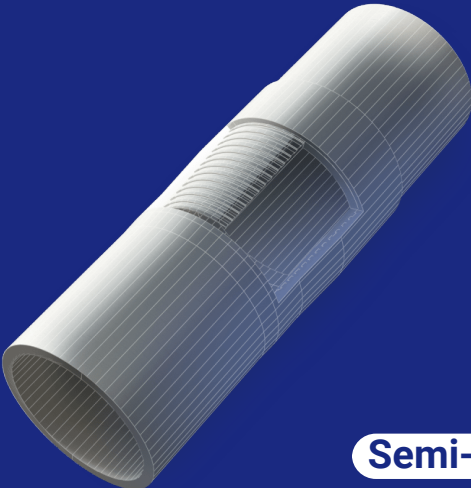

Semi-Flush

Field Torque Values

Make-up Torque (ft-lb)

20,000 MIN

22,500 OPTI

25,000 MAX

Torque with Sealability (ft-lb)

36,000 MTS

Locked Flank Torque (ft-lb)

4,500 MIN

15,750 MAX

(2) MTS: Maximum Torque with Sealability.

PIPE BODY PROPERTIES

|                                   |                  |       |
|-----------------------------------|------------------|-------|
| Nominal OD                        | 5.500            | in.   |
| Nominal ID                        | 4.778            | in.   |
| Nominal Wall Thickness            | 0.361            | in.   |
| Minimum Wall Thickness            | 87.5             | %     |
| Nominal Weight (API)              | 20.00            | lb/ft |
| Plain End Weight                  | 19.83            | lb/ft |
| Drift                             | 4.653            | in.   |
| Grade Type                        | Controlled Yield |       |
| Minimum Yield Strength            | 110              | ksi   |
| Maximum Yield Strength            | 125              | ksi   |
| Minimum Ultimate Tensile Strength | 140              | ksi   |
| Pipe Body Yield Strength          | 641              | klb   |
| Internal Yield Pressure           | 12,640           | psi   |
| Collapse Pressure                 | 11,110           | psi   |

CONNECTION PROPERTIES

|                              |                       |             |
|------------------------------|-----------------------|-------------|
| Connection Type              | Semi-Premium Integral |             |
| Nominal Connection OD        | 5.783                 | in.         |
| Nominal Connection ID        | 4.718                 | in.         |
| Make-up Loss                 | 5.965                 | in.         |
| Tension Efficiency           | 90                    | % Pipe Body |
| Compression Efficiency       | 90                    | % Pipe Body |
| Internal Pressure Efficiency | 100                   | % Pipe Body |
| External Pressure Efficiency | 100                   | % Pipe Body |

JOINT PERFORMANCES

|                                      |        |          |
|--------------------------------------|--------|----------|
| Tension Strength                     | 577    | klb      |
| Compression Strength                 | 577    | klb      |
| Internal Pressure Resistance         | 12,640 | psi      |
| External Pressure Resistance         | 11,110 | psi      |
| Maximum Bending, Structural          | 78     | °/100 ft |
| Maximum Bending, with Sealability(1) | 30     | °/100 ft |

(1) Sealability rating demonstrated as per API RP 5C5 / ISO 13679



BOOST YOUR EFFICIENCY, REDUCE COSTS  
AND ENSURE 100% WELL INTEGRITY WITH

VAM<sup>®</sup> FIELD SERVICE

Scan the QR code  
to contact us



The information available on this Site ("Information") is offered for general information. It is supposed to be correct at the time of publishing on the Site but is not intended to constitute professional advice and is provided 'as is'. Vallourec does not guarantee the completeness and accuracy of this Information. Under no circumstances will Vallourec be liable for damage, liability of any kind, or any loss or injury that may result from the credibility given to this Information or its use. The Information may be amended, corrected, at any time by Vallourec without warning. Vallourec's products and services are subject to Vallourec's The Information may be amended, corrected, and/or supplemented at any time by Vallourec without warning. Standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services.

Released to Imaging: 4/10/2025 11:23:28 AM

## OXY's Minimum Design Criteria

Burst, Collapse, and Tensile SF are calculated using Landmark's Stress Check (Casing Design) software. A sundry will be requested if any lesser grade or different size casing is substituted.

### 1) Casing Design Assumptions

#### a) Burst Loads

##### CSG Test (Surface)

- Internal: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both 43 CFR part 3170 Subpart 3172 and 19.15.16 of the OCD Rules.
- External: Pore pressure in open hole.

##### CSG Test (Intermediate)

- Internal: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both 43 CFR part 3170 Subpart 3172 and 19.15.16 of the OCD Rules.
- External: Mud Weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

##### CSG Test (Production)

- Internal:
  - For Drilling: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both 43 CFR part 3170 Subpart 3172 and 19.15.16 of the OCD Rules.
  - For Production: The design pressure test should be the greater of (1) the planned test pressure prior to stimulation down the casing. (2) the regulatory test pressure, and (3) the expected gas lift system pressure. The design test fluid should be the fluid associated with pressure test having the greatest pressure.
- External:
  - For Drilling: Mud Weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.
  - For Production: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

##### Gas Column (Surface)

- Internal: Assumes a full column of gas in the casing with a Gas/Oil Gradient of 0.1 psi/ft in the absence of better information. It is limited to the controlling pressure based on the fracture pressure at the shoe or the maximum expected pore pressure within the next drilling interval, whichever results in a lower surface pressure.
- External: Fluid gradient below TOC, pore pressure from the TOC to the Intermediate CSG shoe (if applicable), and MW of the drilling mud that was in the hole when the CSG was run from Intermediate CSG shoe to surface.

##### Bullheading (Surface / Intermediate)

- Internal: The string must be designed to withstand a pressure profile based on the fracture pressure at the casing shoe with a column of water above the shoe plus an additional surface pressure (in psi) of  $0.02 \times \text{MD of the shoe}$  to account for pumping friction pressure.
- External: Mud weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

**Gas Kick (Intermediate)**

- The string must be designed to at least a gas kick load case unless the rig is unable to detect a kick. For the gas kick load case, the internal pressure profile must be based on a minimum volume of 50 bbl or the minimum kick detection capability of the rig, whichever is greater, and a kick intensity of 2.0 ppg for Class 1, 1.0 ppg of Class 2, and 0.5 ppg for Class 3 and 4 wells.
- Internal: Influx depth of the maximum pore pressure of 0.55 “gas kick gravity” of gas to surface while drilling the next hole section.
- External: Mud weight to the TOC, cement mix water gradient below TOC, and pore pressure in open hole.

**Tubing Leak Near Surface While Producing (Production)**

- Internal: SITP plus a packer fluid gradient to the shoe or top of packer.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

**Tubing Leak Near Surface While Stimulating (Production)**

- Internal: Surface pressure or pressure-relief system pressure, whichever is lower plus packer fluid gradient.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

**Injection / Stimulation Down Casing (Production)**

- Internal: Surface pressure plus injection fluid gradient.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

**b) Collapse Loads****Lost Circulation (Surface / Intermediate)**

- Internal: Lost circulation at the TD of the next hole section, and the fluid level falls to a depth where the hydrostatic of the mud equals pore pressure at the depth of the lost circulation zone.
- External: MW of the drilling mud that was in the hole when the casing was run. Cementing (Surface / Intermediate / Production)

- Internal: Displacement fluid density.
- External: Mud weight from TOC to surface and cement slurry weight from TOC to casing shoe.

**Full Evacuation (Production)**

- Internal: Full void pipe.
- External: MW of drilling mud in the hole when the casing was run.

**c) Tension Loads****Running Casing (Surface / Intermediate / Production)**

- Axial: Buoyant weight of the string plus the lesser of 100,000 lb or the string weight in air.

**Green Cement (Surface / Intermediate / Production)**

- Axial: Buoyant weight of the string plus cement plug bump pressure load.



# API BTC -Special Clearance

| Coupling        | Pipe Body            |
|-----------------|----------------------|
| Grade: L80-IC   | Grade: L80-IC        |
| Body: Red       | 1st Band: Red        |
| 1st Band: Brown | 2nd Band: Brown      |
| 2nd Band: -     | 3rd Band: Pale Green |
| 3rd Band: -     | 4th Band: -          |

|                      |                   |                 |                   |       |        |
|----------------------|-------------------|-----------------|-------------------|-------|--------|
| Outside Diameter     | 10.750 in.        | Wall Thickness  | 0.400 in.         | Grade | L80-IC |
| Min. Wall Thickness  | 87.50 %           | Pipe Body Drift | Alternative Drift | Type  | Casing |
| Connection OD Option | Special Clearance |                 |                   |       |        |

## Pipe Body Data

| Geometry       |              |                  |             | Performance                  |               |
|----------------|--------------|------------------|-------------|------------------------------|---------------|
| Nominal OD     | 10.750 in.   | Drift            | 9.875 in.   | SMYS                         | 80,000 psi    |
| Wall Thickness | 0.400 in.    | Plain End Weight | 44.26 lb/ft | Min UTS                      | 95,000 psi    |
| Nominal Weight | 45.500 lb/ft | OD Tolerance     | API         | Body Yield Strength          | 1040 x1000 lb |
| Nominal ID     | 9.950 in.    |                  |             | Min. Internal Yield Pressure | 5210 psi      |
|                |              |                  |             | Collapse Pressure            | 2950 psi      |
|                |              |                  |             | Max. Allowed Bending         | 34 °/100 ft   |

## Connection Data

| Geometry             |            | Performance                |               |
|----------------------|------------|----------------------------|---------------|
| Thread per In        | 5          | Joint Strength             | 1041 x1000 lb |
| Connection OD        | 11.250 in. | Coupling Face Load         | 478 x1000 lb  |
| Hand Tight Stand Off | 1 in.      | Internal Pressure Capacity | 4150 psi      |

## Notes

For products according to API Standards 5CT & 5B; Performance calculated considering API Technical Report 5C3 (Sections 9 & 10) equations.  
For geometrical and steel grades combinations not considered in the API Standards 5CT and/or 5B; Performance calculations indirectly derived from API Technical Report 5C3 (Sections 9 & 10) equations.  
Couplings OD are shown according to current API 5CT 10th Edition.  
Tenaris has issued this document for general information only, and the information in this document, including, without limitation, any pictures, drawings or designs ("Information") is not intended to constitute professional or any other type of advice or recommendation and is provided on an "as is" basis. No warranty is given. Tenaris has not independently verified any information—if any- provided by the user in connection with, or for the purpose of, the Information contained hereunder. The use of the Information is at user's own risk and Tenaris does not assume any responsibility or liability of any kind for any loss, damage or injury resulting from, or in connection with any Information contained hereunder or any use thereof. The Information in this document is subject to change or modification without notice. Tenaris's products and services are subject to Tenaris's standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services, as the case may be, between petitioner and Tenaris. For more complete information please contact a Tenaris's representative or visit our website at [www.tenaris.com](http://www.tenaris.com) . ©Tenaris 2023. All rights reserved.

Sante Fe Main Office  
Phone: (505) 476-3441

General Information  
Phone: (505) 629-6116

Online Phone Directory  
<https://www.emnrd.nm.gov/ocd/contact-us>

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

CONDITIONS

Action 443892

**CONDITIONS**

|                                                                    |                                                                       |
|--------------------------------------------------------------------|-----------------------------------------------------------------------|
| Operator:<br>OXY USA INC<br>P.O. Box 4294<br>Houston, TX 772104294 | OGRID:<br>16696                                                       |
|                                                                    | Action Number:<br>443892                                              |
|                                                                    | Action Type:<br>[C-101] BLM - Federal/Indian Land Lease (Form 3160-3) |

**CONDITIONS**

| Created By  | Condition                                                                                                                                                                                                                                                             | Condition Date |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| guthries    | Cement is required to circulate on both surface and intermediate1 strings of casing.                                                                                                                                                                                  | 3/19/2025      |
| guthries    | If cement does not circulate on any string, a Cement Bond Log (CBL) is required for that string of casing.                                                                                                                                                            | 3/19/2025      |
| ward.rikala | Notify the OCD 24 hours prior to casing & cement.                                                                                                                                                                                                                     | 4/10/2025      |
| ward.rikala | File As Drilled C-102 and a directional Survey with C-104 completion packet.                                                                                                                                                                                          | 4/10/2025      |
| ward.rikala | Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string. | 4/10/2025      |
| ward.rikala | Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.                  | 4/10/2025      |
| ward.rikala | Operator must comply with all of the R-111-Q requirements.                                                                                                                                                                                                            | 4/10/2025      |