

Form 3160-5
(June 2019)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: October 31, 2021

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.	
6. If Indian, Allottee or Tribe Name	
7. If Unit of CA/Agreement, Name and/or No.	
8. Well Name and No.	
9. API Well No.	
10. Field and Pool or Exploratory Area	11. Country or Parish, State

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION				
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off	
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Hydraulic Fracturing	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity	
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other	
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon		
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal		

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be perfonned or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has detennined that the site is ready for final inspection.)

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed)	Title
Signature	Date

THE SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

Additional Information

Location of Well

0. SHL: NWSW / 1370 FSL / 205 FWL / TWSP: 18S / RANGE: 29E / SECTION: 31 / LAT: 32.7011755 / LONG: -104.1212205 (TVD: 0 feet, MD: 0 feet)

PPP: SWSW / 600 FSL / 100 FWL / TWSP: 18S / RANGE: 29E / SECTION: 31 / LAT: 32.6990654 / LONG: -104.1215724 (TVD: 8197 feet, MD: 8262 feet)

PPP: SWSW / 600 FSL / 0 FWL / TWSP: 18S / RANGE: 29E / SECTION: 32 / LAT: 32.6989476 / LONG: -104.1054918 (TVD: 8543 feet, MD: 13302 feet)

PPP: SWSW / 600 FSL / 0 FWL / TWSP: 18S / RANGE: 29E / SECTION: 33 / LAT: 32.6988195 / LONG: -104.0883181 (TVD: 8639 feet, MD: 18586 feet)

PPP: SESW / 600 FSL / 1319 FWL / TWSP: 18S / RANGE: 29E / SECTION: 33 / LAT: 32.6987873 / LONG: -104.0840466 (TVD: 8663 feet, MD: 19900 feet)

BHL: SESE / 600 FSL / 100 FEL / TWSP: 18S / RANGE: 29E / SECTION: 33 / LAT: 32.6986919 / LONG: -104.0715029 (TVD: 8733 feet, MD: 23760 feet)

CONFIDENTIAL

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-015-54090	² Pool Code 49553	³ Pool Name PALMILLO; BONE SPRINGS, EAST
⁴ Property Code 334613	⁵ Property Name PAVO MACHO 31/33 FED COM	⁶ Well Number 618H
⁷ OGRID NO. 14744	⁸ Operator Name MEWBOURNE OIL COMPANY	⁹ Elevation 3392'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet From the	East/West line	County
3	31	18S	29E		1370	SOUTH	205	WEST	EDDY

¹¹ Bottom Hole Location If Different From Surface


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
1	33	18S	29E		600	SOUTH	100	EAST	EDDY
¹² Dedicated Acres	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.						

No allowable will be assigned to this completion until all interest have been consolidated or a non-standard unit has been approved by the division.

<p>16</p> <p style="text-align: center;"><u>CORNER DATA</u> NAD 83 GRID - NM EAST</p> <table border="0"> <tr> <td><u>GEODETIC DATA</u> NAD 83 GRID - NM EAST</td> <td>A: FOUND BRASS CAP "1914" N: 617517.3 - E: 606378.0</td> <td>G: FOUND BRASS CAP "1916" N: 622568.7 - E: 621969.3</td> </tr> <tr> <td><u>SURFACE LOCATION</u> N: 618884.2 - E: 606584.7</td> <td>B: FOUND BRASS CAP "1916" N: 622510.2 - E: 606384.3</td> <td>H: FOUND 1/2" REBAR N: 617414.7 - E: 621981.9</td> </tr> <tr> <td>LAT: 32.7011754° N LONG: 104.1212205° W</td> <td>C: FOUND BRASS CAP "1916" N: 622519.0 - E: 608774.2</td> <td>I: CALCULATED CORNER N: 617427.6 - E: 616705.7</td> </tr> <tr> <td><u>BOTTOM HOLE</u> N: 618014.8 - E: 621880.4</td> <td>D: FOUND BRASS CAP "1916" N: 622529.0 - E: 611414.5</td> <td>J: CALCULATED CORNER N: 617471.0 - E: 611427.2</td> </tr> <tr> <td>LAT: 32.6986918° N LONG: 104.0715029° W</td> <td>E: FOUND BRASS CAP "1916" N: 622539.0 - E: 614052.2</td> <td>K: FOUND 1/2" REBAR N: 617485.1 - E: 608788.6</td> </tr> <tr> <td></td> <td>F: FOUND BRASS CAP "1916" N: 622549.6 - E: 616690.4</td> <td>L: FOUND BRASS CAP "1916" N: 619888.3 - E: 611421.1</td> </tr> </table>	<u>GEODETIC DATA</u> NAD 83 GRID - NM EAST	A: FOUND BRASS CAP "1914" N: 617517.3 - E: 606378.0	G: FOUND BRASS CAP "1916" N: 622568.7 - E: 621969.3	<u>SURFACE LOCATION</u> N: 618884.2 - E: 606584.7	B: FOUND BRASS CAP "1916" N: 622510.2 - E: 606384.3	H: FOUND 1/2" REBAR N: 617414.7 - E: 621981.9	LAT: 32.7011754° N LONG: 104.1212205° W	C: FOUND BRASS CAP "1916" N: 622519.0 - E: 608774.2	I: CALCULATED CORNER N: 617427.6 - E: 616705.7	<u>BOTTOM HOLE</u> N: 618014.8 - E: 621880.4	D: FOUND BRASS CAP "1916" N: 622529.0 - E: 611414.5	J: CALCULATED CORNER N: 617471.0 - E: 611427.2	LAT: 32.6986918° N LONG: 104.0715029° W	E: FOUND BRASS CAP "1916" N: 622539.0 - E: 614052.2	K: FOUND 1/2" REBAR N: 617485.1 - E: 608788.6		F: FOUND BRASS CAP "1916" N: 622549.6 - E: 616690.4	L: FOUND BRASS CAP "1916" N: 619888.3 - E: 611421.1	<p>17 OPERATOR CERTIFICATION</p> <p>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</p> <p><i>Benjamin Davis</i> 8/29/2023 Signature Date</p> <p>Benjamin Davis Printed Name</p> <p>bdavis@mewbourne.com E-mail Address</p> <p>18 SURVEYOR CERTIFICATION</p> <p>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</p> <p>05/19/2022 Date of Survey</p> <p>Signature and Seal of Professional Surveyor</p> <p>19680 Certificate Number</p> <p>PROF. ROBERT M. HOWETT NEW MEXICO 19680 PROFESSIONAL SURVEYOR</p> <p>Job No: LS22050603</p>
<u>GEODETIC DATA</u> NAD 83 GRID - NM EAST	A: FOUND BRASS CAP "1914" N: 617517.3 - E: 606378.0	G: FOUND BRASS CAP "1916" N: 622568.7 - E: 621969.3																	
<u>SURFACE LOCATION</u> N: 618884.2 - E: 606584.7	B: FOUND BRASS CAP "1916" N: 622510.2 - E: 606384.3	H: FOUND 1/2" REBAR N: 617414.7 - E: 621981.9																	
LAT: 32.7011754° N LONG: 104.1212205° W	C: FOUND BRASS CAP "1916" N: 622519.0 - E: 608774.2	I: CALCULATED CORNER N: 617427.6 - E: 616705.7																	
<u>BOTTOM HOLE</u> N: 618014.8 - E: 621880.4	D: FOUND BRASS CAP "1916" N: 622529.0 - E: 611414.5	J: CALCULATED CORNER N: 617471.0 - E: 611427.2																	
LAT: 32.6986918° N LONG: 104.0715029° W	E: FOUND BRASS CAP "1916" N: 622539.0 - E: 614052.2	K: FOUND 1/2" REBAR N: 617485.1 - E: 608788.6																	
	F: FOUND BRASS CAP "1916" N: 622549.6 - E: 616690.4	L: FOUND BRASS CAP "1916" N: 619888.3 - E: 611421.1																	

LOCATION VERIFICATION MAP

NOT TO SCALE

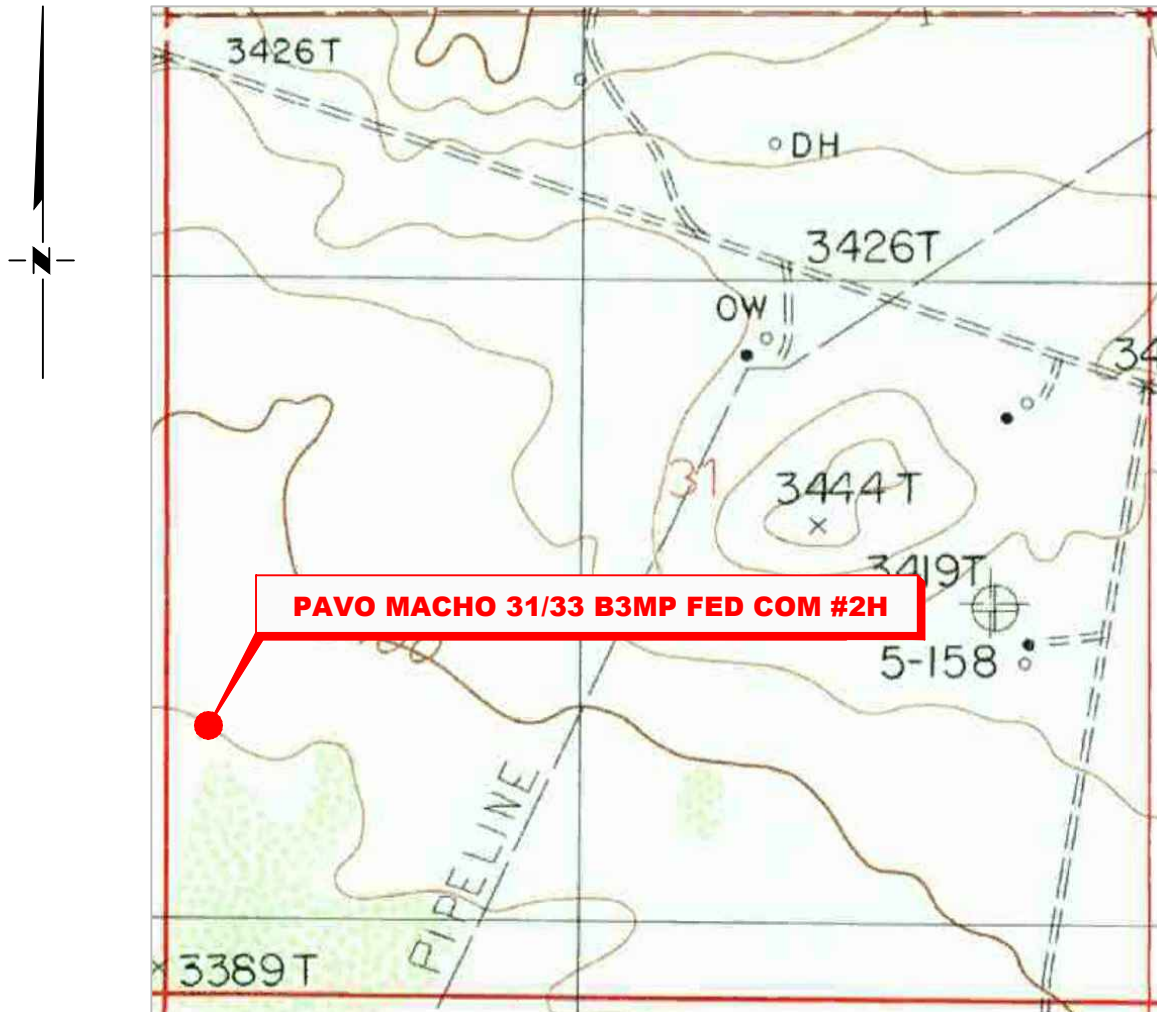

*SECTION 31, TWP. 18 SOUTH, RGE. 29 EAST,
N. M. P. M., EDDY CO., NEW MEXICO*

OPERATOR: Mewbourne Oil CompanyLEASE: Pavo Macho 31/33 B3MP Fed ComWELL NO.: 2HELEVATION: 3392'LOCATION: 1370' FSL & 205 FWLCONTOUR INTERVAL: 10'

USGS TOPO. SOURCE MAP:

Illinois Camp NE, N.M. (1985)

Copyright 2016 - All Rights Reserved

NO.	REVISION	DATE
JOB NO.: LS22050603		
DWG. NO.: 22050603-2		




701 S. CECIL ST., HOBBS, NM 88240 (575) 964-8200

SCALE: N. T. S.
DATE: 05/19/2022
SURVEYED BY: ML/AB
DRAWN BY: RQ
APPROVED BY: RMH
SHEET: 1 OF 1

VICINITY MAP

NOT TO SCALE

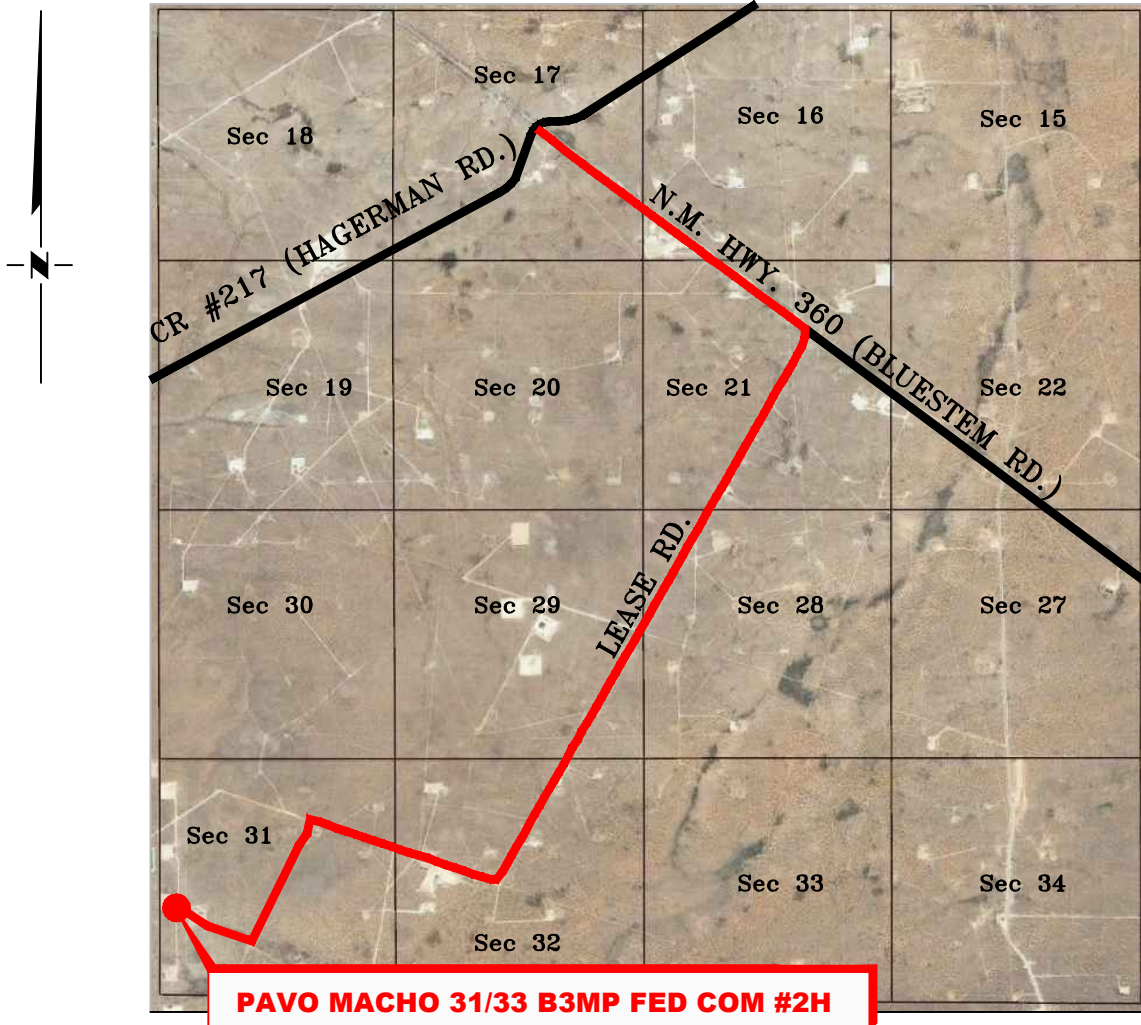

SECTION 31, TWP. 18 SOUTH, RGE. 29 EAST,
N. M. P. M., EDDY CO., NEW MEXICO

OPERATOR: Mewbourne Oil Company
LEASE: Pavo Macho 31/33 B3MP Fed Com
WELL NO.: 2H

LOCATION: 1370' FSL & 205' FWL
ELEVATION: 3392'

Copyright 2016 - All Rights Reserved

NO.	REVISION	DATE
JOB NO.: LS22050603		
DWG. NO.: 22050603-3		

RRC
ENERGY SERVICES LLC.
701 S. CECIL ST., HOBBS, NM 88240 (575) 964-8200

SCALE: N. T. S.
DATE: 05/19/2022
SURVEYED BY: ML/AB
DRAWN BY: RQ
APPROVED BY: RMH
SHEET: 1 OF 1

SCALE: 1" = 100'
DATE: 05/19/2022
SURVEYED BY: ML/AB
DRAWN BY: RQ
APPROVED BY: RMH
SHEET: 1 OF 1

Mewbourne Oil Company, Pavo Macho 31/33 Fed Com618H

Sec 31, T18S, R29E

SHL: 1370' FSL & 205' FWL (Sec 31)

BHL: 600' FSL & 100' FEL (Sec 33)

Casing Program

Hole Size	From	To	Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension
17.5 in	0'	300'	13.375 in	48.0	H40	STC	4.94	11.09	22.36	37.57
12.25 in	0'	3139'	9.625 in	36.0	J55	LTC	1.13	1.96	3.79	4.72
12.25 in	3139'	3300'	9.625 in	40.0	J55	LTC	1.36	2.09	80.79	97.88
8.750 in	0'	8837'	7.0 in	26.0	P110	BTC	1.18	1.88	3.02	3.61
8.500 in	8837'	23760'	5.500 in	20.0	P110	BTC	1.88	2.14	1.84	2.15
BLM Minimum Safety Factor							1.125	1.0	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet

Cement Program

Casing		# Sacks	Wt. lb/gal	Yield cu.ft/sack	TOC	Slurry Description
13.375 in	LEAD	80	12.5	2.12	0	Salt, Gel, Extender, LCM
	TAIL	200	14.8	1.34		Retarder
9.625 in	LEAD	490	12.5	2.12	0	Salt, Gel, Extender, LCM
	TAIL	200	14.8	1.34		Retarder
7 in	LEAD	290	12.5	2.12	6357	Salt, Gel, Extender, LCM, Defoamer
	TAIL	400	15.6	1.18		Retarder, Fluid Loss, Defoamer
5.5 in	LEAD	2310	13.5	1.85	8837	Salt, Gel, Fluid Loss, Retarder, Dispersant, Defoamer, Anti-settling Agent

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	N
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	Y
Is an open annulus used to satisfy R-111-Q? If yes, see cement design.	N
Is an engineered weak point used to satisfy R-111-Q?	
If yes, at what depth is the weak point planned?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Formation	Est. Top (TVD)	Mineral Resources
Rustler		
Castile		
Salt Top	417	None
Salt Base	682	None
Yates	872	Oil/Natural Gas
Seven Rivers	1216	Oil/Natural Gas
Queen	1796	Oil/Natural Gas
Capitan		
Grayburg	2154	None
San Andres	2634	Oil/Natural Gas
Glorieta		
Yeso		
Delaware (Lamar)		
Bell Canyon		
Cherry Canyon		
Manzanita Marker		
Basal Brushy Canyon		
Bone Spring	3274	Oil/Natural Gas
1st Bone Spring	6528	Oil/Natural Gas
2nd Bone Spring	7208	Oil/Natural Gas
3rd Bone Spring	8273	Oil/Natural Gas

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	MEWBOURNE OIL COMPANY
WELL NAME & NO.:	PAVO MACHO 31/33 FED COM 618H
SURFACE HOLE FOOTAGE:	1370'/S & 205'/W
BOTTOM HOLE FOOTAGE	600'/S & 100'/E
SURFACE LOCATION:	Section 31, T.18 S., R.29 E. NMP.
COUNTY:	Eddy County, New Mexico

COA

H ₂ S	<input checked="" type="radio"/> Yes	<input type="radio"/> No	
Potash	<input checked="" type="radio"/> None	<input type="radio"/> Secretary	<input type="radio"/> R-111-P
Cave/Karst Potential	<input checked="" type="radio"/> Low	<input type="radio"/> Medium	<input type="radio"/> High
Cave/Karst Potential	<input type="radio"/> Critical		
Variance	<input type="radio"/> None	<input checked="" type="radio"/> Flex Hose	<input type="radio"/> Other
Wellhead	<input type="radio"/> Conventional	<input checked="" type="radio"/> Multibowl	<input type="radio"/> Both
Other	<input type="checkbox"/> 4 String	<input type="checkbox"/> Capitan Reef	<input type="checkbox"/> WIPP
Other	<input type="checkbox"/> Fluid Filled	<input type="checkbox"/> Pilot Hole	<input type="checkbox"/> Open Annulus
Special Requirements	<input type="checkbox"/> Water Disposal	<input checked="" type="checkbox"/> COM	<input type="checkbox"/> Unit

SEE THE ORIGINAL COAs FOR ALL OTHER REQUIREMENTS.

The previous name of this well was **PAVO MACHO 31/33 B3MP FED COM 2H.**

A. CASING

Casing Design:

1. The **13-3/8** inch surface casing shall be set at approximately **300 ft.** (a minimum of 70 feet (Eddy County) into the Rustler Anhydrite and above the salt) and cemented to the surface. If salt is encountered, set casing **at least 25 feet above the salt.**
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or **500 psi compressive strength**, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours

after bringing cement to surface or 500 psi compressive strength, whichever is greater.

- d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The **9-5/8 in.** intermediate casing shall be set at approximately **3,300 ft.** The minimum required fill of cement behind the **9-5/8 in.** intermediate casing is:
 - **Cement to surface.** If cement does not circulate see B.1.a, c-d above. Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.
 3. The minimum required fill of cement behind the **7 in. x 5-1/2 in. tapered production casing** is:

Option 1 (Single Stage): Cement should tie-back at least 200 feet into previous casing string. (Cement must reach to 3,100 ft.) If cement does not circulate see B.1.a, c-d above.

Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst, potash or Capitan reef.

Option 2 (Two-stage): Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.

- a. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
- b. Second stage above DV tool:
 - **Cement should tie-back at least 200 feet into previous casing string. (Cement must reach to 3,100 ft.)** If cement does not circulate, contact the appropriate BLM office.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst, potash or Capitan reef.

Note: The Operator has provided a cement program for 7 in. x 5-1/2 in. tapered production casing as separate entities. The operator should ensure that the specific cement volume, dedicated to 5-1/2" string, is included in the first cementing stage of tapered production casing.

B. PRESSURE CONTROL

1. Variance approved to use **flex line** from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'

2. Operator has proposed a **multi-bowl wellhead** assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M)** psi. Before drilling out surface casing shoe, the BOP stack and related equipment shall be pressure tested to 250 psi low / 5,000 psi high. The annular preventer shall be pressure tested to 250 psi low / 2,500 psi high in accordance with 43 CFR 3172.
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one-inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172 must be followed.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220, (575) 361-2822

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575) 689-5981

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.

- Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per 43 CFR part 3170 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the doghouse or stairway area.
 3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.

5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in 43 CFR part 3170 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.

- c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- 5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (only applies to single stage cement jobs, prior to the cement setting up.)
 - c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to 43 CFR 3170 subpart 3172 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
 - d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
 - e. The results of the test shall be reported to the appropriate BLM office.

- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per 43 CFR 3170 subpart 3172.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

SA 08/29/2023

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 259957

CONDITIONS

Operator: MEWBOURNE OIL CO P.O. Box 5270 Hobbs, NM 88241	OGRID: 14744
	Action Number: 259957
	Action Type: [C-103] NOI Change of Plans (C-103A)

CONDITIONS

Created By	Condition	Condition Date
ward.rikala	Accepted for the record.	6/25/2025