


N

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

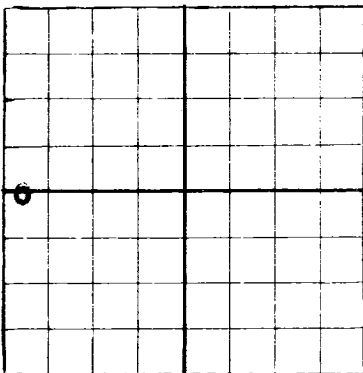

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Resler Oil Co.

Artesia, New Mexico

Malco-Resler-Yates State 84 NW/4SW/4 27 18 S
 Well No. 28 E in Artesia Eddy
 R. 2970 N. M. P. M. 4950 Field, Sec. 27 County.
 Well is 2970 feet south of the North line and 4950 feet west of the East line of 647
 If State land the oil and gas lease is No. Assignment No.
 If patented land the owner is Address
 If Government land the permittee is Address
 The Lessee is Malco-Resler-Yates Address Artesia, New Mexico
 Drilling commenced 11-12 1947 Drilling was completed 1-2-48
 Name of drilling contractor S. P. Yates Address Artesia, New Mexico
 Elevation above sea level at top of casing 3570 feet.
 The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 2660' to 2842' No. 4, from to
 No. 2, from to No. 5, from to
 No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.
 No. 1, from to feet.
 No. 2, from to feet.
 No. 3, from to feet.
 No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8 5/8	28#	8	S.H.	553	Texas				Salt String
7"	20#	8	J&L	2620	Guide				Prod. String

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
10" 8	5/8	553'	50	Halliburton		
8"	7"	2620'	100	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
 Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		20% acid	2000 Gal	12-26-47	2625'-2780'	
		20% acid	2000 Gal	1-2-48	below 2805'	

Increased production from
 Results of shooting or chemical treatment estimated 24 B.P.D. to 100 B.P.D.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 2842 feet, and from feet to feet
 Cable tools were used from 0 feet to 2842 feet, and from feet to feet

PRODUCTION

Put to producing 1-2-48
 The production of the first 24 hours was 100 barrels of fluid of which 100% was oil; % emulsion; % water; and % sediment. Gravity, Be.
 If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
 Rock pressure, lbs. per sq. in.

EMPLOYEES

R. O. Jacobs Driller
 H. S. Guinan Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 3rd day of January 1948
 Notary Public February 25, 1951
 Artesia, New Mexico 1-3-48
 Name Hugh J. [Signature]
 Position Office Manager
 Representing Resler Oil Co.
 Company or Operator
 Address Artesia, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	65'	65	Sand & top soil
65'	425'	360	Red Bed
425'	470'	45	Red Rock
470'	645'	175	Salt
645'	1195'	550	Anhydrite
1195'	1375'	180	Lime
1375'	1980'	605	Anhydrite & lime
1980'	2842'	862	Lime
2842'	T.D.		