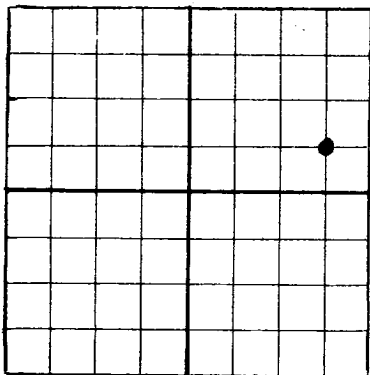


N


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

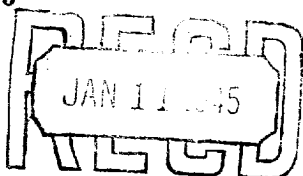

Robert E. McKee

Box 602, Artesia, New Mexico

Company or Operator

Address

Spencer

Well No.

3

in SE NE

of Sec.

3

T. 19 S

Lease

R. 29 E

N. M. P. M.

Turkey Track

Field,

Bddy

County.

Well is 1980 feet south of the North line and 460 feet west of the East line of Section 3

If State land the oil and gas lease is No. B 8876 Assignment No. 4

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is Robert E. McKee & Co., Inc., Daguerre Address Box 602, Artesia, New Mexico

Drilling commenced June 4th, 1944 Drilling was completed August 18th, 1944

Name of drilling contractor S. P. Yates Address Artesia, New Mexico

Elevation above sea level at top of casing 3403 feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 2160 to 2175 Oil No. 4, from 2463 to 2475 Oil

No. 2, from 2240 to 2250 Gas No. 5, from to

No. 3, from 2300 to 2315 Oil No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 2730 to 2745 feet. Hole Full After Shot

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8 5/8"	28#	8 Rd.		344	Texas				Surface Production
7"	20#	8 Rd.		2424	Texas				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHICH SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
10"	8 5/8"	344	50	Halliburton		
8"	7"	2424	66	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
5"	Tin	Nitro Glycerin	230 Qts.	8-7-44	2714-2775	2730
5 1/2"	Tin	Nitro Glycerin	140 Qts.	8-12-44	2455-2480	2480

Results of shooting or chemical treatment Increase from 12 Bbls. natural, to 25 Bbls.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from feet to T. D. feet, and from feet to feet

PRODUCTION

Put to producing August 31st, 1944

The production of the first 24 hours was 25 barrels of fluid of which 100 % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

C. V. Miller Driller W. L. Barrett Driller

M. F. Willis Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 10th

day of January 19 45

Virginia Shaw
Notary Public

My Commission expires 7-14-45

Artesia, New Mexico

Place

Date

Name

Position Superintendent

Representing Robert E. McKee

Company or Operator

Address Artesia, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	65	65	Sand
65	160	95	Gravel
160	250	90	Shale
250	265	15	Anhydrite
265	315	50	Red Beds
315	320	5	Anhydrite
320	780	460	Salt
780	817	37	Anhydrite
817	970	153	Salt
970	1085	55	Anhydrite
1025	1037	12	S.L.H.
1037	1265	228	Anhydrite
1265	1395	130	Anhydrite & Sand
1395	1450	55	Anhydrite
1450	1465	15	Lime & Anhydrite
1465	1500	35	Lime, Anhydrite & Sand
1500	1530	30	Anhydrite
1530	1543	13	Sand, Anhydrite & Lime
1543	1565	22	Lime & some Shale
1565	1577	12	Lime, Anhydrite & Shale
1577	1595	18	Sandy Lime
1595	1740	145	Lime, Anhydrite & Gypsum
1740	1985	245	Lime with Anhydrite & Gypsum Breaks
1985	2015	30	Lime, Anhydrite & Sand
2015	2085	70	Lime & Anhydrite
2085	2105	20	Sandy Lime
2105	2143	38	Lime
2143	2187	44	Sand
2187	2240	53	Lime (Sand & Anhydrite Breaks)
2240	2250	10	Sand
2250	2300	50	Lime
2300	2315	15	Sand
2315	2367	52	Sandy Lime
2367	2385	18	Sand
2385	2412	27	Sand & Anhydrite
2412	2430	18	Sandy Lime
2430	2463	33	Lime
2463	2475	12	Sand
2475	2477	2	S.L.H.
2477	2483	6	Lime
2483	2520	37	Sandy Lime
2520	2617	97	Lime (Few Sand Breaks)
2617	2662	45	Sandy Lime
2662	2682	20	Sand
2682	2730	48	Lime
2730	2775	45	Sandy Lime
2775	2833	58	Sand
2833	2850	17	Lime
2850	2896	46	Sand (Few Lime Stringers) T. D.

P.R. 2480