

UNITED STATES DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

NM OIL CONS. COMMISSION
DRAWER 100
ARTESIA OFFICE
SEP 16 1981

Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

LC-029392

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Hinkle F

9. WELL NO.

#7

10. FIELD AND POOL, OR WILDCAT

Shugart Y-SQ-2

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

27-18S31E

12. COUNTY OR PARISH

Eddy

13. STATE

NM

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT" for such proposals.)

RECEIVED

1. OIL WELL ☒ GAS WELL ☐ OTHER ☐
2. NAME OF OPERATOR Westall - Mask
3. ADDRESS OF OPERATOR P.O. Drawer 1477 Roswell, New Mexico 88201
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.
See also space 17 below.)
At surface
990' from the South line and 1650' from the
West line of Sec. 27-18S31E

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

3653 GR

Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

PULL OR ALTER CASING

FRACTURE TREAT

MULTIPLE COMPLETE

SHOOT OR ACIDIZE

ABANDON*

REPAIR WELL

CHANGE PLANS

(Other)

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

REPAIRING WELL

FRACTURE TREATMENT

ALTERING CASING

SHOOTING OR ACIDIZING

ABANDONMENT*

(Other)

Re-Entry

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Hole size 11 1/4" casing size 7" weight per foot 20# setting depth 809
300 sacks cement used to cir.

Hole size 8" casing size 4 1/2" weight per foot 9.5# setting depth 3984
700 sacks cement used to cir.

Went in with 7" casing to existing casing approximately 836'

1. Will complete 2500' and lower
2. 50 sacks at 8 5/8" at 836' original casing
3. New 7" at 725' and circulated
4. 4 1/2" cement top 980'
5. Base salt 1850' Top Salt 840'
6. Open hole 980' to 836'

See attachment.

18. I hereby certify that the foregoing is true and correct

SIGNED

Richard E. Burt

Personal Representative for
the Estate of Jack Mask

DATE 9-9-81

(This space for Federal or State office use)


APPROVED BY
CONDITIONS OF

ROGER A. CHAPMAN
SEP 14 1981
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

TITLE

DATE

*See Instructions on Reverse Side

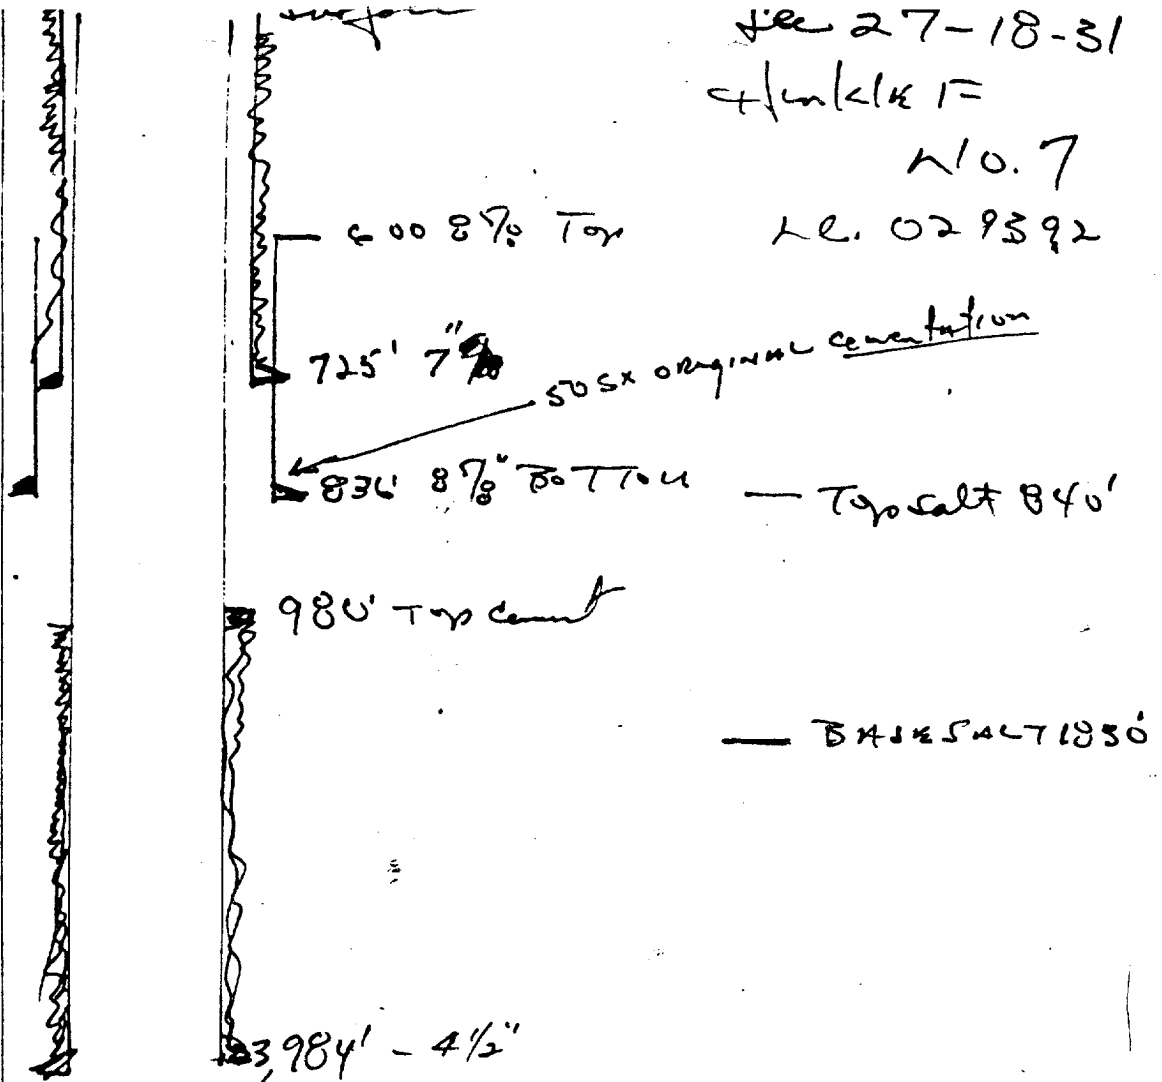

- ① well complete 2500' and lower.
- ② 50 SX at 8 7/8" at 836' original casing
- ③ NEW 7" @ 725' + cemented
- ④ 4 1/2" cement top 980'
- ⑤ BASESALT 1850' — Top salt 840'
- ⑥ Open hole 980' to 836'

Permission given to produce well but if water enters between 7" + 4 1/2" it will have to be perforated & squeezed

George H. Stewart
 9-1-81