

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form C-101
August 1, 2011

Permit 396416

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

1. Operator Name and Address MATADOR PRODUCTION COMPANY One Lincoln Centre Dallas, TX 75240		2. OGRID Number 228937
4. Property Code 337808		3. API Number 30-025-55306
5. Property Name KYLE PIPKIN STATE COM		6. Well No. 202H

7. Surface Location

UL - Lot C	Section 14	Township 26S	Range 36E	Lot Idn C	Feet From 710	N/S Line N	Feet From 2555	E/W Line E	County Lea
----------------------	----------------------	------------------------	---------------------	---------------------	-------------------------	----------------------	--------------------------	----------------------	----------------------

8. Proposed Bottom Hole Location

UL - Lot F	Section 35	Township 26S	Range 36E	Lot Idn 3	Feet From 110	N/S Line S	Feet From 1980	E/W Line W	County Lea
----------------------	----------------------	------------------------	---------------------	---------------------	-------------------------	----------------------	--------------------------	----------------------	----------------------

9. Pool Information

WC-025 G-09 S263619C;WOLFCAMP	98234
-------------------------------	-------

Additional Well Information

11. Work Type New Well	12. Well Type OIL	13. Cable/Rotary	14. Lease Type State	15. Ground Level Elevation 2931
16. Multiple N	17. Proposed Depth 28889	18. Formation Wolfcamp	19. Contractor	20. Spud Date 10/6/2025
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☒ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	17.5	13.375	54.5	1810	1208	0
Int1	12.25	10.75	45.5	5785	1093	0
Int2	9.875	7.625	29.7	10293	2030	0
Prod	6.75	5.5	20	28889	1725	10093

Casing/Cement Program: Additional Comments

--

22. Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Annular	5000	3000	Cameron
Double Ram	10000	5000	Cameron
Pipe	10000	5000	Cameron

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief.
I hereby certify that no additives containing PFAS chemicals will be added to the completion or recompletion of this well.

I further certify I have complied with 19.15.14.9 (A) NMAC ☐ and/or 19.15.14.9 (B) NMAC ☒ if applicable.

Signature:

OIL CONSERVATION DIVISION

Printed Name: Electronically filed by Brett A Jennings	Approved By: Jeffrey Harrison
Title: Regulatory Analyst	Title: Petroleum Specialist III
Email Address: brett.jennings@matadorresources.com	Approved Date: 10/2/2025 Expiration Date: 10/2/2027
Date: 9/3/2025 Phone: 972-629-2160	Conditions of Approval Attached

C-102 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION	Revised July 9, 2024	
		Submittal Type:	☒ Initial Submittal
			☐ Amended Report
		☐ As Drilled	

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-025-55306	Pool Code 98234	Pool Name WC-025 G-09 263619C; WOLFCAMP
Property Code 337808	Property Name KYLE PIPKIN STATE COM	Well Number 202H
OGRID No. 228937	Operator Name MATADOR PRODUCTION COMPANY	Ground Level Elevation 2931'
Surface Owner: ☒ State ☐ Fee ☐ Tribal ☐ Federal		Mineral Owner: ☒ State ☐ Fee ☐ Tribal ☐ Federal

Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the N/S	Feet from the E/W	Latitude	Longitude	County
C	14	26-S	36-E	-	710' N	2555' E	N 32.0485874	W 103.2357017	LEA

Bottom Hole Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the N/S	Feet from the E/W	Latitude	Longitude	County
F 3	35	26-S	36-E	3 -	110' S	1980' W	N 32.0006265	W 103.2381665	LEA

Dedicated Acres 553.55	Infill or Defining Well DEFINING	Defining Well API N/A	Overlapping Spacing Unit (Y/N) N	Consolidated Code N/A
Order Numbers PENDING			Well Setbacks are under Common Ownership: ☒ Yes ☐ No	

Kick Off Point (KOP)

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the N/S	Feet from the E/W	Latitude	Longitude	County
N	14	26-S	36-E	-	50' N	1980' W	N 32.0504017	W 103.2381183	LEA


First Take Point (FTP)

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the N/S	Feet from the E/W	Latitude	Longitude	County
C	14	26-S	36-E	-	100' N	1980' W	N 32.0502642	W 103.2381185	LEA


Last Take Point (LTP)

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the N/S	Feet from the E/W	Latitude	Longitude	County
F 3	35	26-S	36-E	3 -	110' S	1980' W	N 32.0006265	W 103.2381665	LEA

Unitized Area or Area of Uniform Interest N/A	Spacing Unity Type ☒ Horizontal ☐ Vertical	Ground Floor Elevation 2931'
---	--	--

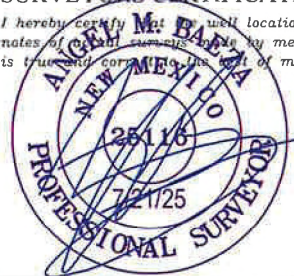
OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief; and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.  Signature _____ Date 7/28/2025 Print Name Addison Costley E-mail Address addison.costley@matadorresources.com		SURVEYORS CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual survey made by me or under my supervision, and that the same is true and correct to the best of my belief.  Signature and Seal of Professional Surveyor _____ Date 07/21/2025 Certificate Number 25116 Date of Survey 03/30/2025	
--	--	--	--

C-102 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION	Revised July 9, 2024	
		Submittal Type:	☒ Initial Submittal ☐ Amended Report ☐ As Drilled
Property Name and Well Number KYLE PIPKIN STATE COM 202H			

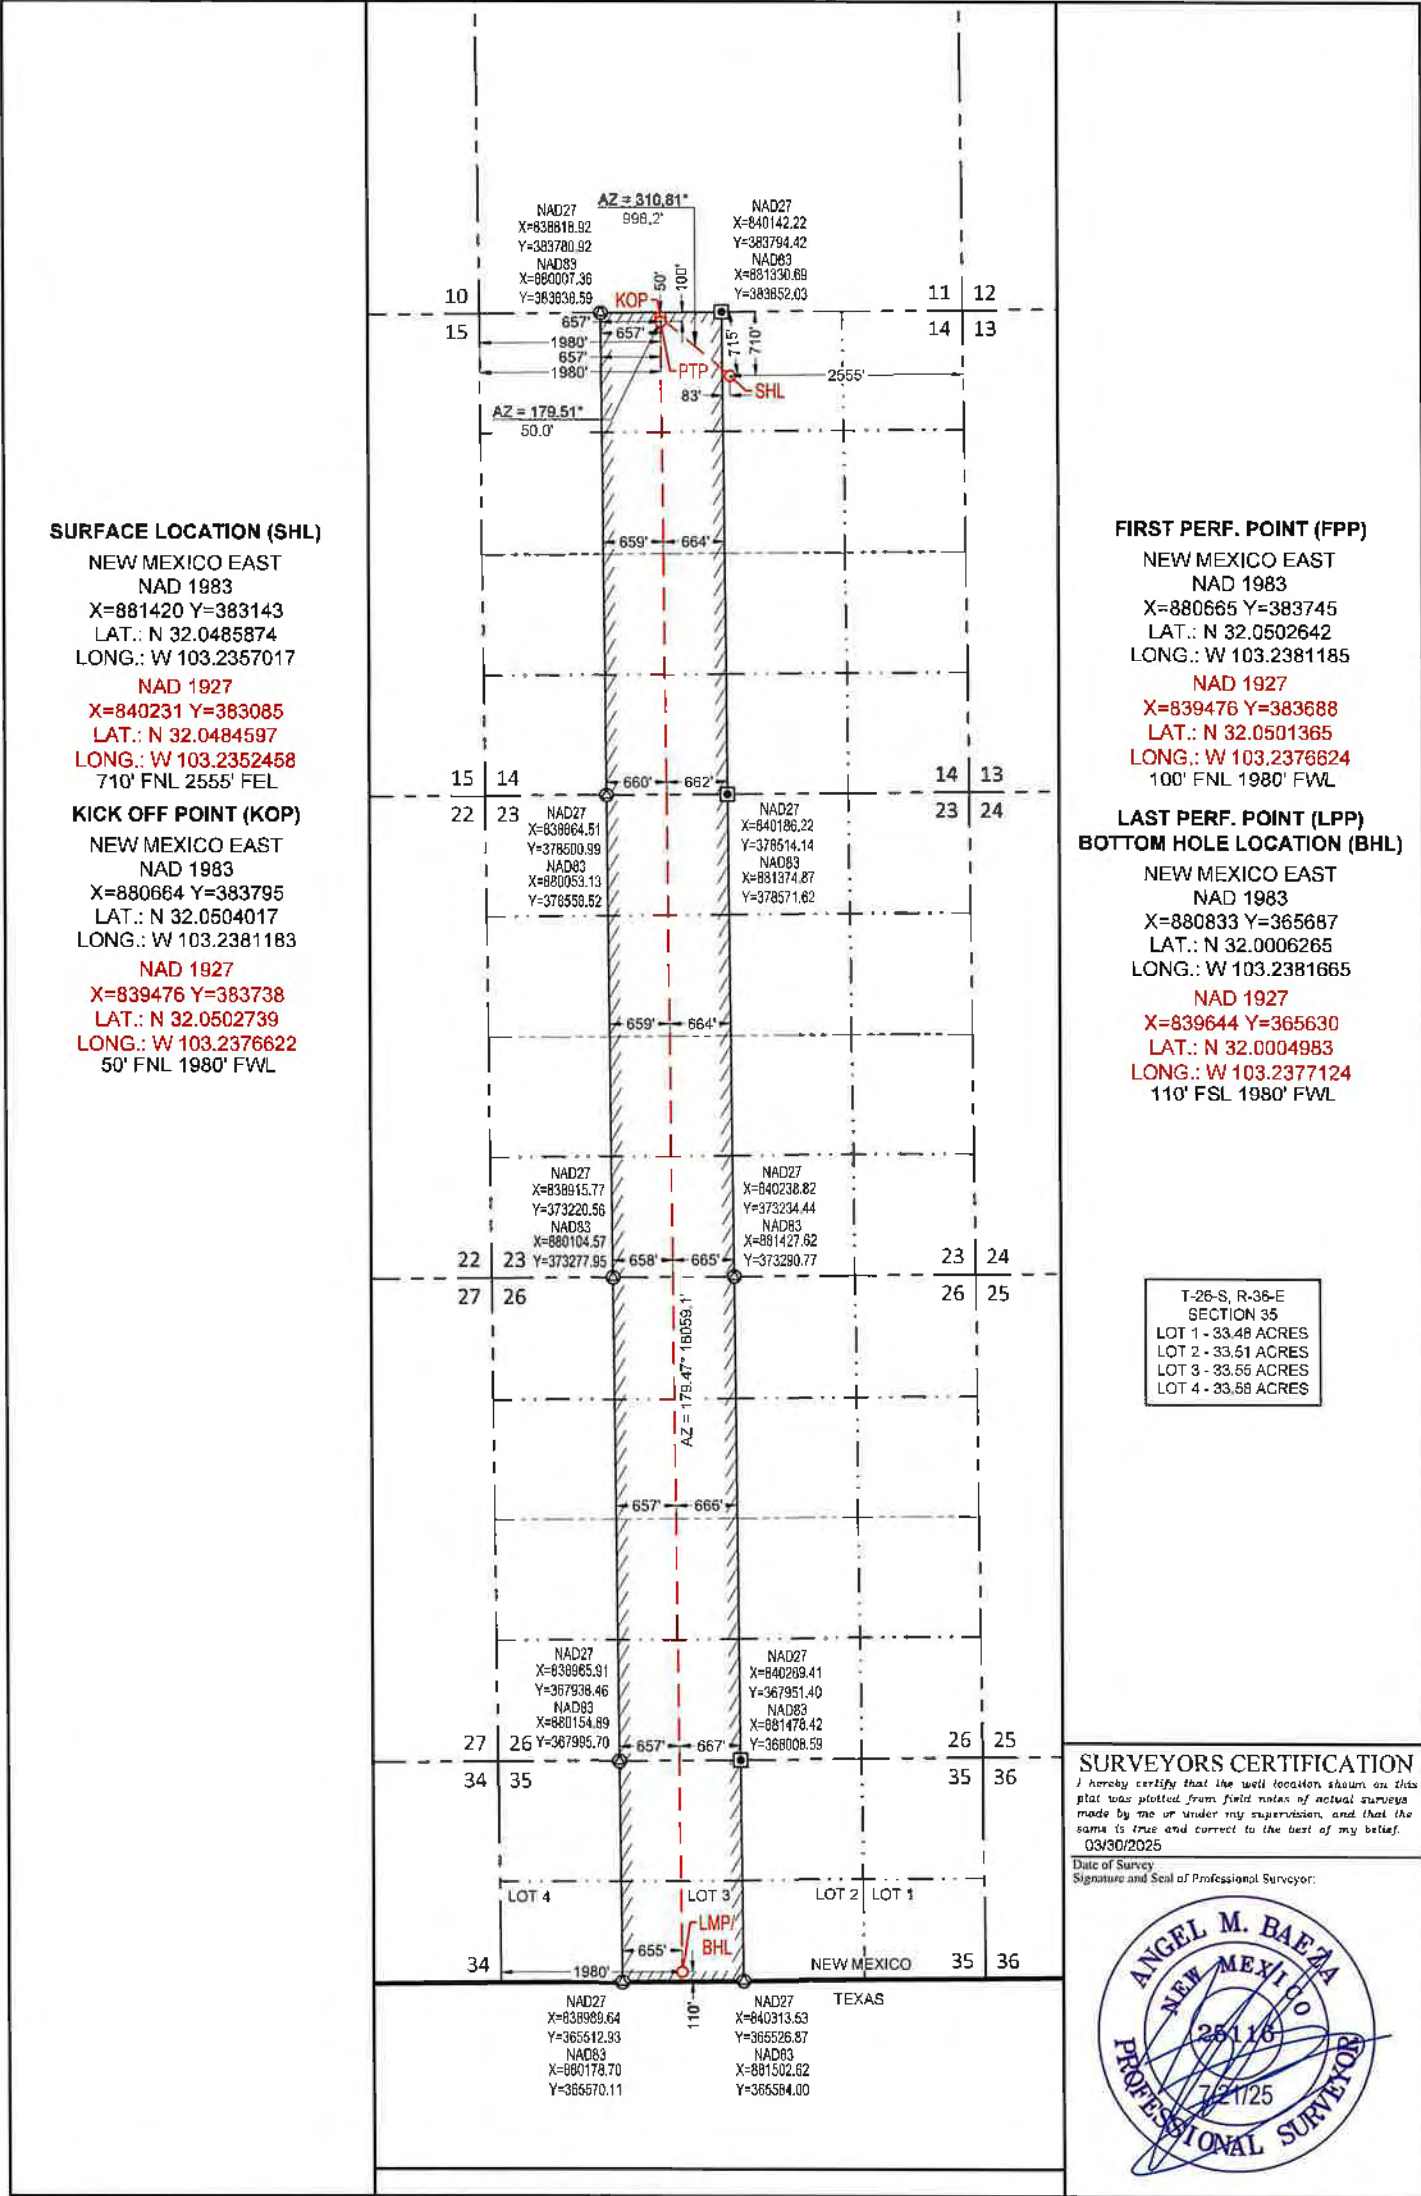



SECTION 14, TOWNSHIP 26-S, RANGE 36-E, N.M.P.M.
LEA COUNTY, NEW MEXICO

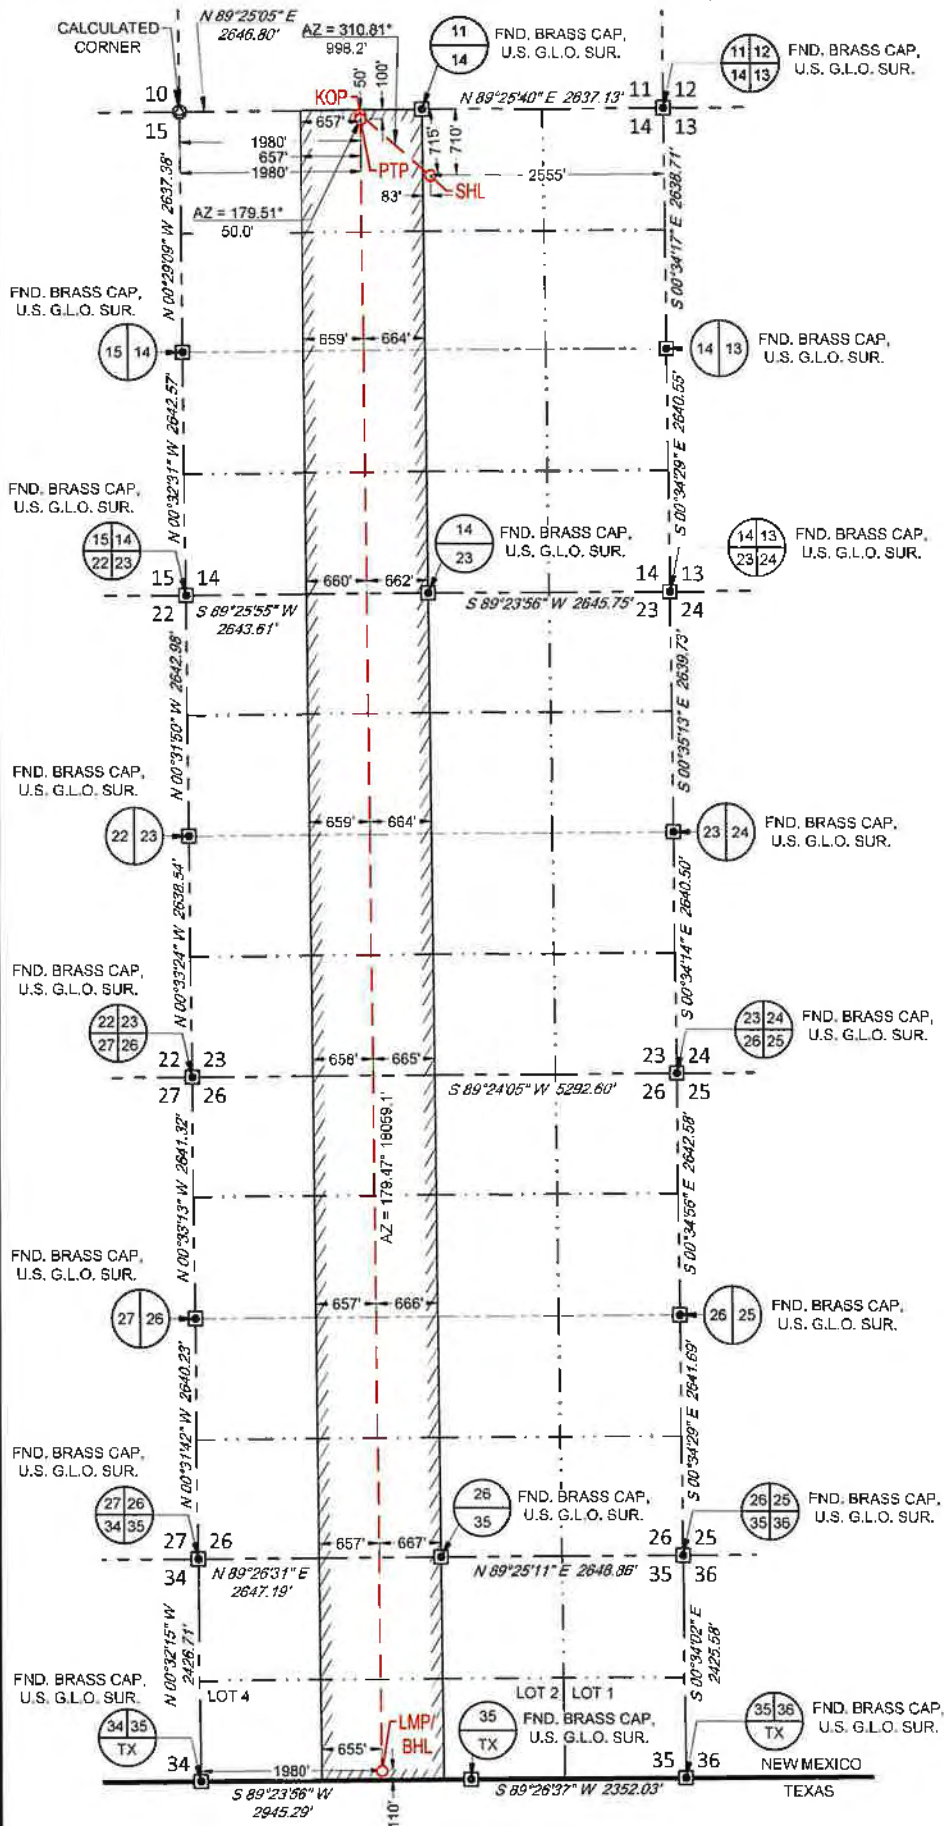

SURFACE LOCATION (SHL)

NEW MEXICO EAST
NAD 1983
X=881420 Y=383143
LAT.: N 32.0485874
LONG.: W 103.2357017
710' FNL 2555' FEL

KICK OFF POINT (KOP)

NEW MEXICO EAST
NAD 1983
X=880664 Y=383795
LAT.: N 32.0504017
LONG.: W 103.2381183
50' FNL 1980' FWL


FIRST PERF. POINT (FPP)

NEW MEXICO EAST
NAD 1983
X=880665 Y=383745
LAT.: N 32.0502642
LONG.: W 103.2381185
100' FNL 1980' FWL

**LAST PERF. POINT (LPP)
BOTTOM HOLE LOCATION (BHL)**

NEW MEXICO EAST
NAD 1983
X=880833 Y=365687
LAT.: N 32.0006265
LONG.: W 103.2381865
110' FSL 1980' FWL

T-26-S, R-36-E
SECTION 35
LOT 1 - 33.48 ACRES
LOT 2 - 33.51 ACRES
LOT 3 - 33.55 ACRES
LOT 4 - 33.58 ACRES

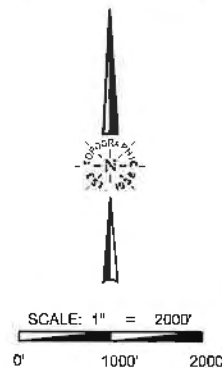

LEASE NAME & WELL NO.: KYLE PIPKIN STATE COM 202H
SECTION 14 TWP 26-S RGE 36-E SURVEY N.M.P.M.
COUNTY LEA STATE NM
DESCRIPTION 710' FNL & 2555' FEL

DISTANCE & DIRECTION

FROM INT. OF NM-128 W. & N 3RD ST. GO SOUTH ON N 3RD ST ±1.7 MILES.
THENCE CONTINUE ONTO NM-205 S/FRYING PAN RD ±3.9 MILES. THENCE WEST
(RIGHT) ON ANTHONY RD. ±0.3 MILES, THENCE SOUTH (LEFT) ON A PROPOSED
RD. ±209 FEET TO A POINT ±368 FEET NORTHEAST OF THE LOCATION.



Angel M. Baeza, P.S. No. 25116



401 WINSOTT ROAD, Ste. 200 • BENBROOK, TEXAS 75126
TELEPHONE: (817) 744-7512 • FAX (817) 744-7554
2903 NORTH BIG SPRING • MIDLAND, TEXAS 79705
TELEPHONE: (432) 682-1653 OR (800) 767-1653 • FAX (432) 682-1743
WWW.TOPOGRAPHIC.COM


ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREON ARE GRID BASED UPON THE NEW MEXICO COORDINATE SYSTEM OF 1983, EAST ZONE, U.S. SURVEY FEET
THIS EASEMENT/SERVITUDE LOCATION SHOWN HEREON HAS BEEN SURVEYED ON THE GROUND UNDER MY SUPERVISION AND PREPARED ACCORDING TO THE EVIDENCE FOUND AT THE TIME OF SURVEY, AND DATA PROVIDED BY MATADOR PRODUCTION COMPANY.
THIS CERTIFICATION IS MADE AND LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS NON-TRANSFERABLE. THIS SURVEY IS CERTIFIED FOR THIS TRANSACTION ONLY.
AS OF THE DATE OF SURVEY, ALL ABOVE GROUND APPURTENANCES WITHIN 300' OF THE STAKED LOCATION ARE SHOWN HEREON.



LEGEND

SECTION LINE
PROPOSED ROAD

SECTION 14, TOWNSHIP 26-S, RANGE 36-E, N.M.P.M.
LEA COUNTY, NEW MEXICO

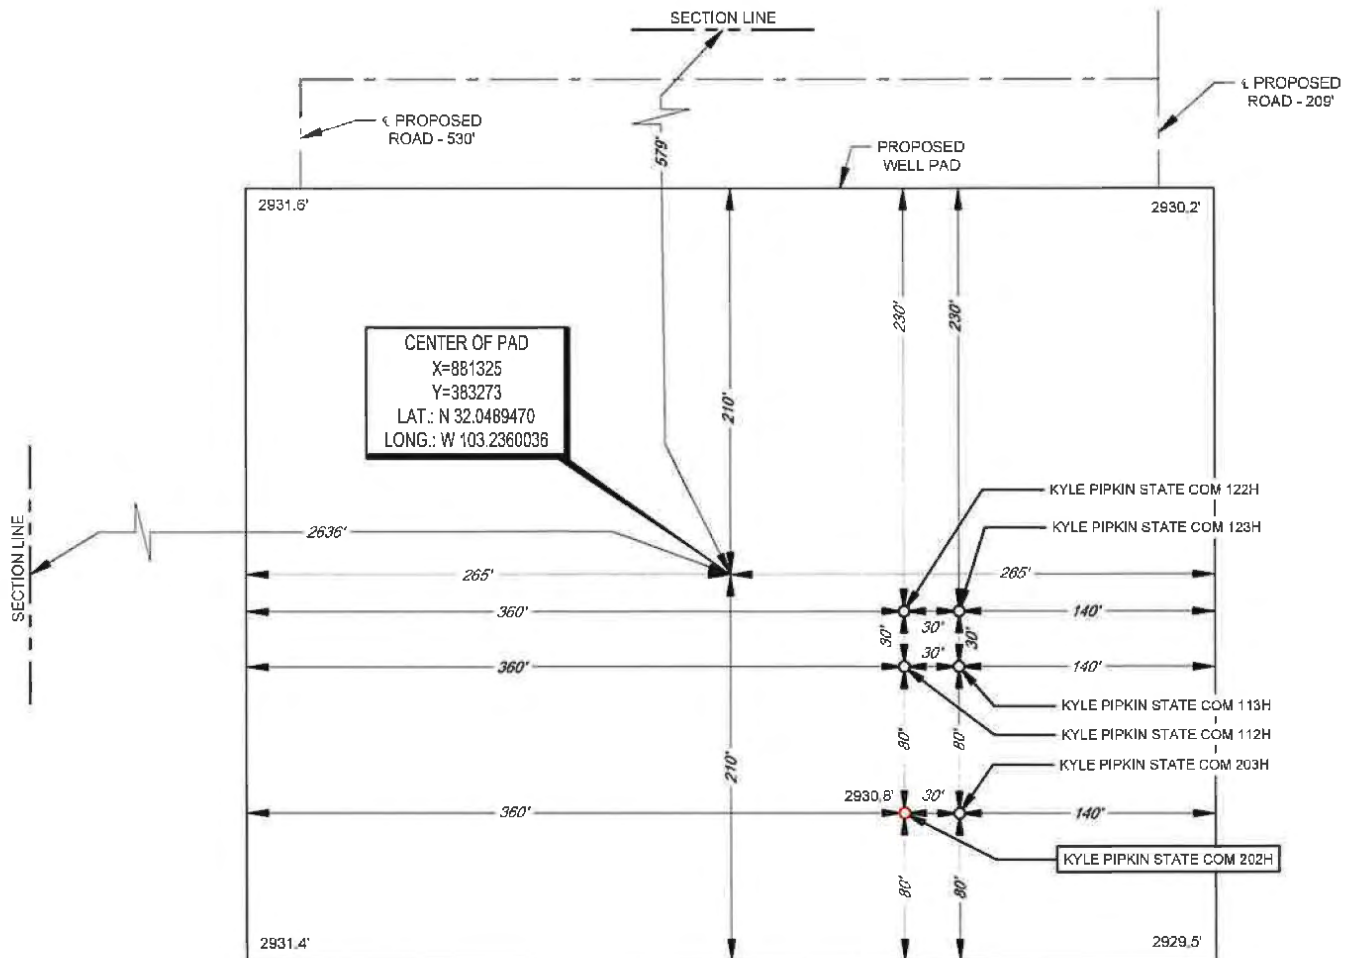

Angel M. Baeza, P.S. No. 25116

LEASE NAME & WELL NO.: KYLE PIPKIN STATE COM 202H
202H LATITUDE N 32.0485874 202H LONGITUDE W 103.2357017

CENTER OF PAD IS 579' FNL & 2636' FWL



SCALE: 1" = 100'

0' 50' 100'

TOPOGRAPHIC
LOYALTY INNOVATION LEGACY

481 WINSCOTT ROAD, Ste. 200 • BENBROOK, TEXAS 76126
TELEPHONE: (817) 744-7512 • FAX (817) 744-7554
2903 NORTH BIG SPRING • MIDLAND, TEXAS 79705
TELEPHONE: (432) 682-1653 OR (800) 767-1653 • FAX (432) 682-1743
WWW.TOPOGRAPHIC.COM

ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREON ARE GRID BASED UPON THE NEW MEXICO COORDINATE SYSTEM OF 1983, EAST ZONE, U.S. SURVEY FEET, ELEVATIONS USED ARE NAVD88, OBTAINED THROUGH AN OPUS SOLUTION.

THIS PROPOSED PAD SITE LOCATION SHOWN HEREON HAS BEEN SURVEYED ON THE GROUND UNDER MY SUPERVISION AND PREPARED ACCORDING TO THE EVIDENCE FOUND AT THE TIME OF SURVEY, AND DATA PROVIDED BY MATADOR PRODUCTION COMPANY. ONLY THE DATA SHOWN ABOVE IS BEING CERTIFIED TO, ALL OTHER INFORMATION WAS INTENTIONALLY OMITTED. THIS PLAT IS ONLY INTENDED TO BE USED FOR A PERMIT AND IS NOT A BOUNDARY SURVEY. THIS CERTIFICATION IS MADE AND LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS NON-TRANSFERABLE. THIS SURVEY IS CERTIFIED FOR THIS TRANSACTION ONLY.

ORIGINAL DOCUMENT SIZE: 8.5" X 11"

S:\SURVEY\MATADOR_RESOURCES\KYLE_PIPKIN_INFRASTRUCTURE\FINAL_PRODUCTS\LO_KYLE_PIPKIN_STATE_COM_202H_REV1.DWG 7/21/2025 7:49:55 AM skyler.harris

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Comments
Permit 396416

PERMIT COMMENTS

Operator Name and Address: MATADOR PRODUCTION COMPANY [228937] One Lincoln Centre Dallas, TX 75240		API Number: 30-025-55306
		Well: KYLE PIPKIN STATE COM #202H
Created By	Comment	Comment Date
jeffrey.harrison	Submitted as defining well for HSU.	9/30/2025
jeffrey.harrison	Submitted as defining well for HSU	10/2/2025

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Conditions

Permit 396416

PERMIT CONDITIONS OF APPROVAL

Operator Name and Address: MATADOR PRODUCTION COMPANY [228937] One Lincoln Centre Dallas, TX 75240	API Number: 30-025-55306
	Well: KYLE PIPKIN STATE COM #202H

OCD Reviewer	Condition
jeffrey.harrison	No additives containing PFAS chemicals will be added to the drilling fluids or completion fluids used during drilling, completions, or recompletions operations.
jeffrey.harrison	All logs run on the well must be submitted to NMOCD.
jeffrey.harrison	Cement is required to circulate on both surface and intermediate1 strings of casing.
jeffrey.harrison	If cement does not circulate on any string, a Cement Bond Log (CBL) is required for that string of casing.
jeffrey.harrison	Notify the OCD 24 hours prior to casing & cement.
jeffrey.harrison	File As Drilled C-102 and a directional Survey with C-104 completion packet.
jeffrey.harrison	A [C-103] Sub. Drilling (C-103N) is required within (10) days of spud.
jeffrey.harrison	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string.
jeffrey.harrison	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.
jeffrey.harrison	This well is within the Capitan Reef aquifer zone. The first intermediate casing string shall be set and cemented back to surface immediately below the Capitan Reef.
jeffrey.harrison	The OCD is currently reviewing the areas containing the Capitan Reef Aquifer and may expand the designated 4-string casing area to encompass additional portions of it in the future.

Well Name: Kyle Pipkin State Com #202H										
STRING	FLUID TYPE	HOLE SZ	CSG SZ	CSG GRADE	CSG WT	DEPTH SET	TOP CSG	TTL SX CEMENT	EST TOC	ADDITIONAL INFO FOR CSG/CMT PROGRAM (Optional)
SURF	FRESH WTR	17.5	13.375	J-55	54.50	1810	0	1208	0	Option to drill surface hole with surface setting rig
INT 1	Brine	12.25	10.75	HCL-80	45.50	5785	0	1093	0	Option to cement surface casing offline
INT 2	Diesel Brine Emulsion	9.875	7.625	P-110	29.70	10293	0	2030	0	Option to run DV tool and Packer.
PROD	OBM	6.75	5.5	P-110	20.00	28889	0	1725	10093	Option to run DV tool and Packer.

Matador Production Company

Antelope Ridge

Kyle Pipkin

Kyle Pipkin State Com #202H

Wellbore #1

Plan: State Plan #1

Standard Planning Report

21 July, 2025

Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well Kyle Pipkin State Com #202H
Company:	Matador Production Company	TVD Reference:	KB @ 2959.5usft
Project:	Antelope Ridge	MD Reference:	KB @ 2959.5usft
Site:	Kyle Pipkin	North Reference:	Grid
Well:	Kyle Pipkin State Com #202H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	State Plan #1		

Project	Antelope Ridge		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site	Kyle Pipkin					
Site Position:		Northing:	383,085.20 usft	Latitude:	32° 2' 54.456 N	
From:	Lat/Long	Easting:	840,231.38 usft	Longitude:	103° 14' 6.884 W	
Position Uncertainty:		0.0 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.58 °

Well	Kyle Pipkin State Com #202H					
Well Position	+N/-S	44.9 usft	Northing:	383,130.15 usft	Latitude:	32° 2' 54.915 N
	+E/-W	-141.8 usft	Easting:	840,089.58 usft	Longitude:	103° 14' 8.526 W
Position Uncertainty		0.0 usft	Wellhead Elevation:		Ground Level:	2,931.0 usft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2015	12/31/2024	5.95	59.85	47,097.73269047

Design	State Plan #1				
Audit Notes:					
Version:	Phase:	PROTOTYPE		Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.0	0.0	0.0	179.47	

Plan Survey Tool Program	Date	7/21/2025			
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.0	28,889.3	State Plan #1 (Wellbore #1)	MWD	
			OWSG MWD - Standard		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,271.5	5.43	314.73	1,271.1	9.0	-9.1	2.00	2.00	0.00	314.73	
10,080.4	5.43	314.73	10,040.5	595.8	-601.4	0.00	0.00	0.00	0.00	
10,442.5	0.00	0.00	10,402.0	607.9	-613.6	1.50	-1.50	0.00	180.00	KOP - Kyle Pipkin Sta
11,322.5	88.00	179.47	10,974.6	54.9	-608.5	10.00	10.00	0.00	179.47	
28,889.3	88.00	179.47	11,587.7	-17,500.4	-446.1	0.00	0.00	0.00	0.00	BHL - Kyle Pipkin Sta

Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well Kyle Pipkin State Com #202H
Company:	Matador Production Company	TVD Reference:	KB @ 2959.5usft
Project:	Antelope Ridge	MD Reference:	KB @ 2959.5usft
Site:	Kyle Pipkin	North Reference:	Grid
Well:	Kyle Pipkin State Com #202H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	State Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
Start Build 2.00									
1,100.0	2.00	314.73	1,100.0	1.2	-1.2	-1.2	2.00	2.00	0.00
1,200.0	4.00	314.73	1,199.8	4.9	-5.0	-5.0	2.00	2.00	0.00
1,271.5	5.43	314.73	1,271.1	9.0	-9.1	-9.1	2.00	2.00	0.00
Start 8808.9 hold at 1271.5 MD									
1,300.0	5.43	314.73	1,299.5	10.9	-11.0	-11.0	0.00	0.00	0.00
1,400.0	5.43	314.73	1,399.0	17.6	-17.8	-17.8	0.00	0.00	0.00
1,500.0	5.43	314.73	1,498.6	24.3	-24.5	-24.5	0.00	0.00	0.00
1,600.0	5.43	314.73	1,598.1	30.9	-31.2	-31.2	0.00	0.00	0.00
1,700.0	5.43	314.73	1,697.7	37.6	-37.9	-37.9	0.00	0.00	0.00
1,740.4	5.43	314.73	1,737.9	40.3	-40.7	-40.7	0.00	0.00	0.00
Rustler									
1,800.0	5.43	314.73	1,797.2	44.2	-44.7	-44.7	0.00	0.00	0.00
1,900.0	5.43	314.73	1,896.8	50.9	-51.4	-51.4	0.00	0.00	0.00
2,000.0	5.43	314.73	1,996.3	57.6	-58.1	-58.1	0.00	0.00	0.00
2,100.0	5.43	314.73	2,095.9	64.2	-64.8	-64.8	0.00	0.00	0.00
2,200.0	5.43	314.73	2,195.4	70.9	-71.6	-71.6	0.00	0.00	0.00
2,300.0	5.43	314.73	2,295.0	77.6	-78.3	-78.3	0.00	0.00	0.00
2,400.0	5.43	314.73	2,394.5	84.2	-85.0	-85.0	0.00	0.00	0.00
2,500.0	5.43	314.73	2,494.1	90.9	-91.7	-91.7	0.00	0.00	0.00
2,600.0	5.43	314.73	2,593.6	97.5	-98.5	-98.4	0.00	0.00	0.00
2,627.6	5.43	314.73	2,621.1	99.4	-100.3	-100.3	0.00	0.00	0.00
Top Salt - Salado									
2,700.0	5.43	314.73	2,693.2	104.2	-105.2	-105.2	0.00	0.00	0.00
2,800.0	5.43	314.73	2,792.7	110.9	-111.9	-111.9	0.00	0.00	0.00
2,900.0	5.43	314.73	2,892.3	117.5	-118.6	-118.6	0.00	0.00	0.00
3,000.0	5.43	314.73	2,991.8	124.2	-125.3	-125.3	0.00	0.00	0.00
3,100.0	5.43	314.73	3,091.4	130.8	-132.1	-132.1	0.00	0.00	0.00
3,200.0	5.43	314.73	3,190.9	137.5	-138.8	-138.8	0.00	0.00	0.00
3,300.0	5.43	314.73	3,290.5	144.2	-145.5	-145.5	0.00	0.00	0.00
3,400.0	5.43	314.73	3,390.0	150.8	-152.2	-152.2	0.00	0.00	0.00
3,476.7	5.43	314.73	3,466.4	155.9	-157.4	-157.4	0.00	0.00	0.00
Base Salt - Capitan									
3,500.0	5.43	314.73	3,489.6	157.5	-159.0	-158.9	0.00	0.00	0.00
3,600.0	5.43	314.73	3,589.1	164.1	-165.7	-165.7	0.00	0.00	0.00
3,700.0	5.43	314.73	3,688.7	170.8	-172.4	-172.4	0.00	0.00	0.00
3,800.0	5.43	314.73	3,788.2	177.5	-179.1	-179.1	0.00	0.00	0.00
3,900.0	5.43	314.73	3,887.8	184.1	-185.9	-185.8	0.00	0.00	0.00
4,000.0	5.43	314.73	3,987.3	190.8	-192.6	-192.6	0.00	0.00	0.00
4,100.0	5.43	314.73	4,086.9	197.4	-199.3	-199.3	0.00	0.00	0.00
4,200.0	5.43	314.73	4,186.4	204.1	-206.0	-206.0	0.00	0.00	0.00
4,300.0	5.43	314.73	4,286.0	210.8	-212.8	-212.7	0.00	0.00	0.00

Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well Kyle Pipkin State Com #202H
Company:	Matador Production Company	TVD Reference:	KB @ 2959.5usft
Project:	Antelope Ridge	MD Reference:	KB @ 2959.5usft
Site:	Kyle Pipkin	North Reference:	Grid
Well:	Kyle Pipkin State Com #202H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	State Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,400.0	5.43	314.73	4,385.6	217.4	-219.5	-219.4	0.00	0.00	0.00
4,500.0	5.43	314.73	4,485.1	224.1	-226.2	-226.2	0.00	0.00	0.00
4,600.0	5.43	314.73	4,584.7	230.7	-232.9	-232.9	0.00	0.00	0.00
4,700.0	5.43	314.73	4,684.2	237.4	-239.6	-239.6	0.00	0.00	0.00
4,800.0	5.43	314.73	4,783.8	244.1	-246.4	-246.3	0.00	0.00	0.00
4,900.0	5.43	314.73	4,883.3	250.7	-253.1	-253.1	0.00	0.00	0.00
5,000.0	5.43	314.73	4,982.9	257.4	-259.8	-259.8	0.00	0.00	0.00
5,100.0	5.43	314.73	5,082.4	264.1	-266.5	-266.5	0.00	0.00	0.00
5,200.0	5.43	314.73	5,182.0	270.7	-273.3	-273.2	0.00	0.00	0.00
5,300.0	5.43	314.73	5,281.5	277.4	-280.0	-280.0	0.00	0.00	0.00
5,400.0	5.43	314.73	5,381.1	284.0	-286.7	-286.7	0.00	0.00	0.00
5,500.0	5.43	314.73	5,480.6	290.7	-293.4	-293.4	0.00	0.00	0.00
5,600.0	5.43	314.73	5,580.2	297.4	-300.2	-300.1	0.00	0.00	0.00
5,700.0	5.43	314.73	5,679.7	304.0	-306.9	-306.8	0.00	0.00	0.00
5,734.6	5.43	314.73	5,714.2	306.3	-309.2	-309.2	0.00	0.00	0.00
G26: Bell Cyn.									
5,800.0	5.43	314.73	5,779.3	310.7	-313.6	-313.6	0.00	0.00	0.00
5,900.0	5.43	314.73	5,878.8	317.3	-320.3	-320.3	0.00	0.00	0.00
5,989.5	5.43	314.73	5,967.9	323.3	-326.3	-326.3	0.00	0.00	0.00
G13: Cherry Cyn.									
6,000.0	5.43	314.73	5,978.4	324.0	-327.1	-327.0	0.00	0.00	0.00
6,100.0	5.43	314.73	6,077.9	330.7	-333.8	-333.7	0.00	0.00	0.00
6,200.0	5.43	314.73	6,177.5	337.3	-340.5	-340.5	0.00	0.00	0.00
6,273.5	5.43	314.73	6,250.6	342.2	-345.4	-345.4	0.00	0.00	0.00
G7: Brushy Cyn.									
6,300.0	5.43	314.73	6,277.0	344.0	-347.2	-347.2	0.00	0.00	0.00
6,400.0	5.43	314.73	6,376.6	350.6	-353.9	-353.9	0.00	0.00	0.00
6,500.0	5.43	314.73	6,476.1	357.3	-360.7	-360.6	0.00	0.00	0.00
6,600.0	5.43	314.73	6,575.7	364.0	-367.4	-367.3	0.00	0.00	0.00
6,700.0	5.43	314.73	6,675.2	370.6	-374.1	-374.1	0.00	0.00	0.00
6,800.0	5.43	314.73	6,774.8	377.3	-380.8	-380.8	0.00	0.00	0.00
6,900.0	5.43	314.73	6,874.3	383.9	-387.6	-387.5	0.00	0.00	0.00
7,000.0	5.43	314.73	6,973.9	390.6	-394.3	-394.2	0.00	0.00	0.00
7,081.7	5.43	314.73	7,055.2	396.0	-399.8	-399.7	0.00	0.00	0.00
G4: BSGL (CS9)									
7,100.0	5.43	314.73	7,073.4	397.3	-401.0	-401.0	0.00	0.00	0.00
7,200.0	5.43	314.73	7,173.0	403.9	-407.7	-407.7	0.00	0.00	0.00
7,300.0	5.43	314.73	7,272.5	410.6	-414.5	-414.4	0.00	0.00	0.00
7,400.0	5.43	314.73	7,372.1	417.3	-421.2	-421.1	0.00	0.00	0.00
7,500.0	5.43	314.73	7,471.6	423.9	-427.9	-427.9	0.00	0.00	0.00
7,600.0	5.43	314.73	7,571.2	430.6	-434.6	-434.6	0.00	0.00	0.00
7,700.0	5.43	314.73	7,670.7	437.2	-441.4	-441.3	0.00	0.00	0.00
7,800.0	5.43	314.73	7,770.3	443.9	-448.1	-448.0	0.00	0.00	0.00
7,900.0	5.43	314.73	7,869.8	450.6	-454.8	-454.7	0.00	0.00	0.00
8,000.0	5.43	314.73	7,969.4	457.2	-461.5	-461.5	0.00	0.00	0.00
8,100.0	5.43	314.73	8,068.9	463.9	-468.2	-468.2	0.00	0.00	0.00
8,133.5	5.43	314.73	8,102.3	466.1	-470.5	-470.4	0.00	0.00	0.00
L6.3: Avalon Carb									
8,200.0	5.43	314.73	8,168.5	470.5	-475.0	-474.9	0.00	0.00	0.00
8,300.0	5.43	314.73	8,268.0	477.2	-481.7	-481.6	0.00	0.00	0.00
8,400.0	5.43	314.73	8,367.6	483.9	-488.4	-488.4	0.00	0.00	0.00
8,500.0	5.43	314.73	8,467.1	490.5	-495.1	-495.1	0.00	0.00	0.00
8,600.0	5.43	314.73	8,566.7	497.2	-501.9	-501.8	0.00	0.00	0.00

Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well Kyle Pipkin State Com #202H
Company:	Matador Production Company	TVD Reference:	KB @ 2959.5usft
Project:	Antelope Ridge	MD Reference:	KB @ 2959.5usft
Site:	Kyle Pipkin	North Reference:	Grid
Well:	Kyle Pipkin State Com #202H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	State Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,700.0	5.43	314.73	8,666.3	503.8	-508.6	-508.5	0.00	0.00	0.00
8,800.0	5.43	314.73	8,765.8	510.5	-515.3	-515.2	0.00	0.00	0.00
8,900.0	5.43	314.73	8,865.4	517.2	-522.0	-522.0	0.00	0.00	0.00
9,000.0	5.43	314.73	8,964.9	523.8	-528.8	-528.7	0.00	0.00	0.00
9,053.1	5.43	314.73	9,017.7	527.4	-532.3	-532.3	0.00	0.00	0.00
L5.1: FBSG									
9,100.0	5.43	314.73	9,064.5	530.5	-535.5	-535.4	0.00	0.00	0.00
9,139.9	5.43	314.73	9,104.2	533.1	-538.2	-538.1	0.00	0.00	0.00
L4.3: SBSC									
9,200.0	5.43	314.73	9,164.0	537.1	-542.2	-542.1	0.00	0.00	0.00
9,300.0	5.43	314.73	9,263.6	543.8	-548.9	-548.9	0.00	0.00	0.00
9,400.0	5.43	314.73	9,363.1	550.5	-555.7	-555.6	0.00	0.00	0.00
9,500.0	5.43	314.73	9,462.7	557.1	-562.4	-562.3	0.00	0.00	0.00
9,555.8	5.43	314.73	9,518.2	560.8	-566.1	-566.1	0.00	0.00	0.00
L4.1: SBSG									
9,577.9	5.43	314.73	9,540.2	562.3	-567.6	-567.5	0.00	0.00	0.00
L3.3: TBSC									
9,600.0	5.43	314.73	9,562.2	563.8	-569.1	-569.0	0.00	0.00	0.00
9,700.0	5.43	314.73	9,661.8	570.4	-575.8	-575.7	0.00	0.00	0.00
9,800.0	5.43	314.73	9,761.3	577.1	-582.5	-582.5	0.00	0.00	0.00
9,900.0	5.43	314.73	9,860.9	583.8	-589.3	-589.2	0.00	0.00	0.00
10,000.0	5.43	314.73	9,960.4	590.4	-596.0	-595.9	0.00	0.00	0.00
10,080.4	5.43	314.73	10,040.5	595.8	-601.4	-601.3	0.00	0.00	0.00
Start Drop -1.50									
10,100.0	5.14	314.73	10,060.0	597.1	-602.7	-602.6	1.50	-1.50	0.00
10,200.0	3.64	314.73	10,159.7	602.4	-608.1	-608.0	1.50	-1.50	0.00
10,300.0	2.14	314.73	10,259.5	606.0	-611.7	-611.6	1.50	-1.50	0.00
10,400.0	0.64	314.73	10,359.5	607.7	-613.4	-613.3	1.50	-1.50	0.00
10,442.5	0.00	0.00	10,402.0	607.9	-613.6	-613.5	1.50	-1.50	106.54
Start Build 10.00 - KOP - Kyle Pipkin State Com #202H									
10,500.0	5.75	179.47	10,459.4	605.0	-613.6	-610.6	10.00	10.00	312.06
10,600.0	15.75	179.47	10,557.5	586.3	-613.4	-592.0	10.00	10.00	0.00
10,643.4	20.09	179.47	10,598.8	573.0	-613.3	-578.6	10.00	10.00	0.00
L3.1: TBSC									
10,700.0	25.75	179.47	10,650.9	551.0	-613.1	-556.6	10.00	10.00	0.00
10,800.0	35.75	179.47	10,736.8	499.9	-612.6	-505.5	10.00	10.00	0.00
10,805.8	36.33	179.47	10,741.5	496.5	-612.5	-502.1	10.00	10.00	0.00
L2: WFMP A									
10,900.0	45.75	179.47	10,812.4	434.7	-612.0	-440.3	10.00	10.00	0.00
11,000.0	55.75	179.47	10,875.6	357.4	-611.3	-363.0	10.00	10.00	0.00
11,100.0	65.75	179.47	10,924.4	270.2	-610.5	-275.9	10.00	10.00	0.00
11,200.0	75.75	179.47	10,957.3	175.9	-609.6	-181.6	10.00	10.00	0.00
11,300.0	85.75	179.47	10,973.4	77.4	-608.7	-83.0	10.00	10.00	0.00
11,322.5	88.00	179.47	10,974.6	54.9	-608.5	-60.5	10.00	10.00	0.00
Start 17566.8 hold at 11322.5 MD									
11,400.0	88.00	179.47	10,977.3	-22.5	-607.7	16.9	0.00	0.00	0.00
11,500.0	88.00	179.47	10,980.8	-122.5	-606.8	116.9	0.00	0.00	0.00
11,600.0	88.00	179.47	10,984.3	-222.4	-605.9	216.8	0.00	0.00	0.00
11,700.0	88.00	179.47	10,987.8	-322.4	-605.0	316.7	0.00	0.00	0.00
11,800.0	88.00	179.47	10,991.3	-422.3	-604.1	416.7	0.00	0.00	0.00
11,900.0	88.00	179.47	10,994.8	-522.2	-603.1	516.6	0.00	0.00	0.00
12,000.0	88.00	179.47	10,998.3	-622.2	-602.2	616.6	0.00	0.00	0.00
12,100.0	88.00	179.47	11,001.7	-722.1	-601.3	716.5	0.00	0.00	0.00

Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well Kyle Pipkin State Com #202H
Company:	Matador Production Company	TVD Reference:	KB @ 2959.5usft
Project:	Antelope Ridge	MD Reference:	KB @ 2959.5usft
Site:	Kyle Pipkin	North Reference:	Grid
Well:	Kyle Pipkin State Com #202H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	State Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
12,200.0	88.00	179.47	11,005.2	-822.0	-600.4	816.4	0.00	0.00	0.00
12,300.0	88.00	179.47	11,008.7	-922.0	-599.4	916.4	0.00	0.00	0.00
12,400.0	88.00	179.47	11,012.2	-1,021.9	-598.5	1,016.3	0.00	0.00	0.00
12,500.0	88.00	179.47	11,015.7	-1,121.8	-597.6	1,116.3	0.00	0.00	0.00
12,600.0	88.00	179.47	11,019.2	-1,221.8	-596.7	1,216.2	0.00	0.00	0.00
12,700.0	88.00	179.47	11,022.7	-1,321.7	-595.7	1,316.1	0.00	0.00	0.00
12,800.0	88.00	179.47	11,026.2	-1,421.6	-594.8	1,416.1	0.00	0.00	0.00
12,900.0	88.00	179.47	11,029.7	-1,521.6	-593.9	1,516.0	0.00	0.00	0.00
13,000.0	88.00	179.47	11,033.2	-1,621.5	-593.0	1,615.9	0.00	0.00	0.00
13,100.0	88.00	179.47	11,036.6	-1,721.4	-592.0	1,715.9	0.00	0.00	0.00
13,200.0	88.00	179.47	11,040.1	-1,821.4	-591.1	1,815.8	0.00	0.00	0.00
13,300.0	88.00	179.47	11,043.6	-1,921.3	-590.2	1,915.8	0.00	0.00	0.00
13,400.0	88.00	179.47	11,047.1	-2,021.2	-589.3	2,015.7	0.00	0.00	0.00
13,500.0	88.00	179.47	11,050.6	-2,121.2	-588.3	2,115.6	0.00	0.00	0.00
13,600.0	88.00	179.47	11,054.1	-2,221.1	-587.4	2,215.6	0.00	0.00	0.00
13,700.0	88.00	179.47	11,057.6	-2,321.0	-586.5	2,315.5	0.00	0.00	0.00
13,800.0	88.00	179.47	11,061.1	-2,421.0	-585.6	2,415.5	0.00	0.00	0.00
13,900.0	88.00	179.47	11,064.6	-2,520.9	-584.6	2,515.4	0.00	0.00	0.00
14,000.0	88.00	179.47	11,068.1	-2,620.9	-583.7	2,615.3	0.00	0.00	0.00
14,100.0	88.00	179.47	11,071.5	-2,720.8	-582.8	2,715.3	0.00	0.00	0.00
14,200.0	88.00	179.47	11,075.0	-2,820.7	-581.9	2,815.2	0.00	0.00	0.00
14,300.0	88.00	179.47	11,078.5	-2,920.7	-580.9	2,915.2	0.00	0.00	0.00
14,400.0	88.00	179.47	11,082.0	-3,020.6	-580.0	3,015.1	0.00	0.00	0.00
14,500.0	88.00	179.47	11,085.5	-3,120.5	-579.1	3,115.0	0.00	0.00	0.00
14,600.0	88.00	179.47	11,089.0	-3,220.5	-578.2	3,215.0	0.00	0.00	0.00
14,700.0	88.00	179.47	11,092.5	-3,320.4	-577.2	3,314.9	0.00	0.00	0.00
14,800.0	88.00	179.47	11,096.0	-3,420.3	-576.3	3,414.9	0.00	0.00	0.00
14,900.0	88.00	179.47	11,099.5	-3,520.3	-575.4	3,514.8	0.00	0.00	0.00
15,000.0	88.00	179.47	11,103.0	-3,620.2	-574.5	3,614.7	0.00	0.00	0.00
15,100.0	88.00	179.47	11,106.4	-3,720.1	-573.5	3,714.7	0.00	0.00	0.00
15,200.0	88.00	179.47	11,109.9	-3,820.1	-572.6	3,814.6	0.00	0.00	0.00
15,300.0	88.00	179.47	11,113.4	-3,920.0	-571.7	3,914.5	0.00	0.00	0.00
15,400.0	88.00	179.47	11,116.9	-4,019.9	-570.8	4,014.5	0.00	0.00	0.00
15,500.0	88.00	179.47	11,120.4	-4,119.9	-569.8	4,114.4	0.00	0.00	0.00
15,600.0	88.00	179.47	11,123.9	-4,219.8	-568.9	4,214.4	0.00	0.00	0.00
15,700.0	88.00	179.47	11,127.4	-4,319.7	-568.0	4,314.3	0.00	0.00	0.00
15,800.0	88.00	179.47	11,130.9	-4,419.7	-567.1	4,414.2	0.00	0.00	0.00
15,900.0	88.00	179.47	11,134.4	-4,519.6	-566.1	4,514.2	0.00	0.00	0.00
16,000.0	88.00	179.47	11,137.9	-4,619.5	-565.2	4,614.1	0.00	0.00	0.00
16,100.0	88.00	179.47	11,141.3	-4,719.5	-564.3	4,714.1	0.00	0.00	0.00
16,200.0	88.00	179.47	11,144.8	-4,819.4	-563.4	4,814.0	0.00	0.00	0.00
16,300.0	88.00	179.47	11,148.3	-4,919.4	-562.5	4,913.9	0.00	0.00	0.00
16,400.0	88.00	179.47	11,151.8	-5,019.3	-561.5	5,013.9	0.00	0.00	0.00
16,500.0	88.00	179.47	11,155.3	-5,119.2	-560.6	5,113.8	0.00	0.00	0.00
16,600.0	88.00	179.47	11,158.8	-5,219.2	-559.7	5,213.8	0.00	0.00	0.00
16,700.0	88.00	179.47	11,162.3	-5,319.1	-558.8	5,313.7	0.00	0.00	0.00
16,800.0	88.00	179.47	11,165.8	-5,419.0	-557.8	5,413.6	0.00	0.00	0.00
16,900.0	88.00	179.47	11,169.3	-5,519.0	-556.9	5,513.6	0.00	0.00	0.00
17,000.0	88.00	179.47	11,172.8	-5,618.9	-556.0	5,613.5	0.00	0.00	0.00
17,100.0	88.00	179.47	11,176.2	-5,718.8	-555.1	5,713.5	0.00	0.00	0.00
17,200.0	88.00	179.47	11,179.7	-5,818.8	-554.1	5,813.4	0.00	0.00	0.00
17,300.0	88.00	179.47	11,183.2	-5,918.7	-553.2	5,913.3	0.00	0.00	0.00
17,400.0	88.00	179.47	11,186.7	-6,018.6	-552.3	6,013.3	0.00	0.00	0.00
17,500.0	88.00	179.47	11,190.2	-6,118.6	-551.4	6,113.2	0.00	0.00	0.00

Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well Kyle Pipkin State Com #202H
Company:	Matador Production Company	TVD Reference:	KB @ 2959.5usft
Project:	Antelope Ridge	MD Reference:	KB @ 2959.5usft
Site:	Kyle Pipkin	North Reference:	Grid
Well:	Kyle Pipkin State Com #202H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	State Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
17,600.0	88.00	179.47	11,193.7	-6,218.5	-550.4	6,213.1	0.00	0.00	0.00
17,700.0	88.00	179.47	11,197.2	-6,318.4	-549.5	6,313.1	0.00	0.00	0.00
17,800.0	88.00	179.47	11,200.7	-6,418.4	-548.6	6,413.0	0.00	0.00	0.00
17,900.0	88.00	179.47	11,204.2	-6,518.3	-547.7	6,513.0	0.00	0.00	0.00
18,000.0	88.00	179.47	11,207.7	-6,618.2	-546.7	6,612.9	0.00	0.00	0.00
18,100.0	88.00	179.47	11,211.1	-6,718.2	-545.8	6,712.8	0.00	0.00	0.00
18,200.0	88.00	179.47	11,214.6	-6,818.1	-544.9	6,812.8	0.00	0.00	0.00
18,300.0	88.00	179.47	11,218.1	-6,918.0	-544.0	6,912.7	0.00	0.00	0.00
18,400.0	88.00	179.47	11,221.6	-7,018.0	-543.0	7,012.7	0.00	0.00	0.00
18,500.0	88.00	179.47	11,225.1	-7,117.9	-542.1	7,112.6	0.00	0.00	0.00
18,600.0	88.00	179.47	11,228.6	-7,217.9	-541.2	7,212.5	0.00	0.00	0.00
18,700.0	88.00	179.47	11,232.1	-7,317.8	-540.3	7,312.5	0.00	0.00	0.00
18,800.0	88.00	179.47	11,235.6	-7,417.7	-539.3	7,412.4	0.00	0.00	0.00
18,900.0	88.00	179.47	11,239.1	-7,517.7	-538.4	7,512.4	0.00	0.00	0.00
19,000.0	88.00	179.47	11,242.5	-7,617.6	-537.5	7,612.3	0.00	0.00	0.00
19,100.0	88.00	179.47	11,246.0	-7,717.5	-536.6	7,712.2	0.00	0.00	0.00
19,200.0	88.00	179.47	11,249.5	-7,817.5	-535.6	7,812.2	0.00	0.00	0.00
19,300.0	88.00	179.47	11,253.0	-7,917.4	-534.7	7,912.1	0.00	0.00	0.00
19,400.0	88.00	179.47	11,256.5	-8,017.3	-533.8	8,012.1	0.00	0.00	0.00
19,500.0	88.00	179.47	11,260.0	-8,117.3	-532.9	8,112.0	0.00	0.00	0.00
19,600.0	88.00	179.47	11,263.5	-8,217.2	-531.9	8,211.9	0.00	0.00	0.00
19,700.0	88.00	179.47	11,267.0	-8,317.1	-531.0	8,311.9	0.00	0.00	0.00
19,800.0	88.00	179.47	11,270.5	-8,417.1	-530.1	8,411.8	0.00	0.00	0.00
19,900.0	88.00	179.47	11,274.0	-8,517.0	-529.2	8,511.7	0.00	0.00	0.00
20,000.0	88.00	179.47	11,277.4	-8,616.9	-528.2	8,611.7	0.00	0.00	0.00
20,100.0	88.00	179.47	11,280.9	-8,716.9	-527.3	8,711.6	0.00	0.00	0.00
20,200.0	88.00	179.47	11,284.4	-8,816.8	-526.4	8,811.6	0.00	0.00	0.00
20,300.0	88.00	179.47	11,287.9	-8,916.7	-525.5	8,911.5	0.00	0.00	0.00
20,400.0	88.00	179.47	11,291.4	-9,016.7	-524.5	9,011.4	0.00	0.00	0.00
20,500.0	88.00	179.47	11,294.9	-9,116.6	-523.6	9,111.4	0.00	0.00	0.00
20,600.0	88.00	179.47	11,298.4	-9,216.5	-522.7	9,211.3	0.00	0.00	0.00
20,700.0	88.00	179.47	11,301.9	-9,316.5	-521.8	9,311.3	0.00	0.00	0.00
20,800.0	88.00	179.47	11,305.4	-9,416.4	-520.8	9,411.2	0.00	0.00	0.00
20,900.0	88.00	179.47	11,308.9	-9,516.4	-519.9	9,511.1	0.00	0.00	0.00
21,000.0	88.00	179.47	11,312.3	-9,616.3	-519.0	9,611.1	0.00	0.00	0.00
21,100.0	88.00	179.47	11,315.8	-9,716.2	-518.1	9,711.0	0.00	0.00	0.00
21,200.0	88.00	179.47	11,319.3	-9,816.2	-517.2	9,811.0	0.00	0.00	0.00
21,300.0	88.00	179.47	11,322.8	-9,916.1	-516.2	9,910.9	0.00	0.00	0.00
21,400.0	88.00	179.47	11,326.3	-10,016.0	-515.3	10,010.8	0.00	0.00	0.00
21,500.0	88.00	179.47	11,329.8	-10,116.0	-514.4	10,110.8	0.00	0.00	0.00
21,600.0	88.00	179.47	11,333.3	-10,215.9	-513.5	10,210.7	0.00	0.00	0.00
21,700.0	88.00	179.47	11,336.8	-10,315.8	-512.5	10,310.6	0.00	0.00	0.00
21,800.0	88.00	179.47	11,340.3	-10,415.8	-511.6	10,410.6	0.00	0.00	0.00
21,900.0	88.00	179.47	11,343.8	-10,515.7	-510.7	10,510.5	0.00	0.00	0.00
22,000.0	88.00	179.47	11,347.2	-10,615.6	-509.8	10,610.5	0.00	0.00	0.00
22,100.0	88.00	179.47	11,350.7	-10,715.6	-508.8	10,710.4	0.00	0.00	0.00
22,200.0	88.00	179.47	11,354.2	-10,815.5	-507.9	10,810.3	0.00	0.00	0.00
22,300.0	88.00	179.47	11,357.7	-10,915.4	-507.0	10,910.3	0.00	0.00	0.00
22,400.0	88.00	179.47	11,361.2	-11,015.4	-506.1	11,010.2	0.00	0.00	0.00
22,500.0	88.00	179.47	11,364.7	-11,115.3	-505.1	11,110.2	0.00	0.00	0.00
22,600.0	88.00	179.47	11,368.2	-11,215.2	-504.2	11,210.1	0.00	0.00	0.00
22,700.0	88.00	179.47	11,371.7	-11,315.2	-503.3	11,310.0	0.00	0.00	0.00
22,800.0	88.00	179.47	11,375.2	-11,415.1	-502.4	11,410.0	0.00	0.00	0.00
22,900.0	88.00	179.47	11,378.7	-11,515.0	-501.4	11,509.9	0.00	0.00	0.00

Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well Kyle Pipkin State Com #202H
Company:	Matador Production Company	TVD Reference:	KB @ 2959.5usft
Project:	Antelope Ridge	MD Reference:	KB @ 2959.5usft
Site:	Kyle Pipkin	North Reference:	Grid
Well:	Kyle Pipkin State Com #202H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	State Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
23,000.0	88.00	179.47	11,382.1	-11,615.0	-500.5	11,609.9	0.00	0.00	0.00
23,100.0	88.00	179.47	11,385.6	-11,714.9	-499.6	11,709.8	0.00	0.00	0.00
23,200.0	88.00	179.47	11,389.1	-11,814.9	-498.7	11,809.7	0.00	0.00	0.00
23,300.0	88.00	179.47	11,392.6	-11,914.8	-497.7	11,909.7	0.00	0.00	0.00
23,400.0	88.00	179.47	11,396.1	-12,014.7	-496.8	12,009.6	0.00	0.00	0.00
23,500.0	88.00	179.47	11,399.6	-12,114.7	-495.9	12,109.6	0.00	0.00	0.00
23,600.0	88.00	179.47	11,403.1	-12,214.6	-495.0	12,209.5	0.00	0.00	0.00
23,700.0	88.00	179.47	11,406.6	-12,314.5	-494.0	12,309.4	0.00	0.00	0.00
23,800.0	88.00	179.47	11,410.1	-12,414.5	-493.1	12,409.4	0.00	0.00	0.00
23,900.0	88.00	179.47	11,413.6	-12,514.4	-492.2	12,509.3	0.00	0.00	0.00
24,000.0	88.00	179.47	11,417.0	-12,614.3	-491.3	12,609.2	0.00	0.00	0.00
24,100.0	88.00	179.47	11,420.5	-12,714.3	-490.3	12,709.2	0.00	0.00	0.00
24,200.0	88.00	179.47	11,424.0	-12,814.2	-489.4	12,809.1	0.00	0.00	0.00
24,300.0	88.00	179.47	11,427.5	-12,914.1	-488.5	12,909.1	0.00	0.00	0.00
24,400.0	88.00	179.47	11,431.0	-13,014.1	-487.6	13,009.0	0.00	0.00	0.00
24,500.0	88.00	179.47	11,434.5	-13,114.0	-486.6	13,108.9	0.00	0.00	0.00
24,600.0	88.00	179.47	11,438.0	-13,213.9	-485.7	13,208.9	0.00	0.00	0.00
24,700.0	88.00	179.47	11,441.5	-13,313.9	-484.8	13,308.8	0.00	0.00	0.00
24,800.0	88.00	179.47	11,445.0	-13,413.8	-483.9	13,408.8	0.00	0.00	0.00
24,900.0	88.00	179.47	11,448.5	-13,513.7	-482.9	13,508.7	0.00	0.00	0.00
25,000.0	88.00	179.47	11,451.9	-13,613.7	-482.0	13,608.6	0.00	0.00	0.00
25,100.0	88.00	179.47	11,455.4	-13,713.6	-481.1	13,708.6	0.00	0.00	0.00
25,200.0	88.00	179.47	11,458.9	-13,813.5	-480.2	13,808.5	0.00	0.00	0.00
25,300.0	88.00	179.47	11,462.4	-13,913.5	-479.2	13,908.5	0.00	0.00	0.00
25,400.0	88.00	179.47	11,465.9	-14,013.4	-478.3	14,008.4	0.00	0.00	0.00
25,500.0	88.00	179.47	11,469.4	-14,113.4	-477.4	14,108.3	0.00	0.00	0.00
25,600.0	88.00	179.47	11,472.9	-14,213.3	-476.5	14,208.3	0.00	0.00	0.00
25,700.0	88.00	179.47	11,476.4	-14,313.2	-475.6	14,308.2	0.00	0.00	0.00
25,800.0	88.00	179.47	11,479.9	-14,413.2	-474.6	14,408.2	0.00	0.00	0.00
25,900.0	88.00	179.47	11,483.4	-14,513.1	-473.7	14,508.1	0.00	0.00	0.00
26,000.0	88.00	179.47	11,486.8	-14,613.0	-472.8	14,608.0	0.00	0.00	0.00
26,100.0	88.00	179.47	11,490.3	-14,713.0	-471.9	14,708.0	0.00	0.00	0.00
26,200.0	88.00	179.47	11,493.8	-14,812.9	-470.9	14,807.9	0.00	0.00	0.00
26,300.0	88.00	179.47	11,497.3	-14,912.8	-470.0	14,907.8	0.00	0.00	0.00
26,400.0	88.00	179.47	11,500.8	-15,012.8	-469.1	15,007.8	0.00	0.00	0.00
26,500.0	88.00	179.47	11,504.3	-15,112.7	-468.2	15,107.7	0.00	0.00	0.00
26,600.0	88.00	179.47	11,507.8	-15,212.6	-467.2	15,207.7	0.00	0.00	0.00
26,700.0	88.00	179.47	11,511.3	-15,312.6	-466.3	15,307.6	0.00	0.00	0.00
26,800.0	88.00	179.47	11,514.8	-15,412.5	-465.4	15,407.5	0.00	0.00	0.00
26,900.0	88.00	179.47	11,518.3	-15,512.4	-464.5	15,507.5	0.00	0.00	0.00
27,000.0	88.00	179.47	11,521.7	-15,612.4	-463.5	15,607.4	0.00	0.00	0.00
27,100.0	88.00	179.47	11,525.2	-15,712.3	-462.6	15,707.4	0.00	0.00	0.00
27,200.0	88.00	179.47	11,528.7	-15,812.2	-461.7	15,807.3	0.00	0.00	0.00
27,300.0	88.00	179.47	11,532.2	-15,912.2	-460.8	15,907.2	0.00	0.00	0.00
27,400.0	88.00	179.47	11,535.7	-16,012.1	-459.8	16,007.2	0.00	0.00	0.00
27,500.0	88.00	179.47	11,539.2	-16,112.1	-458.9	16,107.1	0.00	0.00	0.00
27,600.0	88.00	179.47	11,542.7	-16,212.0	-458.0	16,207.1	0.00	0.00	0.00
27,700.0	88.00	179.47	11,546.2	-16,311.9	-457.1	16,307.0	0.00	0.00	0.00
27,800.0	88.00	179.47	11,549.7	-16,411.9	-456.1	16,406.9	0.00	0.00	0.00
27,900.0	88.00	179.47	11,553.2	-16,511.8	-455.2	16,506.9	0.00	0.00	0.00
28,000.0	88.00	179.47	11,556.6	-16,611.7	-454.3	16,606.8	0.00	0.00	0.00
28,100.0	88.00	179.47	11,560.1	-16,711.7	-453.4	16,706.8	0.00	0.00	0.00
28,200.0	88.00	179.47	11,563.6	-16,811.6	-452.4	16,806.7	0.00	0.00	0.00
28,300.0	88.00	179.47	11,567.1	-16,911.5	-451.5	16,906.6	0.00	0.00	0.00

Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well Kyle Pipkin State Com #202H
Company:	Matador Production Company	TVD Reference:	KB @ 2959.5usft
Project:	Antelope Ridge	MD Reference:	KB @ 2959.5usft
Site:	Kyle Pipkin	North Reference:	Grid
Well:	Kyle Pipkin State Com #202H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	State Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
28,400.0	88.00	179.47	11,570.6	-17,011.5	-450.6	17,006.6	0.00	0.00	0.00
28,500.0	88.00	179.47	11,574.1	-17,111.4	-449.7	17,106.5	0.00	0.00	0.00
28,600.0	88.00	179.47	11,577.6	-17,211.3	-448.7	17,206.4	0.00	0.00	0.00
28,700.0	88.00	179.47	11,581.1	-17,311.3	-447.8	17,306.4	0.00	0.00	0.00
28,800.0	88.00	179.47	11,584.6	-17,411.2	-446.9	17,406.3	0.00	0.00	0.00
28,889.3	88.00	179.47	11,587.7	-17,500.4	-446.1	17,495.5	0.00	0.00	0.00
TD at 28889.3 - BHL - Kyle Pipkin State Com #202H									

Design Targets									
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
KOP - Kyle Pipkin State - plan hits target center - Point	0.00	0.00	10,402.0	607.9	-613.6	383,738.00	839,476.00	32° 3' 0.991 N	103° 14' 15.582 W
BHL - Kyle Pipkin State - plan misses target center by 0.4usft at 28889.3usft MD (11587.7 TVD, -17500.4 N, -446.1 E) - Point	0.00	0.00	11,587.7	-17,500.4	-445.6	365,629.74	839,643.93	32° 0' 1.795 N	103° 14' 15.765 W

Formations					
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
1,740.4	1,737.9	Rustler		2.00	179.47
2,627.6	2,621.1	Top Salt - Salado		2.00	179.47
3,476.7	3,466.4	Base Salt - Capitan		2.00	179.47
5,734.6	5,714.2	G26: Bell Cyn.		2.00	179.47
5,989.5	5,967.9	G13: Cherry Cyn.		2.00	179.47
6,273.5	6,250.6	G7: Brushy Cyn.		2.00	179.47
7,081.7	7,055.2	G4: BSG (CS9)		2.00	179.47
8,133.5	8,102.3	L6.3: Avalon Carb		2.00	179.47
9,053.1	9,017.7	L5.1: FBSG		2.00	179.47
9,139.9	9,104.2	L4.3: SBSC		2.00	179.47
9,555.8	9,518.2	L4.1: SBSG		2.00	179.47
9,577.9	9,540.2	L3.3: TBSC		2.00	179.47
10,643.4	10,598.8	L3.1: TBSG		2.00	179.47
10,805.8	10,741.5	L2: WFMP A		2.00	179.47

Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well Kyle Pipkin State Com #202H
Company:	Matador Production Company	TVD Reference:	KB @ 2959.5usft
Project:	Antelope Ridge	MD Reference:	KB @ 2959.5usft
Site:	Kyle Pipkin	North Reference:	Grid
Well:	Kyle Pipkin State Com #202H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	State Plan #1		

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
1,000.0	1,000.0	0.0	0.0	Start Build 2.00
1,271.5	1,271.1	9.0	-9.1	Start 8808.9 hold at 1271.5 MD
10,080.4	10,040.5	595.8	-601.4	Start Drop -1.50
10,442.5	10,402.0	607.9	-613.6	Start Build 10.00
11,322.5	10,974.6	54.9	-608.5	Start 17566.8 hold at 11322.5 MD
28,889.3	11,587.7	-17,500.4	-446.1	TD at 28889.3

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: Matador Production Company **OGRID:** 228937 **Date:** 7/25/2025

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
KYLE PIPKIN STATE COM #202H	TBD	B-14-26S-36E	710' FNL & 2555' FEL	1399	4330	3123
KYLE PIPKIN STATE COM #203H	TBD	B-14-26S-36E	711' FNL & 2525' FEL	1399	4330	3123

IV. Central Delivery Point Name: Kyle Pipkin TB [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
KYLE PIPKIN STATE COM #202H	TBD	12/19/2025	01/25/2026	03/10/2026	04/25/2026	04/25/2026
KYLE PIPKIN STATE COM #203H	TBD	01/25/2025	02/26/2026	03/10/2026	04/27/2026	04/27/2026

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan
EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications**Effective May 25, 2021**

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices


1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: 
Printed Name: Adrian Salinas
Title: Facilities Engineer
E-mail Address: adrian.salinas@matadorresources.com
Date: 7/25/2025
Phone: 832-314-0336
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)
Approved By:
Title:
Approval Date:
Conditions of Approval:

Addendum to Natural Gas Management Plan for Matador's

KYLE PIPKIN STATE COM #202H, #203H

VI. Separation Equipment

Flow from the wells will be routed via a flowline to a 72"x15' three phase separator dedicated to the well. The first stage separators are sized with input from BRE ProMax and API 12J. Anticipated production rates can be seen in the below table. Liquid retention times at expected maximum rates will be >3 minutes. Gas will be routed from the first stage separator to sales. Hydrocarbon liquids are dumped from the first stage separator to one or more heater treaters. From the heater treaters, hydrocarbon liquid will be routed to oil storage tanks. Water is dumped from the first stage 3-phase separators and heater treaters to water storage tanks. The flash gas from the heater treater(s) and tanks will be captured by Vapor Recovery Units (VRUs) and routed to sales or to a compressor if the sales line pressure is higher than the VRU's maximum discharge pressure (~150 psi). Therefore, Matador has sized and staged our separation equipment to optimize gas capture, and our separation equipment is of sufficient size to handle the expected volumes of gas.

Well Name	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
KYLE PIPKIN STATE COM #202H	1399	4330	3123
KYLE PIPKIN STATE COM #203H	1399	4330	3123

VII. Operation Practices

Although not a complete recitation of all our efforts to comply with subsection A through F of 19.15.27.8 NMAC, a summary is as follows. During drilling, Matador will have a properly sized flare stack at least 100 feet from the nearest surface hole. During initial flowback we will route the flowback fluids into completion or storage tanks and, to the extent possible, flare rather than vent any gas. We will commence operation of a separator as soon as technically feasible and have instructed our team that we want to connect the gas to sales as soon as possible but not later than 30 days after initial flowback.

Regarding production operations, we have designed our production facilities to be compliant with the requirements of Part E of 19.15.27.8 NMAC. We will instruct our team to perform the AVOs on the frequency required under the rules. While the well is producing, we will take steps to minimize flaring during maintenance, as set forth below, and we have a process in place for the measuring of any flared gas and the reporting of any reportable flaring events.

VII. Best Management Practices

Steps are taken to minimize venting during active or planned maintenance when technically feasible including:

- Isolating the affected component and reducing pressure through process piping
- Blowing down the equipment being maintained to a control device

- Performing preventative maintenance and minimizing the duration of maintenance activities
- Shutting in sources of supply as possible
- Other steps that are available depending on the maintenance being performed