

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ well gas ☐ well other ☐ Re-Enter
2. NAME OF OPERATOR
Chama Petroleum Company
3. ADDRESS OF OPERATOR
5447 Glen Lakes Dr., Dallas, Texas 75231
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 660' FSL & 1980' FWL Sec. 34
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:


SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐

(other) Activity

5. LEASE
USA, NM-15291
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME
Irami Federal
9. WELL NO.
1
10. FIELD OR WILDCAT NAME
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 34, T-19-S, R-25-E
12. COUNTY OR PARISH
Eddy
13. STATE
New Mexico
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)
3527.1 GR

(NOTE: Report results of multiple completion or zone changes on Form 9-330)

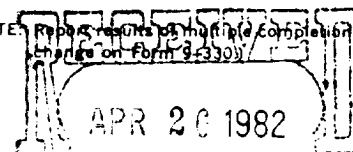

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

4-19-82: Continued

tubing backed off 26 joints above bridge plug while trying to release same, screwed back into fish, continued trying to release bridge plug & tubing unscrewed again, removed well head, pulled out of hole, installed well head, shut down overnight.

4-20-82: 150# casing pressure, flowed well down, removed well head, trip in hole with overshot, caught fish, worked with bridge plug & released, pulled out of hole to overshot, removed well head & overshot, finished pulling out of hole with bridge plug, top cups torn up, trip in hole with 2 7/8" seating nipple & 179 joints 2 7/8" OD EUE 8 rd. thread 6.50# Class A, J55 tubing, set bottom of tubing at 2399' K.B., rigged up & swabbed estimated 160 bbls. load water in 3 1/2 hrs., lowered fluid level 400' from surface, shut down overnight.

Subsurface Safety Valve: Manu. and Type Set @ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED

TITLE

DATE

APPROVED BY
CONDITIONS OF APPROVAL, IF ANY

ACCEPTED FOR RECORD

PETER W. CHESTER

JUN 14 1982

U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

Instructions on Reverse Side