



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Operator Certification Data Report

11/04/2025

Operator

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

NAME: SARA GUTHRIE

Signed on: 10/08/2025

Title: Regulatory Advisor

Street Address: 5 GREENWAY PLAZA SUITE 110

City: HOUSTON

State: TX

Zip: 77046

Phone: (713)497-2851

Email address: SARA_GUTHRIE@OXY.COM

Field

Representative Name: Michael Wilson

Street Address:

City:

State:

Zip:

Phone: (575)631-6618

Email address: michael_wilson@oxy.com



APD ID: 10400107731	Submission Date: 10/08/2025	Highlighted data reflects the most recent changes Show Final Text
Operator Name: OXY USA INCORPORATED		
Well Name: PLATINUM MDP1 34_3 FEDERAL COM	Well Number: 45H	
Well Type: OIL WELL	Well Work Type: Drill	

Section 1 - General

APD ID: 10400107731	Tie to previous NOS? N	Submission Date: 10/08/2025
BLM Office: Carlsbad	User: SARA GUTHRIE	Title: Regulatory Advisor
Federal/Indian APD: FED	Is the first lease penetrated for production Federal or Indian? FED	
Lease number: NMNM43744	Lease Acres:	
Surface access agreement in place?	Allotted?	Reservation:
Agreement in place? NO	Federal or Indian agreement:	
Agreement number:		
Agreement name:		
Keep application confidential? N		
Permitting Agent? NO	APD Operator: OXY USA INCORPORATED	
Operator letter of		

Operator Info

Operator Organization Name: OXY USA INCORPORATED	
Operator Address: P.O. BOX 1002	
Operator PO Box:	Zip: 93276-1002
Operator City: TUPMAN	State: CA
Operator Phone: (661)763-6046	
Operator Internet Address:	

Section 2 - Well Information

Well in Master Development Plan? NO	Master Development Plan name:	
Well in Master SUPO? NO	Master SUPO name:	
Well in Master Drilling Plan? NO	Master Drilling Plan name:	
Well Name: PLATINUM MDP1 34_3 FEDERAL COM	Well Number: 45H	Well API Number:
Field/Pool or Exploratory? Field and Pool	Field Name: WC-015 G-08 S233135D	Pool Name: WOLFCAMP

Operator Name: OXY USA INCORPORATED**Well Name:** PLATINUM MDP1 34_3 FEDERAL COM**Well Number:** 45H**Is the proposed well in an area containing other mineral resources? USEABLE WATER,NATURAL GAS,OIL,POTASH****Is the proposed well in a Helium production area? N Use Existing Well Pad? N New surface disturbance?****Type of Well Pad:** MULTIPLE WELL**Multiple Well Pad Name:**
SNDDNS_23S31E**Number:** 34_2**Well Class:** HORIZONTAL**Number of Legs:** 1**Well Work Type:** Drill**Well Type:** OIL WELL**Describe Well Type:****Well sub-Type:** INFILL**Describe sub-type:****Distance to town:****Distance to nearest well:** 30 FT**Distance to lease line:** 1177 FT**Reservoir well spacing assigned acres Measurement:** 640 Acres**Well plat:** PLATINUMMDP134_3FEDCOM45H_C102_Pool_1_20251008092652.pdf

PLATINUMMDP134_3FEDCOM45H_C102_Pool_2_20251008092659.pdf

PLATINUMMDP134_3FEDCOM45H_Site_Plan_20251008092709.pdf

Well work start Date: 10/08/2026**Duration:** 45 DAYS

Section 3 - Well Location Table

Survey Type: RECTANGULAR**Describe Survey Type:****Datum:** NAD83**Vertical Datum:** NAVD88**Survey number:****Reference Datum:** GROUND LEVEL

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this
SHL Leg #1	117 7	FNL	253 7	FW L	23S	31E	34	Aliquot NENW	32.26494 97	-103.7659 982	EDD Y	NEW MEXI CO	NEW MEXI CO	F	NMNM 43744	343 7			N
KOP Leg #1	50	FNL	123 6	FEL	23S	31E	34	Aliquot NENE	32.26805 19	-103.7611 215	EDD Y	NEW MEXI CO	NEW MEXI CO	F	NMNM 43744	-857 4	120 75	120 11	N

Operator Name: OXY USA INCORPORATED**Well Name:** PLATINUM MDP1 34_3 FEDERAL COM**Well Number:** 45H

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVd	Will this well produce from this
PPP Leg #1-1	100	FNL	123 6	FEL	23S	31E	34	Aliquot NENE	32.26791 45	-103.7611 215	EDD Y	NEW MEXI CO	NEW MEXI CO	F	NMMN 43744	-916 5	130 01	126 02	Y
EXIT Leg #1	100	FSL	123 6	FEL	24S	31E	3	Aliquot SESE	32.23942 06	-103.7611 41	EDD Y	NEW MEXI CO	NEW MEXI CO	F	NMMN 80645	-916 5	228 45	126 02	Y
BHL Leg #1	20	FSL	123 6	FEL	24S	31E	3	Aliquot SESE	32.23920 07	-103.7611 413	EDD Y	NEW MEXI CO	NEW MEXI CO	F	NMMN 80645	-916 5	229 25	126 02	N



APD ID: 10400107731

Submission Date: 10/08/2025

Highlighted data
reflects the most
recent changes

Operator Name: OXY USA INCORPORATED

Well Name: PLATINUM MDP1 34_3 FEDERAL COM

Well Number: 45H

Well Type: OIL WELL

Well Work Type: Drill

[Show Final Text](#)

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical	Measured Depth	Lithologies	Mineral Resources	Producing Formation
16717553	RUSTLER	3437	647	647	ANHYDRITE, DOLOMITE, SHALE	USEABLE WATER	N
16717554	SALADO	2468	969	969	ANHYDRITE, DOLOMITE, HALITE, SHALE	OTHER : SALT	N
16717555	CASTILE	557	2880	2880	ANHYDRITE	OTHER : SALT	N
16717556	DELAWARE	-915	4352	4352	LIMESTONE, SANDSTONE, SILTSTONE	NATURAL GAS, OIL, OTHER : BRINE	Y
16717557	BELL CANYON	-943	4380	4380	SANDSTONE, SILTSTONE	NATURAL GAS, OIL, OTHER : BRINE	Y
16717558	CHERRY CANYON	-1845	5282	5283	SANDSTONE, SILTSTONE	NATURAL GAS, OIL, OTHER : BRINE	Y
16717559	BRUSHY CANYON	-3190	6627	6661	SANDSTONE, SILTSTONE	OTHER : LOSSES	N
16717560	BONE SPRING	-4770	8207	8305	LIMESTONE, SANDSTONE, SILTSTONE	NATURAL GAS, OIL	Y
16717561	BONE SPRING 1ST	-5826	9263	9403	LIMESTONE, SANDSTONE, SILTSTONE	NATURAL GAS, OIL	Y
16717562	BONE SPRING 2ND	-6404	9841	10005	LIMESTONE, SANDSTONE, SILTSTONE	NATURAL GAS, OIL	Y
16717563	BONE SPRING 3RD	-7681	11118	11333	LIMESTONE, SANDSTONE, SILTSTONE	NATURAL GAS, OIL	Y
16717564	WOLFCAMP	-8126	11563	11796	SANDSTONE, SILTSTONE	NATURAL GAS, OIL	Y

Section 2 - Blowout Prevention

Pressure Rating (PSI): 10M

Rating Depth: 12325

Equipment: 13-5/8" 5M Annular, 10M Blind Ram, 10M Double Ram

Requesting Variance? YES

Variance request: Request for the use of a flexible choke line from the BOP to Choke Manifold.

Testing Procedure: BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per 43 CFR part 3170 Subpart 3172 requirements. The System may be

Operator Name: OXY USA INCORPORATED**Well Name:** PLATINUM MDP1 34_3 FEDERAL COM**Well Number:** 45H

upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. OXY requests permission to adjust the BOP break testing requirements as per the agreement reached in the OXY/BLM meeting on September 5, 2019. See the attached BOP Break Testing variance.

Choke Diagram Attachment:

PLATINUMMDP134_3FEDCOM45H_ChkManifolds_20251008095257.pdf

BOP Diagram Attachment:

PLATINUMMDP134_3FEDCOM45H_BOP_20251008095306.pdf

PLATINUMMDP134_3FEDCOM45H_FlexHoseCert_20251008095319.pdf

PLATINUMMDP134_3FEDCOM45H_13inADAPT_4S_10x15_20251008095326.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	707	0	707	3437	2730	707	J-55	54.5	BUTT	1	1.1	BUOY	1.4	BUOY	1.4
2	OTHER - SALT	12.25	10.75	NEW	API	N	0	4352	0	4352	3437	-915	4352	HCL-80	45.5	BUTT	1	1.1	BUOY	1.4	BUOY	1.4
3	INTERMEDIATE	9.875	7.625	NEW	API	N	0	12253	0	12000	3698	-8563	12253	HCL-80	26.4	BUTT	1	1.1	BUOY	1.4	BUOY	1.4
4	PRODUCTION	6.75	5.5	NEW	API	N	0	22828	0	12325	3698	-8888	22828	P-110	20	OTHER - SPRINT-SF	1	1.1	BUOY	1.4	BUOY	1.4

Casing Attachments

Operator Name: OXY USA INCORPORATED**Well Name:** PLATINUM MDP1 34_3 FEDERAL COM**Well Number:** 45H**Casing Attachments****Casing ID:** 1 **String** SURFACE**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**

PLATINUMMDP134_3FEDCOM45H_CsgCriteria_20251008095610.pdf

Casing ID: 2 **String** OTHER - SALT**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**

PLATINUMMDP134_3FEDCOM45H_CsgCriteria_20251008095942.pdf

PLATINUMMDP134_3FEDCOM45H_API_BTC_SC_10.750in_45.50ppf_L80IC_20251008095949.pdf

Casing ID: 3 **String** INTERMEDIATE**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**

PLATINUMMDP134_3FEDCOM45H_CsgCriteria_20251008095716.pdf

Operator Name: OXY USA INCORPORATED**Well Name:** PLATINUM MDP1 34_3 FEDERAL COM**Well Number:** 45H**Casing Attachments****Casing ID:** 4 **String** PRODUCTION**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**

PLATINUMMDP134_3FEDCOM45H_CsgCriteria_20251008095807.pdf

PLATINUMMDP134_3FEDCOM45H_VAM_SPRINT_SF_5.5in_20ppf_P110RY_20251008095814.pdf

Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	707	739	1.33	14.8	983	100	Class C	Accelerator

OTHER	Lead	1	0	3852	610	1.73	12.9	1055	50	Class Pozz	Retarder
-------	------	---	---	------	-----	------	------	------	----	------------	----------

OTHER	Lead	1	3852	4352	85	1.33	14.8	113	20	Class C	Accelerator
-------	------	---	------	------	----	------	------	-----	----	---------	-------------

INTERMEDIATE	Lead	2	3852	6911	467	1.71	13.3	799	25	Class C	Accelerator
--------------	------	---	------	------	-----	------	------	-----	----	---------	-------------

INTERMEDIATE	Lead	2	6911	1225 3	717	1.68	13.2	1205	5	Class C	Retarder, Dispersant
--------------	------	---	------	--------	-----	------	------	------	---	---------	----------------------

PRODUCTION	Lead		1175 3	2282 8	627	1.84	13.3	1154	25	Class C	Retarder
------------	------	--	--------	--------	-----	------	------	------	----	---------	----------

Operator Name: OXY USA INCORPORATED**Well Name:** PLATINUM MDP1 34_3 FEDERAL COM**Well Number:** 45H

Section 5 - Circulating Medium

Mud System Type: Closed**Will an air or gas system be Used?** NO**Description of the equipment for the circulating system in accordance with 43 CFR 3172:****Diagram of the equipment for the circulating system in accordance with 43 CFR 3172:**

Describe what will be on location to control well or mitigate other conditions: Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times. The following is a general list of products: Barite, Bentonite, Gypsum, Lime, Soda Ash, Caustic Soda, Nut Plug, Cedar Fiber, Cotton Seed Hulls, Drilling Paper, Salt Water Clay, CACL2. Oxy will use a closed mud system.

Describe the mud monitoring system utilized: PVT/MD Totco/Visual Monitoring

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	pH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	707	WATER-BASED MUD	8.6	8.8							
707	4352	OTHER : SATURATED BRINE-BASED OR OIL-BASED MUD	8	10							
4352	1225 3	OTHER : WATER-BASED MUD OR OIL-BASED MUD	8	10							
1225 3	2282 8	OTHER : WATER-BASED OR OIL-BASED MUD	9.5	13.5							

Operator Name: OXY USA INCORPORATED

Well Name: PLATINUM MDP1 34_3 FEDERAL COM

Well Number: 45H

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

GR from TD to surface (horizontal well vertical portion of hole)

Mud Log from Bone Spring - TD

CBL (production string) - to be ran by completions.

List of open and cased hole logs run in the well:

GAMMA RAY LOG, CEMENT BOND LOG, DIRECTIONAL SURVEY, MUD LOG/GEOLOGICAL LITHOLOGY LOG,

Coring operation description for the well:

No coring is planned at this time.

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 8653

Anticipated Surface Pressure: 5880

Anticipated Bottom Hole Temperature(F): 179

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geohazards description:

Contingency Plans geohazards

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations

PLATINUMMDP134_3FEDCOM45H_H2S1_20251008101303.pdf

PLATINUMMDP134_3FEDCOM45H_H2S2_20251008101312.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

PLATINUMMDP134_3FEDCOM45H_DirectPlan_20251008101400.pdf

Other proposed operations facets description:

Other proposed operations facets attachment:

PLATINUMMDP134_3FEDCOM45H_DrillPlan_20251008101408.pdf

PLATINUMMDP134_3FEDCOM45H_SpudRigData_20251008101418.pdf

PLATINUMMDP134_3FEDCOM45H_NGMP_WMP_20251008101442.pdf

PLATINUMMDP134_3FEDCOM45H_2024_KPLA_Addendum_WellboreSchematics_20251008101451.pdf

Other Variance request(s): Y

Other Variance attachment:

PLATINUMMDP134_3FEDCOM45H_5MAnnBOPVariance_20251008101632.pdf

Operator Name: OXY USA INCORPORATED

Well Name: PLATINUM MDP1 34_3 FEDERAL COM

Well Number: 45H

PLATINUMMDP134_3FEDCOM45H_BOPBreakTestingVariance_20251008101644.pdf

PLATINUMMDP134_3FEDCOM45H_BradenheadCBLVariance_20251008101651.pdf

PLATINUMMDP134_3FEDCOM45H_OfflineCementVariance_20251008101701.pdf



APD ID: 10400107731

Submission Date: 10/08/2025

Highlighted data
reflects the most
recent changes
[Show Final Text](#)

Operator Name: OXY USA INCORPORATED

Well Name: PLATINUM MDP1 34_3 FEDERAL COM

Well Number: 45H

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Existing Roads

Will existing roads be used? YES

Existing Road Map:

PLATINUMMDP134_3FEDCOM45H_Existing_Roads_20251008101844.pdf

Existing Road Purpose: ACCESS,FLUID TRANSPORT

Row(s) Exist? NO

ROW ID(s)

ID:

Do the existing roads need to be improved? NO

Existing Road Improvement Description:

Existing Road Improvement Attachment:

Section 2 - New or Reconstructed Access Roads

Will new roads be needed? YES

New Road Map:

PLATINUMMDP134_3FEDCOM45H_NewRoads_20251008101900.pdf

New road type: LOCAL

Length: 1407 **Feet** **Width (ft.):** 30

Max slope (%): 0 **Max grade (%):** 0

Army Corp of Engineers (ACOE) permit required? N

ACOE Permit Number(s):

New road travel width: 20

New road access erosion control: Watershed diversion every 200', if needed.

New road access plan or profile prepared? N

New road access plan

Operator Name: OXY USA INCORPORATED

Well Name: PLATINUM MDP1 34_3 FEDERAL COM

Well Number: 45H

Access road engineering design? N

Access road engineering design

Turnout? N

Access surfacing type: OTHER

Access topsoil source: ONSITE

Access surfacing type description: CALICHE

Access onsite topsoil source depth: 0

Offsite topsoil source description:

Onsite topsoil removal process: If available

Access other construction information:

Access miscellaneous information:

Number of access turnouts:

Access turnout map:

Drainage Control

New road drainage crossing: CULVERT

Drainage Control comments: Watershed diversion every 200', if needed.

Road Drainage Control Structures (DCS) description: Watershed diversion every 200', if needed.

Road Drainage Control Structures (DCS) attachment:

Access Additional Attachments

Section 3 - Location of Existing Wells

Existing Wells Map? YES

Existing Well map Attachment:

PLATINUMMDP134_3FEDCOM45H_1_Mile_Existing_Well_Map_20251008101942.pdf

Section 4 - Location of Existing and/or Proposed Production Facilities

Submit or defer a Proposed Production Facilities plan? SUBMIT

Production Facilities description: In the event the well is found productive, the Platinum CTB would be utilized and the necessary production equipment will be installed at the well site.

Production Facilities map:

PLATINUMMDP134_3FEDCOM45H_Lease_Facility_20251008102012.pdf

Operator Name: OXY USA INCORPORATED**Well Name:** PLATINUM MDP1 34_3 FEDERAL COM**Well Number:** 45H

Section 5 - Location and Types of Water Supply

Water Source Table

Water source type: GW WELL**Water source use type:** SURFACE CASING

OTHER

Describe use type: DRILLINGINTERMEDIATE/PRODUCTION
CASING**Source latitude:****Source longitude:****Source datum:****City:****Water source permit type:** WATER WELL**Water source transport method:** TRUCKING

PIPELINE

Source land ownership: COMMERCIAL**Source transportation land ownership:** COMMERCIAL**Water source volume (barrels):** 2000**Source volume (acre-feet):** 0.25778619**Source volume (gal):** 84000

Water source and transportation

PLATINUMMDP134_3FEDCOM45H_WaterCaliche_20251008102226.pdf

PLATINUMMDP134_3FEDCOM45H_WtrSrcGRR_20251008102242.pdf

PLATINUMMDP134_3FEDCOM45H_WtrSrcMesq_20251008102248.pdf

Water source comments: This well will be drilled using a combination of water mud systems. It will be obtained from commercial water stations (Gregory Rockhouse, Mesquite) in the area and will be hauled to location by transport truck using existing and proposed roads.**New water well?** N

New Water Well Info

Well latitude:**Well Longitude:****Well datum:****Well target aquifer:****Est. depth to top of aquifer(ft):****Est thickness of aquifer:****Aquifer comments:****Aquifer documentation:****Well depth (ft):****Well casing type:**

Operator Name: OXY USA INCORPORATED**Well Name:** PLATINUM MDP1 34_3 FEDERAL COM**Well Number:** 45H**Well casing outside diameter (in.):****Well casing inside diameter (in.):****New water well casing?****Used casing source:****Drilling method:****Drill material:****Grout material:****Grout depth:****Casing length (ft.):****Casing top depth (ft.):****Well Production type:****Completion Method:****Water well additional information:****State appropriation permit:****Additional information attachment:**

Section 6 - Construction Materials

Using any construction materials: YES

Construction Materials description: Primary All caliche utilized for the drilling pad and proposed access road will be obtained from an existing BLM/State/Fee approved pit or from prevailing deposits found on the location. Will use BLM recommended extra caliche from other locations close by for roads, if available. Secondary The secondary way of obtaining caliche to build locations and roads will be by turning over the location. This means, caliche will be obtained from the actual well site. A caliche permit will be obtained from BLM prior to pushing up any caliche. 2400 cubic yards is max amount of caliche needed for pad and roads. Amount will vary for each pad. The procedure below has been approved by BLM personnel: a. The top 6 of topsoil is pushed off and stockpiled along the side of the location. b. An approximate 120 X 120 area is used within the proposed well site to remove caliche. c. Subsoil is removed and piled alongside the 120 X 120 within the pad site. d. When caliche is found, material will be stockpiled within the pad site to build the location and road. e. Then subsoil is pushed back in the hole and caliche is spread accordingly across entire location and road. f. Once the well is drilled the stockpiled top soil will be used for interim reclamation and spread along areas where caliche is picked up and the location size is reduced. Neither caliche nor subsoil will be stockpiled outside of the well pad. Topsoil will be stockpiled along the edge of the pad as depicted in the site plan included with this APD.

Construction Materials source location

PLATINUMMDP134_3FEDCOM45H_WaterCaliche_20251008102312.pdf

Section 7 - Methods for Handling

Waste type: DRILLING**Waste content description:** Water-Based Cuttings, Water-Based Mud, Oil-Based Cuttings, Oil-Based Mud, Produced Water**Amount of waste:** 1959 barrels**Waste disposal frequency :** Daily**Safe containment description:** Haul-Off Bins**Safe containmant attachment:****Waste disposal type:** HAUL TO COMMERCIAL

FACILITY

Disposal location ownership: COMMERCIAL**Disposal type description:**

Disposal location description: An approved facility that can process drill cuttings, drill fluids, flowback water, produced water, contaminated soils, and other non-hazardous wastes. Methods of Handling Waste Material: a. A closed loop system will be utilized consisting of above ground steel tanks and haul-off bins.

Operator Name: OXY USA INCORPORATED**Well Name:** PLATINUM MDP1 34_3 FEDERAL COM**Well Number:** 45H

Disposal of liquids, drilling fluids and cuttings will be disposed of at an approved facility. Solids-CRI, Liquids-Laguna b. All trash, junk and other waste material will be contained in trash cages or bins to prevent scattering. When the job is completed, all contents will be removed and disposed of in an approved sanitary landfill. c. The supplier, including broken sacks, will pickup slats remaining after completion of well. d. A Porto-john will be provided for the rig crews. This equipment will be properly maintained during the drilling and completion operations and will be removed when all operations are complete. e. Disposal of fluids to be transported will be by the following companies. TFH Ltd, Laguna SWD Facility

Reserve Pit

Reserve Pit being used? NO**Temporary disposal of produced water into reserve pit?** NO**Reserve pit length (ft.)** **Reserve pit width (ft.)****Reserve pit depth (ft.)** **Reserve pit volume (cu. yd.)****Is at least 50% of the reserve pit in cut?****Reserve pit liner****Reserve pit liner specifications and installation description**

Cuttings Area

Cuttings Area being used? NO**Are you storing cuttings on location?** Y**Description of cuttings location** A closed loop system will be utilized consisting of above ground steel tanks and haul-off bins. Disposal of liquids, drilling fluids and cuttings will be disposed of at an approved facility.**Cuttings area length (ft.)** **Cuttings area width (ft.)****Cuttings area depth (ft.)** **Cuttings area volume (cu. yd.)****Is at least 50% of the cuttings area in cut?****Cuttings area liner****Cuttings area liner specifications and installation description**

Section 8 - Ancillary

Are you requesting any Ancillary Facilities?: N**Ancillary Facilities****Comments:**

Operator Name: OXY USA INCORPORATED**Well Name:** PLATINUM MDP1 34_3 FEDERAL COM**Well Number:** 45H

Section 9 - Well Site

Well Site Layout Diagram:

PLATINUMMDP134_3FEDCOM45H_Site_Plan_20251008102400.pdf

PLATINUMMDP134_3FEDCOM45H_ClosedLoop_20251008102408.pdf

Comments:

Section 10 - Plans for Surface

Type of disturbance: New Surface Disturbance**Multiple Well Pad Name:** SNDDNS_23S31E**Multiple Well Pad Number:** 34_2**Recontouring**

PLATINUMMDP134_3FEDCOM45H_Site_Plan_20251008102424.pdf

PLATINUMMDP134_3FEDCOM45H_Cut_Fill_20251008102435.pdf

Drainage/Erosion control construction: Reclamation to be wind rowed as needed to control erosion.**Drainage/Erosion control reclamation:** Reclamation to be wind rowed as needed to control erosion.

Well pad proposed disturbance (acres): 9.99	Well pad interim reclamation (acres): 0.99	Well pad long term disturbance (acres): 9
Road proposed disturbance (acres): 0.97	Road interim reclamation (acres): 0.32	Road long term disturbance (acres): 0.65
Powerline proposed disturbance (acres): 0.74	Powerline interim reclamation (acres): 0.74	Powerline long term disturbance (acres): 0
Pipeline proposed disturbance (acres): 11.14	Pipeline interim reclamation (acres): 7.43	Pipeline long term disturbance (acres): 3.71
Other proposed disturbance (acres): 0	Other interim reclamation (acres): 0	Other long term disturbance (acres): 0

Total proposed disturbance:

22.840000000000003

Total interim reclamation: 9.48**Total long term disturbance:** 13.36**Disturbance Comments:**

Reconstruction method: If the well is deemed commercially productive, caliche from the areas of the pad site not required for operations will be reclaimed. The original topsoil will be returned to the area of the drill pad not necessary to operate the well. These unused areas of the drill pad will be contoured, as close as possible, to match the original topography, and the area will be seeded with an approved BLM mixture to re-establish vegetation. After concluding the drilling and/or completion operations, if the well is found non-commercial, the caliche will be removed from the pad and transported to the original caliche pit or used for other drilling locations. The road will be reclaimed as directed by the BLM. The original topsoil will again be returned to the pad and contoured, as close as possible, to the original topography and the area will be seeded with an approved BLM mixture to re-establish vegetation.

Topsoil redistribution: The original topsoil will be returned to the area of the drill pad not necessary to operate the well.**Soil treatment:** To be determined by BLM.**Existing Vegetation at the well pad:** To be determined by BLM at onsite.**Existing Vegetation at the well pad**

Operator Name: OXY USA INCORPORATED

Well Name: PLATINUM MDP1 34_3 FEDERAL COM

Well Number: 45H

Existing Vegetation Community at the road: To be determined by BLM at onsite.

Existing Vegetation Community at the road

Existing Vegetation Community at the pipeline: To be determined by BLM at onsite.

Existing Vegetation Community at the pipeline

Existing Vegetation Community at other disturbances: To be determined by BLM at onsite.

Existing Vegetation Community at other disturbances

Non native seed used? N

Non native seed description:

Seedling transplant description:

Will seedlings be transplanted for this project? N

Seedling transplant description attachment:

Will seed be harvested for use in site reclamation? N

Seed harvest description:

Seed harvest description attachment:

Seed

Seed Table

Seed Summary

Total pounds/Acre:

Seed Type	Pounds/Acre
------------------	--------------------

Seed reclamation

Operator Contact/Responsible Official

First Name: Michael

Last Name: Wilson

Phone: (575)631-6618

Email: michael_wilson@oxy.com

Seedbed prep:

Seed BMP:

Seed method:

Existing invasive species? N

Existing invasive species treatment description:

Operator Name: OXY USA INCORPORATED

Well Name: PLATINUM MDP1 34_3 FEDERAL COM

Well Number: 45H

Existing invasive species treatment

Weed treatment plan description: To be determined by BLM.

Weed treatment plan

Monitoring plan description: To be determined by BLM.

Monitoring plan

Success standards: To be determined by BLM.

Pit closure description: NA

Pit closure attachment:

Section 11 - Surface

Disturbance type: WELL PAD

Describe:

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Disturbance type: NEW ACCESS ROAD

Describe:

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

Operator Name: OXY USA INCORPORATED

Well Name: PLATINUM MDP1 34_3 FEDERAL COM

Well Number: 45H

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Disturbance type: PIPELINE

Describe:

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Operator Name: OXY USA INCORPORATED

Well Name: PLATINUM MDP1 34_3 FEDERAL COM

Well Number: 45H

Disturbance type: OTHER

Describe: ELECTRIC LINES

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Section 12 - Other

Right of Way needed? Y

Use APD as ROW? Y

ROW Type(s): 281001 ROW - ROADS,285003 ROW – POWER TRANS,288100 ROW – O&G Pipeline,288101 ROW – O&G Facility Sites,289001 ROW- O&G Well Pad

ROW

SUPO Additional Information: Permian Basin MOA : To be submitted after APD acceptance. GIS shapefiles available for BLM.

Use a previously conducted onsite? N

Previous Onsite information:

Other SUPO

PLATINUMMDP134_3FEDCOM45H_Staking_Sheet_20251008112159.pdf

PLATINUMMDP134_3FEDCOM45H_NGMP_WMP_20251008112207.pdf

**APD ID:** 10400107731**Submission Date:** 10/08/2025**Operator Name:** OXY USA INCORPORATED**Well Name:** PLATINUM MDP1 34_3 FEDERAL COM**Well Number:** 45H**Well Type:** OIL WELL**Well Work Type:** Drill

Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined

Would you like to utilize Lined Pit PWD options? N**Produced Water Disposal (PWD) Location:****PWD surface owner:****PWD disturbance (acres):****Other PWD Surface Owner Description:****Lined pit PWD on or off channel:****Lined pit PWD discharge volume (bbl/day):****Lined pit****Pit liner description:****Pit liner manufacturers****Precipitated solids disposal:****Describe precipitated solids disposal:****Precipitated solids disposal****Lined pit precipitated solids disposal schedule:****Lined pit precipitated solids disposal schedule****Lined pit reclamation description:****Lined pit reclamation****Leak detection system description:****Leak detection system**

Operator Name: OXY USA INCORPORATED

Well Name: PLATINUM MDP1 34_3 FEDERAL COM

Well Number: 45H

State

Unlined Produced Water Pit Estimated

Unlined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Unlined pit bond number:

Unlined pit bond amount:

Additional bond information

Section 4 -

Would you like to utilize Injection PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Other PWD Surface Owner Description:

Injection PWD discharge volume (bbl/day):

Injection well mineral owner:

Injection well type:

Injection well number:

Injection well name:

Assigned injection well API number?

Injection well API number:

Injection well new surface disturbance (acres):

Minerals protection information:

Mineral protection

Underground Injection Control (UIC) Permit?

UIC Permit

Section 5 - Surface

Would you like to utilize Surface Discharge PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Other PWD Surface Owner Description :

Surface discharge PWD discharge volume (bbl/day):

Surface Discharge NPDES Permit?

Surface Discharge NPDES Permit attachment:

Surface Discharge site facilities information:

Surface discharge site facilities map:

Operator Name: OXY USA INCORPORATED

Well Name: PLATINUM MDP1 34_3 FEDERAL COM

Well Number: 45H

Section 6 -

Would you like to utilize Other PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

PWD Surface Owner Description:

Other PWD discharge volume (bbl/day):

Other PWD type description:

Other PWD type

Have other regulatory requirements been met?

Other regulatory requirements



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Bond Info Data

11/04/2025

APD ID: 10400107731

Submission Date: 10/08/2025

Highlighted data
reflects the most
recent changes
[Show Final Text](#)

Operator Name: OXY USA INCORPORATED

Well Number: 45H

Well Name: PLATINUM MDP1 34_3 FEDERAL COM

Well Work Type: Drill

Well Type: OIL WELL

Bond

Federal/Indian APD: FED

BLM Bond number: NMB001508

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond attachment:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information attachment:

Form 3160-3
(October 2024)FORM APPROVED
OMB No. 1004-0220
Expires: October 31, 2027

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work:	<input checked="" type="checkbox"/> DRILL	<input type="checkbox"/> REENTER	7. If Unit or CA Agreement, Name and No.
1b. Type of Well:	<input checked="" type="checkbox"/> Oil Well	<input type="checkbox"/> Gas Well	8. Lease Name and Well No.
1c. Type of Completion:	<input type="checkbox"/> Hydraulic Fracturing	<input type="checkbox"/> Single Zone	<input checked="" type="checkbox"/> Multiple Zone
2. Name of Operator	OXY USA INCORPORATED		9. API Well No. 30-015-57559
3a. Address	3b. Phone No. (include area code)		10. Field and Pool, or Exploratory
5 GREENWAY PLAZA SUITE 110, HOUSTON, TX 77046	(713) 366-5716		WC-015 G-08 S233135D/WOLFCAMP
4. Location of Well (Report location clearly and in accordance with any State requirements. *)	11. Sec., T. R. M. or Blk. and Survey or Area		
At surface NENW / 1177 FNL / 2537 FWL / LAT 32.2649497 / LONG -103.7659982	SEC 34/T23S/R31E/NMP		
At proposed prod. zone SESE / 20 FSL / 1236 FEL / LAT 32.2392007 / LONG -103.7611413			
14. Distance in miles and direction from nearest town or post office*	12. County or Parish		13. State
	EDDY		NM
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any)	1177 feet	16. No of acres in lease	17. Spacing Unit dedicated to this well
			640.0
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.	30 feet	19. Proposed Depth	20. BLM/BIA Bond No. in file
		12602 feet / 22925 feet	FED: NMB001508
21. Elevations (Show whether DF, KDB, RT, GL, etc.)	22. Approximate date work will start*		23. Estimated duration
3437 feet	10/08/2026		45 days
24. Attachments			

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

1. Well plat certified by a registered surveyor.	4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
2. A Drilling Plan.	5. Operator certification.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).	6. Such other site specific information and/or plans as may be requested by the BLM.

25. Signature (Electronic Submission)	Name (Printed/Typed) SARA GUTHRIE / Ph: (713) 366-5716	Date 10/08/2025
--	---	--------------------

Title

Regulatory Advisor

Approved by (Signature) (Electronic Submission)	Name (Printed/Typed) CODY LAYTON / Ph: (575) 234-5959	Date 11/04/2025
--	--	--------------------

Title

Assistant Field Manager Lands & Minerals

Office

Carlsbad Field Office

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

APPROVED WITH CONDITIONS

*(Instructions on page 2)

Additional Operator Remarks

Location of Well

0. SHL: NENW / 1177 FNL / 2537 FWL / TWSP: 23S / RANGE: 31E / SECTION: 34 / LAT: 32.2649497 / LONG: -103.7659982 (TVD: 0 feet, MD: 0 feet)
PPP: NENE / 100 FNL / 1236 FEL / TWSP: 23S / RANGE: 31E / SECTION: 34 / LAT: 32.2679145 / LONG: -103.7611215 (TVD: 12602 feet, MD: 13001 feet)
BHL: SESE / 20 FSL / 1236 FEL / TWSP: 24S / RANGE: 31E / SECTION: 3 / LAT: 32.2392007 / LONG: -103.7611413 (TVD: 12602 feet, MD: 22925 feet)

BLM Point of Contact

Name: TENILLE C MOLINA

Title: Land Law Examiner

Phone: (575) 234-2224

Email: TCMOLINA@BLM.GOV

C-102

Submit Electronically
Via OCD PermittingState of New Mexico
Energy, Minerals, & Natural Resources Department
OIL CONSERVATION DIVISIONRevised July 9, 2024
PAGE 1 OF 2Submittal Initial Submittal
 Amended Report
Type: As Drilled

WELL LOCATION INFORMATION

API Number 30-015-57559	Pool Code 98236	Pool Name WC-015 G-08 S233135D; WOLFCAMP
Property Code 322245	Property Name PLATINUM MDP1 34_3 FED COM	Well Number 45H
OGRID No. 16696	Operator Name OXY USA INC.	Ground Level Elevation 3437'
Surface Owner: <input type="checkbox"/> State <input type="checkbox"/> Fee <input type="checkbox"/> Tribal <input checked="" type="checkbox"/> Federal	Mineral Owner: <input type="checkbox"/> State <input type="checkbox"/> Fee <input type="checkbox"/> Tribal <input checked="" type="checkbox"/> Federal	

Surface Location

UL C	Section 34	Township 23S	Range 31E	Lot	Ft. from N/S 1177' FNL	Ft. from E/W 2537' FWL	Latitude (NAD83) 32.26494974	Longitude (NAD83) -103.76599825	County EDDY
---------	---------------	-----------------	--------------	-----	---------------------------	---------------------------	---------------------------------	------------------------------------	----------------

Bottom Hole Location

UL P	Section 03	Township 24S	Range 31E	Lot	Ft. from N/S 20' FSL	Ft. from E/W 1236' FEL	Latitude (NAD83) 32.23920075	Longitude (NAD83) -103.76114135	County EDDY
---------	---------------	-----------------	--------------	-----	-------------------------	---------------------------	---------------------------------	------------------------------------	----------------

Dedicated Acres 320	Infill or Defining Well INFILL	Defining Well API PLATINUM 175H 30-015-45251	Overlapping Spacing Unit (Y/N) N	Consolidation Code C
Order Numbers: N/A			Well setbacks are under Common Ownership: <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	

Kick Off Point (KOP)

UL A	Section 34	Township 23S	Range 31E	Lot	Ft. from N/S 50' FNL	Ft. from E/W 1236' FEL	Latitude (NAD83) 32.26805199	Longitude (NAD83) -103.76112154	County EDDY
---------	---------------	-----------------	--------------	-----	-------------------------	---------------------------	---------------------------------	------------------------------------	----------------

First Take Point (FTP)

UL A	Section 34	Township 23S	Range 31E	Lot	Ft. from N/S 100' FNL	Ft. from E/W 1236' FEL	Latitude (NAD83) 32.26791455	Longitude (NAD83) -103.76112152	County EDDY
---------	---------------	-----------------	--------------	-----	--------------------------	---------------------------	---------------------------------	------------------------------------	----------------

Last Take Point (LTP)

UL P	Section 03	Township 24S	Range 31E	Lot	Ft. from N/S 100' FSL	Ft. from E/W 1236' FEL	Latitude (NAD83) 32.23942065	Longitude (NAD83) -103.76114101	County EDDY
---------	---------------	-----------------	--------------	-----	--------------------------	---------------------------	---------------------------------	------------------------------------	----------------

Unitized Area or Area of Uniform Interest N/A	Spacing Unit Type: <input checked="" type="checkbox"/> Horizontal <input type="checkbox"/> Vertical	Ground Floor Elevation 3437'
---	---	--

OPERATOR CERTIFICATIONS

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.

Sara Guthrie 10/2/2025
Signature Date

Sara Guthrie
Printed Name

sara_guthrie@oxy.com
Email Address

SURVEYOR CERTIFICATIONS

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.



Signature and Seal of Professional Surveyor

Certificate Number 21653	Date of Survey FEBRUARY 26, 2025
------------------------------------	--

ACREAGE DEDICATION PLATS

PLATINUM MDP1 34_3 FED COM 45H

PAGE 2 OF 2



SHL (NAD83)
X:716698.24' / Y:460585.29'
LAT:32.26494974 / LON:-103.76599825

SHL (NAD27)
X:675514.63' / Y:460526.02'
LAT:32.26482660 / LON:-103.76551336

KOP (NAD83)
X:718199.61' / Y:461721.86'
LAT:32.26805199 / LON:-103.76112154

KOP (NAD27)
X:677016.03' / Y:461662.57'
LAT:32.26792886 / LON:-103.76063665

FTP (NAD83)
X:718199.89' / Y:461671.87'
LAT:32.26791455 / LON:-103.76112152

FTP (NAD27)
X:677016.30' / Y:461612.57'
LAT:32.26779142 / LON:-103.76063663

PPP-1 (NAD83)
X:718224.50' / Y:456488.82'
LAT:32.25366727 / LON:-103.76113128

PPP-1 (NAD27)
X:677040.76' / Y:456429.66'
LAT:32.25354405 / LON:-103.76064697

LTP (NAD83)
X:718249.11' / Y:451306.02'
LAT:32.23942065 / LON:-103.76114101

LTP (NAD27)
X:677065.19' / Y:451246.99'
LAT:32.23929732 / LON:-103.76065737

BHL (NAD83)
X:718249.43' / Y:451226.02'
LAT:32.23920075 / LON:-103.76114135

BHL (NAD27)
X:677065.51' / Y:451166.99'
LAT:32.23907741 / LON:-103.76065772

98236- WC-015 G-08
S233135D; Wolfcamp
(Section 34)

Sec. 34
NMNM 043744

KOP
1137' NORTH OF SHL
1501' EAST OF SHL
FNL 50'
FEL 1236'

FTP
1087' NORTH OF SHL
1502' EAST OF SHL
FNL 100'
FEL 1236'

T23S R31E
T24S R31E

98220- Purple Sage,
Wolfcamp (GAS)
(Section 3)

Sec. 03
NMNM 055142

PPP-1
4096' SOUTH OF SHL
1526' EAST OF SHL
FSL 0'
FEL 1240'

LTP
9279' SOUTH OF SHL
1551' EAST OF SHL
FSL 100'
FEL 1236'

BHL
9359' SOUTH OF SHL
1551' EAST OF SHL
FSL 20'
FEL 1236'

CORNER COORDINATES
NAD 83, SPCS NM EAST
A - X: 719435.32' / Y:461779.46'
B - X: 719449.83' / Y:459137.41'
C - X: 719464.12' / Y:456495.77'
D - X: 719485.49' / Y:451213.94'
E - X: 716843.83' / Y:451197.02'
F - X: 716824.24' / Y:456480.96'
G - X: 716794.61' / Y:461763.23'

CORNER COORDINATES
NAD 27, SPCS NM EAST
A - X: 678251.73' / Y:461720.16'
B - X: 678266.17' / Y:459078.18'
C - X: 678280.38' / Y:456436.62'
D - X: 678301.56' / Y:451154.91'
E - X: 675659.90' / Y:451137.98'
F - X: 675640.50' / Y:456421.80'
G - X: 675611.03' / Y:461703.93'

*FTP TO LTP LINE BEARINGS

LINE	BEARING
L1	S 00°16'19" E ~ 10365.96'

*FTP TO LTP LEASE DISTANCES

TRACT	DISTANCE
NMNM 043744	5183.11'
NMNM 080645	5182.85'
TOTAL	10365.96'



Drill Line Events

Section Corners

Drill Line

Dimension Lines

Federal Leases

HSU

HSU Corners

JOB No. OXY_0033_PT01_14721

REV 1 JMW 2/25/2025

All bearings and coordinates refer to New Mexico State Plane Coordinate System, East Zone, U.S. Survey Feet.

Distances/areas relative to NAD 83 grid measurements. Combined Scale Factor: 0.99978064 and a Convergence Angle: 0.303074914°

C-102

Submit Electronically
Via OCD PermittingState of New Mexico
Energy, Minerals, & Natural Resources Department
OIL CONSERVATION DIVISIONRevised July 9, 2024
PAGE 1 OF 2Submittal Initial Submittal
 Amended Report
Type: As Drilled

WELL LOCATION INFORMATION

API Number 30-015	Pool Code 98220	Pool Name PURPLE SAGE, WOLFCAMP (GAS)
Property Code	Property Name PLATINUM MDP1 34_3 FED COM	Well Number 45H
OGRID No. 16696	Operator Name OXY USA INC.	Ground Level Elevation 3437'
Surface Owner: <input type="checkbox"/> State <input type="checkbox"/> Fee <input type="checkbox"/> Tribal <input checked="" type="checkbox"/> Federal		Mineral Owner: <input type="checkbox"/> State <input type="checkbox"/> Fee <input type="checkbox"/> Tribal <input checked="" type="checkbox"/> Federal

Surface Location

UL C	Section 34	Township 23S	Range 31E	Lot	Ft. from N/S 1177' FNL	Ft. from E/W 2537' FWL	Latitude (NAD83) 32.26494974	Longitude (NAD83) -103.76599825	County EDDY
---------	---------------	-----------------	--------------	-----	---------------------------	---------------------------	---------------------------------	------------------------------------	----------------

Bottom Hole Location

UL P	Section 03	Township 24S	Range 31E	Lot	Ft. from N/S 20' FSL	Ft. from E/W 1236' FEL	Latitude (NAD83) 32.23920075	Longitude (NAD83) -103.76114135	County EDDY
---------	---------------	-----------------	--------------	-----	-------------------------	---------------------------	---------------------------------	------------------------------------	----------------

Dedicated Acres 320.11	Infill or Defining Well INFILL	Defining Well API PLATINUM 175H 30-015-45251	Overlapping Spacing Unit (Y/N) N	Consolidation Code C
Order Numbers: N/A			Well setbacks are under Common Ownership: <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	

Kick Off Point (KOP)

UL A	Section 34	Township 23S	Range 31E	Lot	Ft. from N/S 50' FNL	Ft. from E/W 1236' FEL	Latitude (NAD83) 32.26805199	Longitude (NAD83) -103.76112154	County EDDY
---------	---------------	-----------------	--------------	-----	-------------------------	---------------------------	---------------------------------	------------------------------------	----------------

First Take Point (FTP)

UL A	Section 34	Township 23S	Range 31E	Lot	Ft. from N/S 100' FNL	Ft. from E/W 1236' FEL	Latitude (NAD83) 32.26791455	Longitude (NAD83) -103.76112152	County EDDY
---------	---------------	-----------------	--------------	-----	--------------------------	---------------------------	---------------------------------	------------------------------------	----------------

Last Take Point (LTP)

UL P	Section 03	Township 24S	Range 31E	Lot	Ft. from N/S 100' FSL	Ft. from E/W 1236' FEL	Latitude (NAD83) 32.23942065	Longitude (NAD83) -103.76114101	County EDDY
---------	---------------	-----------------	--------------	-----	--------------------------	---------------------------	---------------------------------	------------------------------------	----------------

Unitized Area or Area of Uniform Interest N/A	Spacing Unit Type: <input checked="" type="checkbox"/> Horizontal <input type="checkbox"/> Vertical	Ground Floor Elevation 3437'
---	---	--

OPERATOR CERTIFICATIONS

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.

Sara Guthrie 10/2/2025
Signature Date

Sara Guthrie
Printed Name

sara_guthrie@oxy.com
Email Address

SURVEYOR CERTIFICATIONS

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.



Signature and Seal of Professional Surveyor

Certificate Number 21653 Date of Survey FEBRUARY 26, 2025

ACREAGE DEDICATION PLATS

PLATINUM MDP1 34_3 FED COM 45H

PAGE 2 OF 2



SHL (NAD83)
X:716698.24' / Y:460585.29'
LAT:32.26494974 / LON:-103.76599825

SHL (NAD27)
X:675514.63' / Y:460526.02'
LAT:32.26482660 / LON:-103.76551336

KOP (NAD83)
X:718199.61' / Y:461721.86'
LAT:32.26805199 / LON:-103.76112154

KOP (NAD27)
X:677016.03' / Y:461662.57'
LAT:32.26792886 / LON:-103.76063665

FTP (NAD83)
X:718199.89' / Y:461671.87'
LAT:32.26791455 / LON:-103.76112152

FTP (NAD27)
X:677016.30' / Y:461612.57'
LAT:32.26779142 / LON:-103.76063663

PPP-1 (NAD83)
X:718224.50' / Y:456488.82'
LAT:32.25366727 / LON:-103.76113128

PPP-1 (NAD27)
X:677040.76' / Y:456429.66'
LAT:32.25354405 / LON:-103.76064697

LTP (NAD83)
X:718249.11' / Y:451306.02'
LAT:32.23942065 / LON:-103.76114101

LTP (NAD27)
X:677065.19' / Y:451246.99'
LAT:32.23929732 / LON:-103.76065737

BHL (NAD83)
X:718249.43' / Y:451226.02'
LAT:32.23920075 / LON:-103.76114135

BHL (NAD27)
X:677065.51' / Y:451166.99'
LAT:32.23907741 / LON:-103.76065772

PLATINUM MDP1 34_3 FED COM 45H

KOP
1137' NORTH OF SHL
1501' EAST OF SHL
FNL 50'
FEL 1236'

FTP
1087' NORTH OF SHL
1502' EAST OF SHL
FNL 100'
FEL 1236'

Sec. 34
NMNM 043744

98236- WC-015 G-08
S233135D; Wolfcamp
(Section 34)

98220- Purple Sage,
Wolfcamp (GAS)
(Section 3)

Sec. 03
NMNM 055142

G 84'
84'

SHL
FNL 1177'
FWL 2537'

FTP
1087' NORTH OF SHL
1502' EAST OF SHL
FNL 100'
FEL 1236'

LOT 4 LOT 3 LOT 2 LOT 1

T23S R31E
T24S R31E

F L1 C

PPP-1
4096' SOUTH OF SHL
1526' EAST OF SHL
FSL 0'
FEL 1240'

Sec. 03
NMNM 080645

85'
85'

LTP
9279' SOUTH OF SHL
1551' EAST OF SHL
FSL 100'
FEL 1236'

BHL
9359' SOUTH OF SHL
1551' EAST OF SHL
FSL 20'
FEL 1236'

CORNER COORDINATES
NAD 83, SPCS NM EAST
A - X: 719435.32' / Y:461779.46'
B - X: 719449.83' / Y:459137.41'
C - X: 719464.12' / Y:456495.77'
D - X: 719485.49' / Y:451213.94'
E - X: 716843.83' / Y:451197.02'
F - X: 716824.24' / Y:456480.96'
G - X: 716794.61' / Y:461763.23'

CORNER COORDINATES
NAD 27, SPCS NM EAST
A - X: 678251.73' / Y:461720.16'
B - X: 678266.17' / Y:459078.18'
C - X: 678280.38' / Y:456436.62'
D - X: 678301.56' / Y:451154.91'
E - X: 675659.90' / Y:451137.98'
F - X: 675640.50' / Y:456421.80'
G - X: 675611.03' / Y:461703.93'

*FTP TO LTP LINE BEARINGS

LINE	BEARING
L1	S 00°16'19" E ~ 10365.96'

*FTP TO LTP LEASE DISTANCES

TRACT	DISTANCE
NMNM 043744	5183.11'
NMNM 080645	5182.85'
TOTAL	10365.96'



Drill Line Events

Section Corners

Drill Line

Dimension Lines

Federal Leases

HSU

HSU Corners

JOB No. OXY_0033_PT01_14721

REV 1 JMW 2/25/2025

All bearings and coordinates refer to New Mexico State Plane Coordinate System, East Zone, U.S. Survey Feet.

Distances/areas relative to NAD 83 grid measurements. Combined Scale Factor: 0.99978064 and a Convergence Angle: 0.303074914°

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description Effective May 25, 2021

I. Operator: OXY USA INC. **OGRID:** 16696 **Date:** 0 6 / 2 3 / 2 5

II. Type: Original Amendment due to 19.15.27.9.D(6)(a) NMAC 19.15.27.9.D(6)(b) NMAC Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
SEE ATTACHED						

IV. Central Delivery Point Name: PLATINUM CTB [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
SEE ATTACHED						

VI. Separation Equipment: Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan
EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system will will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator does does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: *Sara Guthrie*

Printed Name: Sara Guthrie

Title: Regulatory Advisor

E-mail Address: sara_guthrie@oxy.com

Date: 6/23/2025

Phone: 713-497-2851

OIL CONSERVATION DIVISION

(Only applicable when submitted as a standalone form)

Approved By:

Title:

Approval Date:

Conditions of Approval:

III. Well(s)

Well Name	API	WELL LOCATION (ULSTR)	Footages	ANTICIPATED OIL BBL/D	ANTICIPATED GAS MCF/D	ANTICIPATED PROD WATER BBL/D
PLATINUM MDP1 34_3 FED COM 11H	Pending	C-34-23S-31E	124' FNL 1712' FWL	1600	2275	3375
PLATINUM MDP1 34_3 FED COM 12H	Pending	C-34-23S-31E	125' FNL 1772' FWL	2330	9500	5750
PLATINUM MDP1 34_3 FED COM 21H	Pending	C-34-23S-31E	124' FNL 1682' FWL	2330	9500	5750
PLATINUM MDP1 34_3 FED COM 22H	Pending	C-34-23S-31E	125' FNL 1742' FWL	2330	9500	5750
PLATINUM MDP1 34_3 FED COM 41H	Pending	C-34-23S-31E	125' FNL 1832' FWL	2240	11300	10000
PLATINUM MDP1 34_3 FED COM 42H	Pending	C-34-23S-31E	250' FNL 1831' FWL	2240	11300	10000
PLATINUM MDP1 34_3 FED COM 43H	Pending	C-34-23S-31E	1177' FNL 2477' FWL	2240	11300	10000
PLATINUM MDP1 34_3 FED COM 44H	Pending	A-34-23S-31E	111' FNL 863' FEL	2240	11300	10000
PLATINUM MDP1 34_3 FED COM 45H	Pending	C-34-23S-31E	1177' FNL 2537' FWL	2240	11300	10000
PLATINUM MDP1 34_3 FED COM 51H	Pending	C-34-23S-31E	250' FNL 1801' FWL	2240	11300	10000
PLATINUM MDP1 34_3 FED COM 52H	Pending	C-34-23S-31E	125' FNL 1862' FWL	2240	11300	10000
PLATINUM MDP1 34_3 FED COM 53H	Pending	C-34-23S-31E	250' FNL 1861' FWL	2240	11300	10000
PLATINUM MDP1 34_3 FED COM 54H	Pending	C-34-23S-31E	1177' FNL 2507' FWL	2240	11300	10000
PLATINUM MDP1 34_3 FED COM 55H	Pending	A-34-23S-31E	111' FNL 828' FEL	2240	11300	10000
PLATINUM MDP1 34_3 FED COM 71H	Pending	C-34-23S-31E	249' FNL 1681' FWL	2160	3600	3350
PLATINUM MDP1 34_3 FED COM 72H	Pending	C-34-23S-31E	249' FNL 1711' FWL	2160	3600	3350
PLATINUM MDP1 34_3 FED COM 73H	Pending	C-34-23S-31E	249' FNL 1741' FWL	2160	3600	3350
PLATINUM MDP1 34_3 FED COM 74H	Pending	H-34-23S-31E	1330' FNL 927' FEL	2160	3600	3350
PLATINUM MDP1 34_3 FED COM 75H	Pending	H-34-23S-31E	1330' FNL 897' FEL	2160	3600	3350
PLATINUM MDP1 34_3 FED COM 76H	Pending	H-34-23S-31E	1330' FNL 867' FEL	2160	3600	3350

V. Anticipated Schedule

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
PLATINUM MDP1 34_3 FED COM 11H	Pending	TBD	TBD	TBD	TBD	TBD
PLATINUM MDP1 34_3 FED COM 12H	Pending	TBD	TBD	TBD	TBD	TBD
PLATINUM MDP1 34_3 FED COM 21H	Pending	TBD	TBD	TBD	TBD	TBD
PLATINUM MDP1 34_3 FED COM 22H	Pending	TBD	TBD	TBD	TBD	TBD
PLATINUM MDP1 34_3 FED COM 41H	Pending	TBD	TBD	TBD	TBD	TBD
PLATINUM MDP1 34_3 FED COM 42H	Pending	TBD	TBD	TBD	TBD	TBD
PLATINUM MDP1 34_3 FED COM 43H	Pending	TBD	TBD	TBD	TBD	TBD
PLATINUM MDP1 34_3 FED COM 44H	Pending	TBD	TBD	TBD	TBD	TBD
PLATINUM MDP1 34_3 FED COM 45H	Pending	TBD	TBD	TBD	TBD	TBD
PLATINUM MDP1 34_3 FED COM 51H	Pending	TBD	TBD	TBD	TBD	TBD
PLATINUM MDP1 34_3 FED COM 52H	Pending	TBD	TBD	TBD	TBD	TBD
PLATINUM MDP1 34_3 FED COM 53H	Pending	TBD	TBD	TBD	TBD	TBD
PLATINUM MDP1 34_3 FED COM 54H	Pending	TBD	TBD	TBD	TBD	TBD
PLATINUM MDP1 34_3 FED COM 55H	Pending	TBD	TBD	TBD	TBD	TBD
PLATINUM MDP1 34_3 FED COM 71H	Pending	TBD	TBD	TBD	TBD	TBD
PLATINUM MDP1 34_3 FED COM 72H	Pending	TBD	TBD	TBD	TBD	TBD
PLATINUM MDP1 34_3 FED COM 73H	Pending	TBD	TBD	TBD	TBD	TBD
PLATINUM MDP1 34_3 FED COM 74H	Pending	TBD	TBD	TBD	TBD	TBD
PLATINUM MDP1 34_3 FED COM 75H	Pending	TBD	TBD	TBD	TBD	TBD
PLATINUM MDP1 34_3 FED COM 76H	Pending	TBD	TBD	TBD	TBD	TBD

Central Delivery Point Name : PLATINUM CTB

Part VI. Separation Equipment

Operator will size the flowback separator to handle 11,000 Bbls of fluid and over 10MMscfd. Each separator is rated to 1440psig, and pressure control valves and

automated communication will cause the wells to shut in in the event of an upset at the facility, therefore no gas will be flared on pad during an upset. Current Oxy practices avoid use of flare or venting on pad, therefore if there is an upset or emergency condition at the facility, the wells will immediately shut down, and reassume production once the condition has cleared.

VII. Operational Practices

Gathering System and Pipeline Notification

Well(s) will be connected to a production facility after flowback operations are complete, where a gas transporter system is in place. The gas produced from production facility is dedicated to Enterprise Field Services, LLC ("Enterprise") and is connected to Enterprise low/high pressure gathering system located in Eddy County, New Mexico. OXY USA INC. ("OXY") provides (periodically) to Enterprise a drilling, completion and estimated first production date for wells that are scheduled to be drilled in the foreseeable future. In addition, OXY and Enterprise have periodic conference calls to discuss changes to drilling and completion schedules. Gas from these wells will be processed at Enterprise's Processing Plant located in Sec. 36, Twn. 24S, Rng. 30E, Eddy County, New Mexico. The actual flow of the gas will be based on compression operating parameters and gathering system pressures.

Flowback Strategy

After the fracture treatment/completion operations, well(s) will be produced to temporary production tanks and gas will be flared or vented. During flowback, the fluids and sand content will be monitored. When the produced fluids contain minimal sand, the wells will be turned to production facilities. Gas sales should start as soon as the wells start flowing through the production facilities, unless there are operational issues on Enterprise system at that time. Based on current information, it is OXY's belief the system can take this gas upon completion of the well(s).

Safety requirements during cleanout operations from the use of underbalanced air cleanout systems may necessitate that sand and non-pipeline quality gas be vented and/or flared rather than sold on a temporary basis.

VIII. Best Management Practices

Alternatives to Reduce Flaring

Below are alternatives considered from a conceptual standpoint to reduce the amount of gas flared.

Power Generation – On lease

Only a portion of gas is consumed operating the generator, remainder of gas will be flared


Compressed Natural Gas – On lease

Gas flared would be minimal, but might be uneconomical to operate when gas volume declines


NGL Removal – On lease

Plants are expensive, residue gas is still flared, and uneconomical to operate when gas volume declines

SOUTH BONESPRING		
	Oil (bbl/d)	Gas (mcf/d)
Jan-2024	1,250	5,135
Feb-2024	1,184	6,041
Mar-2024	933	5,849
Apr-2024	670	5,349
May-2024	517	4,893
Jun-2024	421	4,401
Jul-2024	355	3,994
Aug-2024	306	3,652
Sep-2024	270	3,368
Oct-2024	240	3,125
Nov-2024	217	2,915
Dec-2024	197	2,731
Jan-2025	181	2,566
Feb-2025	167	2,426
Mar-2025	155	2,301
Apr-2025	145	2,184
May-2025	136	2,078
Jun-2025	127	1,982
Jul-2025	120	1,894
Aug-2025	114	1,812
Sep-2025	108	1,739
Oct-2025	102	1,670
Nov-2025	98	1,607
Dec-2025	93	1,549
Jan-2026	89	1,493
Feb-2026	85	1,444
Mar-2026	82	1,398
Apr-2026	79	1,353
May-2026	76	1,311
Jun-2026	73	1,271
Jul-2026	71	1,234
Aug-2026	68	1,198
Sep-2026	66	1,165
Oct-2026	64	1,133
Nov-2026	62	1,104
Dec-2026	60	1,075

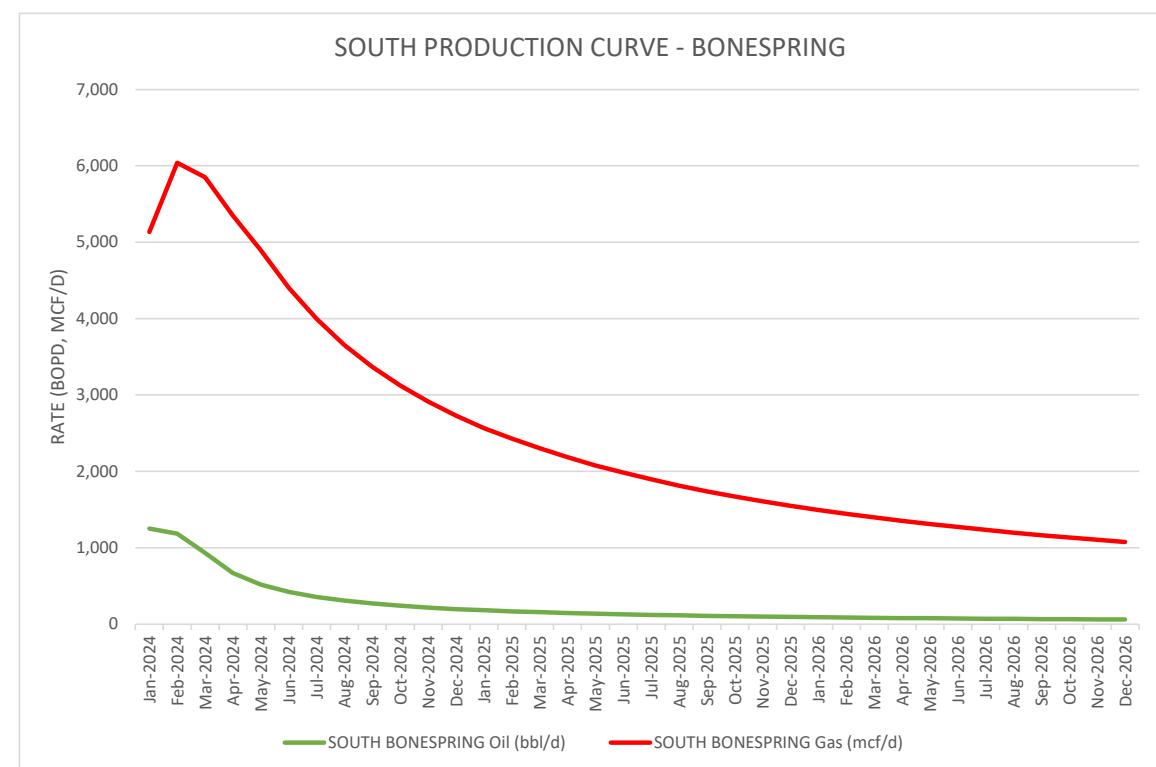

SOUTH WOLFCAMP		
	Oil (bbl/d)	Gas (mcf/d)
Jan-2024	1,178	8,636
Feb-2024	995	8,951
Mar-2024	706	7,614
Apr-2024	544	6,588
May-2024	445	5,841
Jun-2024	377	5,261
Jul-2024	328	4,794
Aug-2024	291	4,402
Sep-2024	261	4,076
Oct-2024	238	3,797
Nov-2024	218	3,555
Dec-2024	201	3,343
Jan-2025	187	3,152
Feb-2025	175	2,990
Mar-2025	165	2,844
Apr-2025	156	2,708
May-2025	148	2,584
Jun-2025	140	2,471
Jul-2025	133	2,368
Aug-2025	127	2,272
Sep-2025	122	2,184
Oct-2025	117	2,104
Nov-2025	112	2,029
Dec-2025	108	1,959
Jan-2026	104	1,893
Feb-2026	101	1,834
Mar-2026	97	1,778
Apr-2026	94	1,725
May-2026	91	1,674
Jun-2026	89	1,626
Jul-2026	86	1,581
Aug-2026	84	1,538
Sep-2026	81	1,498
Oct-2026	79	1,460
Nov-2026	77	1,423
Dec-2026	75	1,389

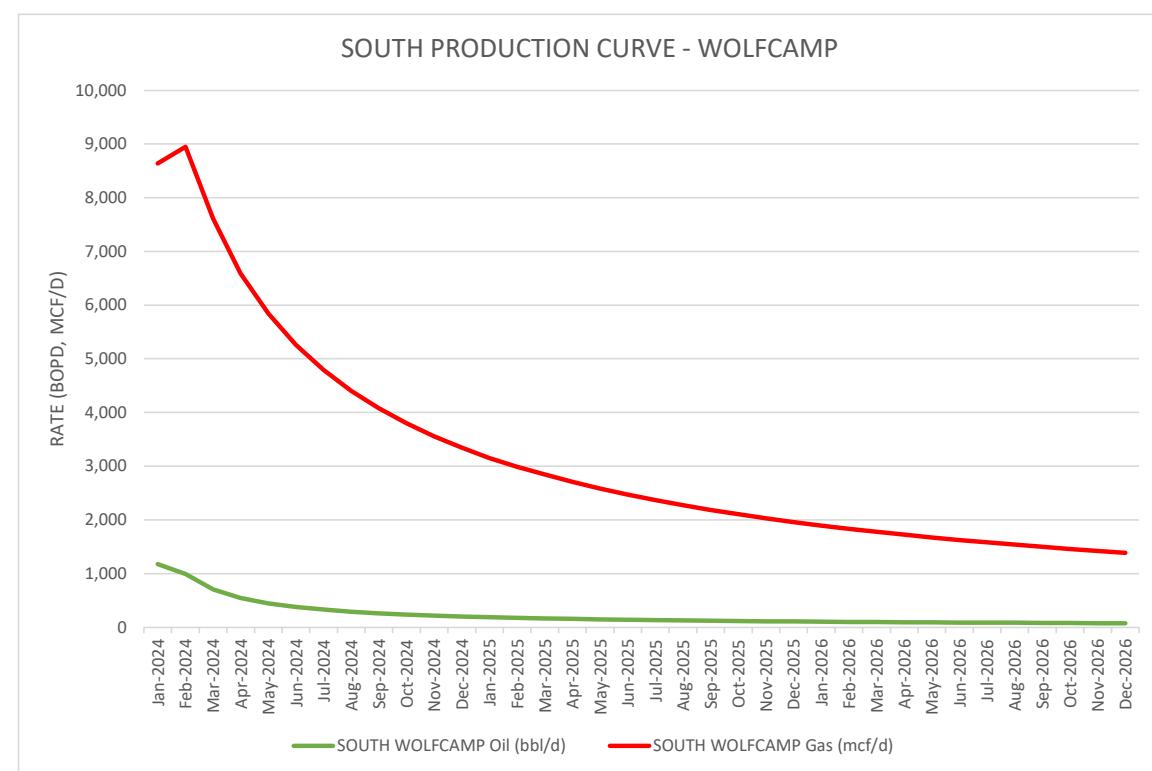

Oxy USA Inc. - PLATINUM MDP1 34_3 FED COM 45H

Drill Plan

1. Geologic Formations

TVD of Target (ft):	12325	Pilot Hole Depth (ft):	
Total Measured Depth (ft):	22828	Deepest Expected Fresh Water (ft):	647

Delaware Basin

Formation	MD-RKB (ft)	TVD-RKB (ft)	Expected Fluids
Rustler	647	647	
Salado	969	969	Salt
Castile	2880	2880	Salt
Delaware	4352	4352	Oil/Gas/Brine
Bell Canyon	4380	4380	Oil/Gas/Brine
Cherry Canyon	5283	5282	Oil/Gas/Brine
Brushy Canyon	6661	6627	Losses
Bone Spring	8305	8207	Oil/Gas
Bone Spring 1st	9403	9263	Oil/Gas
Bone Spring 2nd	10005	9841	Oil/Gas
Bone Spring 3rd	11333	11118	Oil/Gas
Wolfcamp	11796	11563	Oil/Gas
Penn			Oil/Gas
Strawn			Oil/Gas

*H2S, water flows, loss of circulation, abnormal pressures, etc.

2. Casing Program

Section	Hole Size (in)	MD		TVD		Csg. OD (in)	Csg Wt. (ppf)	Grade	Conn.
		From (ft)	To (ft)	From (ft)	To (ft)				
Surface	17.5	0	707	0	707	13.375	54.5	J-55	BTC
Salt	12.25	0	4352	0	4352	10.75	45.5	L-80 HC	BTC-SC
Intermediate	9.875	0	12253	0	12000	7.625	26.4	L-80 HC	BTC
Production	6.75	0	22828	0	12325	5.5	20	P-110	Sprint-SF

All casing strings will be tested in accordance with 43 CFR part 3170 Subpart 3172

All Casing SF Values will meet or exceed those below			
SF Collapse	SF Burst	Body SF Tension	Joint SF Tension
1.00	1.100	1.4	1.4

	Y or N
Is casing new? If used, attach certification as required in 43 CFR 3160	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	Y
Does the above casing design meet or exceed BLM's minimum standards?	Y
If not provide justification (loading assumptions, casing design criteria).	
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	Y
If yes, are the first three strings cemented to surface?	Y
Is 2 nd string set 100' to 600' below the base of salt?	Y
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

3. Cementing Program

Section	Stage	Slurry:	Sacks	Yield (ft ³ /ft)	Density (lb/gal)	Excess:	TOC	Placement	Description
Surface	1	Surface - Tail	739	1.33	14.8	100%	-	Circulate	Class C+Accel.
Int.1	1	Intermediate - Tail	85	1.33	14.8	20%	3,852	Circulate	Class C+Accel.
Int.1	1	Intermediate - Lead	610	1.73	12.9	50%	-	Circulate	Class Pozz+Ret.
Int. 2	1	Intermediate 1S - Tail	717	1.68	13.2	5%	6,911	Circulate	Class C+Ret., Disper.
Int. 2	2	Intermediate 2S - Tail BH	467	1.71	13.3	25%	3,852	Bradenhead Post-Frac	Class C+Accel.
Prod.	1	Production - Tail	627	1.84	13.3	25%	11,753	Circulate	Class C+Ret.

Offline Cementing Request

Oxy requests a variance to cement the 9.625" and/or 7.625" intermediate casing strings offline in accordance to the approved variance, EC Tran 461365. Please see Offline Cementing Variance attachment for further details.

Bradenhead CBL Request

Oxy requests permission to adjust the CBL requirement after bradenhead cement jobs, on 7-5/8" intermediate casings, as per the agreement reached in the OXY/BLM meeting on September 5, 2019. Please see Bradenhead CBL Variance attachment for further details.

4. Pressure Control Equipment

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Type	✓	Tested to:	TVD Depth (ft) per Section:	
12.25" Hole	13-5/8"	5M	Annular	✓	70% of working pressure	4352	
		5M	Blind Ram	✓	250 psi / 5000 psi		
			Pipe Ram				
			Double Ram	✓			
		Other*					
9.875" Hole	13-5/8"	5M	Annular	✓	70% of working pressure	12000	
		5M	Blind Ram	✓	250 psi / 5000 psi		
			Pipe Ram				
			Double Ram	✓			
		Other*					
6.75" Hole	13-5/8"	5M	Annular	✓	100% of working pressure	12325	
		10M	Blind Ram	✓	250 psi / 10000 psi		
			Pipe Ram				
			Double Ram	✓			
		Other*					

*Specify if additional ram is utilized

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per 43 CFR part 3170 Subpart 3172 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold.

5M Annular BOP Request

Per BLM's Memorandum No. NM-2017-008: *Decision and Rationale for a Variance Allowing the Use of a 5M Annular Preventer with a 10M BOP Stack*, Oxy requests to employ a 5M annular with a 10M BOPE stack in the pilot and lateral sections of the well and will ensure that two barriers to flow are maintained at all times. Please see Annular BOP Variance attachment for further details.

	Formation integrity test will be performed per 43 CFR part 3170 Subpart 3172.
	On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with 43 CFR part 3170 Subpart 3172.
	A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.
<input checked="" type="checkbox"/>	Are anchors required by manufacturer?

BOP Break Testing Request

Oxy requests permission to adjust the BOP break testing requirements as per the agreement reached in the OXY/BLM meeting on September 5, 2019. Please see BOP Break Testing Variance attachment for further details.

Oxy will use Cameron ADAPT wellhead system that uses an OEC top flange connection. This connection has been fully vetted and verified by API to Spec 6A and carries an API monogram.

5. Mud Program

Section	Depth		Depth - TVD		Type	Weight (ppg)	Viscosity	Water Loss
	From (ft)	To (ft)	From (ft)	To (ft)				
Surface	0	707	0	707	Water-Based Mud	8.6 - 8.8	40-60	N/C
Intermediate 1	707	4352	707	4352	Saturated Brine-Based or Oil-Based Mud	8.0 - 10.0	35-45	N/C
Intermediate 2	4352	12253	4352	12000	Water-Based or Oil-Based Mud	8.0 - 10.0	38-50	N/C
Production	12253	22828	12000	12325	Water-Based or Oil-Based Mud	9.5 - 13.5	38-50	N/C

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times. The following is a general list of products: Barite, Bentonite, Gypsum, Lime, Soda Ash, Caustic Soda, Nut Plug, Cedar Fiber, Cotton Seed Hulls, Drilling Paper, Salt Water Clay, CACL2. Oxy will use a closed mud system.

What will be used to monitor the loss or gain of fluid?	PVT/MD Totco/Visual Monitoring
---	--------------------------------

6. Logging and Testing Procedures

Logging, Coring and Testing.

Yes	Will run GR from TD to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
No	Logs are planned based on well control or offset log information.
No	Drill stem test? If yes, explain
No	Coring? If yes, explain

Additional logs planned Interval

No	Resistivity	
No	Density	
Yes	CBL	Production string
Yes	Mud log	Bone Spring – TD
No	PEX	

7. Drilling Conditions

Condition	Specify what type and where?
BH Pressure at deepest TVD	8653 psi
Abnormal Temperature	No
BH Temperature at deepest TVD	179°F

Pump high viscosity sweeps as needed for hole cleaning. The mud system will be monitored visually/manually as well as with an electronic PVT. The necessary mud products for additional weight and fluid loss control will be on location at all times. Appropriately weighted mud will be used to isolate potential gas, oil, and water zones until such time as casing can be cemented into place for zonal

Hydrogen Sulfide (H2S) monitors will be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of 43 CFR part 3170 Subpart 3172. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.

N	H2S is present
Y	H2S Plan attached

8. Other facets of operation

Yes/No
Will the well be drilled with a walking/skidding operation? If yes, describe. We plan to drill the 3 well pad in batch by section: all surface sections, intermediate sections and production sections. The wellhead will be secured with a night cap whenever the rig is not over the well.
Will more than one drilling rig be used for drilling operations? If yes, describe. Oxy requests the option to contract a Surface Rig to drill, set surface casing, and cement for this well. If the timing between rigs is such that Oxy would not be able to preset surface, the Primary Rig will MIRU and drill the well in its entirety per the APD. Please see the attached document for information on the spudder rig.

Total Estimated Cuttings Volume: 1959 bbls

OXY USA Inc
APD ATTACHMENT: SPUDDER RIG DATA

OPERATOR NAME / NUMBER: OXY USA Inc

1. SUMMARY OF REQUEST:


Oxy USA respectfully requests approval for the following operations for the surface hole in the drill plan:

1. Utilize a spudder rig to pre-set surface casing for time and cost savings.

2. Description of Operations


1. Spudder rig will move in to drill the surface hole and pre-set surface casing on the well.
 - a. After drilling the surface hole section, the spudder rig will run casing and cement following all of the applicable rules and regulations (43 CFR part 3170 Subpart 3172, all COAs and NMOCD regulations).
 - b. The spudder rig will utilize fresh water-based mud to drill the surface hole to TD. Solids control will be handled entirely on a closed loop basis. No earth pits will be used.
2. The wellhead will be installed and tested as soon as the surface casing is cut off and the WOC time has been reached.
3. A blind flange at the same pressure rating as the wellhead will be installed to seal the wellbore. Pressure will be monitored with needle valves installed on two wingvalves.
 - a. A means for intervention will be maintained while the drilling rig is not over the well.
4. Spudder rig operations are expected to take 2-3 days per well on the pad.
5. The BLM will be contacted and notified 24 hours prior to commencing spudder rig operations.
6. Drilling operations will begin with a larger rig and a BOP stack equal to or greater than the pressure rating that was permitted will be nippled up and tested on the wellhead before drilling operations resume on each well.
 - a. The larger rig will move back onto the location within 90 days from the point at which the wells are secured and the spudder rig is moved off location.
 - b. The BLM will be contacted / notified 24 hours before the larger rig moves back on the pre-set locations.
7. Oxy will have supervision on the rig to ensure compliance with all BLM and NMOCD regulations and to oversee operations.
8. Once the rig is removed, Oxy will secure the wellhead area by placing a guard rail around the cellar area.

Spudder Rig Layout

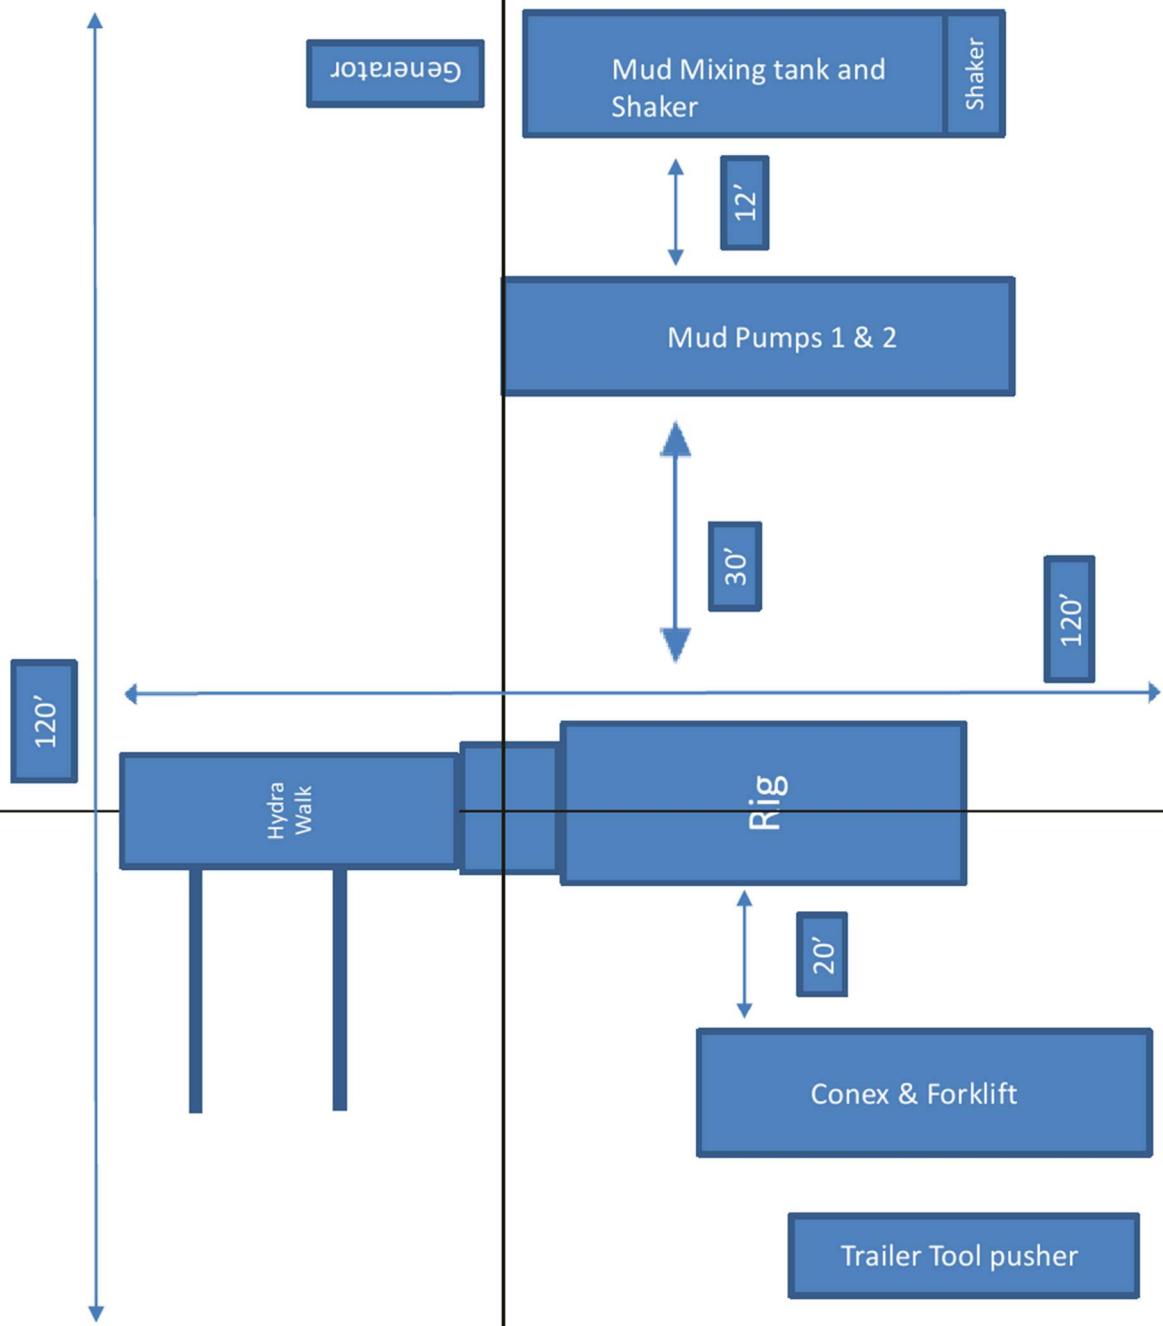

Revision Date – May 21, 2024

4-String Design – Open Int 1 x Int 2 Annulus

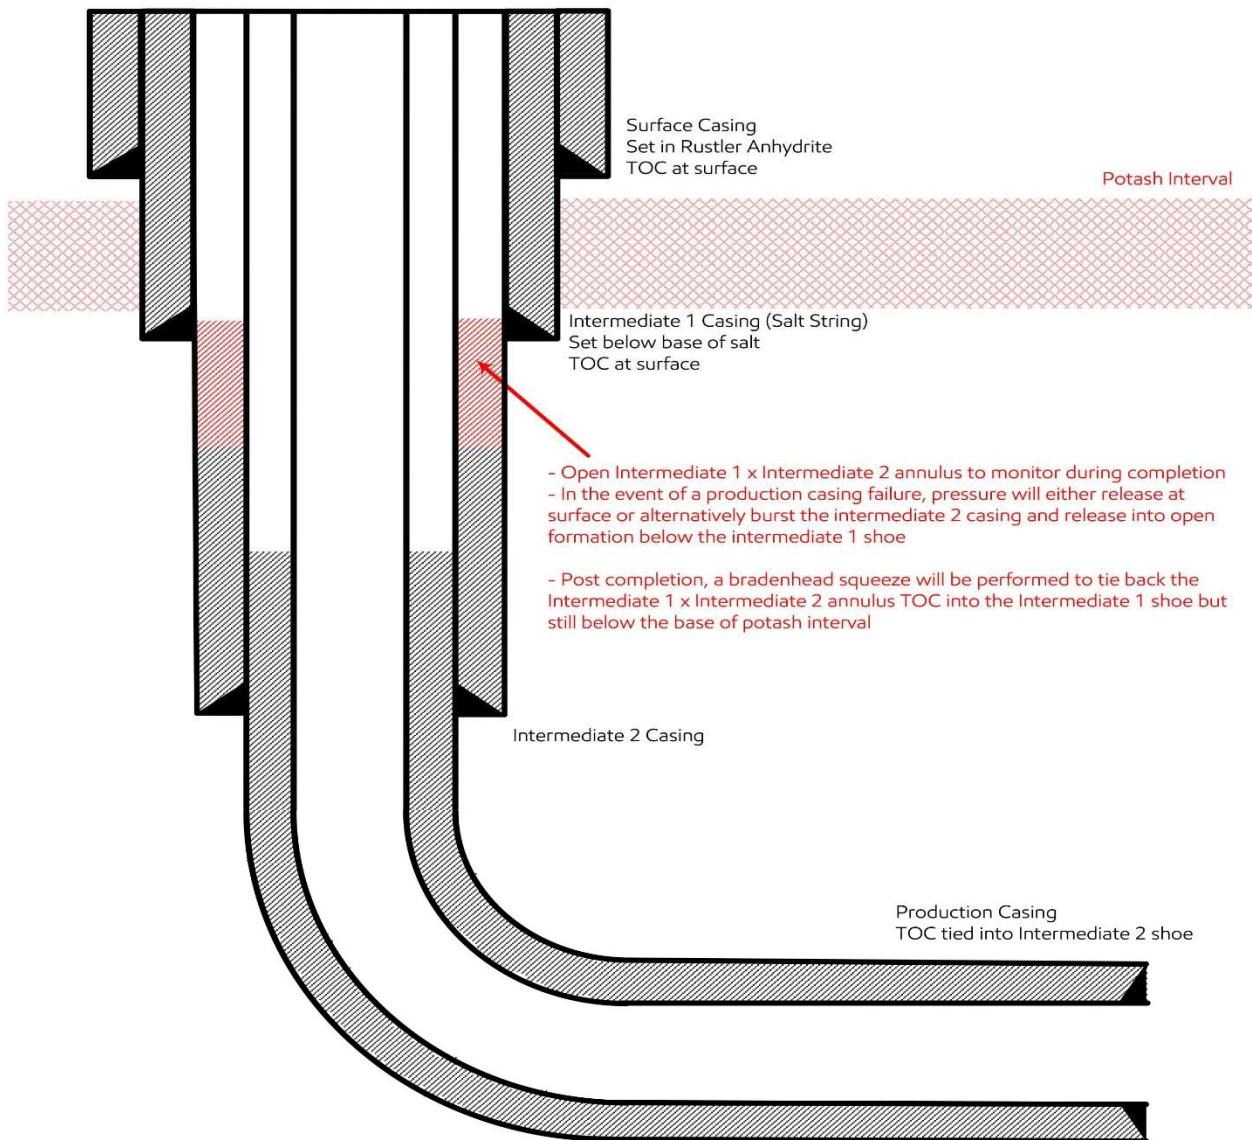
**Update May 2024:**

OXY is aware of the R111-Q update and will comply with these requirements including (but not limited to):

- 1) Alignment with KPLA requirements per schematic above, leaving open annulus for pressure monitoring during frac and utilizing new casing that meets API standards
- 2) Contingency plans in place to divert formation fluids away from salt interval in event of production casing failure
- 3) Bradenhead squeeze to be completed within 180days to tie back TOC to salt string at least 500ft but with top below Marker Bed 126
- 4) Production cement to be tied back no less than 500ft inside previous casing shoe
- 5) While drilling salt interval, separation distance to any active/inactive producing offset well will be ensured such that $SF > 1.0$; Anti-Collision Reports will be provided with APD Packages for review where $SF < 1.5$ against any applicable offset well, or where center-to-center separation against a blind or inclination only surveyed offset well is less than 500ft

Revision Date – May 21, 2024

3-String Design – Open Production Casing Annulus

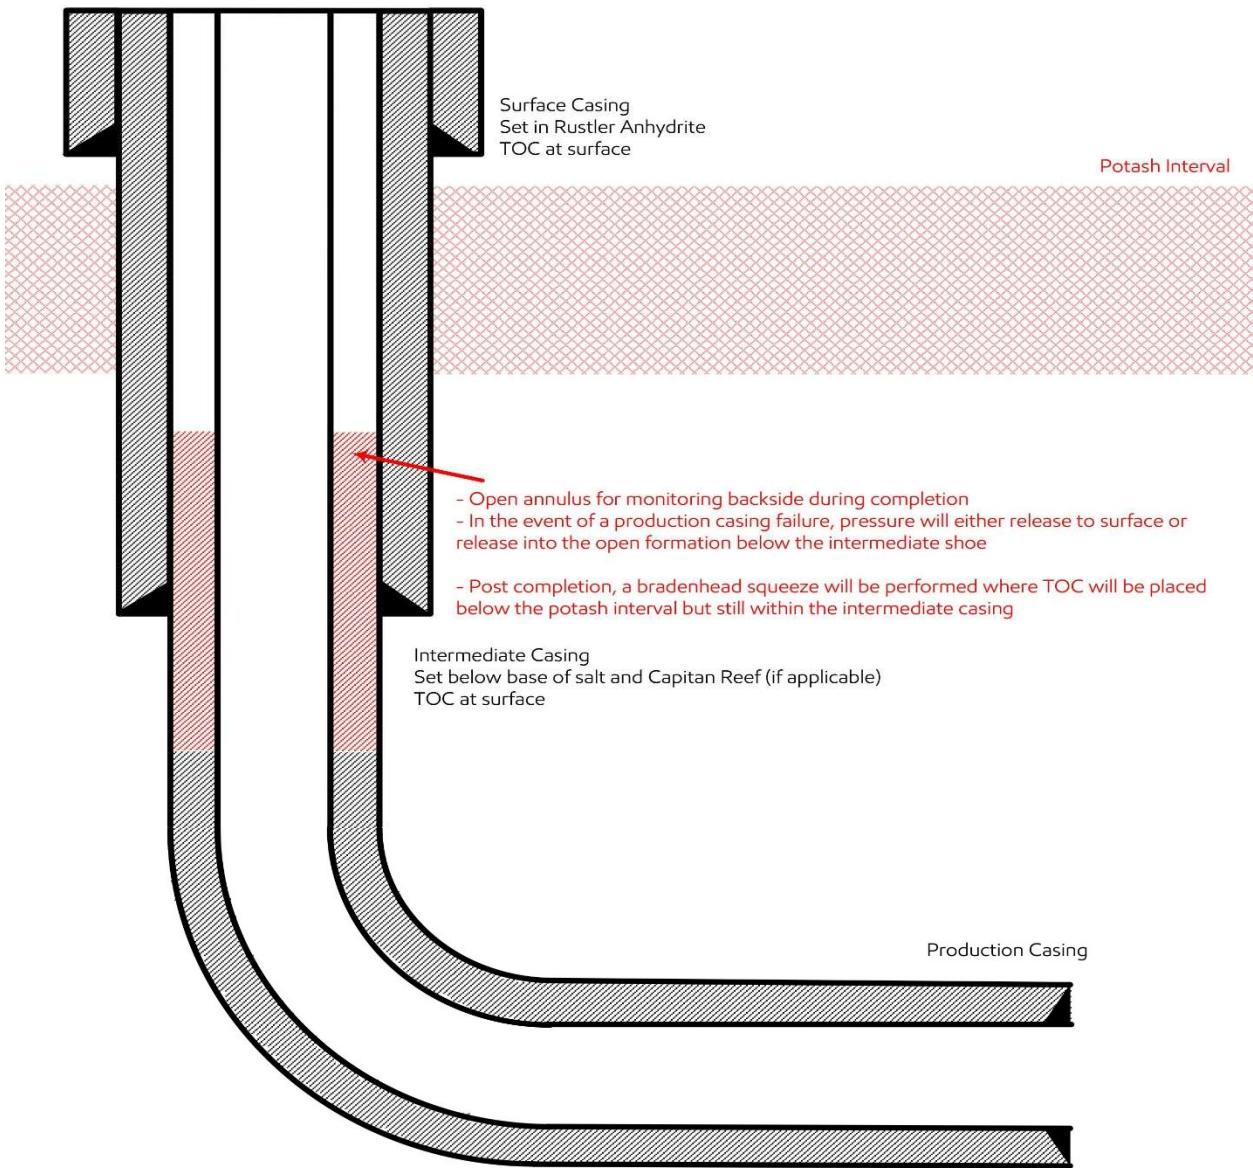

Update May 2024:

OXY is aware of the R111-Q update and will comply with these requirements including (but not limited to):

- 1) Alignment with KPLA requirements per schematic above, leaving open annulus for pressure monitoring during frac and utilizing new casing that meets API standards
- 2) Contingency plans in place to divert formation fluids away from salt interval in event of production casing failure
- 3) Bradenhead squeeze for Production cement to be completed within 180days to tie back TOC to previous casing string at least 500ft but with top below Marker Bed 126
- 4) While drilling salt interval, separation distance to any active/inactive producing offset well will be ensured such that $SF > 1.0$; Anti-Collision Reports will be provided with APD Packages for review where $SF < 1.5$ against any applicable offset well, or where center-to-center separation against a blind or inclination only surveyed offset well is less than 500ft

5M Annular BOP Variance Request

Per BLM's Memorandum No. NM-2017-008: *Decision and Rationale for a Variance Allowing the Use of a 5M Annular Preventer with a 10M BOP Stack*, Oxy requests to employ a 5M annular with a 10M BOPE stack in the pilot and lateral sections of the well and will ensure that two barriers to flow are maintained at all times. Please see Well Control Plan below.

Oxy Well Control Plan

A. Component and Preventer Compatibility Table

The table below, which covers the drilling and casing of the >5M MASP portion of the well, outlines the tubulars and the compatible preventers in use. This table, combined with the mud program, documents that two barriers to flow can be maintained at all times, independent of the rating of the annular preventer.

Pilot hole and Lateral sections, 10M requirement

Component	OD	Preventer	RWP
Drillpipe	4-1/2"-5"	Lower 3-1/2 - 5-1/2" VBR Upper 3-1/2 - 5-1/2" VBR	10M
HWDP	4-1/2"-5"	Lower 3-1/2 - 5-1/2" VBR Upper 3-1/2 - 5-1/2" VBR	10M
Drill collars and MWD tools	4-3/4" – 5-1/2"	Lower 3-1/2 - 5-1/2" VBR Upper 3-1/2 - 5-1/2" VBR	10M
Mud Motor	4-3/4"	Lower 3-1/2 - 5-1/2" VBR Upper 3-1/2 - 5-1/2" VBR	10M
Production casing	5-1/2"	Lower 3-1/2 - 5-1/2" VBR Upper 3-1/2 - 5-1/2" VBR	10M
ALL	0" - 13-5/8"	Annular	5M
Open-hole	6-3/4"	Blind Rams	10M

VBR = Variable Bore Ram. Compatible range listed in chart.

HWDP = Heavy Weight Drill Pipe

MWD = Measurement While Drilling

B. Well Control Procedures

Well control procedures are specific to the rig equipment and the operation at the time the kick occurs. Below are the minimal high-level tasks prescribed to assure a proper shut-in while drilling, tripping, running casing, pipe out of the hole (open hole), and moving the Bottom Hole Assembly (BHA) through the Blowout Preventers (BOP). The pressure at which control is swapped from the annular to another compatible ram will occur when the anticipated pressure is approaching or envisioned to exceed 70% of the 5M annular Rated Working Pressure (RWP) or 3500 PSI.

General Procedure While Drilling

1. Sound alarm (alert crew)
2. Space out drill string
3. Shut down pumps (stop pumps and rotary)
4. Shut-in Well (uppermost applicable BOP, typically annular preventer first. The Hydraulic Control Remote (HCR) valve and choke will already be in the closed position).
5. Confirm shut-in
6. Notify tool pusher/company representative
7. Read and record the following:
 - a. SIDPP and SICP
 - b. Pit gain
 - c. Time
8. Regroup and identify forward plan
9. If pressure has built or expected to reach 70% of the annular RWP during kill operations, crew will reconfirm spacing and swap to the upper pipe ram

General Procedure While Tripping

1. Sound alarm (alert crew)
2. Stab full opening safety valve and close
3. Space out drill string
4. Shut-in (uppermost applicable BOP, typically annular preventer first. The HCR and choke will already be in the closed position)
5. Confirm shut-in
6. Notify tool pusher/company representative
7. Read and record the following:
 - a. SIDPP and SICP
 - b. Pit gain
 - c. Time
 - d. Regroup and identify forward plan
 - e. If pressure has built or is anticipated during the kill to reach the RWP of the annular preventer, confirm spacing and swap to the upper pipe ram

General Procedure While Running Casing

1. Sound alarm (alert crew)
2. Stab crossover and full opening safety valve and close
3. Space out string
4. Shut-in (uppermost applicable BOP, typically annular preventer first. The HCR and choke will already be in the closed position).
5. Confirm shut-in
6. Notify tool pusher/company representative
7. Read and record the following:
 - a. SIDPP and SICP
 - b. Pit gain
 - c. Time
 - d. Regroup and identify forward plan.
 - e. If pressure has built or is anticipated during the kill to reach the RWP of the annular preventer, confirm spacing and swap to compatible pipe ram.

General Procedure With No Pipe In Hole (Open Hole)

1. Sound alarm (alert crew)
2. Shut-in with blind rams or BSR. (The HCR and choke will already be in the closed position)
3. Confirm shut-in
4. Notify tool pusher/company representative
5. Read and record the following:
 - a. SICP
 - b. Pit gain
 - c. Time
6. Regroup and identify forward plan

General Procedures While Pulling BHA thru Stack

1. PRIOR to pulling last joint of drill pipe thru the stack.
 - a. Perform flow check, if flowing:
 - b. Sound alarm (alert crew)
 - c. Stab full opening safety valve and close
 - d. Space out drill string with tool joint just beneath the upper pipe ram
 - e. Shut-in using upper pipe ram. (The HCR and choke will already be in the closed position)
 - f. Confirm shut-in
 - g. Notify tool pusher/company representative
 - h. Read and record the following:
 - i. SIDPP and SICP
 - ii. Pit gain
 - iii. Time
 - iv. Regroup and identify forward plan
2. With BHA in the stack and compatible ram preventer and pipe combo immediately available.
 - a. Sound alarm (alert crew)
 - b. Stab crossover and full opening safety valve and close
 - c. Space out drill string with upset just beneath the compatible pipe ram
 - d. Shut-in using compatible pipe ram. (The HCR and choke will already be in the closed position.)
 - e. Confirm shut-in
 - f. Notify tool pusher/company representative
 - g. Read and record the following:
 - i. SIDPP and SICP
 - ii. Pit gain
 - iii. Time
 - iv. Regroup and identify forward plan
3. With BHA in the stack and NO compatible ram preventer and pipe combo immediately available.

- a. Sound alarm (alert crew)
- b. If possible to pick up high enough, pull string clear of the stack and follow “Open Hole” scenario
- c. If impossible to pick up high enough to pull the string clear of the stack
- d. Stab crossover, make up one joint/stand of drill pipe, and full opening safety valve and close
- e. Space out drill string with tool joint just beneath the upper pipe ram
- f. Shut-in using upper pipe ram. (The HCR and choke will already be in the closed position)
- g. Confirm shut-in
- h. Notify tool pusher/company representative
- i. Read and record the following:
 - i. SIDPP and SICP
 - ii. Pit gain
 - iii. Time
- j. Regroup and identify forward plan

BOP Break Testing Request

Oxy requests permission to adjust the BOP break testing requirements as per the agreement reached in the OXY/BLM meeting on September 5, 2019.

BOP break test under the following conditions:

- After a full BOP test is conducted
- When skidding to drill an intermediate section where ICP is set into the third Bone Spring or shallower.
- When skidding to drill a production section that does not penetrate into the third Bone Spring or deeper.

If the kill line is broken prior to skid, two tests will be performed.

- 1) Wellhead flange, co-flex hose, kill line connections and upper pipe rams
- 2) Wellhead flange, HCR valve, check valve, upper pipe rams

If the kill line is not broken prior to skid, only one test will be performed.

- 1) Wellhead flange, co-flex hose, check valve, upper pipe rams

See supporting information below:

Subject: Request for a Variance Allowing Break Testing of a Blowout Preventer Stack

OXY USA Inc. (OXY) requests a variance to allow break testing of the Blowout Preventer (BOP) stack when skidding a drilling rig between wells on multi-well pads. This practice entails retesting only the connections of the **BOP** stack that have been disconnected during this operation and not a complete **BOP** test.

Background

43 CFR part 3170 Subpart 3172 states that a **BOP** test must be performed whenever any seal subject to test pressure is broken. The current interpretation of the Bureau of Land Management (BLM) is this requires a complete **BOP** test and not just a test of the affected component. 43 CFR part 3170 Subpart 3172, Section I.D.2. states, "Some situations may exist either on a well-by-well basis or field-wide basis whereby it is commonly accepted practice to vary a particular minimum standard(s) established in this Order. This situation can be resolved by requesting a variance...". OXY feels the practice of break testing the **BOP** stack is such a situation. Therefore, as per 43 CFR part 3170 Subpart 3172, Section IV., OXY submits this request for the variance.

Supporting Rationale

43 CFR part 3170 Subpart 3172 became effective on December 19, 1988, and has remained the standard for regulating BLM onshore drilling operations for almost 30 years. During this time there have been significant changes in drilling technology. **BLM** continues to use the variance request process to allow for the use of modern technology and acceptable engineering practices that have arisen since 43 CFR part 3170 Subpart 3172 was originally released. The drilling rig fleet OXY utilizes in New Mexico was built with many modern upgrades. One of which allows the rigs to skid between wells on multi-well pads. A part of this rig package is a hydraulic winch system which safely installs and removes the BOP from the wellhead and carries it during skidding operations. This technology has made break testing a safe and reliable procedure.

American Petroleum Institute (API) standards, specifications and recommended practices are considered industry standards and are consistently utilized and referenced by the industry. 43 CFR part 3170 Subpart 3172 recognized API Recommended Practices (RP) 53 in its original development. API Standard 53,

Blowout Prevention Equipment Systems for Drilling Wells (Fourth Edition, November 2012, Addendum 1, July 2016) recognizes break testing as an acceptable practice. Specifically, API Standard 53, Section 6.5.3.4.1.b states "Pressure tests on the well control equipment shall be conducted after the disconnection or repair of any pressure containment seal in the **BOP** stack, choke line, kill line, choke manifold, or wellhead assembly but limited to the affected component."

The Bureau of Safety and Environmental Enforcement (BSEE), Department of Interior, has also utilized the API standards, specifications and best practices in the development of its offshore oil and gas regulations and incorporates them by reference within its regulations. BSEE issued new offshore regulations under 30 CFR Part 250, *Oil and Gas and Sulphur Operations in the Outer Continental Shelf - Blowout Preventer Systems and Well Control*, which became effective on July 28, 2016. Section 250.737(d.1) states "Follow the testing requirements of API Standard 53". In addition, Section 250.737(d.8) has adopted language from **API** Standard 53 as it states "Pressure test affected **BOP** components following the disconnection or repair of any well-pressure containment seal in the wellhead or **BOP** stack assembly".

Break testing has been approved by the BLM in the past. See the Appendix for a Sundry Notice that was approved in 2015 by the Farmington Field Office. This approval granted permission for the operator to break test when skidding its Aztec 1000 rig on multi-well pads.

Oxy feels break testing and our current procedures meet the intent of 43 CFR part 3170 Subpart 3172 and often exceed it. We have not seen any evidence that break testing results in more components failing tests than seen on full BOP tests. As skidding operations take place within the 30-day full BOPE test window, the BOP shell and components such as the pipe rams and check valve get tested to the full rated working pressure more often. Therefore, there are more opportunities to ensure components are in good working order. Also, Oxy's standard requires complete BOP tests more often than that of 43 CFR part 3170 Subpart 3172. In addition to function testing the annular at least weekly and the pipe and blind rams on each trip, Oxy also performs a choke drill prior to drilling out every casing shoe. As a crew's training is a vital part of well control, this procedure to simulate step one of the Driller's Method exceeds the requirements of 43 CFR part 3170 Subpart 3172.

Procedures

- 1) OXY to submit the break testing plan in the APD or Sundry Notice (SN) and receive approval prior to implementing (See Appendix for examples)
- 2) OXY would perform BOP break testing on multi-well pads where multiple intermediate sections can be drilled and cased within the 30-day BOP test window
- 3) After performing a complete BOP test on the first well and drilling and casing the hole section, three breaks would be made on the BOP.
 - Between the check valve and the kill line
 - Between the HCR valve and the co-flex hose or the co-flex hose and the manifold
 - Between the BOP flange and the wellhead
- 4) The BOP is then lifted and removed from the wellhead by the hydraulic winch system
- 5) After skidding to the next well, the BOP is moved to the wellhead by the hydraulic winch system and installed
- 6) The choke line and kill line are reconnected
- 7) A test plug is installed in the wellhead with a joint of drill pipe and the internal parts of the check valve are removed
- 8) A shell test is performed against the upper pipe rams testing all three breaks
- 9) The internal parts of the check valve are reinstalled and the HCR valve is closed. A second test is performed on them
- 10) These tests consist of a 250 psi low test and a high test to the value submitted in the APD or SN (e.g., 5000 psi)
- 11) Perform a function test of components not pressure tested to include the lower pipe rams, the blind rams and the annular
- 12) If this were a three well pad, the same three breaks on the BOP would be made and steps 4 through 11 would be repeated
- 13) A second break test would only be done if the third hole section could be completed within the 30-day BOP test window
- 14) If a second break test is performed, additional components that were not tested on the initial break test will be tested on this break test

Notes:


- a. If any parts of the BOP are changed out or any additional breaks are made during the skidding operation, these affected components would also be tested as in step 10.
- b. As the choke manifold remains stationary during the skidding operation and the only break to the manifold is tested in step 8 above, no further testing of the manifold is done until the next full BOP test.

Summary

OXY requests a variance to allow break testing of the BOP stack when skidding drilling rigs between wells on multi-well pads. API standards, specifications and recommended practices are considered industry standards and are consistently utilized and referenced by the industry and the BLM. API Standard 53 recognizes break testing as an acceptable practice and BSEE adopted language from this standard into its newly created 30 CFR Part 250 which also supports break testing. Due to this, OXY feels this request meets the intent of 43 CFR part 3170

REQUEST FOR A VARIANCE TO BREAK TEST THE BOP

Permian Resources New Mexico

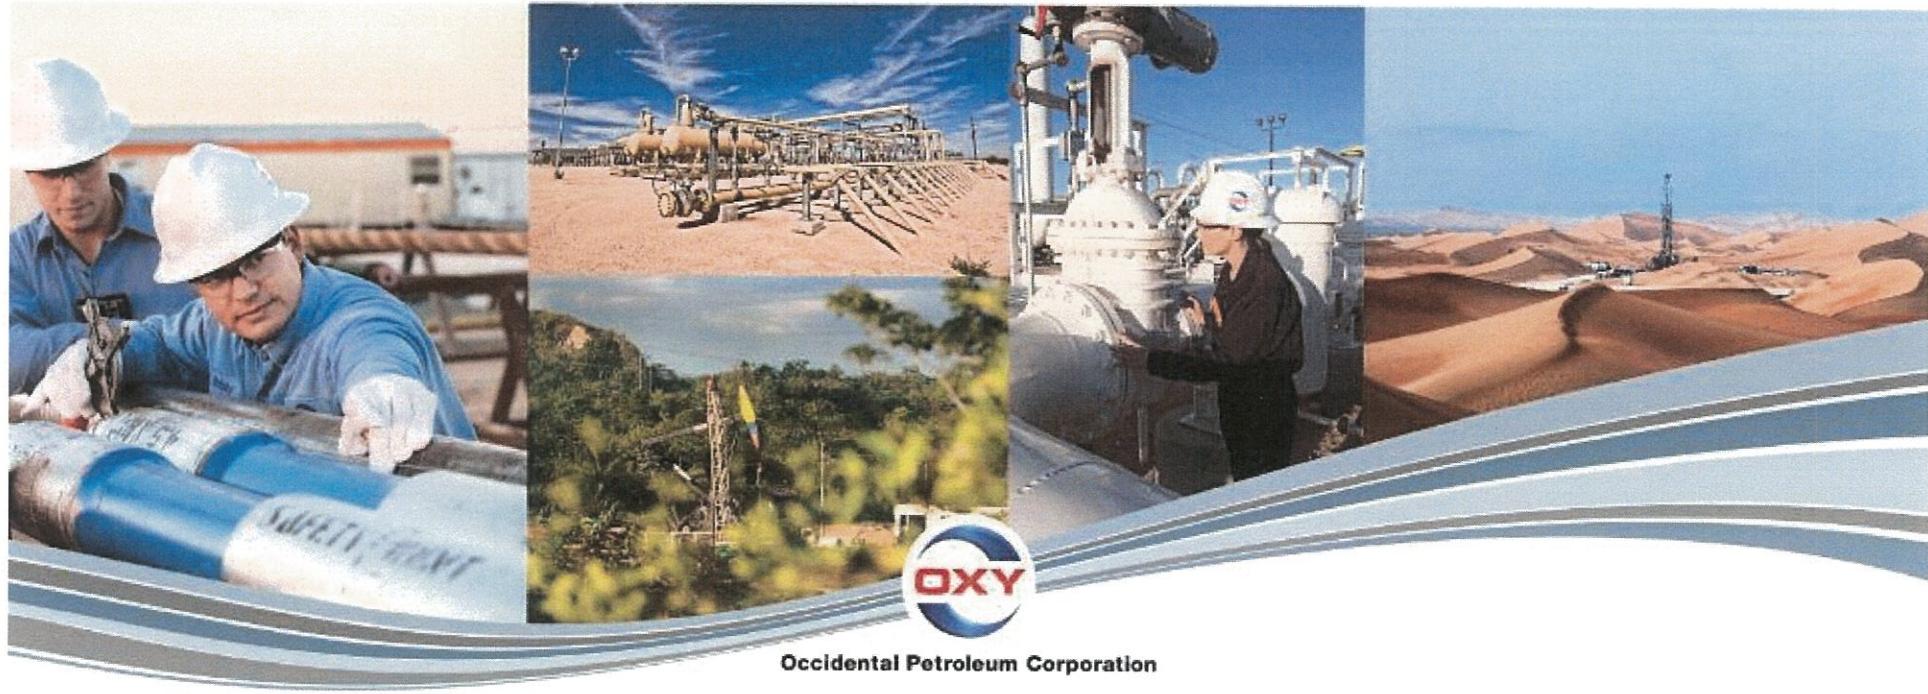

Occidental Petroleum Corporation

Request for Variance

OXY USA Inc. (OXY) requests a variance to allow break testing of the Blowout Preventer (BOP) stack when skidding a drilling rig between wells on multi-well pads

- This practice entails retesting only the connections of the BOP stack that have been disconnected during this operation and not a complete BOP test.
- As the choke manifold remains stationary during the skidding operation and the only break to the manifold is tested, no further testing of the manifold is done until the next full BOP test.
- This request is being made as per Section IV of the *Onshore Oil and Gas Order (OOGO) No. 2*

Rationale for Allowing BOP Break Testing

American Petroleum Institute (API) standards, specifications and recommended practices are considered industry standards and are consistently utilized and referenced by the industry

- API Standard 53, *Blowout Prevention Equipment Systems for Drilling Wells* (Fourth Edition, November 2012, Addendum 1, July 2016) recognizes break testing as an acceptable practice.
- Specifically, API Standard 53, Section 6.5.3.4.1.b states “Pressure tests on the well control equipment shall be conducted after the disconnection or repair of any pressure containment seal in the BOP stack, choke line, kill line, choke manifold, or wellhead assembly but limited to the affected component.”

Rationale for Allowing BOP Break Testing

The Bureau of Safety and Environmental Enforcement (BSEE), Department of Interior, has also utilized the API standards, specifications and best practices in the development of its offshore oil and gas regulations and incorporates them by reference within its regulations.

- BSEE issued new offshore regulations in July 2016 under 30 CFR Part 250, *Oil and Gas and Sulphur Operations in the Outer Continental Shelf - Blowout Preventer Systems and Well Control*. Within these regulations is language adopted from API Standard 53 which also supports break testing.
- Specifically, Section 250.737(d.8) states “Pressure test affected BOP components following the disconnection or repair of any well-pressure containment seal in the wellhead or BOP stack assembly.”



Rationale for Allowing BOP Break Testing

Break testing has been approved by the BLM in the past

- The Farmington Field Office approved a Sundry Notice (SN) to allow break testing in 2015
- This SN granted permission for the operator to break test when skidding its Aztec 1000 rig on multi-well pads

Oxy feels break testing and our current procedures meet or exceed the intent of OOOGO No. 2

- As skidding operations take place within the 30-day full BOPE test window, the BOP shell and components such as the pipe rams and check valve get tested to the full rated working pressure more often
- Oxy's standard requires complete BOP tests more often than that of OOOGO No. 2
- Oxy performs a choke drill prior to drilling out every casing shoe. As a crew's training is a vital part of well control, this procedure to simulate step one of the Driller's Method exceeds the requirements of OOOGO No. 2



Break Testing Procedures

- 1) OXY to submit the break testing plan in the APD or Sundry Notice (SN) and receive approval prior to implementing
- 2) OXY would perform BOP break testing on multi-well pads where multiple intermediate sections can be drilled and cased within the full BOP test window
- 3) After performing a complete BOP test on the first well and drilling and casing the hole section, three breaks would be made on the BOP.
 - Between the check valve and the kill line
 - Between the HCR valve and the co-flex hose or the co-flex hose and the manifold
 - Between the BOP flange and the wellhead
- 4) The BOP is then lifted and removed from the wellhead by the hydraulic winch system
- 5) After skidding to the next well, the BOP is moved to the wellhead by the hydraulic winch system and installed
- 6) The choke line and kill line are reconnected
- 7) A test plug is installed in the wellhead with a joint of drill pipe and the internal parts of the check valve are removed




Break Testing Procedures

- 8) A shell test is performed against the upper pipe rams testing all three breaks
- 9) The internal parts of the check valve are reinstalled and the HCR valve is closed.
A second test is performed on them
- 10) These tests consist of a 250 psi low test and a high test to the value submitted in the APD or SN (e.g., 5000 psi)
- 11) Perform a function test of components not pressure tested to include the lower pipe rams, the blind rams and the annular
- 12) If this were a three well pad, the same three breaks on the BOP would be made and steps 4 through 11 would be repeated
- 13) A second break test would only be done if the third hole section could be completed within the 30-day BOP test window
- 14) If a second break test is performed, additional components that were not tested on the first break test will be tested




Break Testing Procedures and Tests

1. After performing a complete BOP test on the first well, the BOP is removed, the rig is skidded and the BOP is installed on the second well

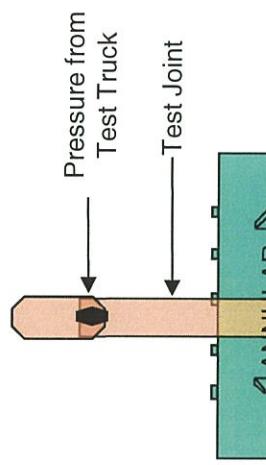

Test #1
BOP-Wellhead flange, choke line and kill line connections and upper pipe rams


2. A test plug is installed in the wellhead on drill pipe and the inner components of the check valve are removed

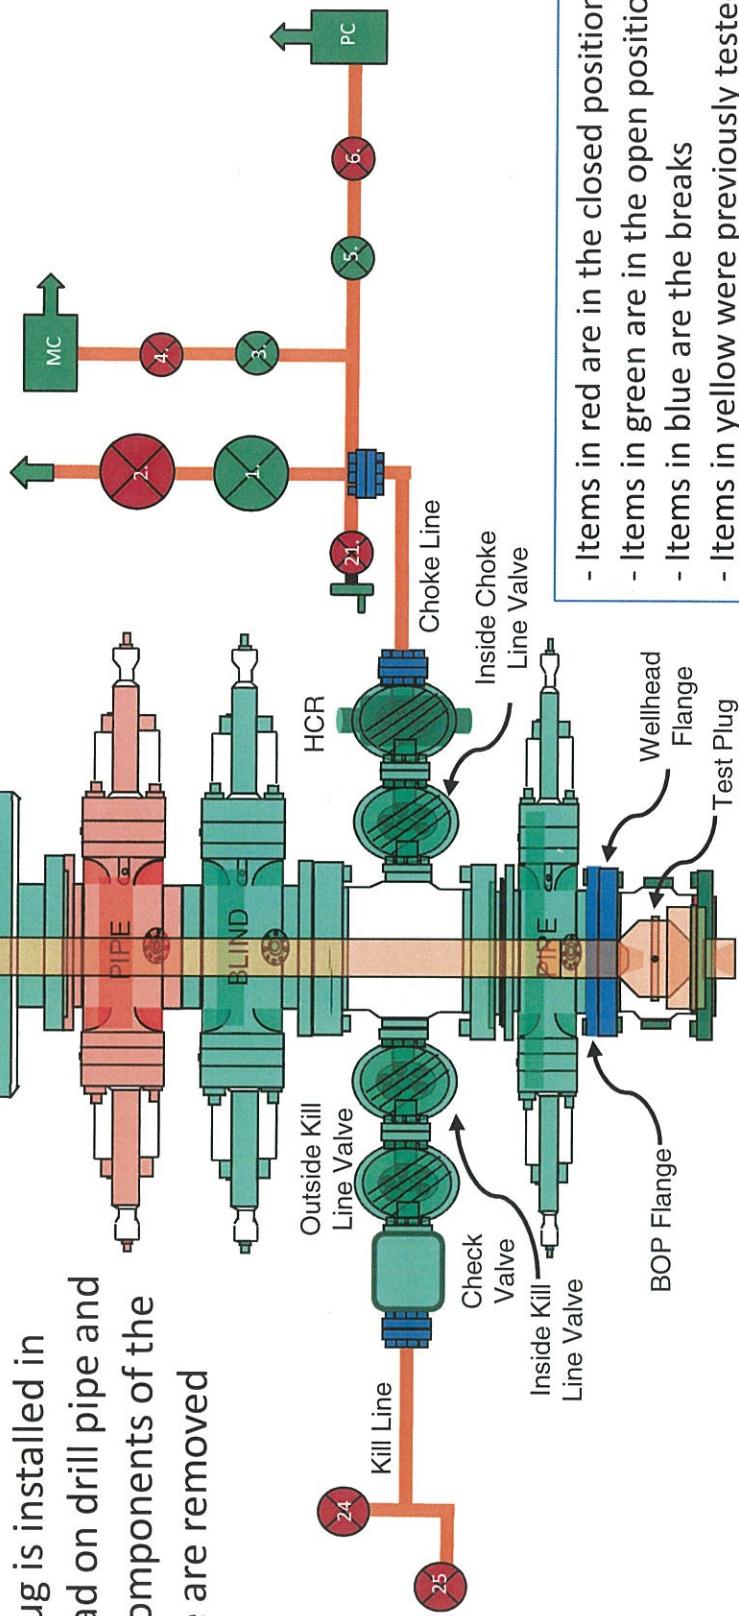

- Items in red are in the closed position
- Items in green are in the open position
- Items in blue are the breaks
- Items in yellow were previously tested


Break Testing Procedures and Tests

3. After Test #1, the inner components of the check valve are reinstalled and the HCR valve is closed

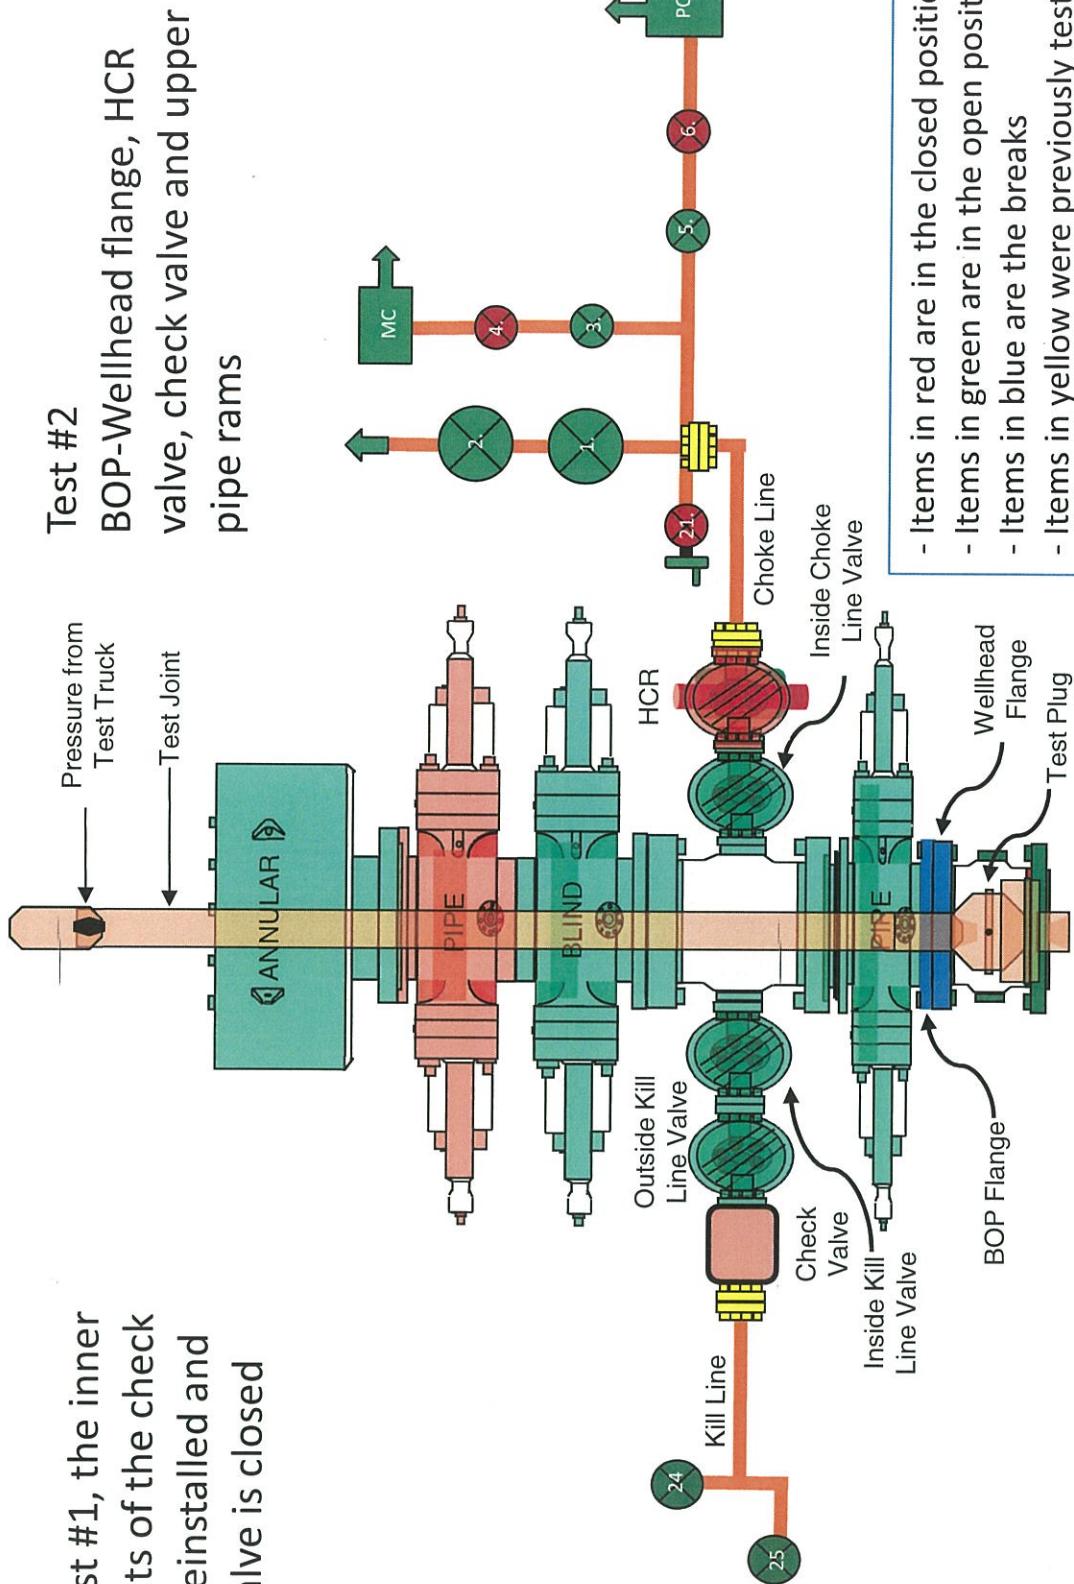


Second Break Testing Procedures and Tests

Procedures 1 and 2 and Test #1 will be completed as in the first break test (see slide 8)

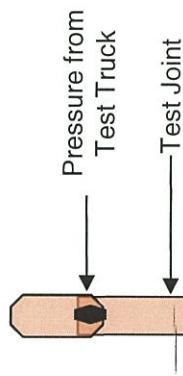

Test #2
BOP-Wellhead flange, inside choke line valve, check valve and upper pipe rams

3. After Test #1, the inner components of the check valve are reinstalled and the inside choke line valve is closed

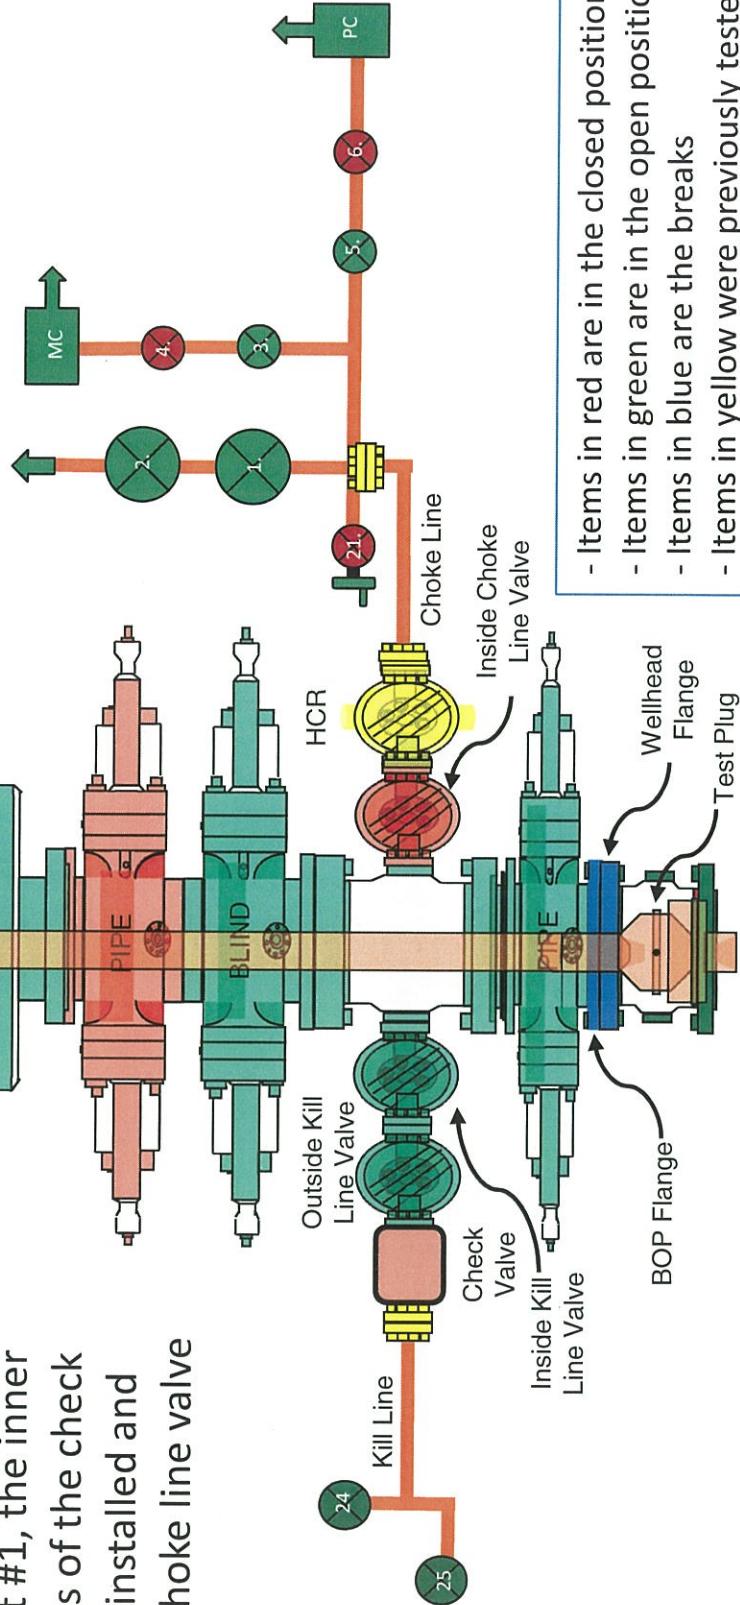

BOP Handling System



BOP Handling System



Hydraulic winch
system moving
the BOP over to
the wellhead

Wellhead

Summary for Variance Request for Break Testing

- API standards, specifications and recommended practices are considered industry standards
- OOOGO No. 2 recognized API Recommended Practices (RP) 53 in its original development
- API Standard 53 recognizes break testing as an acceptable practice
- The Bureau of Safety and Environmental Enforcement has utilized API standards, specifications and best practices in the development of its offshore oil and gas regulations
- API Standard 53 recognizes break testing as an acceptable practice
- OXY feels break testing meets the intent of OOOGO No. 2 to protect public health and safety and the environment

Bradenhead Cement CBL Variance Request

Oxy requests permission to adjust the CBL requirement after bradenhead cement jobs, on 7-5/8" intermediate casings, as per the agreement reached in the OXY/BLM meeting on September 5, 2019.

Three string wells:

- CBL will be required on one well per pad
- If the pumped volume of cement is less than permitted in the APD, BLM will be notified and a CBL may be run
- Echometer will be used after bradenhead cement job to determine TOC before pumping top-out cement

Four string wells:

- CBL is not required
- If the pumped volume of cement is less than permitted in the APD, BLM will be notified and a CBL may be run
- Echometer will be used after bradenhead cement job to determine TOC before pumping top-out cement

Offline Cementing Variance Request

Oxy requests a variance to cement the 9.625" and/or 7.625" intermediate casing strings offline in accordance to the approved variance, EC Tran 461365.

1. Cement Program

No changes to the cement program will take place for offline cementing.


2. Offline Cementing Procedure


The operational sequence will be as follows:

1. Run casing as per normal operations. While running casing, conduct negative pressure test and confirm integrity of the float equipment (float collar and shoe)
2. Land casing with mandrel
3. Fill pipe with kill weight fluid, do not circulate through floats and confirm well is static
4. Set annular packoff shown below and pressure test to confirm integrity of the seal.

Pressure ratings of wellhead components and valves is 5,000 psi


Annular packoff with both external and internal seals

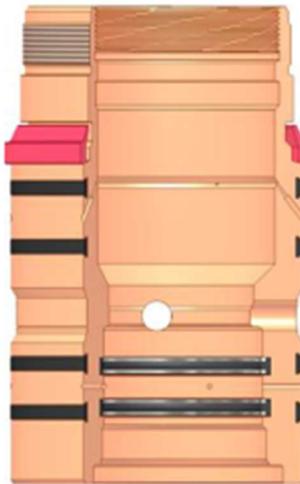

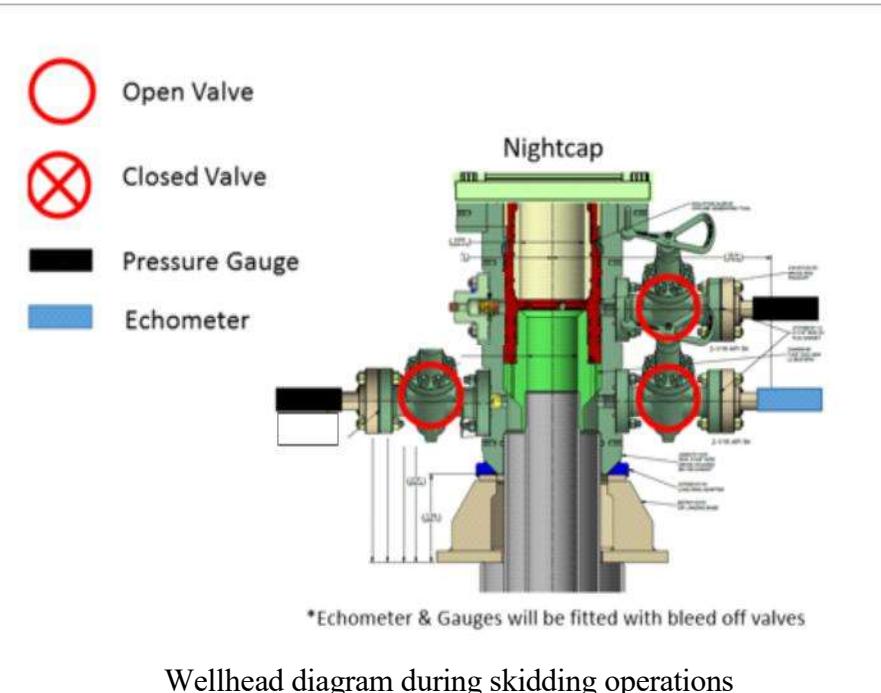

Wellhead diagram during skidding operations

5. After confirmation of both annular barriers and internal barriers, nipple down BOP and install cap flange.
 - a. If any barrier fails to test, the BOP stack will not be nippled down until after the cement job is completed with cement 500ft above the highest formation capable of flow with kill weight mud above or after it has achieved 50 psi compressive strength if cannot be verified.
6. Skid rig to next well on pad.
7. Confirm well is static before removing cap flange, flange will not be removed and offline cementing operations will not commence until well is under control. If well is not static, casing outlet valves will provide access to both the casing ID and annulus. Rig or third party pump truck will kill well prior to cementing or nipping up for further remediation.
 - a. Well Control Plan
 - i. The Drillers Method will be the primary well control method to regain control of the wellbore prior to cementing, if wellbore conditions do not permit the drillers method other methods of well control may be used
 - ii. Rig pumps or a 3rd party pump will be tied into the upper casing valve to pump down the casing ID
 - iii. A high pressure return line will be rigged up to lower casing valve and run to choke manifold to control annular pressure
 - iv. Once influx is circulated out of the hole, kill weight mud will be circulated
 - v. Well will be confirmed static
 - vi. Once confirmed static, cap flange will be removed to allow for offline cementing operations to commence
8. Install offline cement tool
9. Rig up cement equipment

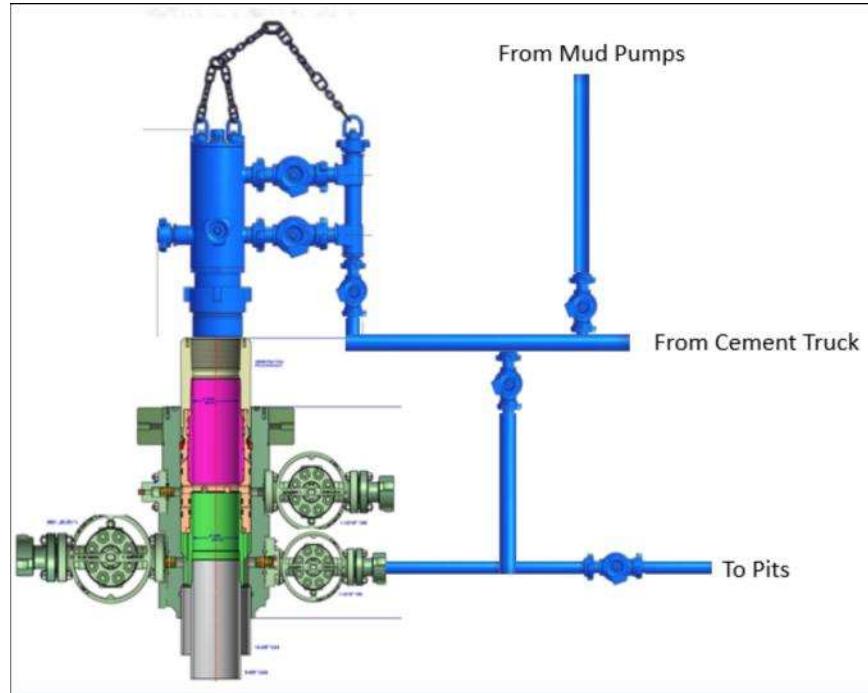

Wellhead diagram during offline cementing operations

10. Circulate bottoms up with cement truck
 - a. If gas is present on bottoms up, well will be shut in and returns rerouted through gas buster to handle entrained gas
 - b. Max anticipated time before circulating with cement truck is 6 hrs
11. Perform cement job taking returns from the annulus wellhead valve
12. Confirm well is static and floats are holding after cement job
13. Remove cement equipment, offline cement tools and install night cap with pressure gauge for monitoring.

OXY

PRD NM DIRECTIONAL PLANS (NAD 1983)

PLATINUM MDP1 34-3 FED COM

Platinum MDP1 34_3 Fed Com 45H

Original Hole

Plan: Permitting Plan

Standard Planning Report

03 July, 2024

OXY

Planning Report

Database: Company: Project: Site: Well: Wellbore: Design:	HOPSSP ENGINEERING DESIGNS PRD NM DIRECTIONAL PLANS (NAD 1983) PLATINUM MDP1 34-3 FED COM Platinum MDP1 34_3 Fed Com 45H Original Hole Permitting Plan	Local Co-ordinate Reference: TVD Reference: MD Reference: North Reference: Survey Calculation Method:	Well Platinum MDP1 34_3 Fed Com 45H RKB=25' @ 3462.00ft RKB=25' @ 3462.00ft Grid Minimum Curvature
--	--	--	--

Project	PRD NM DIRECTIONAL PLANS (NAD 1983)	
Map System:	US State Plane 1983	System Datum:
Geo Datum:	North American Datum 1983	Mean Sea Level
Map Zone:	New Mexico Eastern Zone	Using geodetic scale factor

Site	PLATINUM MDP1 34-3 FED COM
Site Position:	Northing: 461,352.44 usft
From: Map	Easting: 714,923.95 usft
Position Uncertainty: 44.72 ft	Slot Radius: 13.200 in

Well	Platinum MDP1 34_3 Fed Com 45H
Well Position	+N/S: 0.00 ft Northing: 460,585.29 usf
	+E/W: 0.00 ft Easting: 716,698.24 usf
Position Uncertainty	2.00 ft Wellhead Elevation: 0.00 ft
Grid Convergence:	0.30 °

Wellbore	Original Hole
Magnetics	Model Name
	Sample Date
	Declination (°)
	HDGM_FILE 12/18/2018 6.80
	Dip Angle (°)
	59.97
	Field Strength (nT)
	48,007.00000000

Design	Permitting Plan			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (ft)	+N/S (ft)	+E/W (ft)	Direction (°)
	0.00	0.00	0.00	170.59

Plan Survey Tool Program	Date	7/3/2024
Depth From (ft)	Depth To (ft)	Survey (Wellbore)
1 0.00	22,827.72	Permitting Plan (Original Hole)

B001Mc_MWD+HRGM_R5
MWD+HRGM

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/S (ft)	+E/W (ft)	Dogleg Rate ('/100ft)	Build Rate ('/100ft)	Turn Rate ('/100ft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,718.00	0.00	0.00	4,718.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,318.28	16.00	50.31	6,297.56	141.81	170.84	1.00	1.00	0.00	50.31	
11,904.89	16.00	50.31	11,667.67	1,125.49	1,355.92	0.00	0.00	0.00	0.00	
12,905.72	90.00	179.73	12,325.00	562.08	1,504.22	10.00	7.39	12.93	128.32	
22,827.72	90.00	179.73	12,325.00	-9,359.81	1,551.28	0.00	0.00	0.00	0.00	PBHL (Platinum)

OXY

Planning Report

Database: HOPSPP	Local Co-ordinate Reference:	Well Platinum MDP1 34_3 Fed Com 45H
Company: ENGINEERING DESIGNS	TVD Reference:	RKB=25' @ 3462.00ft
Project: PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB=25' @ 3462.00ft
Site: PLATINUM MDP1 34-3 FED COM	North Reference:	Grid
Well: Platinum MDP1 34_3 Fed Com 45H	Survey Calculation Method:	Minimum Curvature
Wellbore: Original Hole		
Design: Permitting Plan		

Planned Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/S (ft)	+E/W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,200.00	0.00	0.00	3,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,300.00	0.00	0.00	3,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,600.00	0.00	0.00	3,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,900.00	0.00	0.00	3,900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,000.00	0.00	0.00	4,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,100.00	0.00	0.00	4,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,200.00	0.00	0.00	4,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,300.00	0.00	0.00	4,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,400.00	0.00	0.00	4,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,500.00	0.00	0.00	4,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,600.00	0.00	0.00	4,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,700.00	0.00	0.00	4,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,718.00	0.00	0.00	4,718.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,800.00	0.82	50.31	4,800.00	0.37	0.45	-0.30	1.00	1.00	0.00	0.00
4,900.00	1.82	50.31	4,899.97	1.85	2.22	-1.46	1.00	1.00	0.00	0.00
5,000.00	2.82	50.31	4,999.89	4.43	5.34	-3.50	1.00	1.00	0.00	0.00
5,100.00	3.82	50.31	5,099.72	8.13	9.79	-6.42	1.00	1.00	0.00	0.00
5,200.00	4.82	50.31	5,199.43	12.94	15.59	-10.22	1.00	1.00	0.00	0.00
5,300.00	5.82	50.31	5,299.00	18.86	22.73	-14.89	1.00	1.00	0.00	0.00

OXY
Planning Report

Database: HOPSPP	Local Co-ordinate Reference:	Well Platinum MDP1 34_3 Fed Com 45H
Company: ENGINEERING DESIGNS	TVD Reference:	RKB=25' @ 3462.00ft
Project: PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB=25' @ 3462.00ft
Site: PLATINUM MDP1 34-3 FED COM	North Reference:	Grid
Well: Platinum MDP1 34_3 Fed Com 45H	Survey Calculation Method:	Minimum Curvature
Wellbore: Original Hole		
Design: Permitting Plan		

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/S (ft)	+E/W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,400.00	6.82	50.31	5,398.39	25.89	31.20	-20.44	1.00	1.00	0.00
5,500.00	7.82	50.31	5,497.57	34.03	41.00	-26.87	1.00	1.00	0.00
5,600.00	8.82	50.31	5,596.52	43.27	52.13	-34.17	1.00	1.00	0.00
5,700.00	9.82	50.31	5,695.20	53.62	64.59	-42.33	1.00	1.00	0.00
5,800.00	10.82	50.31	5,793.58	65.06	78.38	-51.37	1.00	1.00	0.00
5,900.00	11.82	50.31	5,891.63	77.60	93.48	-61.27	1.00	1.00	0.00
6,000.00	12.82	50.31	5,989.33	91.22	109.90	-72.03	1.00	1.00	0.00
6,100.00	13.82	50.31	6,086.64	105.94	127.63	-83.64	1.00	1.00	0.00
6,200.00	14.82	50.31	6,183.53	121.73	146.66	-96.12	1.00	1.00	0.00
6,300.00	15.82	50.31	6,279.98	138.61	166.99	-109.44	1.00	1.00	0.00
6,318.28	16.00	50.31	6,297.56	141.81	170.84	-111.97	1.00	1.00	0.00
6,400.00	16.00	50.31	6,376.11	156.20	188.18	-123.33	0.00	0.00	0.00
6,500.00	16.00	50.31	6,472.23	173.81	209.39	-137.23	0.00	0.00	0.00
6,600.00	16.00	50.31	6,568.36	191.41	230.61	-151.13	0.00	0.00	0.00
6,700.00	16.00	50.31	6,664.48	209.02	251.82	-165.04	0.00	0.00	0.00
6,800.00	16.00	50.31	6,760.61	226.63	273.03	-178.94	0.00	0.00	0.00
6,900.00	16.00	50.31	6,856.73	244.24	294.24	-192.84	0.00	0.00	0.00
7,000.00	16.00	50.31	6,952.86	261.85	315.46	-206.74	0.00	0.00	0.00
7,100.00	16.00	50.31	7,048.98	279.45	336.67	-220.65	0.00	0.00	0.00
7,200.00	16.00	50.31	7,145.11	297.06	357.88	-234.55	0.00	0.00	0.00
7,300.00	16.00	50.31	7,241.23	314.67	379.09	-248.45	0.00	0.00	0.00
7,400.00	16.00	50.31	7,337.36	332.28	400.31	-262.35	0.00	0.00	0.00
7,500.00	16.00	50.31	7,433.48	349.89	421.52	-276.25	0.00	0.00	0.00
7,600.00	16.00	50.31	7,529.61	367.49	442.73	-290.16	0.00	0.00	0.00
7,700.00	16.00	50.31	7,625.73	385.10	463.95	-304.06	0.00	0.00	0.00
7,800.00	16.00	50.31	7,721.86	402.71	485.16	-317.96	0.00	0.00	0.00
7,900.00	16.00	50.31	7,817.98	420.32	506.37	-331.86	0.00	0.00	0.00
8,000.00	16.00	50.31	7,914.11	437.92	527.58	-345.77	0.00	0.00	0.00
8,100.00	16.00	50.31	8,010.23	455.53	548.80	-359.67	0.00	0.00	0.00
8,200.00	16.00	50.31	8,106.35	473.14	570.01	-373.57	0.00	0.00	0.00
8,300.00	16.00	50.31	8,202.48	490.75	591.22	-387.47	0.00	0.00	0.00
8,400.00	16.00	50.31	8,298.60	508.36	612.44	-401.38	0.00	0.00	0.00
8,500.00	16.00	50.31	8,394.73	525.96	633.65	-415.28	0.00	0.00	0.00
8,600.00	16.00	50.31	8,490.85	543.57	654.86	-429.18	0.00	0.00	0.00
8,700.00	16.00	50.31	8,586.98	561.18	676.07	-443.08	0.00	0.00	0.00
8,800.00	16.00	50.31	8,683.10	578.79	697.29	-456.99	0.00	0.00	0.00
8,900.00	16.00	50.31	8,779.23	596.39	718.50	-470.89	0.00	0.00	0.00
9,000.00	16.00	50.31	8,875.35	614.00	739.71	-484.79	0.00	0.00	0.00
9,100.00	16.00	50.31	8,971.48	631.61	760.93	-498.69	0.00	0.00	0.00
9,200.00	16.00	50.31	9,067.60	649.22	782.14	-512.60	0.00	0.00	0.00
9,300.00	16.00	50.31	9,163.73	666.83	803.35	-526.50	0.00	0.00	0.00
9,400.00	16.00	50.31	9,259.85	684.43	824.56	-540.40	0.00	0.00	0.00
9,500.00	16.00	50.31	9,355.98	702.04	845.78	-554.30	0.00	0.00	0.00
9,600.00	16.00	50.31	9,452.10	719.65	866.99	-568.20	0.00	0.00	0.00
9,700.00	16.00	50.31	9,548.23	737.26	888.20	-582.11	0.00	0.00	0.00
9,800.00	16.00	50.31	9,644.35	754.87	909.42	-596.01	0.00	0.00	0.00
9,900.00	16.00	50.31	9,740.48	772.47	930.63	-609.91	0.00	0.00	0.00
10,000.00	16.00	50.31	9,836.60	790.08	951.84	-623.81	0.00	0.00	0.00
10,100.00	16.00	50.31	9,932.73	807.69	973.05	-637.72	0.00	0.00	0.00
10,200.00	16.00	50.31	10,028.85	825.30	994.27	-651.62	0.00	0.00	0.00
10,300.00	16.00	50.31	10,124.98	842.90	1,015.48	-665.52	0.00	0.00	0.00
10,400.00	16.00	50.31	10,221.10	860.51	1,036.69	-679.42	0.00	0.00	0.00
10,500.00	16.00	50.31	10,317.23	878.12	1,057.91	-693.33	0.00	0.00	0.00
10,600.00	16.00	50.31	10,413.35	895.73	1,079.12	-707.23	0.00	0.00	0.00
10,700.00	16.00	50.31	10,509.48	913.34	1,100.33	-721.13	0.00	0.00	0.00

OXY
Planning Report

Database: HOPSPP	Local Co-ordinate Reference:	Well Platinum MDP1 34_3 Fed Com 45H
Company: ENGINEERING DESIGNS	TVD Reference:	RKB=25' @ 3462.00ft
Project: PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB=25' @ 3462.00ft
Site: PLATINUM MDP1 34-3 FED COM	North Reference:	Grid
Well: Platinum MDP1 34_3 Fed Com 45H	Survey Calculation Method:	Minimum Curvature
Wellbore: Original Hole		
Design: Permitting Plan		

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N-S (ft)	+E-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
10,800.00	16.00	50.31	10,605.60	930.94	1,121.54	-735.03	0.00	0.00	0.00
10,900.00	16.00	50.31	10,701.73	948.55	1,142.76	-748.94	0.00	0.00	0.00
11,000.00	16.00	50.31	10,797.85	966.16	1,163.97	-762.84	0.00	0.00	0.00
11,100.00	16.00	50.31	10,893.97	983.77	1,185.18	-776.74	0.00	0.00	0.00
11,200.00	16.00	50.31	10,990.10	1,001.37	1,206.40	-790.64	0.00	0.00	0.00
11,300.00	16.00	50.31	11,086.22	1,018.98	1,227.61	-804.55	0.00	0.00	0.00
11,400.00	16.00	50.31	11,182.35	1,036.59	1,248.82	-818.45	0.00	0.00	0.00
11,500.00	16.00	50.31	11,278.47	1,054.20	1,270.03	-832.35	0.00	0.00	0.00
11,600.00	16.00	50.31	11,374.60	1,071.81	1,291.25	-846.25	0.00	0.00	0.00
11,700.00	16.00	50.31	11,470.72	1,089.41	1,312.46	-860.16	0.00	0.00	0.00
11,800.00	16.00	50.31	11,566.85	1,107.02	1,333.67	-874.06	0.00	0.00	0.00
11,900.00	16.00	50.31	11,662.97	1,124.63	1,354.89	-887.96	0.00	0.00	0.00
11,904.89	16.00	50.31	11,667.67	1,125.49	1,355.92	-888.64	0.00	0.00	0.00
12,000.00	12.50	87.09	11,760.02	1,134.41	1,376.34	-894.10	10.00	-3.68	38.67
12,100.00	15.61	127.24	11,857.24	1,126.80	1,397.92	-883.06	10.00	3.10	40.15
12,200.00	22.97	148.21	11,951.68	1,102.01	1,418.95	-855.17	10.00	7.36	20.97
12,300.00	31.75	158.75	12,040.46	1,060.80	1,438.82	-811.27	10.00	8.78	10.54
12,400.00	41.05	164.99	12,120.88	1,004.42	1,456.90	-752.69	10.00	9.30	6.24
12,500.00	50.58	169.24	12,190.52	934.58	1,472.66	-681.21	10.00	9.53	4.25
12,600.00	60.23	172.45	12,247.24	853.41	1,485.62	-599.01	10.00	9.65	3.21
12,700.00	69.94	175.09	12,289.33	763.36	1,495.37	-508.59	10.00	9.71	2.64
12,800.00	79.68	177.42	12,315.51	667.19	1,501.62	-412.68	10.00	9.74	2.33
12,900.00	89.44	179.60	12,324.97	567.80	1,504.19	-314.21	10.00	9.76	2.19
12,905.72	90.00	179.73	12,325.00	562.08	1,504.22	-308.56	10.00	9.76	2.16
13,000.00	90.00	179.73	12,325.00	467.80	1,504.67	-215.48	0.00	0.00	0.00
13,100.00	90.00	179.73	12,325.00	367.80	1,505.15	-116.74	0.00	0.00	0.00
13,200.00	90.00	179.73	12,325.00	267.80	1,505.62	-18.01	0.00	0.00	0.00
13,300.00	90.00	179.73	12,325.00	167.80	1,506.09	80.72	0.00	0.00	0.00
13,400.00	90.00	179.73	12,325.00	67.80	1,506.57	179.45	0.00	0.00	0.00
13,500.00	90.00	179.73	12,325.00	-32.20	1,507.04	278.18	0.00	0.00	0.00
13,600.00	90.00	179.73	12,325.00	-132.20	1,507.52	376.91	0.00	0.00	0.00
13,700.00	90.00	179.73	12,325.00	-232.20	1,507.99	475.64	0.00	0.00	0.00
13,800.00	90.00	179.73	12,325.00	-332.19	1,508.47	574.37	0.00	0.00	0.00
13,900.00	90.00	179.73	12,325.00	-432.19	1,508.94	673.10	0.00	0.00	0.00
14,000.00	90.00	179.73	12,325.00	-532.19	1,509.41	771.83	0.00	0.00	0.00
14,100.00	90.00	179.73	12,325.00	-632.19	1,509.89	870.56	0.00	0.00	0.00
14,200.00	90.00	179.73	12,325.00	-732.19	1,510.36	969.29	0.00	0.00	0.00
14,300.00	90.00	179.73	12,325.00	-832.19	1,510.84	1,068.02	0.00	0.00	0.00
14,400.00	90.00	179.73	12,325.00	-932.19	1,511.31	1,166.75	0.00	0.00	0.00
14,500.00	90.00	179.73	12,325.00	-1,032.19	1,511.79	1,265.48	0.00	0.00	0.00
14,600.00	90.00	179.73	12,325.00	-1,132.19	1,512.26	1,364.22	0.00	0.00	0.00
14,700.00	90.00	179.73	12,325.00	-1,232.18	1,512.73	1,462.95	0.00	0.00	0.00
14,800.00	90.00	179.73	12,325.00	-1,332.18	1,513.21	1,561.68	0.00	0.00	0.00
14,900.00	90.00	179.73	12,325.00	-1,432.18	1,513.68	1,660.41	0.00	0.00	0.00
15,000.00	90.00	179.73	12,325.00	-1,532.18	1,514.16	1,759.14	0.00	0.00	0.00
15,100.00	90.00	179.73	12,325.00	-1,632.18	1,514.63	1,857.87	0.00	0.00	0.00
15,200.00	90.00	179.73	12,325.00	-1,732.18	1,515.11	1,956.60	0.00	0.00	0.00
15,300.00	90.00	179.73	12,325.00	-1,832.18	1,515.58	2,055.33	0.00	0.00	0.00
15,400.00	90.00	179.73	12,325.00	-1,932.18	1,516.05	2,154.06	0.00	0.00	0.00
15,500.00	90.00	179.73	12,325.00	-2,032.18	1,516.53	2,252.79	0.00	0.00	0.00
15,600.00	90.00	179.73	12,325.00	-2,132.17	1,517.00	2,351.52	0.00	0.00	0.00
15,700.00	90.00	179.73	12,325.00	-2,232.17	1,517.48	2,450.25	0.00	0.00	0.00
15,800.00	90.00	179.73	12,325.00	-2,332.17	1,517.95	2,548.98	0.00	0.00	0.00
15,900.00	90.00	179.73	12,325.00	-2,432.17	1,518.42	2,647.71	0.00	0.00	0.00
16,000.00	90.00	179.73	12,325.00	-2,532.17	1,518.90	2,746.44	0.00	0.00	0.00

OXY
Planning Report

Database: HOPSPP	Local Co-ordinate Reference:	Well Platinum MDP1 34_3 Fed Com 45H
Company: ENGINEERING DESIGNS	TVD Reference:	RKB=25' @ 3462.00ft
Project: PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB=25' @ 3462.00ft
Site: PLATINUM MDP1 34-3 FED COM	North Reference:	Grid
Well: Platinum MDP1 34_3 Fed Com 45H	Survey Calculation Method:	Minimum Curvature
Wellbore: Original Hole		
Design: Permitting Plan		

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/S (ft)	+E/W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
16,100.00	90.00	179.73	12,325.00	-2,632.17	1,519.37	2,845.17	0.00	0.00	0.00
16,200.00	90.00	179.73	12,325.00	-2,732.17	1,519.85	2,943.91	0.00	0.00	0.00
16,300.00	90.00	179.73	12,325.00	-2,832.17	1,520.32	3,042.64	0.00	0.00	0.00
16,400.00	90.00	179.73	12,325.00	-2,932.17	1,520.80	3,141.37	0.00	0.00	0.00
16,500.00	90.00	179.73	12,325.00	-3,032.16	1,521.27	3,240.10	0.00	0.00	0.00
16,600.00	90.00	179.73	12,325.00	-3,132.16	1,521.74	3,338.83	0.00	0.00	0.00
16,700.00	90.00	179.73	12,325.00	-3,232.16	1,522.22	3,437.56	0.00	0.00	0.00
16,800.00	90.00	179.73	12,325.00	-3,332.16	1,522.69	3,536.29	0.00	0.00	0.00
16,900.00	90.00	179.73	12,325.00	-3,432.16	1,523.17	3,635.02	0.00	0.00	0.00
17,000.00	90.00	179.73	12,325.00	-3,532.16	1,523.64	3,733.75	0.00	0.00	0.00
17,100.00	90.00	179.73	12,325.00	-3,632.16	1,524.12	3,832.48	0.00	0.00	0.00
17,200.00	90.00	179.73	12,325.00	-3,732.16	1,524.59	3,931.21	0.00	0.00	0.00
17,300.00	90.00	179.73	12,325.00	-3,832.16	1,525.06	4,029.94	0.00	0.00	0.00
17,400.00	90.00	179.73	12,325.00	-3,932.15	1,525.54	4,128.67	0.00	0.00	0.00
17,500.00	90.00	179.73	12,325.00	-4,032.15	1,526.01	4,227.40	0.00	0.00	0.00
17,600.00	90.00	179.73	12,325.00	-4,132.15	1,526.49	4,326.13	0.00	0.00	0.00
17,700.00	90.00	179.73	12,325.00	-4,232.15	1,526.96	4,424.86	0.00	0.00	0.00
17,800.00	90.00	179.73	12,325.00	-4,332.15	1,527.44	4,523.60	0.00	0.00	0.00
17,900.00	90.00	179.73	12,325.00	-4,432.15	1,527.91	4,622.33	0.00	0.00	0.00
18,000.00	90.00	179.73	12,325.00	-4,532.15	1,528.38	4,721.06	0.00	0.00	0.00
18,100.00	90.00	179.73	12,325.00	-4,632.15	1,528.86	4,819.79	0.00	0.00	0.00
18,200.00	90.00	179.73	12,325.00	-4,732.15	1,529.33	4,918.52	0.00	0.00	0.00
18,300.00	90.00	179.73	12,325.00	-4,832.14	1,529.81	5,017.25	0.00	0.00	0.00
18,400.00	90.00	179.73	12,325.00	-4,932.14	1,530.28	5,115.98	0.00	0.00	0.00
18,500.00	90.00	179.73	12,325.00	-5,032.14	1,530.76	5,214.71	0.00	0.00	0.00
18,600.00	90.00	179.73	12,325.00	-5,132.14	1,531.23	5,313.44	0.00	0.00	0.00
18,700.00	90.00	179.73	12,325.00	-5,232.14	1,531.70	5,412.17	0.00	0.00	0.00
18,800.00	90.00	179.73	12,325.00	-5,332.14	1,532.18	5,510.90	0.00	0.00	0.00
18,900.00	90.00	179.73	12,325.00	-5,432.14	1,532.65	5,609.63	0.00	0.00	0.00
19,000.00	90.00	179.73	12,325.00	-5,532.14	1,533.13	5,708.36	0.00	0.00	0.00
19,100.00	90.00	179.73	12,325.00	-5,632.14	1,533.60	5,807.09	0.00	0.00	0.00
19,200.00	90.00	179.73	12,325.00	-5,732.13	1,534.08	5,905.82	0.00	0.00	0.00
19,300.00	90.00	179.73	12,325.00	-5,832.13	1,534.55	6,004.56	0.00	0.00	0.00
19,400.00	90.00	179.73	12,325.00	-5,932.13	1,535.02	6,103.29	0.00	0.00	0.00
19,500.00	90.00	179.73	12,325.00	-6,032.13	1,535.50	6,202.02	0.00	0.00	0.00
19,600.00	90.00	179.73	12,325.00	-6,132.13	1,535.97	6,300.75	0.00	0.00	0.00
19,700.00	90.00	179.73	12,325.00	-6,232.13	1,536.45	6,399.48	0.00	0.00	0.00
19,800.00	90.00	179.73	12,325.00	-6,332.13	1,536.92	6,498.21	0.00	0.00	0.00
19,900.00	90.00	179.73	12,325.00	-6,432.13	1,537.39	6,596.94	0.00	0.00	0.00
20,000.00	90.00	179.73	12,325.00	-6,532.13	1,537.87	6,695.67	0.00	0.00	0.00
20,100.00	90.00	179.73	12,325.00	-6,632.12	1,538.34	6,794.40	0.00	0.00	0.00
20,200.00	90.00	179.73	12,325.00	-6,732.12	1,538.82	6,893.13	0.00	0.00	0.00
20,300.00	90.00	179.73	12,325.00	-6,832.12	1,539.29	6,991.86	0.00	0.00	0.00
20,400.00	90.00	179.73	12,325.00	-6,932.12	1,539.77	7,090.59	0.00	0.00	0.00
20,500.00	90.00	179.73	12,325.00	-7,032.12	1,540.24	7,189.32	0.00	0.00	0.00
20,600.00	90.00	179.73	12,325.00	-7,132.12	1,540.71	7,288.05	0.00	0.00	0.00
20,700.00	90.00	179.73	12,325.00	-7,232.12	1,541.19	7,386.78	0.00	0.00	0.00
20,800.00	90.00	179.73	12,325.00	-7,332.12	1,541.66	7,485.51	0.00	0.00	0.00
20,900.00	90.00	179.73	12,325.00	-7,432.12	1,542.14	7,584.25	0.00	0.00	0.00
21,000.00	90.00	179.73	12,325.00	-7,532.11	1,542.61	7,682.98	0.00	0.00	0.00
21,100.00	90.00	179.73	12,325.00	-7,632.11	1,543.09	7,781.71	0.00	0.00	0.00
21,200.00	90.00	179.73	12,325.00	-7,732.11	1,543.56	7,880.44	0.00	0.00	0.00
21,300.00	90.00	179.73	12,325.00	-7,832.11	1,544.03	7,979.17	0.00	0.00	0.00
21,400.00	90.00	179.73	12,325.00	-7,932.11	1,544.51	8,077.90	0.00	0.00	0.00
21,500.00	90.00	179.73	12,325.00	-8,032.11	1,544.98	8,176.63	0.00	0.00	0.00

OXY

Planning Report

Database: Company: Project: Site: Well: Wellbore: Design:	HOPSSP ENGINEERING DESIGNS PRD NM DIRECTIONAL PLANS (NAD 1983) PLATINUM MDP1 34-3 FED COM Platinum MDP1 34_3 Fed Com 45H Original Hole Permitting Plan	Local Co-ordinate Reference: TVD Reference: MD Reference: North Reference: Survey Calculation Method:	Well Platinum MDP1 34_3 Fed Com 45H RKB=25' @ 3462.00ft RKB=25' @ 3462.00ft Grid Minimum Curvature
--	--	--	--

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/S (ft)	+E/W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
21,600.00	90.00	179.73	12,325.00	-8,132.11	1,545.46	8,275.36	0.00	0.00	0.00
21,700.00	90.00	179.73	12,325.00	-8,232.11	1,545.93	8,374.09	0.00	0.00	0.00
21,800.00	90.00	179.73	12,325.00	-8,332.10	1,546.41	8,472.82	0.00	0.00	0.00
21,900.00	90.00	179.73	12,325.00	-8,432.10	1,546.88	8,571.55	0.00	0.00	0.00
22,000.00	90.00	179.73	12,325.00	-8,532.10	1,547.35	8,670.28	0.00	0.00	0.00
22,100.00	90.00	179.73	12,325.00	-8,632.10	1,547.83	8,769.01	0.00	0.00	0.00
22,200.00	90.00	179.73	12,325.00	-8,732.10	1,548.30	8,867.74	0.00	0.00	0.00
22,300.00	90.00	179.73	12,325.00	-8,832.10	1,548.78	8,966.47	0.00	0.00	0.00
22,400.00	90.00	179.73	12,325.00	-8,932.10	1,549.25	9,065.20	0.00	0.00	0.00
22,500.00	90.00	179.73	12,325.00	-9,032.10	1,549.73	9,163.94	0.00	0.00	0.00
22,600.00	90.00	179.73	12,325.00	-9,132.10	1,550.20	9,262.67	0.00	0.00	0.00
22,700.00	90.00	179.73	12,325.00	-9,232.09	1,550.67	9,361.40	0.00	0.00	0.00
22,800.00	90.00	179.73	12,325.00	-9,332.09	1,551.15	9,460.13	0.00	0.00	0.00
22,827.72	90.00	179.73	12,325.00	-9,359.81	1,551.28	9,487.49	0.00	0.00	0.00

Design Targets

Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/S (ft)	+E/W (ft)	Northing (usft)	Easting (usft)	Latitude	Longitude
- hit/miss target									
- Shape									
KOP (Platinum MDP1	0.00	0.00	0.00	1,136.64	1,501.46	461,721.86	718,199.61	32.268052	-103.761122
- plan misses target center by 1883.17ft at 0.00ft MD (0.00 TVD, 0.00 N, 0.00 E)									
- Point									
FTP (Platinum MDP1	0.00	0.00	12,325.00	1,086.64	1,501.74	461,671.87	718,199.89	32.267915	-103.761122
- plan misses target center by 204.27ft at 12492.01ft MD (12185.40 TVD, 940.61 N, 1471.50 E)									
- Point									
PBHL (Platinum MDP1	0.00	0.00	12,325.00	-9,359.81	1,551.28	451,226.02	718,249.43	32.239201	-103.761142
- plan hits target center									
- Point									

Formations

Measured Depth (ft)	Vertical Depth (ft)	Name	Lithology	Dip (°)	Dip Direction (°)
647.00	647.00	RUSTLER			
969.00	969.00	SALADO			
2,880.00	2,880.00	CASTILE			
4,352.00	4,352.00	DELAWARE			
4,380.00	4,380.00	BELL CANYON			
5,282.91	5,282.00	CHERRY CANYON			
6,661.01	6,627.00	BRUSHY CANYON			
8,304.70	8,207.00	BONE SPRING			
9,403.27	9,263.00	BONE SPRING 1ST			
10,004.58	9,841.00	BONE SPRING 2ND			
11,333.06	11,118.00	BONE SPRING 3RD			
11,796.00	11,563.00	WOLFCAMP			
11,934.24	11,696.00	WOLFCAMP A			

OXY
Planning Report

Database: HOPSPP	Local Co-ordinate Reference: TVD Reference:	Well Platinum MDP1 34_3 Fed Com 45H
Company: ENGINEERING DESIGNS	MD Reference:	RKB=25' @ 3462.00ft
Project: PRD NM DIRECTIONAL PLANS (NAD 1983)	North Reference:	RKB=25' @ 3462.00ft
Site: PLATINUM MDP1 34-3 FED COM	Survey Calculation Method:	Grid
Well: Platinum MDP1 34_3 Fed Com 45H		Minimum Curvature
Wellbore: Original Hole		
Design: Permitting Plan		

Plan Annotations

Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment
		+N/S (ft)	+E/W (ft)	
4,718.00	4,718.00	0.00	0.00	Build 1°/100'
6,318.28	6,297.56	141.81	170.84	Hold 16° Tangent
11,904.89	11,667.67	1,125.49	1,355.92	KOP, Build & Turn 10°/100'
12,905.72	12,325.00	562.08	1,504.22	Landing Point
22,827.72	12,325.00	-9,359.81	1,551.28	TD at 22827.72' MD

PECOS DISTRICT

DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	OXY USA INC.
WELL NAME & NO.:	PLATINUM MDP1 34-3 FEDERAL COM 45H
LOCATION:	SEC34 T23S R31E-NMP
COUNTY:	Eddy County, New Mexico

[Create COAs](#)

H₂S <input type="checkbox"/> Present	Cave / Karst <input type="checkbox"/> Low	Waste Prevention Rule <input type="checkbox"/> Waste Minimization Plan
Potash <input type="checkbox"/> R-111-Q	R-111-Q Design <input type="checkbox"/> 4-String: Open 1st Int x 2nd Annulus (ICP 2 below Relief Zone)	
Wellhead <input type="checkbox"/> Multibowl <input checked="" type="checkbox"/> Flex Hose <input checked="" type="checkbox"/> Break Testing	Casing <input type="checkbox"/> 4-String Well <input type="checkbox"/> Liner <input type="checkbox"/> Fluid <input type="checkbox"/> Casing Clearance	Cementing <input type="checkbox"/> DV Tool <input type="checkbox"/> Bradenhead <input type="checkbox"/> Echometer <input checked="" type="checkbox"/> Offline Cement <input checked="" type="checkbox"/> Open Annulus <input type="checkbox"/> Pilot Hole
Special Requirements <input type="checkbox"/> Capitan Reef <input type="checkbox"/> Water Disposal <input checked="" type="checkbox"/> COM <input type="checkbox"/> Unit		

A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H₂S) Drilling Plan shall be activated AT SPUD. As a result, the Hydrogen Sulfide area must meet all requirements from 43 CFR 3176, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

APD is within the R-111-Q defined boundary. Operator must follow all procedures and requirements listed within the updated order.

B. CASING

1. The **13-3/8** inch surface casing shall be set at approximately **717** feet (a minimum of **70'** into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified

and a temperature survey utilizing an electronic-type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.

- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or **500 pounds compressive strength**, whichever is greater (including lead cement.)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
- d. If cement falls back, remedial cementing will be done prior to drilling out that string.

2. The minimum required fill of cement behind the **10-3/4** inch 1st intermediate casing is **cement to surface**. If cement does not circulate, see B.1.a, c-d above.

- **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry** due to the presence of cave/karst, Capitan Reef, or potash features.

3. The minimum required fill of cement behind the **7-5/8** inch 2nd intermediate casing is **500 feet** into the previous casing but not higher than USGS Marker Bed No. 126 (base of the McNutt Potash ore zone.)

- Operator must verify top of cement per R-111-Q requirements. Submit results to the BLM. If cement does not circulate, contact the appropriate BLM office.
- **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry** due to the presence of cave/karst, Capitan Reef, or potash features.
- **A monitored open annulus will be incorporated during completion by leaving the above annulus un-cemented and monitored.** Operator must follow all monitoring requirements listed within R-111-Q. Tieback shall be met within **180 days**.
- Operator has proposed an open annulus completion in R-111-Q. Operator shall provide a method of verification pre-completion top of cement. **Submit results to the BLM.**
- Pressure monitoring device and Pressure Safety Valves must be installed at surface on both the intermediate annulus and the production annulus for the life of the well.
- **In the event of a casing failure during completion**, the operator must contact the BLM at engineers (575-706-2779) and inspection staff (575-361-2822 Eddy County).

FOR INTERMEDIATE 2, KEEP CASING FULL DURING RUN FOR COLLAPSE SF. KEEP HOLE FULL FOR TENSILE SF (BOUYANT OK.) REVIEW EXTERNAL PRESSURE FOR PT

4. The minimum required fill of cement behind the **5-1/2** inch production casing is **500 feet** into the previous casing but not higher than USGS Marker Bed No. 126 (base of the McNutt Potash ore zone.)

- Operator must verify top of cement per R-111-Q requirements. Submit results to the BLM. If cement does not circulate, contact the appropriate BLM office.

- **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry** due to the presence of cave/karst, Capitan Reef, or potash features.

C. PRESSURE CONTROL

1. Operator has proposed a multi-bowl wellhead assembly. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **10,000 (10M) psi**. **Variance is approved to use a 5000 (5M) annular which shall be tested to 3500 (3.5M) psi.**
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one-inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172 must be followed.
2. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).
3. Break testing has been approved for this well ONLY on those intervals utilizing a 5M BOPE or less. **(Annular preventer must be tested to a minimum of 70% of BOPE working pressure and shall be higher than the MASP.)** If in the event break testing is not utilized, then a full BOPE test would be conducted.
 - BOPE Break Testing is ONLY permitted for hole sections with 5M MASP or less.
 - The break test should involve a shell test that includes testing the upper pipe rams as proposed.
 - Variance only pertains to the hole-sections in and shallower than the Wolfcamp formation. Break testing is NOT allowed when planning to penetrate the Penn group.
 - While in transfer between wells, the BOPE shall be secured by the hydraulic carrier or cradle in accordance with API STD 53.
 - Any well control event while drilling require notification to the BLM Petroleum Engineer.
 - A full BOPE test is required prior to drilling the first intermediate section.
 - If a hole section tends to show more background gas than normal, please notify BLM Engineer prior to proceeding with break testing on the next well.

- The BLM PET is to be contacted 4 hours prior to BOPE tests.
 - *Eddy County Petroleum Engineering Inspection Staff: (575) 361-2822*
 - *Lea County Petroleum Engineering Inspection Staff: (575) 689-5981*
- As a minimum, a full BOPE test shall be performed at 21-day intervals.
- In the event any repairs or replacement of the BOPE is required, the BOPE shall test as per 43 CFR 3172.

D. SPECIAL REQUIREMENT(S)

Communitization Agreement:

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- The operator will submit an as-drilled survey well plat of the well completion, but are not limited to, those specified in 43 CFR 3171 and 3172.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

Offline Cementing

Offline cementing has been approved for **all hole sections, excluding production.** Contact the BLM prior to the commencement of any offline cementing procedure.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

Contact Lea County Petroleum Engineering Inspection Staff:

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575) 689-5981

Contact Eddy County Petroleum Engineering Inspection Staff:

Email or call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220;
[BLM NM CFO DrillingNotifications@BLM.GOV](mailto:BLM_NM_CFO_DrillingNotifications@BLM.GOV); (575) 361-2822

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - i. Notify the BLM when moving in and removing the Spudder Rig.
 - ii. Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - iii. BOP/BOPE test to be conducted per **43 CFR 3172** as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. For intervals in which cement to surface is required, cement to surface should be verified with a visual check and density or pH check to differentiate cement from spacer and drilling mud. The results should be documented in the driller's log and daily reports.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e.

changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.

2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends of both lead and tail cement, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-Q potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in **43 CFR 3172**.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if

exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.

3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - i. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - ii. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - iii. Manufacturer representative shall install the test plug for the initial BOP test.
 - iv. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.
 - v. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - i. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - ii. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (only applies to single stage cement jobs, prior to the cement setting up.)

- iii. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for 8 hours or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- iv. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- v. The results of the test shall be reported to the appropriate BLM office.
- vi. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- vii. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- viii. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per **43 CFR 3172**.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area. Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

KPI 11/3/2025




Permian Drilling Hydrogen Sulfide Drilling Operations Plan

Open drill site. No homes or buildings are near the proposed location.

1. Escape

Personnel shall escape upwind of wellbore in the event of an emergency gas release. Escape can take place through the lease road on the Southeast side of the location. Personnel need to move to a safe distance and block the entrance to location. If the primary route is not an option due to the wind direction, then a secondary egress route should be taken.

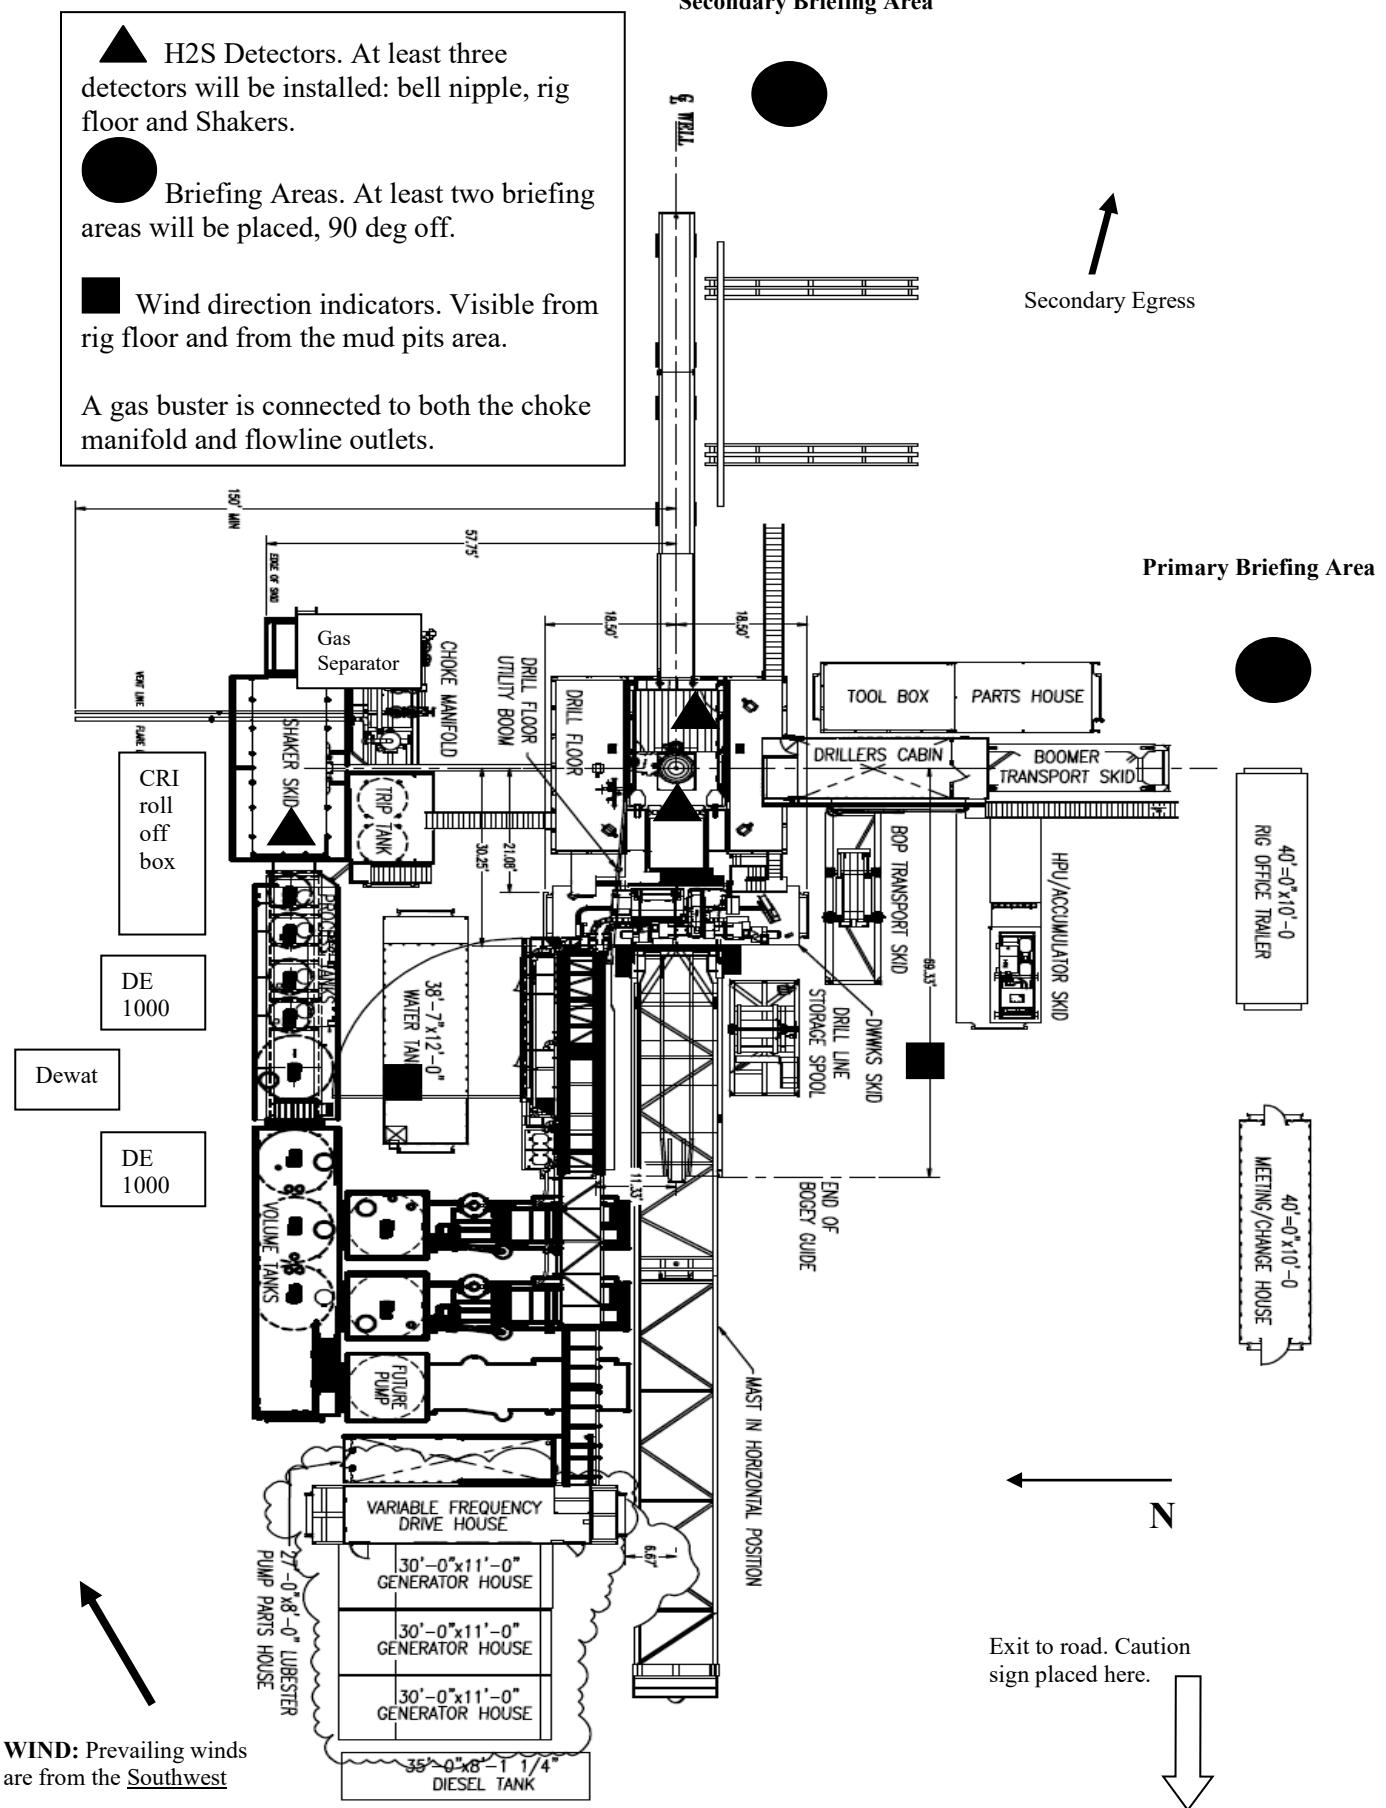



Permian Drilling

Hydrogen Sulfide Drilling Operations Plan

New Mexico

Scope

This contingency plan establishes guidelines for the public, all company employees, and contract employees who's work activities may involve exposure to hydrogen sulfide (H₂S) gas.

While drilling this well, it is possible to encounter H₂S bearing formations. At all times, the first barrier to control H₂S emissions will be the drilling fluid, which will have a density high enough to control influx.

Objective

1. Provide an immediate and predetermined response plan to any condition when H₂S is detected. All H₂S detections in excess of 10 parts per million (ppm) concentration are considered an Emergency.
2. Prevent any and all accidents, and prevent the uncontrolled release of hydrogen sulfide into the atmosphere.
3. Provide proper evacuation procedures to cope with emergencies.
4. Provide immediate and adequate medical attention should an injury occur.

Discussion

Implementation:	This plan with all details is to be fully implemented before drilling to <u>commence</u> .
Emergency response Procedure:	This section outlines the conditions and denotes steps to be taken in the event of an emergency.
Emergency equipment Procedure:	This section outlines the safety and emergency equipment that will be required for the drilling of this well.
Training provisions:	This section outlines the training provisions that must be adhered to prior to drilling.
Drilling emergency call lists:	Included are the telephone numbers of all persons to be contacted should an emergency exist.
Briefing:	This section deals with the briefing of all people involved in the drilling operation.
Public safety:	Public safety personnel will be made aware of any potential evacuation and any additional support needed.
Check lists:	Status check lists and procedural check lists have been included to insure adherence to the plan.
General information:	A general information section has been included to supply support information.

Hydrogen Sulfide Training

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on the well:

1. The hazards and characteristics of H₂S.
2. Proper use and maintenance of personal protective equipment and life support systems.
3. H₂S detection.
4. Proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures and prevailing winds.
5. Proper techniques for first aid and rescue procedures.
6. Physical effects of hydrogen sulfide on the human body.
7. Toxicity of hydrogen sulfide and sulfur dioxide.
8. Use of SCBA and supplied air equipment.
9. First aid and artificial respiration.
10. Emergency rescue.

In addition, supervisory personnel will be trained in the following areas:

1. The effects of H₂S on metal components. If high tensile strength tubular is to be used, personnel will be trained in their special maintenance requirements.
2. Corrective action and shut-in procedures when drilling a well, blowout prevention and well control procedures.
3. The contents and requirements of the H₂S Drilling Operations Plan.

H₂S training refresher must have been taken within one year prior to drilling the well. Specifics on the well to be drilled will be discussed during the pre-spud meeting. H₂S and well control (choke) drills will be performed while drilling the well, at least on a weekly basis. This plan shall be available in the well site. All personnel will be required to carry the documentation proving that the H₂S training has been taken.

Service company and visiting personnel

- A. Each service company that will be on this well will be notified if the zone contains H₂S.
- B. Each service company must provide for the training and equipment of their employees before they arrive at the well site.
- C. Each service company will be expected to attend a well site

Emergency Equipment Requirements

1. Well control equipment

The well shall have hydraulic BOP equipment for the anticipated pressures. Equipment is to be tested on installation and follow Oxy Well Control standard, as well as 43 CFR part 3170 Subpart 3172.

Special control equipment:

- A. Hydraulic BOP equipment with remote control on ground.
Remotely operated choke.
- B. Rotating head
- C. Gas buster equipment shall be installed before drilling out of surface pipe.

2. Protective equipment for personnel

- A. Four (4) 30-minute positive pressure air packs (2 at each briefing area) on location.
- B. Adequate fire extinguishers shall be located at strategic locations.
- C. Radio / cell telephone communication will be available at the rig.
 - Rig floor and trailers.
 - Vehicle.

3. Hydrogen sulfide sensors and alarms

- A. H2S sensor with alarms will be located on the rig floor, at the bell nipple, and at the flow line. These monitors will be set to alarm at 10 ppm with strobe light, and audible alarm.
- B. Hand operated detectors with tubes.
- C. H2S monitor tester (to be provided by contract Safety Company.)
- D. There shall be one combustible gas detector on location at all times.

4. Visual Warning Systems

- A. One sign located at each location entrance with the following language:

**Caution – potential poison gas
Hydrogen sulfide
No admittance without authorization**

Wind sock – wind streamers:

- A. One 36" (in length) wind sock located at protection center, at height visible from rig floor.
- B. One 36" (in length) wind sock located at height visible from pit areas.

Condition flags

- A. One each condition flag to be displayed to denote conditions.

green – normal conditions

yellow – potential danger

red – danger, H2S present

- B. Condition flag shall be posted at each location sign entrance.

5. Mud Program

The mud program is designed to minimize the risk of having H2S and other formation fluids at surface. Proper mud weight and safe drilling practices will be applied. H2S scavengers will be used to minimize the hazards while drilling. Below is a summary of the drilling program.

Mud inspection devices:

Garrett gas train or hatch tester for inspection of sulfide concentration in mud system.

6. Metallurgy

- A. Drill string, casing, tubing, wellhead, blowout preventers, drilling spools or adapters, kill lines, choke manifold, lines and valves shall be suitable for the H2S service.
- B. All the elastomers, packing, seals and ring gaskets shall be suitable for H2S service.

7. Well Testing

No drill stem test will be performed on this well.

8. Evacuation plan

Evacuation routes should be established prior to well spud for each well and discussed with all rig personnel.

9. Designated area

- A. Parking and visitor area: all vehicles are to be parked at a predetermined safe distance from the wellhead.
- B. There will be a designated smoking area.
- C. Two briefing areas on either side of the location at the maximum allowable distance from the well bore so they offset prevailing winds perpendicularly, or at a 45-degree angle if wind direction tends to shift in the area.

Emergency procedures

- A. In the event of any evidence of H2S level above 10 ppm, take the following steps:
 1. The Driller will pick up off bottom, shut down the pumps, slow down the pipe rotation.
 2. Secure and don escape breathing equipment, report to the upwind designated safe briefing / muster area.
 3. All personnel on location will be accounted for and emergency search should begin for any missing, the Buddy System will be implemented.
 4. Order non-essential personnel to leave the well site, order all essential personnel out of the danger zone and upwind to the nearest designated safe briefing / muster area.
 5. Entrance to the location will be secured to a higher level than our usual "Meet and Greet" requirement, and the proper condition flag will be displayed at the entrance to the location.
 6. Take steps to determine if the H2S level can be corrected or suppressed and, if so, proceed as required.
- B. If uncontrollable conditions occur:
 1. Take steps to protect and/or remove any public in the down-wind area from the rig – partial evacuation and isolation. Notify necessary public safety personnel and appropriate regulatory entities (i.e. BLM) of the situation.

2. Remove all personnel to the nearest upwind designated safe briefing / muster area or off location.
3. Notify public safety personnel of safe briefing / muster area.
4. An assigned crew member will blockade the entrance to the location. No unauthorized personnel will be allowed entry to the location.
5. Proceed with best plan (at the time) to regain control of the well. Maintain tight security and safety procedures.

C. Responsibility:

1. Designated personnel.
 - a. Shall be responsible for the total implementation of this plan.
 - b. Shall be in complete command during any emergency.
 - c. Shall designate a back-up.
- All personnel:
 1. On alarm, don escape unit and report to the nearest upwind designated safe briefing / muster area upw
 2. Check status of personnel (buddy system).
 3. Secure breathing equipment.
 4. Await orders from supervisor.
- Drill site manager:
 1. Don escape unit if necessary and report to nearest upwind designated safe briefing / muster area.
 2. Coordinate preparations of individuals to return to point of release with tool pusher and driller (using the buddy system).
 3. Determine H2S concentrations.
 4. Assess situation and take control measures.
- Tool pusher:
 1. Don escape unit Report to up nearest upwind designated safe briefing / muster area.
 2. Coordinate preparation of individuals to return to point of release with tool pusher drill site manager (using the buddy system).
 3. Determine H2S concentration.
 4. Assess situation and take control measures.
- Driller:
 1. Don escape unit, shut down pumps, continue

- rotating DP.
- 2. Check monitor for point of release.
- 3. Report to nearest upwind designated safe briefing / muster area.
- 4. Check status of personnel (in an attempt to rescue, use the buddy system).
- 5. Assigns least essential person to notify Drill Site Manager and tool pusher by quickest means in case of their absence.
- 6. Assumes the responsibilities of the Drill Site Manager and tool pusher until they arrive should they be absent.

Derrick man

Floor man #1

Floor man #2

Mud engineer:

- 1. Will remain in briefing / muster area until instructed by supervisor.

Safety personnel:

- 1. Report to nearest upwind designated safe briefing / muster area.
- 2. When instructed, begin check of mud for pH and H₂S level. (Garrett gas train.)

- 1. Mask up and check status of all personnel and secure operations as instructed by drill site manager.

Taking a kick

When taking a kick during an H₂S emergency, all personnel will follow standard Well control procedures after reporting to briefing area and masking up.

Open-hole logging

All unnecessary personnel off floor. Drill Site Manager and safety personnel should monitor condition, advise status and determine need for use of air equipment.

Running casing or plugging

Following the same “tripping” procedure as above. Drill Site Manager and safety personnel should determine if all personnel have access to protective equipment.

Ignition procedures

The decision to ignite the well is the responsibility of the operator (Oxy Drilling Management). The decision should be made only as a last resort and in a situation where it is clear that:

1. Human life and property are endangered.
2. There is no hope controlling the blowout under the prevailing conditions at the well.

Instructions for igniting the well

1. Two people are required for the actual igniting operation. They must wear self-contained breathing units and have a safety rope attached. One man (tool pusher or safety engineer) will check the atmosphere for explosive gases with the gas monitor. The other man is responsible for igniting the well.
2. Primary method to ignite: 25 mm flare gun with range of approximately 500 feet.
3. Ignite upwind and do not approach any closer than is warranted.
4. Select the ignition site best for protection, and which offers an easy escape route.
5. Before firing, check for presence of combustible gas.
6. After lighting, continue emergency action and procedure as before.
7. All unassigned personnel will remain in briefing area until instructed by supervisor or directed by the Drill Site Manager.

Remember: After well is ignited, burning hydrogen sulfide will convert to sulfur dioxide, which is also highly toxic. **Do not assume the area is safe after the well is ignited.**

Status check list

Note: All items on this list must be completed before drilling to production casing point.

1. H2S sign at location entrance.
2. Two (2) wind socks located as required.
3. Four (4) 30-minute positive pressure air packs (2 at each Briefing area) on location for all rig personnel and mud loggers.
4. Air packs inspected and ready for use.
5. Cascade system and hose line hook-up as needed.
6. Cascade system for refilling air bottles as needed.
7. Condition flag on location and ready for use.
8. H2S detection system hooked up and tested.
9. H2S alarm system hooked up and tested.
10. Hand operated H2S detector with tubes on location.
11. 1 – 100' length of nylon rope on location.
12. All rig crew and supervisors trained as required.
13. All outside service contractors advised of potential H2S hazard on well.
14. No smoking sign posted and a designated smoking area identified.
15. Calibration of all H2S equipment shall be noted on the IADC report.

Checked by: _____ Date: _____

Procedural check list during H2S events

Perform each tour:

1. Check fire extinguishers to see that they have the proper charge.
2. Check breathing equipment to ensure that it is in proper working order.
3. Make sure all the H2S detection system is operative.

Perform each week:

1. Check each piece of breathing equipment to make sure that demand or forced air regulator is working. This requires that the bottle be opened and the mask assembly be put on tight enough so that when you inhale, you receive air or feel air flow.
2. BOP skills (well control drills).
3. Check supply pressure on BOP accumulator stand by source.
4. Check breathing equipment mask assembly to see that straps are loosened and turned back, ready to put on.
5. Check pressure on breathing equipment air bottles to make sure they are charged to full volume. (Air quality checked for proper air grade "D" before bringing to location)
6. Confirm pressure on all supply air bottles.
7. Perform breathing equipment drills with on-site personnel.
8. Check the following supplies for availability.
 - A. Emergency telephone list.
 - B. Hand operated H2S detectors and tubes.

General evacuation plan

1. When the company approved supervisor (Drill Site Manager, consultant, rig pusher, or driller) determines the H₂S gas cannot be limited to the well location and the public will be involved, he will activate the evacuation plan.
2. Drill Site Manager or designee will notify local government agency that a hazardous condition exists and evacuation needs to be implemented.
3. Company or contractor safety personnel that have been trained in the use of H₂S detection equipment and self-contained breathing equipment will monitor H₂S concentrations, wind directions, and area of exposure. They will delineate the outer perimeter of the hazardous gas area. Extension to the evacuation area will be determined from information gathered.
4. Law enforcement personnel (state police, police dept., fire dept., and sheriff's dept.) Will be called to aid in setting up and maintaining road blocks. Also, they will aid in evacuation of the public if necessary.
5. After the discharge of gas has been controlled, company safety personnel will determine when the area is safe for re-entry.

Important: Law enforcement personnel will not be asked to come into a contaminated area. Their assistance will be limited to uncontaminated areas. Constant radio contact will be maintained with them.

Emergency actions

Well blowout – if emergency

1. Evacuate all personnel to “Safe Briefing / Muster Areas” or off location if needed.
2. If sour gas – evacuate rig personnel.
3. If sour gas – evacuate public within 3000 ft radius of exposure.
4. Don SCBA and shut well in if possible using the buddy system.
5. Notify Drilling Superintendent and call 911 for emergency help (fire dept and ambulance) if needed.
6. Implement the Blowout Contingency Plan, and Drilling Emergency Action Plan.
6. Give first aid as needed.

Person down location/facility

1. If immediately possible, contact 911. Give location and wait for confirmation.
2. Don SCBA and perform rescue operation using buddy system.

Toxic effects of hydrogen sulfide

Hydrogen sulfide is extremely toxic. The acceptable ceiling concentration for eight-hour exposure is 10 ppm, which is .001% by volume. Hydrogen sulfide is heavier than air (specific gravity – 1.192) and colorless. It forms an explosive mixture with air between 4.3 and 46.0 percent by volume. Hydrogen sulfide is almost as toxic as hydrogen cyanide and is between five and six times more toxic than carbon monoxide. Toxicity data for hydrogen sulfide and various other gases are compared in table i. Physical effects at various hydrogen sulfide exposure levels are shown in table ii.

Table i
Toxicity of various gases

Common name	Chemical formula	Specific gravity (sc=1)	Threshold limit (1)	Hazardous limit (2)	Lethal concentration (3)
Hydrogen Cyanide	Hcn	0.94	10 ppm	150 ppm/hr	300 ppm
Hydrogen Sulfide	H2S	1.18	10 ppm	250 ppm/hr	600 ppm
Sulfur Dioxide	So2	2.21	5 ppm	-	1000 ppm
Chlorine	Cl2	2.45	1 ppm	4 ppm/hr	1000 ppm
Carbon Monoxide	Co	0.97	50 ppm	400 ppm/hr	1000 ppm
Carbon Dioxide	Co2	1.52	5000 ppm	5%	10%
Methane	Ch4	0.55	90,000 ppm	Combustible above 5% in air	

- 1) threshold limit – concentration at which it is believed that all workers may be repeatedly exposed day after day without adverse effects.
- 2) hazardous limit – concentration that will cause death with short-term exposure.
- 3) lethal concentration – concentration that will cause death with short-term exposure.

Toxic effects of hydrogen sulfide

Table ii
Physical effects of hydrogen sulfide

Percent (%)	Ppm	Concentration		Physical effects
		Grains	100 std. Ft3*	
0.001	<10		00.65	Obvious and unpleasant odor.

0.002	10	01.30	Safe for 8 hours of exposure.
0.010	100	06.48	Kill smell in 3 – 15 minutes. May sting eyes and throat.
0.020	200	12.96	Kills smell shortly; stings eyes and throat.
0.050	500	32.96	Dizziness; breathing ceases in a few minutes; needs prompt artificial respiration.
0.070	700	45.36	Unconscious quickly; death will result if not rescued promptly.
0.100	1000	64.30	Unconscious at once; followed by death within minutes.

*at 15.00 psia and 60'f.

Use of self-contained breathing equipment (SCBA)

1. Written procedures shall be prepared covering safe use of SCBA's in dangerous atmosphere, which might be encountered in normal operations or in emergencies. Personnel shall be familiar with these procedures and the available SCBA.
2. SCBA's shall be inspected frequently at random to insure that they are properly used, cleaned, and maintained.
3. Anyone who may use the SCBA's shall be trained in how to insure proper face-piece to face seal. They shall wear SCBA's in normal air and then wear them in a test atmosphere. (note: such items as facial hair {beard or sideburns} and eyeglasses will not allow proper seal.) Anyone that may be reasonably expected to wear SCBA's should have these items removed before entering a toxic atmosphere. A special mask must be obtained for anyone who must wear eyeglasses or contact lenses.
4. Maintenance and care of SCBA's:
 - a. A program for maintenance and care of SCBA's shall include the following:
 1. Inspection for defects, including leak checks.
 2. Cleaning and disinfecting.
 3. Repair.
 4. Storage.
 - b. Inspection, self-contained breathing apparatus for emergency use shall be inspected monthly.
 1. Fully charged cylinders.
 2. Regulator and warning device operation.
 3. Condition of face piece and connections.
 4. Rubber parts shall be maintained to keep them pliable and prevent deterioration.
 - c. Routinely used SCBA's shall be collected, cleaned and disinfected as frequently as necessary to insure proper protection is provided.
5. Persons assigned tasks that requires use of self-contained breathing equipment shall be certified physically fit (medically cleared) for breathing equipment usage at least annually.
6. SCBA's should be worn when:
 - A. Any employee works near the top or on top of any tank unless test reveals less than 10 ppm of H₂S.

- B. When breaking out any line where H₂S can reasonably be expected.
- C. When sampling air in areas to determine if toxic concentrations of H₂S exists.
- D. When working in areas where over 10 ppm H₂S has been detected.
- E. At any time there is a doubt as to the H₂S level in the area to be entered.

Rescue
First aid for H₂S poisoning

Do not panic!


Remain calm – think!

- 1. Don SCBA breathing equipment.
- 2. Remove victim(s) utilizing buddy system to fresh air as quickly as possible. (go up-wind from source or at right angle to the wind. Not down wind.)
- 3. Briefly apply chest pressure – arm lift method of artificial respiration to clean the victim's lungs and to avoid inhaling any toxic gas directly from the victim's lungs.
- 4. Provide for prompt transportation to the hospital, and continue giving artificial respiration if needed.
- 5. Hospital(s) or medical facilities need to be informed, before-hand, of the possibility of H₂S gas poisoning – no matter how remote the possibility is.
- 6. Notify emergency room personnel that the victim(s) has been exposed to H₂S gas.


Besides basic first aid, everyone on location should have a good working knowledge of artificial respiration.

Revised CM 6/27/2012

Oxy Single Centrifuge
 Closed Loop System – New
 Mexico Flex III
 May 28, 2013

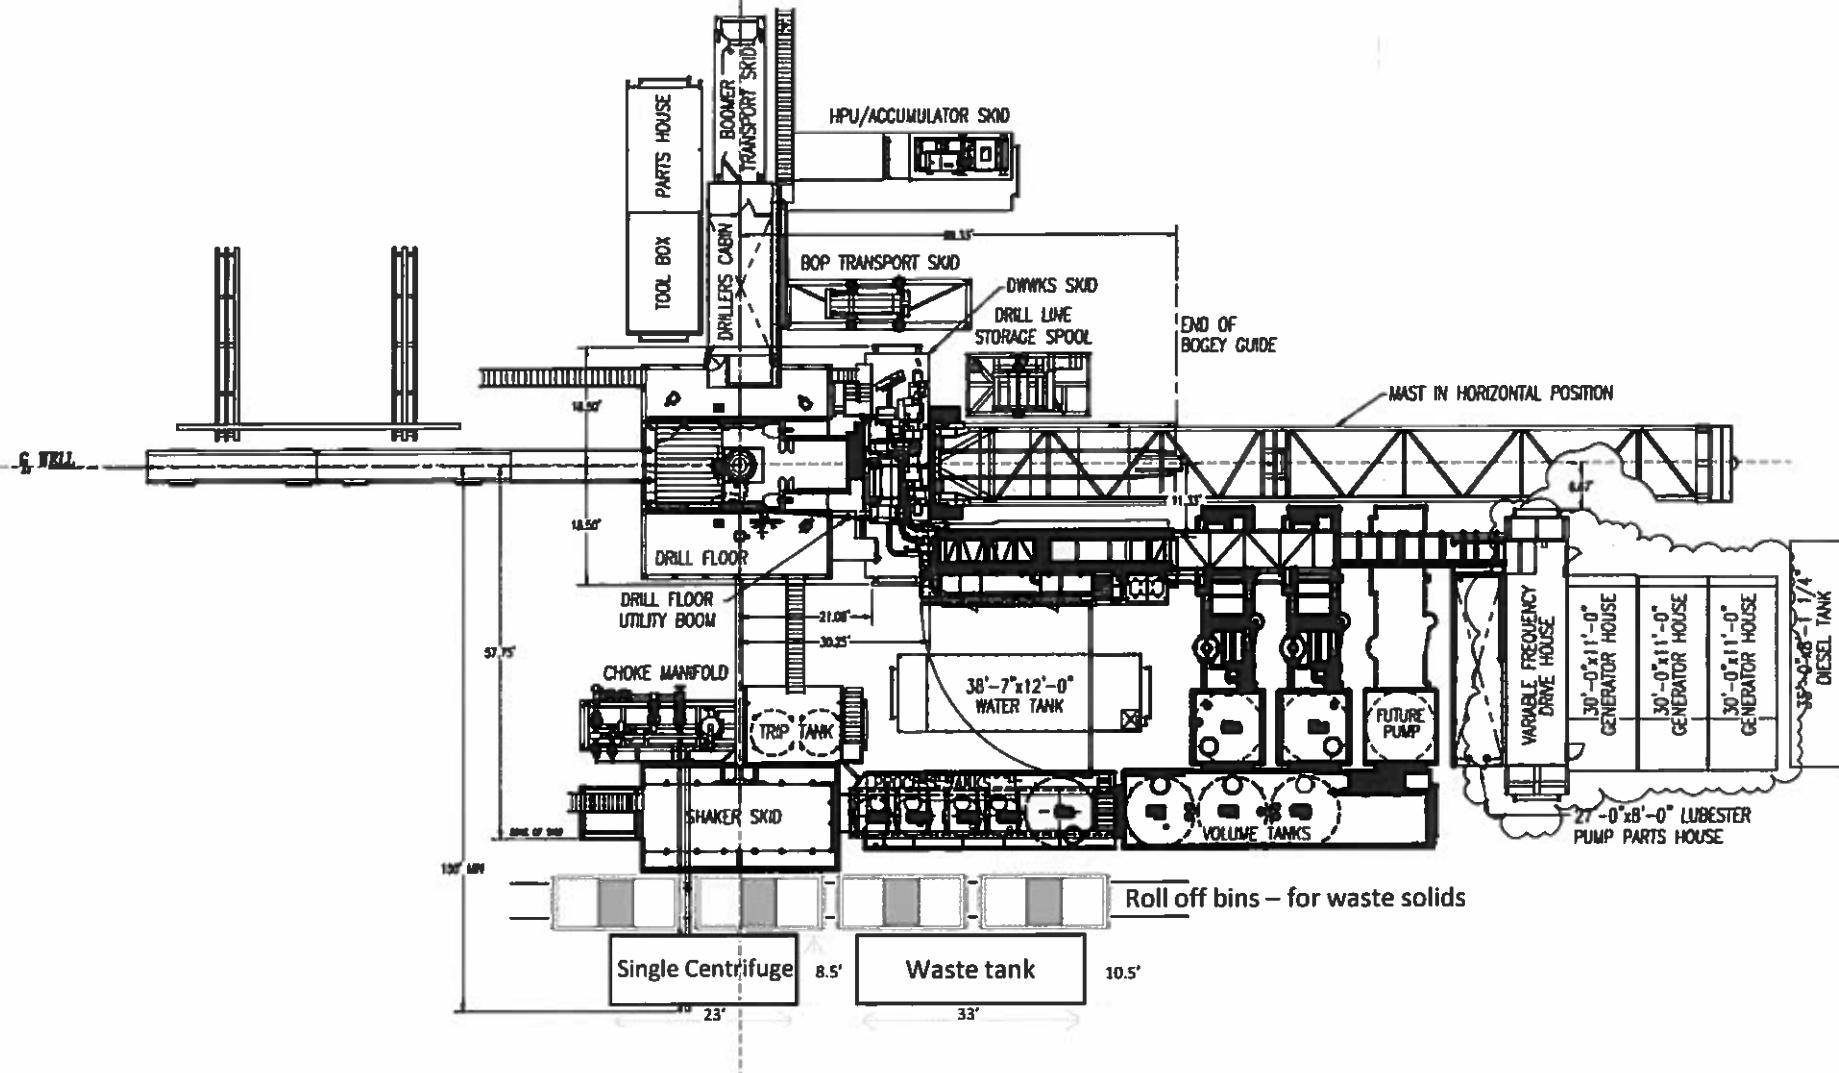

Oxy

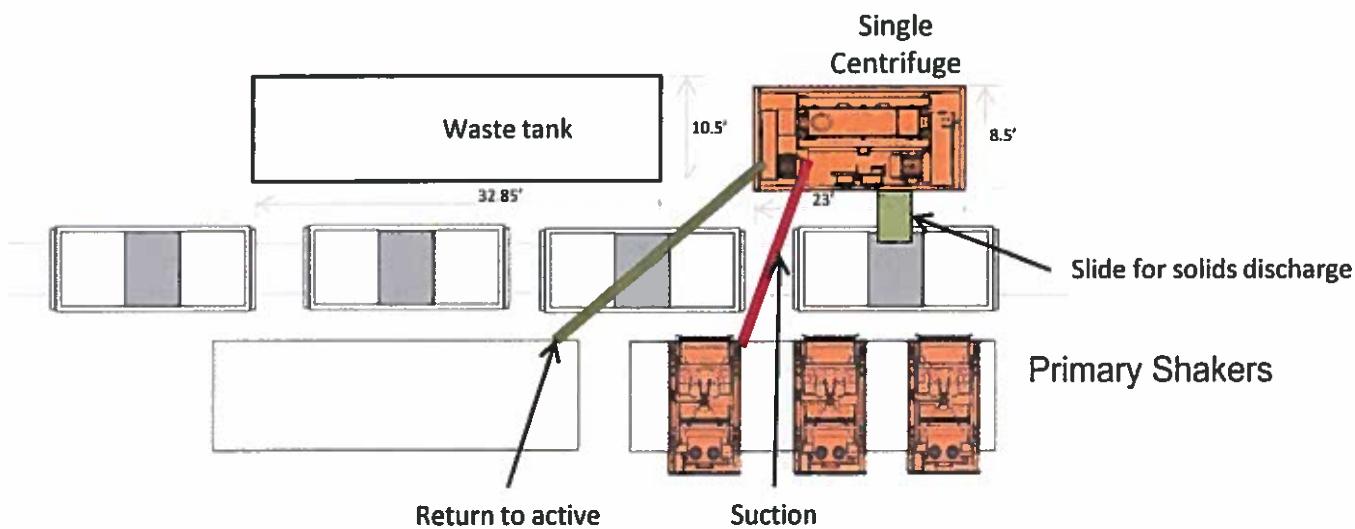

Well Head



Oxy Single Centrifuge
Closed Loop System – New
Mexico Flex III
May 28, 2013



SITE PLAN

SNDDNS_23S31E_34_2

SEC. 34 TWP. 23-S RGE. 31-E

SURVEY: N.M.P.M.

COUNTY: EDDY


OPERATOR: OXY USA, INC.

U.S.G.S. TOPOGRAPHIC MAP: LOS MENADOS, N.M.

FAA PERMIT NEEDED: NO



75' 0' 75' 150'
SCALE: 1" = 150'

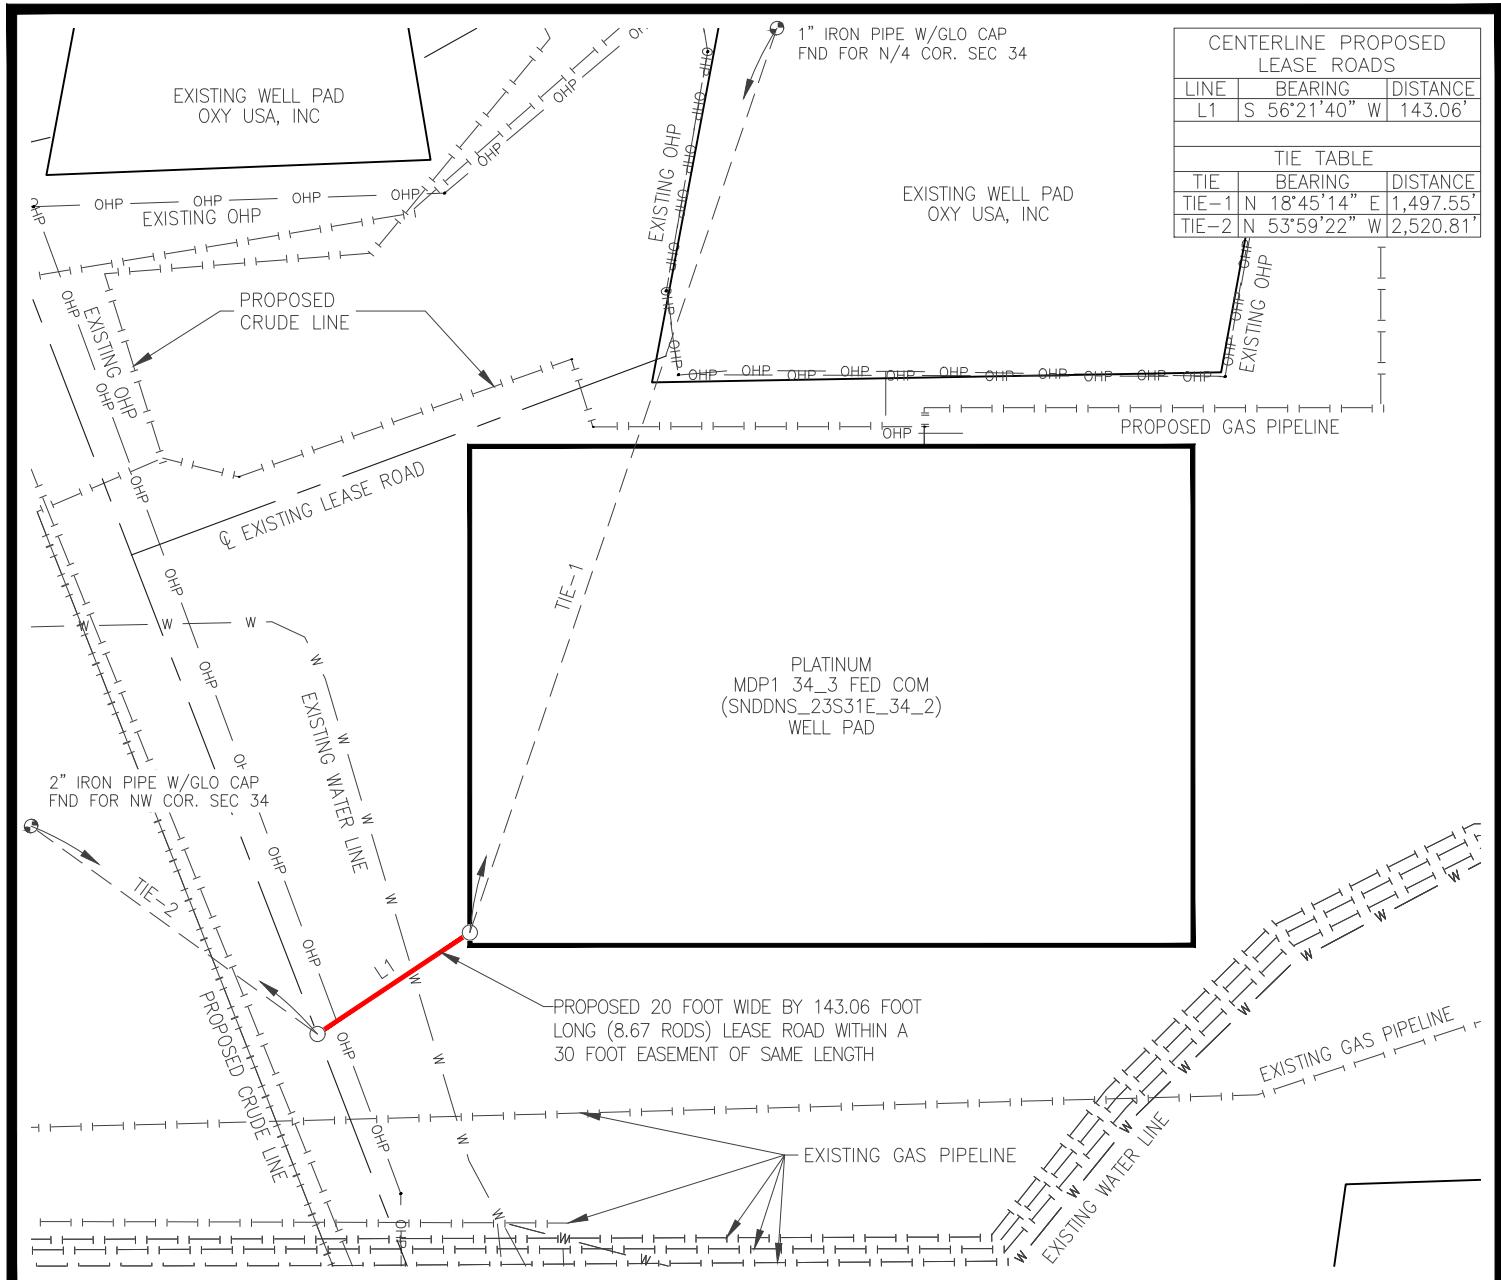

10/02/2023 10/23/2023
DATE SURVEYED DATE DRAWN

REV. DATE BY

I, DAVID W. MYERS, NEW MEXICO PROFESSIONAL SURVEYOR NO. 11403 DO HEREBY CERTIFY THAT THIS EASEMENT SURVEY PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION; THAT I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF. I FURTHER CERTIFY THAT THIS SURVEY IS NOT A LAND DIVISION OR SUBDIVISION AS DEFINED IN THE NEW MEXICO SUBDIVISION ACT AND THAT THIS INSTRUMENT IS AN EASEMENT SURVEY PLAT CROSSING AN EXISTING TRACT OR TRACTS.


BASIS OF BEARING

ALL BEARINGS AND COORDINATES REFER TO NAD 83, NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE, U.S. SURVEY FEET. (ALL BEARINGS, DISTANCES, COORDINATES AND AREAS ARE GRID MEASUREMENTS UTILIZING A COMBINED SCALE FACTOR OF 0.99978064 AND A CONVERGENCE ANGLE OF 0.30307491°.)

LEGEND

- EXISTING ROAD
- PROPOSED ROAD
- SURFACE SITE EDGE
- EXIST. PIPELINE
- MONUMENT
- QUARTER SPLIT
- OHP — OVERHEAD POWER FENCE
- SECTION LINE
- PROPERTY LINE
- W — WATER LINE
- SWD — SALT WATER LINE

NOVEMBER 8, 2023

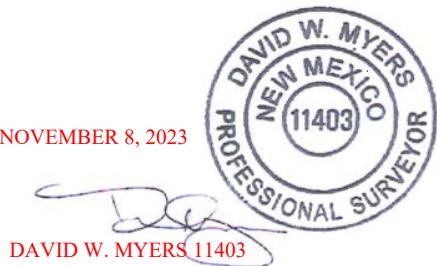

PREPARED BY:
DELTA FIELD SERVICES, LLC
510 TRENTON ST.
WEST MONROE, LA 71291
318-323-6900 OFFICE
JOB No. OXY_0033_PT01
SHEET 1 OF 3



SITE PLAN


SNDDNS_23S31E_34_2
 SEC. 34 TWP. 23-S RGE. 31-E
 SURVEY: N.M.P.M.
 COUNTY: EDDY
 OPERATOR: OXY USA, INC.
 U.S.G.S.TOPOGRAPHIC MAP: LOS MENADOS, N.M.
 FAA PERMIT NEEDED: NO

TANK BATTERY
 RECLAMATION
 30' TOP SOIL
 20' DISTURBANCE AREA



50' 0' 50' 100'
SCALE: 1" = 100'

NAD 83		NAD 27	
A	E: (X)716313.10 N: (Y)460725.24	E: (X)675129.49 N: (Y)460665.97	LAT: 32.26534003 LON: -103.76724184 LAT: 32.26521689 LON: -103.76675691
B	E: (X)716878.12 N: (Y)460725.32	E: (X)675694.51 N: (Y)460666.05	LAT: 32.26533204 LON: -103.76541394 LAT: 32.26520890 LON: -103.76492904
C	E: (X)716878.17 N: (Y)460335.34	E: (X)675694.55 N: (Y)460276.08	LAT: 32.36426008 LON: -103.76542045 LAT: 32.26413693 LON: -103.7649356
D	E: (X)716313.14 N: (Y)460335.31	E: (X)675129.52 N: (Y)460276.05	LAT: 32.26426819 LON: -103.76724835 LAT: 32.26414506 LON: -103.76676347

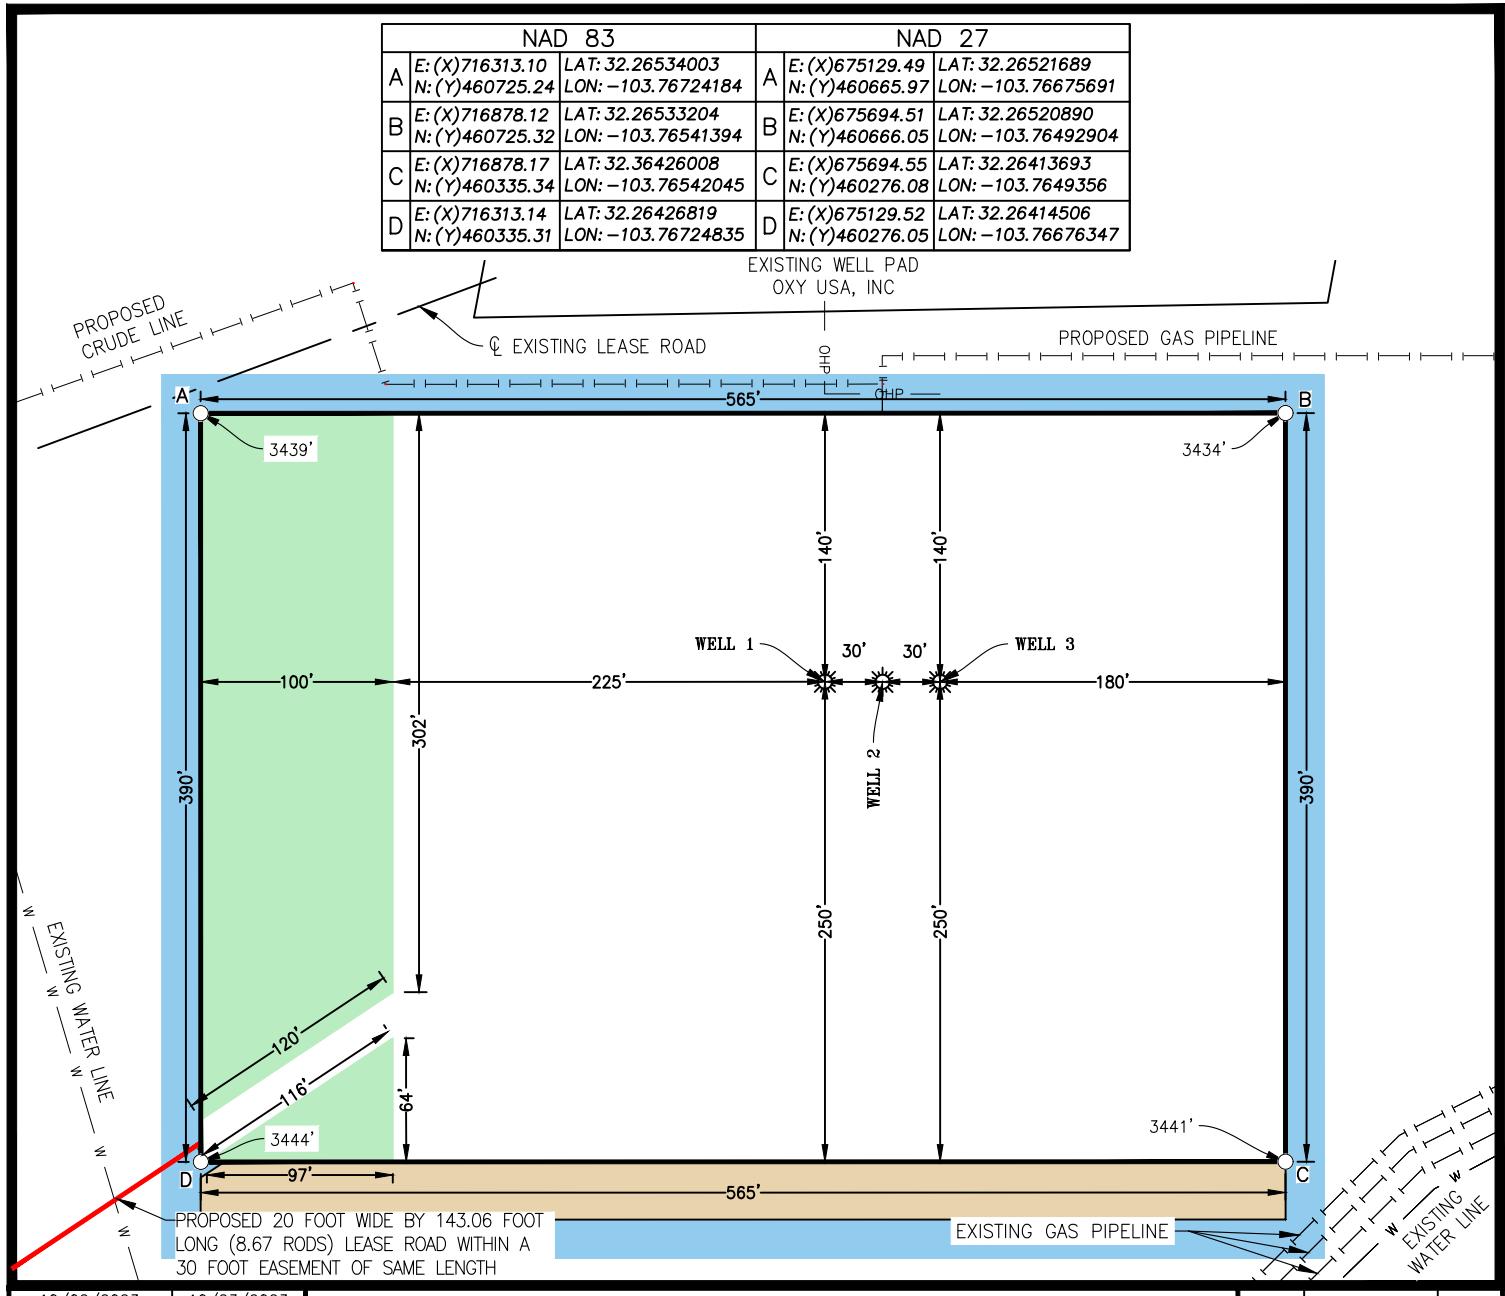

10/02/2023 10/23/2023
DATE SURVEYED DATE DRAWN

I, DAVID W. MYERS, NEW MEXICO PROFESSIONAL SURVEYOR NO. 11403 DO HEREBY CERTIFY THAT THIS EASEMENT SURVEY PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION; THAT I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF. I FURTHER CERTIFY THAT THIS SURVEY IS NOT A LAND DIVISION OR SUBDIVISION AS DEFINED IN THE NEW MEXICO SUBDIVISION ACT AND THAT THIS INSTRUMENT IS AN EASEMENT SURVEY PLAT CROSSING AN EXISTING TRACT OR TRACTS.

REV. DATE BY

BASIS OF BEARING

ALL BEARINGS AND COORDINATES REFER TO NAD 83, NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE, U.S. SURVEY FEET. (ALL BEARINGS, DISTANCES, COORDINATES AND AREAS ARE GRID MEASUREMENTS UTILIZING A COMBINED SCALE FACTOR OF 0.99978064 AND A CONVERGENCE ANGLE OF 0.30307491°.)

LEGEND	
EXISTING ROAD	OHP
PROPOSED ROAD	X X FENCE
SURFACE SITE EDGE	SECTION LINE
EXIST. PIPELINE	PROPERTY LINE
MONUMENT	W W WATER LINE
QUARTER SPLIT	SWD SALT WATER LINE

NOVEMBER 8, 2023

DAVID W. MYERS 11403




PREPARED BY:
 DELTA FIELD SERVICES, LLC
 510 TRENTON ST.
 WEST MONROE, LA 71291
 318-323-6900 OFFICE
 JOB No. OXY_0033_PT01
 SHEET 2 OF 3



SITE PLAN

SNDDNS_23S31E_34_2
 SEC. 34 TWP. 23-S RGE. 31-E
 SURVEY: N.M.P.M.
 COUNTY: EDDY
 OPERATOR: OXY USA, INC.
 U.S.G.S.TOPOGRAPHIC MAP: LOS MENADOS, N.M.
 FAA PERMIT NEEDED: NO

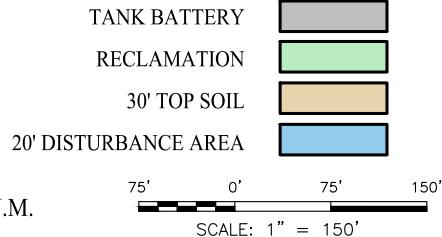

WELL 1
 PLATINUM MDP1 34_3 FED COM 43H
 OXY USA, INC.
 1,177' FNL 2,477' FWL, SECTION 34
NAD 83, SPCS NM EAST
 X:716638.29' / Y:460585.37'
 LAT:32.26495083N / LON:103.76619221W
NAD 27, SPCS NM EAST
 X:675454.67' / Y:460526.10'
 LAT:32.26482769N / LON:103.76570732W
 ELEVATION = 3437'

WELL 2
 PLATINUM MDP1 34_3 FED COM 54H
 OXY USA, INC.
 1,177' FNL 2,507' FWL, SECTION 34
NAD 83, SPCS NM EAST
 X:716668.25' / Y:460585.30'
 LAT:32.26495022N / LON:103.76609528W
NAD 27, SPCS NM EAST
 X:675484.63' / Y:460526.04'
 LAT:32.26482708N / LON:103.76561039W
 ELEVATION = 3437'

WELL 3
 PLATINUM MDP1 34_3 FED COM 45H
 OXY USA, INC.
 1,177' FNL 2,537' FWL, SECTION 34
NAD 83, SPCS NM EAST
 X:716698.24' / Y:460585.29'
 LAT:32.26494974N / LON:103.76599825W
NAD 27, SPCS NM EAST
 X:675514.63' / Y:460526.02'
 LAT:32.26482660N / LON:103.76551336W
 ELEVATION = 3437'

10/02/2023	10/23/2023
DATE SURVEYED	DATE DRAWN

REV.	DATE	BY
------	------	----

I, DAVID W. MYERS, NEW MEXICO PROFESSIONAL SURVEYOR NO. 11403 DO HEREBY CERTIFY THAT THIS EASEMENT SURVEY PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION; THAT I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF. I FURTHER CERTIFY THAT THIS SURVEY IS NOT A LAND DIVISION OR SUBDIVISION AS DEFINED IN THE NEW MEXICO SUBDIVISION ACT AND THAT THIS INSTRUMENT IS AN EASEMENT SURVEY PLAT CROSSING AN EXISTING TRACT OR TRACTS.

BASIS OF BEARING

ALL BEARINGS AND COORDINATES REFER TO NAD 83, NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE, U.S. SURVEY FEET. (ALL BEARINGS, DISTANCES, COORDINATES AND AREAS ARE GRID MEASUREMENTS UTILIZING A COMBINED SCALE FACTOR OF 0.99978064 AND A CONVERGENCE ANGLE OF 0.30307491°.)

LEGEND

EXISTING ROAD	OHP	OVERHEAD POWER
PROPOSED ROAD	X	FENCE
SURFACE SITE EDGE	- - -	SECTION LINE
EXIST. PIPELINE	P	PROPERTY LINE
MONUMENT	W	WATER LINE
QUARTER SPLIT	SWD	SALT WATER LINE


NOVEMBER 8, 2023


 DAVID W. MYERS 11403
 NEW MEXICO
 PROFESSIONAL SURVEYOR



PREPARED BY:
 DELTA FIELD SERVICES, LLC
 510 TRENTON ST.
 WEST MONROE, LA 71291
 318-323-6900 OFFICE
 JOB No. OXY_0033_PT01
 SHEET 3 OF 3

10M Choke Panel

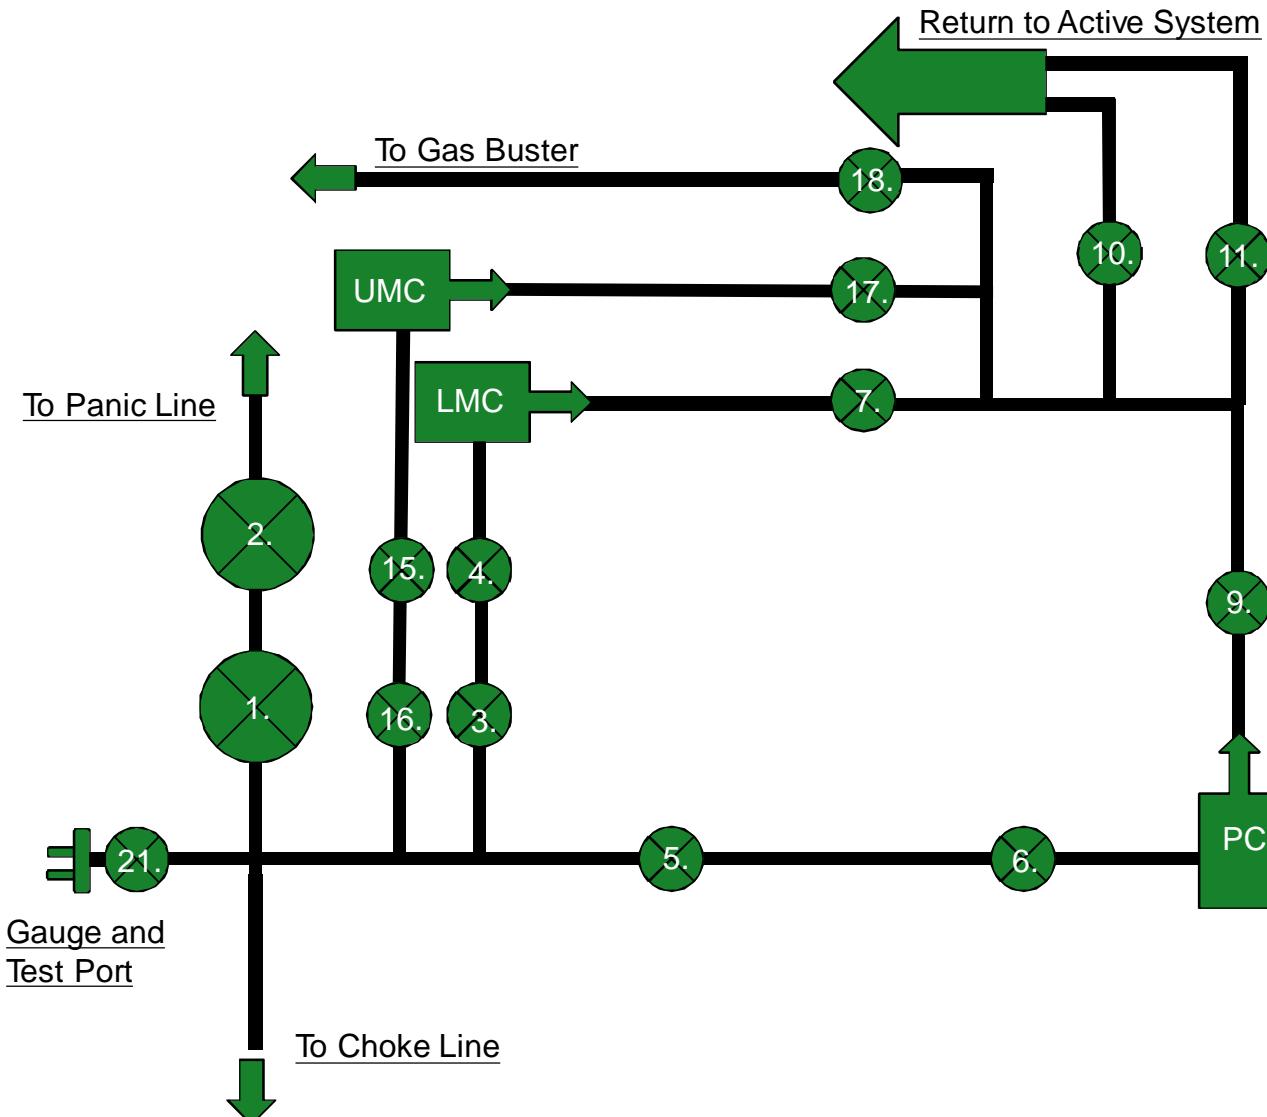


1. Choke Manifold Valve
2. Choke Manifold Valve
3. Choke Manifold Valve
4. Choke Manifold Valve
5. Choke Manifold Valve
6. Choke Manifold Valve
7. Choke Manifold Valve
8. **PC – Power Choke**
9. Choke Manifold Valve
10. Choke Manifold Valve
11. Choke Manifold Valve
12. **LMC – Lower Manual Choke**
13. **UMC – Upper manual choke**


15. Choke Manifold Valve
16. Choke Manifold Valve
17. Choke Manifold Valve
18. Choke Manifold Valve



21. Vertical Choke Manifold Valve

***All Valves 3" minimum**

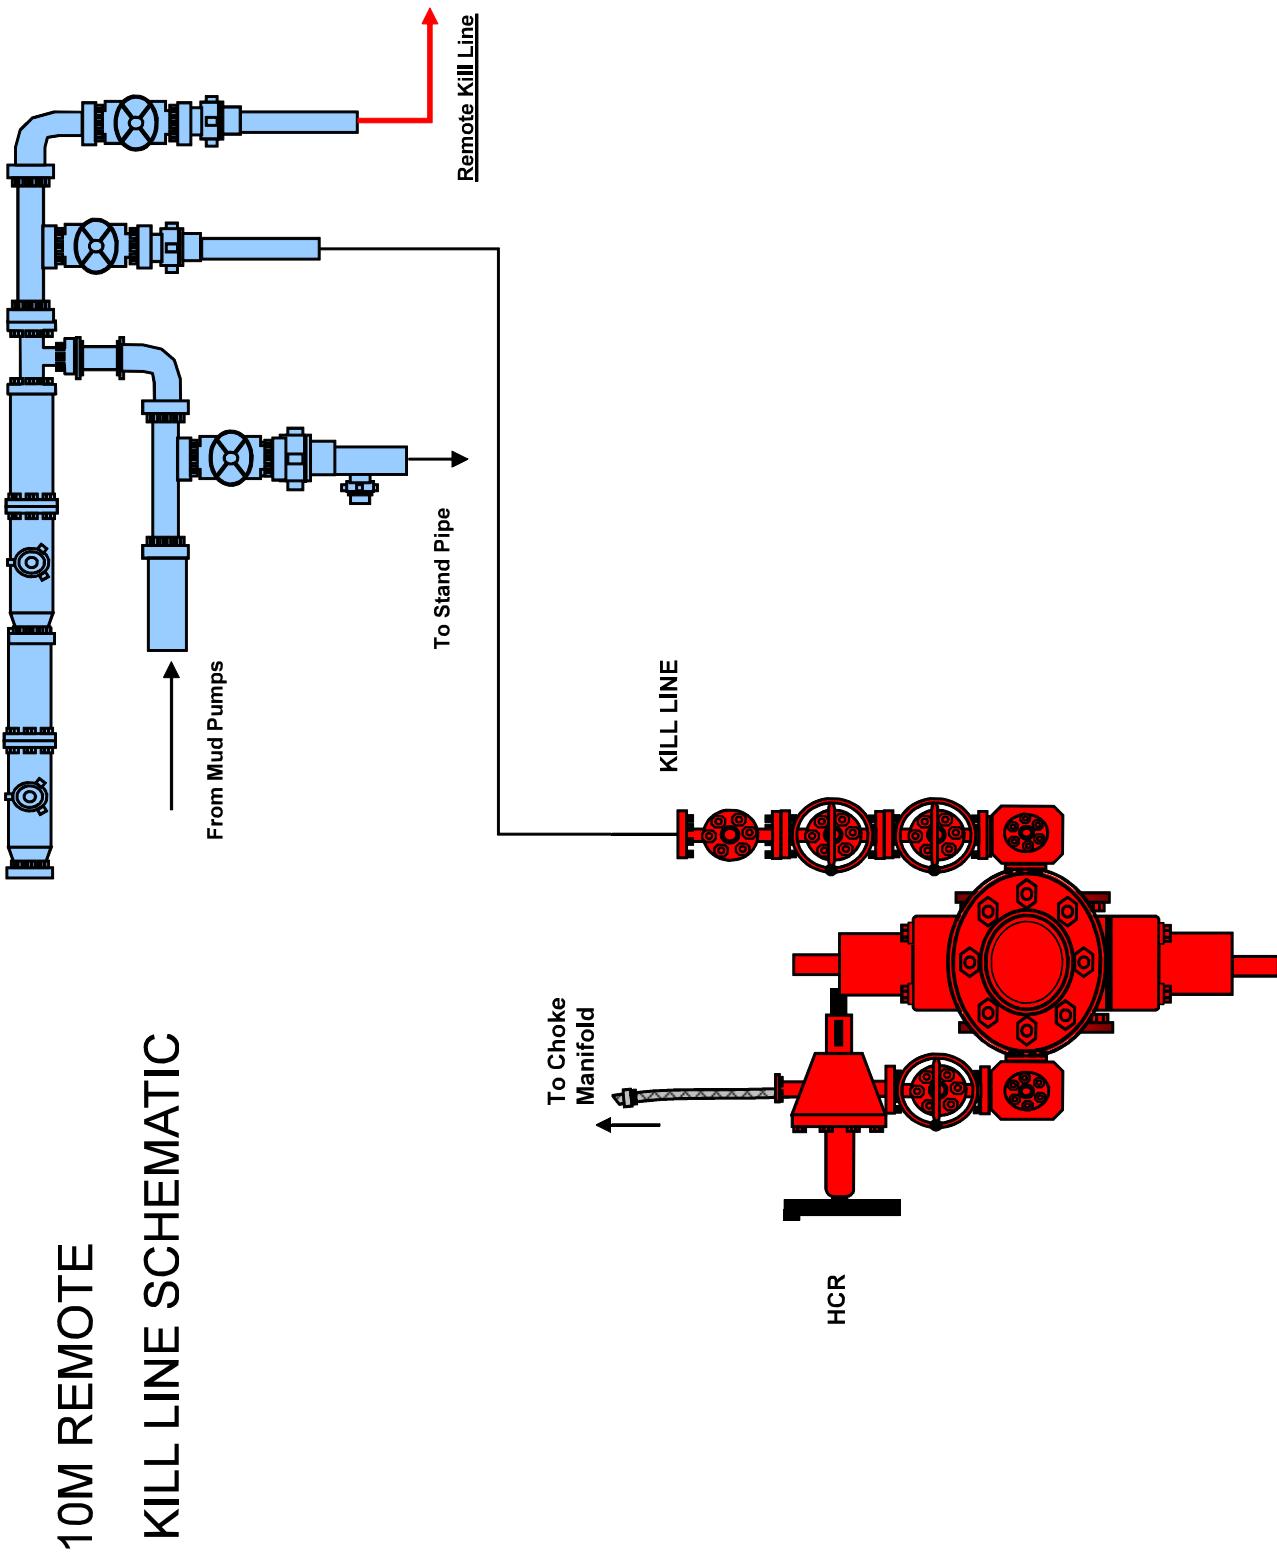

Gas Separator Routing
Flex III Rigs

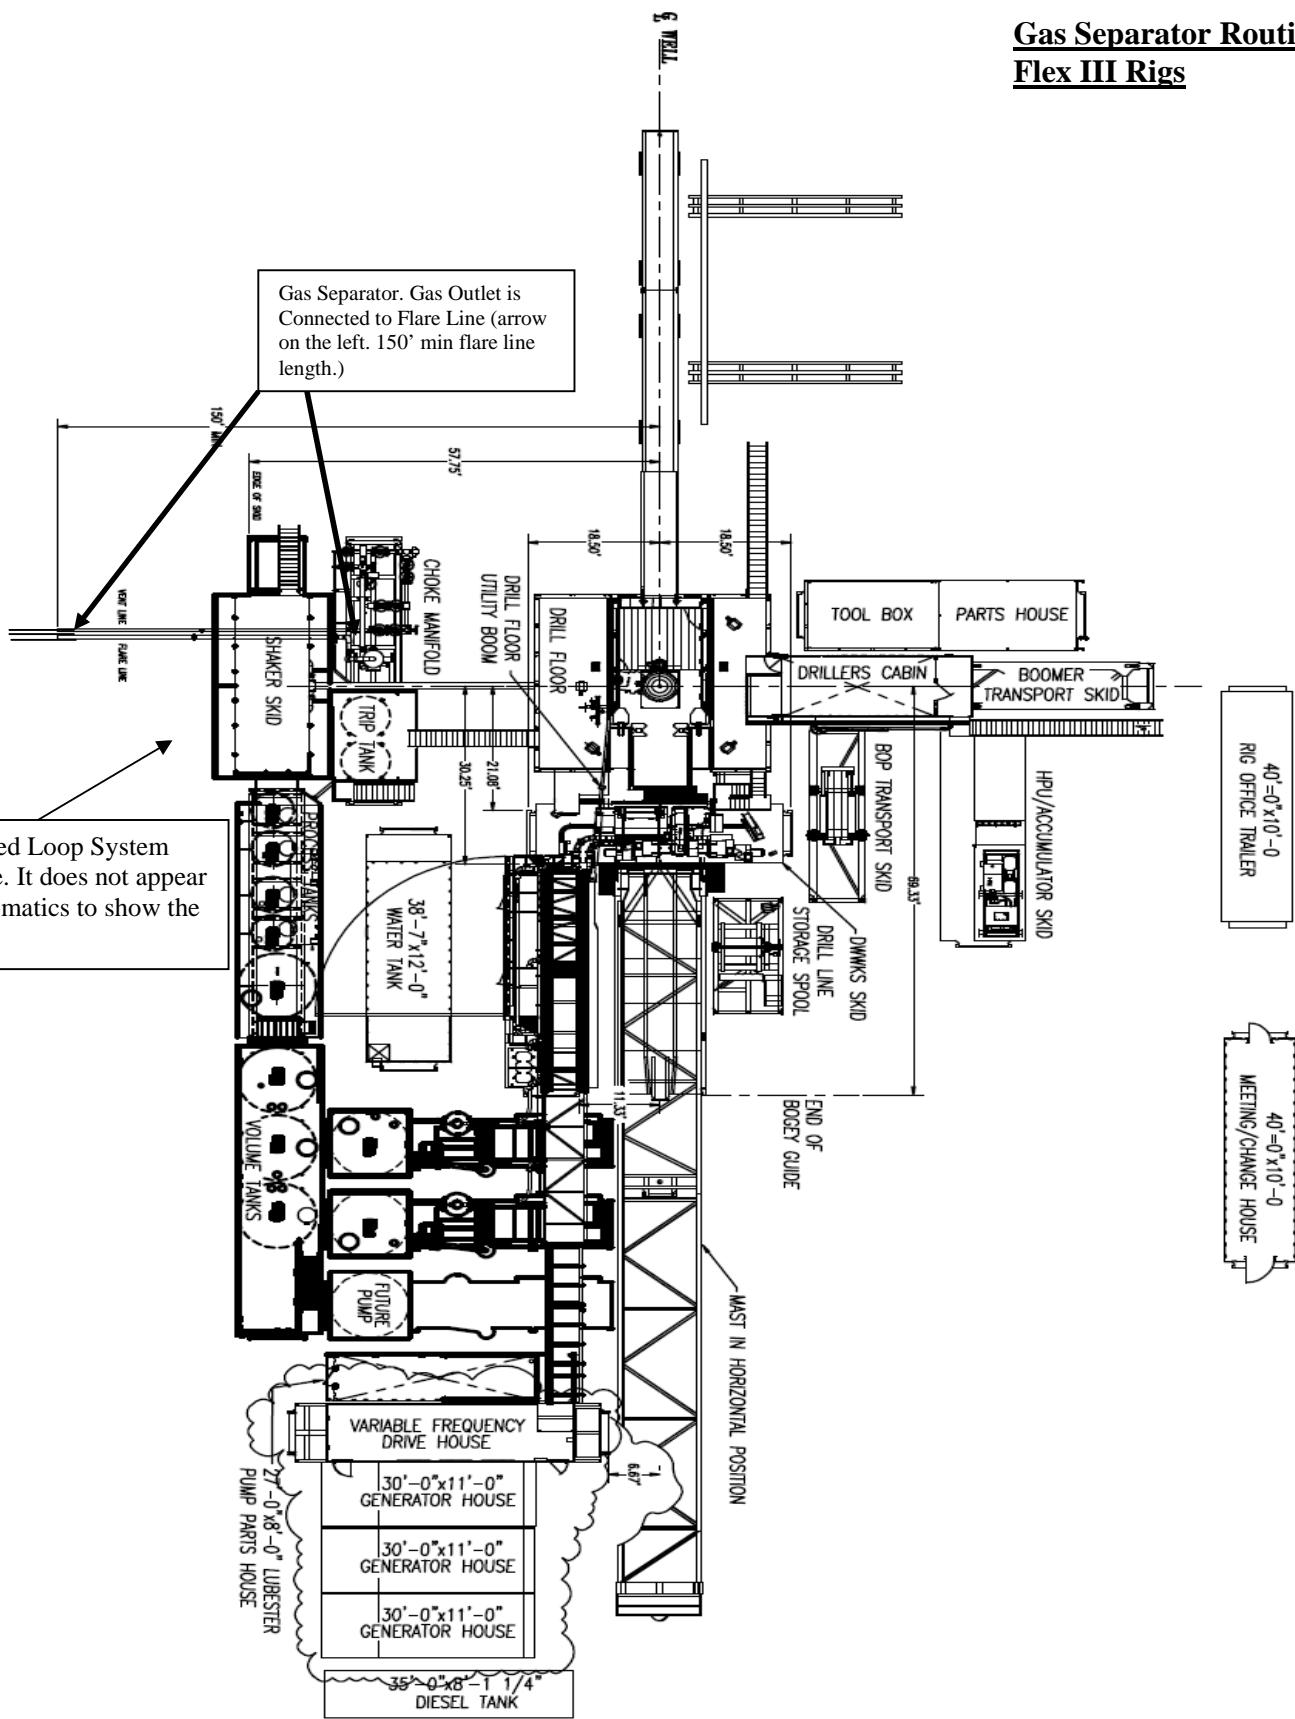

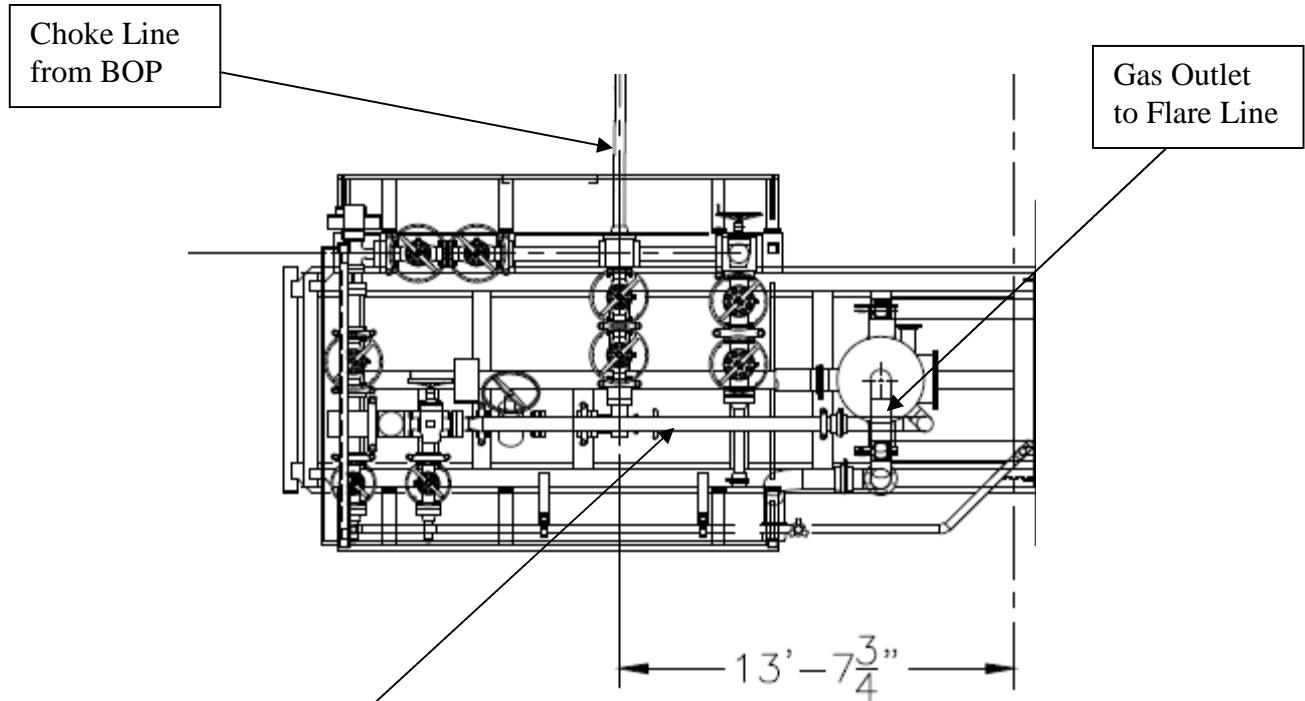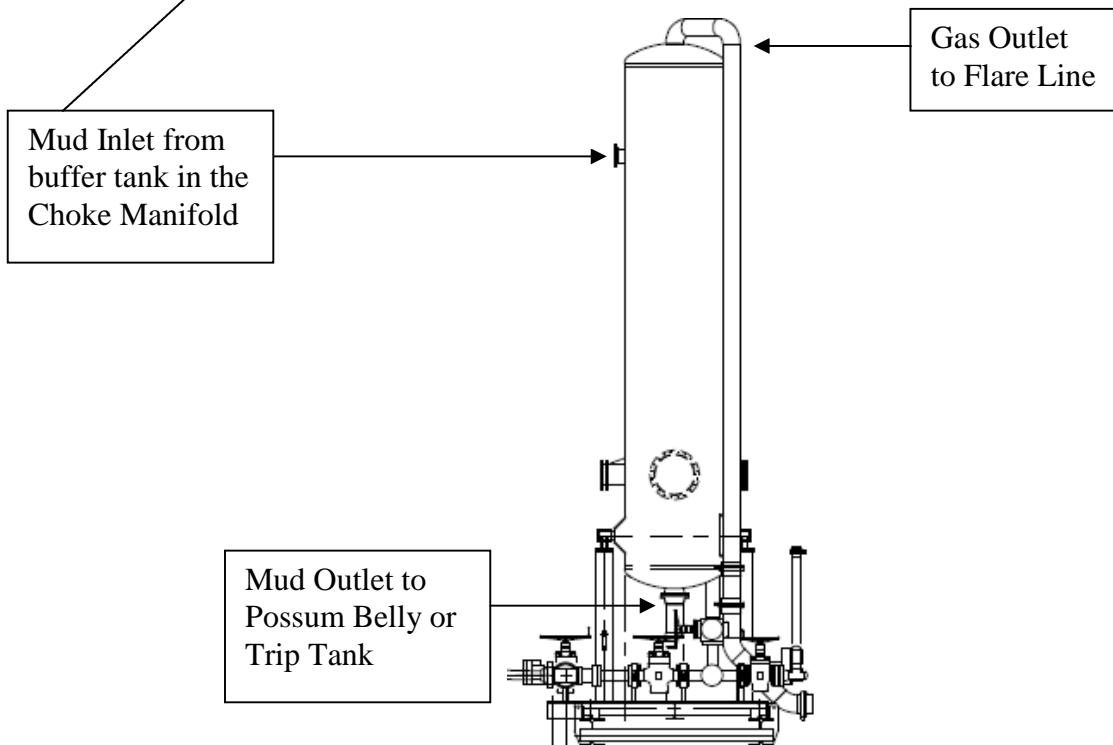Choke Manifold – Gas Separator (Top View)**Choke Manifold – Gas Separator (Side View)**

5/10M BOP Stack

Mud Cross Values:

5. 10M Check Valve

6. Outside 10M Kill Line Valve

7. Inside 10M Kill Line

8. Outside10M Kill Line

9 10M HCR Valve

The diagram illustrates a horizontal pipe assembly with the following components and features:

- ROTATING HEAD:** Located on the far left, connected to the pipe assembly.
- Fill Line:** A line extending from the bottom left, ending in a valve.
- PIPE:** Three vertical sections of green pipe, each with a valve at the top.
- BLIND:** A vertical section of green pipe with a valve at the top, positioned between the first and second pipe sections.
- SPOOL:** A vertical section of green pipe with a valve at the top, located on the far right.
- Valves:** Green valves with diagonal hatching, labeled 5., 6., 7., 8., and 9. from bottom to top.
- Yellow Labels:** Labels 5., 6., 7., 8., and 9. are placed in yellow boxes above the valves.
- Upward Arrow:** An arrow pointing upwards from the top of the pipe assembly.

*Minimum ID = 2-1/16" on Kill Line side and 3" minimum ID on choke line side

To K
Line

To Co-Flex and Choke Manifold

2. 10,000 psi Upper Pipe Ram
(13-5/8" ID)

3. 10,000 psi Blind Ram (13-5/8" ID)

4. 10,000 psi Lower Pipe
Ram (13-5/8" ID)



Certificate of Conformity

ContiTech

Certificate Number H100161	COM Order Reference 1429702	Customer Name & Address			
Customer Purchase Order No:	740382384				
Project:					
Test Center Address		Accepted by COM Inspection			
ContiTech Oil & Marine Corp. 11535 Brittmoore Park Drive Houston, TX 77041 USA	Signed: Date: 06/27/22	Gerson Mejia-Lazo 	Accepted by Client Inspection		

We certify that the items detailed below meet the requirements of the customer's Purchase Order referenced above, and are in conformance with the specifications given below.

Item	Part No.	Description	Qty	Serial Number	Specifications
------	----------	-------------	-----	---------------	----------------

30	RECERTIFICATION	3" ID 10K Choke and Kill Hose x 35ft OAL	1	70024	ContiTech Standard
----	-----------------	--	---	-------	--------------------

ContiTech Oil Marine Corp.

11535 Brittmoore Park Drive Houston, TX 77041, USA

Hydrostatic Test Certificate



ContiTech


Certificate Number H100161	COM Order Reference 1429702	Customer Name & Address HELMERICH & PAYNE DRILLING CO 1434 SOUTH BOULDER AVE TULSA, OK 74119 USA	
Customer Purchase Order No: 740382384			
Project:			
Test Center Address ContiTech Oil & Marine Corp. 11535 Britmoore Park Drive Houston, TX 77041 USA	Signed: Gerson Mejia-Lazo 	Accepted by COM inspection Date: 06/27/22	Accepted by Client Inspection

We certify that the goods detailed hereon have been inspected as described below by our Quality Management System, and to the best of our knowledge are found to conform to the requirements of the above referenced purchase order as issued to ContiTech Oil & Marine Corporation.

Item	Part No.	Description	Qty	Serial Number	Work. Press. (psi)	Test Press. (psi)	Test Time (minutes)
30	RECERTIFICATION	3" ID 10K Choke and Kill Hose x 35ft OAL	1	70024	10,000	15,000	60

Record Information	
Start Time	6/8/2022 12:49:19
End Time	6/8/2022 14:07:25
Interval	00:01:00
Number	79
MaxValue	15762
MinValue	-7
AvgValue	14395
RecordName	70024-sh
RecordNumber	235

Gauge Information	
Model	ADT680
SN	21817380014
Range	(0-40000)psi
Unit	psi

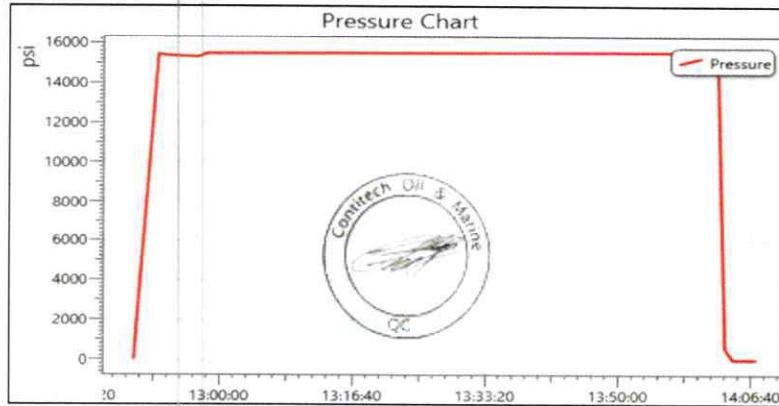

DATE: 11/20/2019
 TITLE: QUALITY ASSURANCE
 SIGNATURE: 

SERIAL #: H2-112019-4
 QANTITY: 1
 SALES ORDER #: 516982
 CLAMPS
 RING GROOVE SUPPLIED WITH SAFETY CLAMPS & SLINGS & LIFT EYE
 ARMOR C/W 4 1/16 INCH X FLOAT H2S SUITED FLANGES WITH BX 155
 3" X 12 FT GATES CHOKE & KILL HOSE ASSEMBLY WITH STAINLESS STEEL
 10KFR3.012.0CK41161OKFFXFL SSA SC LE
 4128128 (RIG 1 PO 002773)
 CUSTOMER P/N: A-7 AUSTIN INC DBA AUSTIN HOSE
 CUSTOMERS P.O.#: 4128128 (RIG 1 PO 002773)
 PART DESCRIPTION: RING GROOVE SUPPLIED WITH SAFETY CLAMPS & SLINGS & LIFT EYE

This is to certify that all parts and materials included in this shipment have manufactured
 and/or processed in accordance with various Gates and API assembly and test
 specifications. Records of required tests are on-file and subject to examination. Test
 reports and subsequent test graphs have been made available with this shipment.
 Additional supporting documentation related to materials, welding, weld inspections, and
 heat-treatment activities are available upon request.

CERTIFICATE OF CONFORMANCE

EMAIL: Troy.Schmidt@gates.com


FAX:

PHONE: (281) 602-4119

Houston, TX, 77086

7603 Prairie Oak Dr.

Gates Engineering & Services North America



THIS IMAGE IS FOR USE AS



Revision 1_022819

F-PRD-005

11/20/2019	PRODUCTION
11/20/2019	QUALITY
11/20/2019	PRODUCTION

11/20/2019	Signature
11/20/2019	Date:
11/20/2019	Signature:

Quality: *[Signature]*
 Date: 11/20/2019
 Signature: *[Signature]*

The following hose assembly has successfully passed all pressure testing requirements set forth in Gates specifications: GTS-Q4-052 (for 5K assemblies) or GTS-Q4-053 (10K assemblies), which include reference to certification API 16C (2nd Edition); sections 7.5.4, 7.5.9, and 10.8.7. A test graph will accompany this test certificate to illustrate conformity to test requirements. This hose was assembly was pressure tested using equipment and instrumentation that has been calibrated in accordance with the requirements set forth in the GESNA management system.

Gates Engineering & Services North America certifies that:

4/16 10K FLANGES FIXED	End Fitting 2:
4/16 10K FLANGES FLOAT	Assembly Code:
4/16 10K FLANGES FLOAT	Test Pressure:
14124 113018	15,000 PSI
68903010-982929	10KFR3.012.0CK411610KFFXXFLT 55A SC LE

Customer P/N: 10KFR3.012.0CK411610KFFXXFLT 55A SC LE
 Order No.: 68903010-982929
 End Fitting 1:

3" X 12 FT GATES CHOKE & KILL HOSE ASSEMBLY WITH STAINLESS STEEL ARMOR C/W 4/16 10K FIX X FLOAT HZS SUSTAINED FLANGES WITH 155 RING GROOVE SUPPLIED WITH SAFETY CLAMPS & SLINGS & LIFT EYE CLAMPS	Product Description:
---	----------------------


Customer Ref.: A-7 AUSTIN INC DBA AUSTIN HOSE	Test Date:
4128128 (RIG 1 PO 002773)	House Serial No.:
11/20/2019	Created By:
HZ-112019-4	Norma Cabrala

Invoice No.: 516982
 Customer Ref.: A-7 AUSTIN INC DBA AUSTIN HOSE
 Test Date:

PRESSURE TEST CERTIFICATE

PHONE: (281) 602 - 4119
 FAX: *[Signature]*
 EMAIL: Troy.Schmidt@gates.com
 WEB: www.gates.com
 7603 Prairie Oak Dr.
 Houston, TX 77086



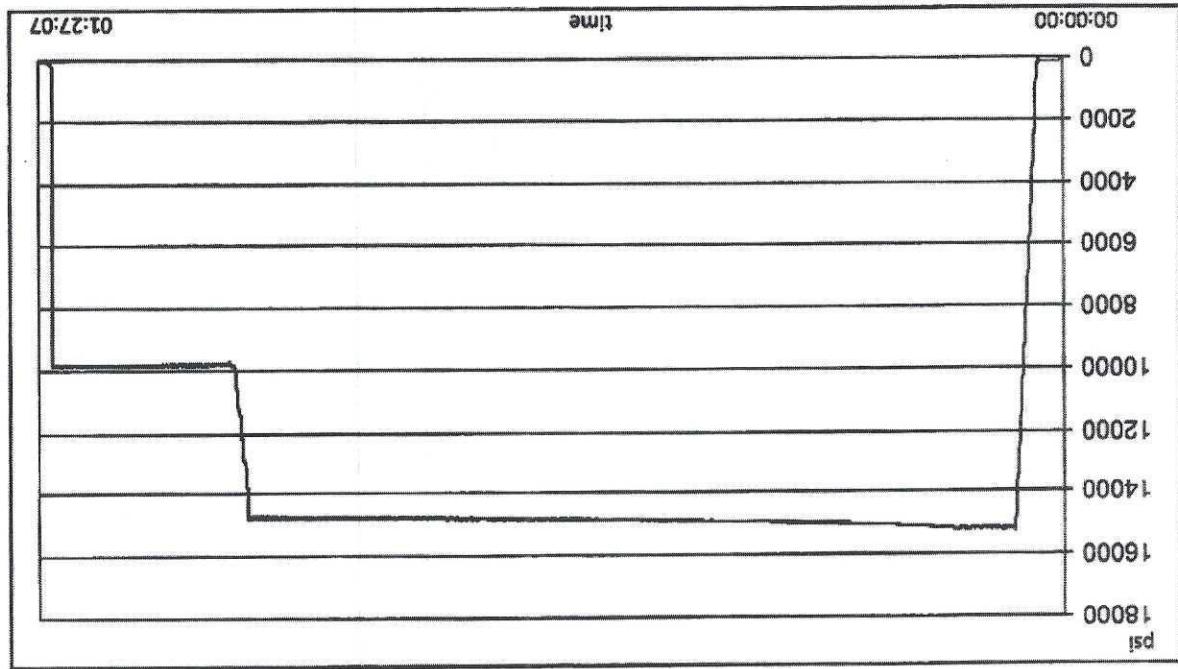

TEST REPORT

11/20/2019 12:13:07 PM

H2-1987



Filename: D:\Certificates\Report_112019-H2-112019-4.pdf

Page 2/2

Comment			
---------	--	--	--

Description	Serial number	Calibration date	Calibration due date
S-25-A-W	110AMCL0	2019-03-17	2020-03-15
S-25-A-W	110AP02K	2019-04-16	2020-04-14

Gauge Traceability**TEST REPORT**

11/20/2019 12:13:07 PM

H2-1987

Garrett Crawford, Director of Quality
DW Industries Inc.

Certificate Issue Date: 2/27/2020

I DO HEREBY CERTIFY, AS THE AUTHORIZED REPRESENTATIVE OF DW INDUSTRIES, THAT THE PRODUCT LISTED ABOVE ARE OF THE QUALITY SPECIFIED AND CONFORM TO ALL REQUIREMENTS OF THE PURCHASE ORDER, INCLUDING: QUALITY CONTROL CLAUSES, DESIGN SPECIFICATIONS, DRAWINGS, PRESERVATION, PACKAGING, PACKING, MARKING, AND PHYSICAL IDENTIFICATION REQUIREMENTS AND HAS BEEN PROCESSED IN ACCORDANCE WITH ISO-9001:2015, API Q1 AND API SPEC 7K.


Purchase Order Information					
Customer Name:	CRADEL DRILLING	Customer Contact:	PAUL HOFFMAN 432-242-5360	Purchase Order Number:	CONTACT PAUL HOFFMAN FOR INFO DW Industries Work Order Number: 20020163
DW Industries Order Number:	OA-5640-4815-1002-4	DW Industries Serial Number:	022620DW-2	QTY Ordered:	1 Assembly Date: 02/26/2020
Custome Part Number:	OA-5640-4815-1002-4	Part Description:	3" 10,000 psi WP CHOKE HOSE MX F4" 100Z HAMMER UNION C/W CLAMPS	Customer Part Number:	OA-5640-4815-1002-4 1002-4" 100Z HAMMER HOSE C/W CLAMPS

6287 Long Drive
Houston, TX 77087
Tel. 713 644-8372 Fax 713-644-4947

DW INDUSTRIES INC.

COPY

Certificate of Conformance

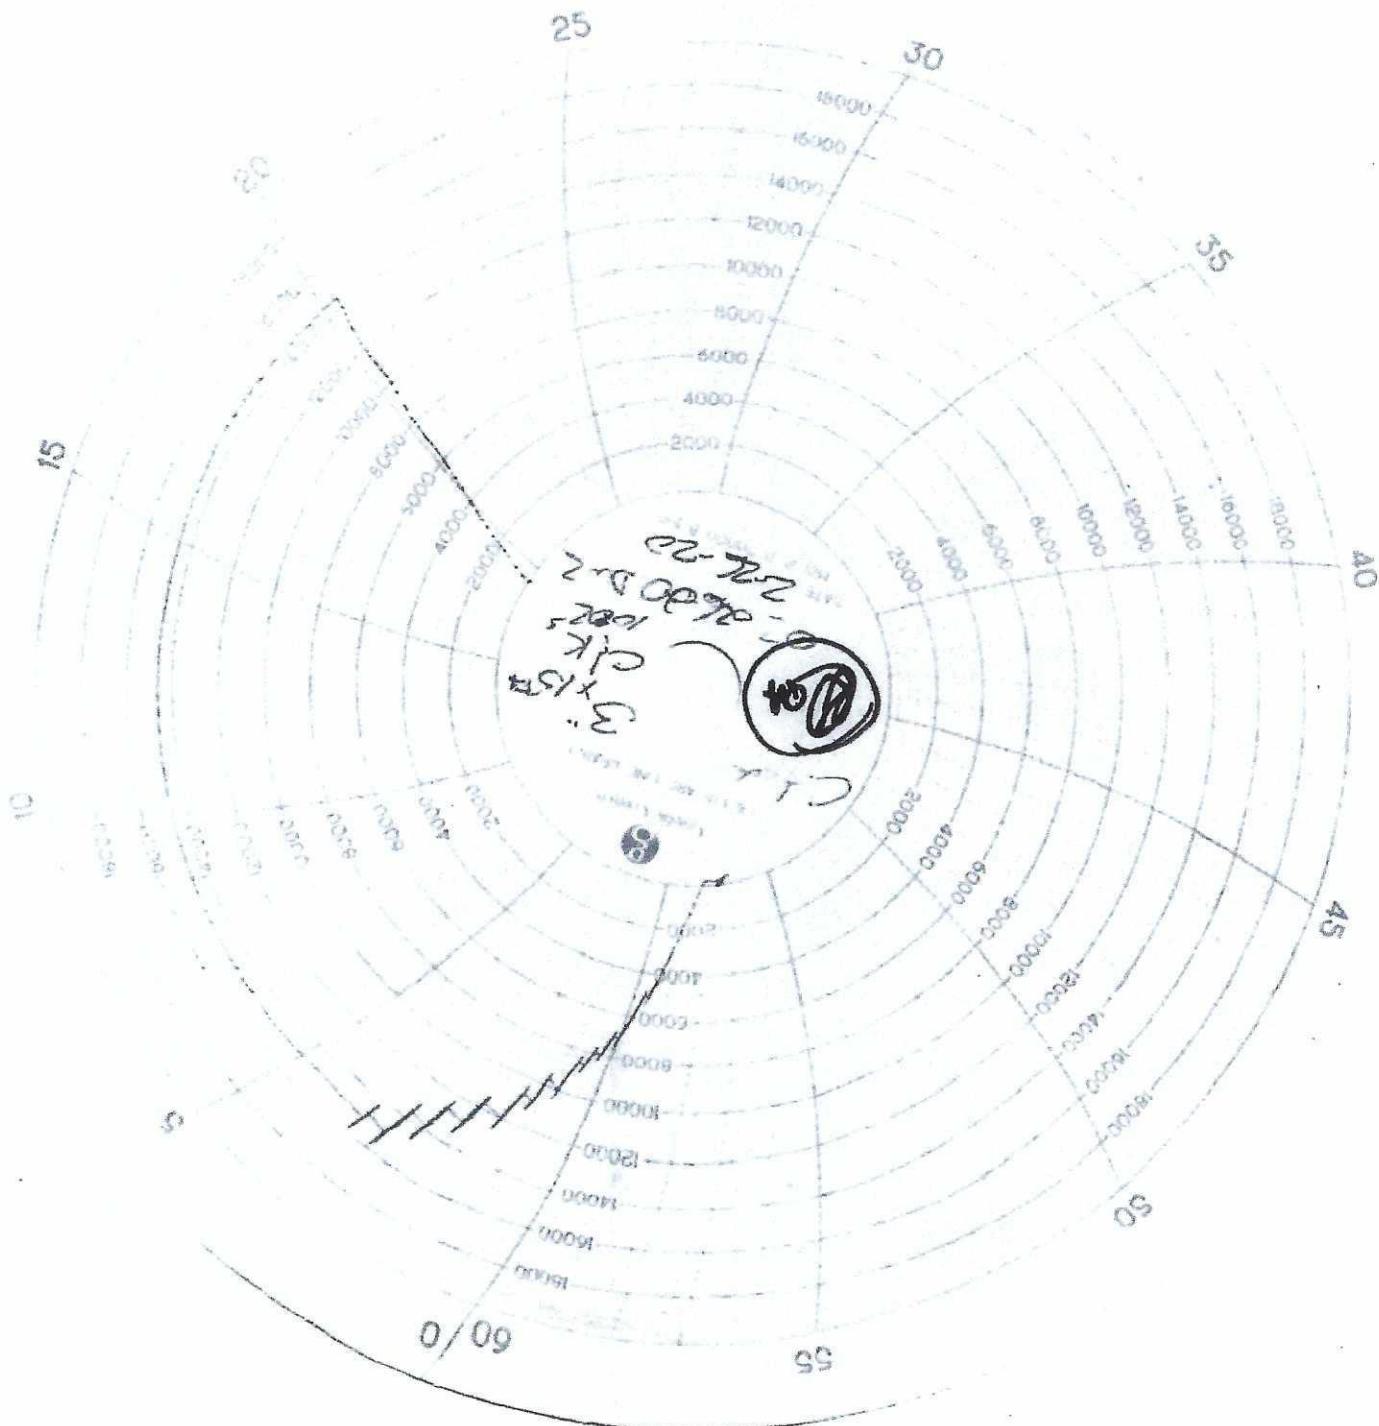

Certificate of Conformance

COPY

DW INDUSTRIES INC.
6287 Long Drive
Houston, TX 77087

Tel. 713 644-8372 Fax 713-644-4947


Purchase Order Information				
Customer Name:	CITADEL DRILLING	Customer Contract:	PAUL HOFFMAN	432-241-5360
Customer Purchase Order Number:	CONTACT PAUL HOFFMAN FOR INFO	DW Industries Work Order Number:	20020164	022620DW-1
DW Industries Part Number:	OA-5640-4822-4-1/16FXFL-AL	Serial Number:	022620DW-1	02/26/2020
QTY Ordered:	1	Assembly Date:		
Customer Part Number:	OA-5640-4822-4-1/16FXFL-AL	Part Description:	3" 10,000 psi WP CHOKER HOSE C/W SS ARMOR & FLOAT FLANGES C/W SS ARMOR & LIFTING EYES	4-1/16" FIXED BY FLOAT FLANGES WITH ISO-9001:2015, API Q1 AND API SPEC 7K.


Garet Crayford, Director of Quality

DW Industries Inc.

Certificate Issue Date: 2/27/2020

I DO HEREBY CERTIFY, AS THE AUTHORIZED REPRESENTATIVE OF DW INDUSTRIES, THAT THE PRODUCT LISTED ABOVE ARE OF THE QUALITY SPECIFIED AND CONFORM TO ALL REQUIREMENTS OF THE PURCHASE ORDER, INCLUDING: QUALITY CONTROL CLAUSES, DESIGN SPECIFICATIONS, DRAWINGS, PRESERVATION, PACKAGING, PACKING, MARKING, AND PHYSICAL IDENTIFICATION REQUIREMENTS AND HAS BEEN PROCESSED IN ACCORDANCE WITH ISO-9001:2015, API Q1 AND API SPEC 7K.

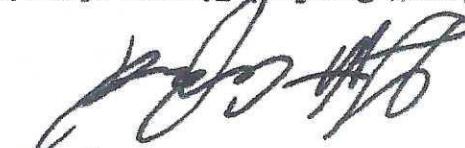

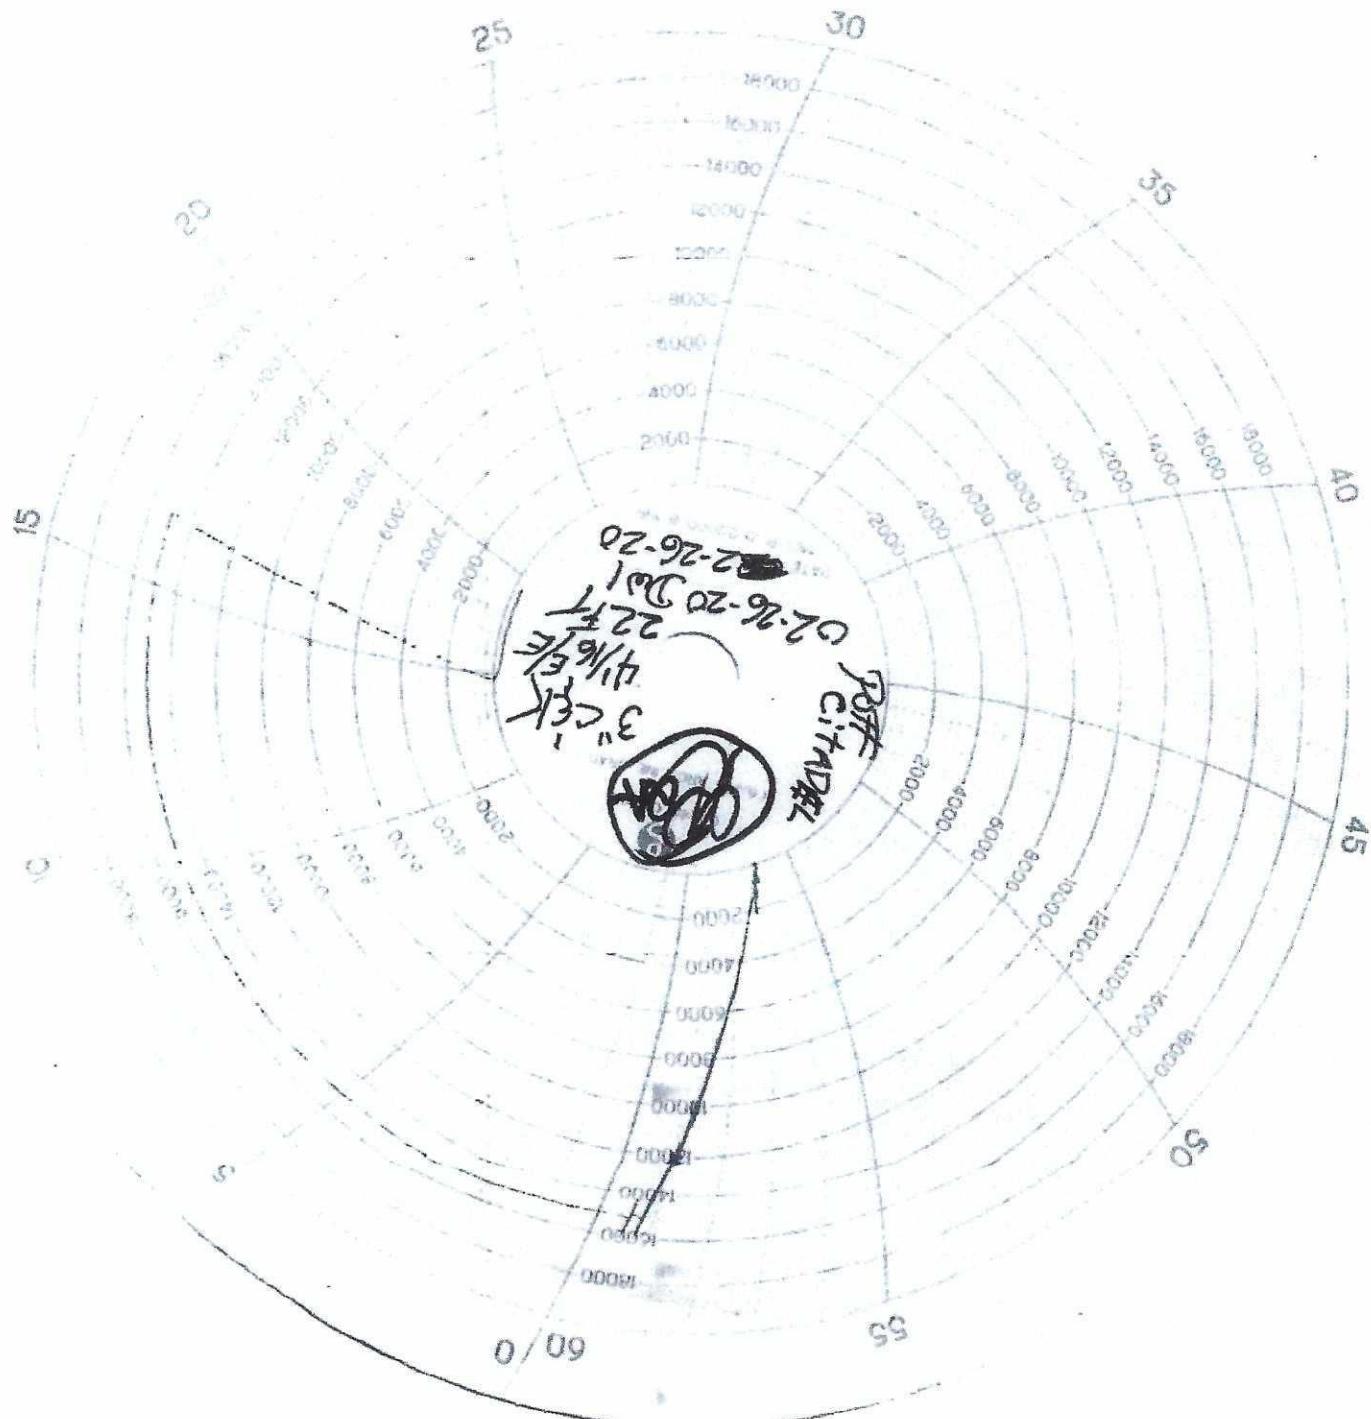

COPY

Quality Assurance,
DW Industries, Inc.

Certificate Issue Date: 1/27/2023

I DO HEREBY CERTIFY, AS THE AUTHORIZED REPRESENTATIVE OF DW INDUSTRIES, THAT THE PRODUCT LISTED ABOVE ARE OF THE QUALITY SPECIFIED AND CONFORM TO ALL REQUIREMENTS OF THE PURCHASE ORDER, INCLUDING: QUALITY CONTROL CLAUSES, DESIGN SPECIFICATIONS, DRAWINGS, PRESERVATION, PACKAGING, PACKING, MARKING, AND PHYSICAL IDENTIFICATION REQUIREMENTS AND HAS BEEN PROCESSED IN ACCORDANCE WITH ISO-9001:2015, API Q1 AND API SPEC 7K.



Purchase Order Information			
Customer Name:	ASUTIN HOSE	Customer Contact:	JUDY LOERA
Customer Purchase Order Number:	00704977	DW Industries Work Order Number:	23010065
DW Industries Part Number:	OA-PS5038-64154"-602	Serial Number:	23010065
QTY Ordered:	1	Assembly Date:	1/27/2023
Customer Part Number:	4"X154" 3K W/4" FIG 602 MXF		


TEL. 713-644-8372 FAX 713-644-4947

Houston, TX 77087

6287 Long Drive

DW INDUSTRIES INC.

Certificate of Conformance

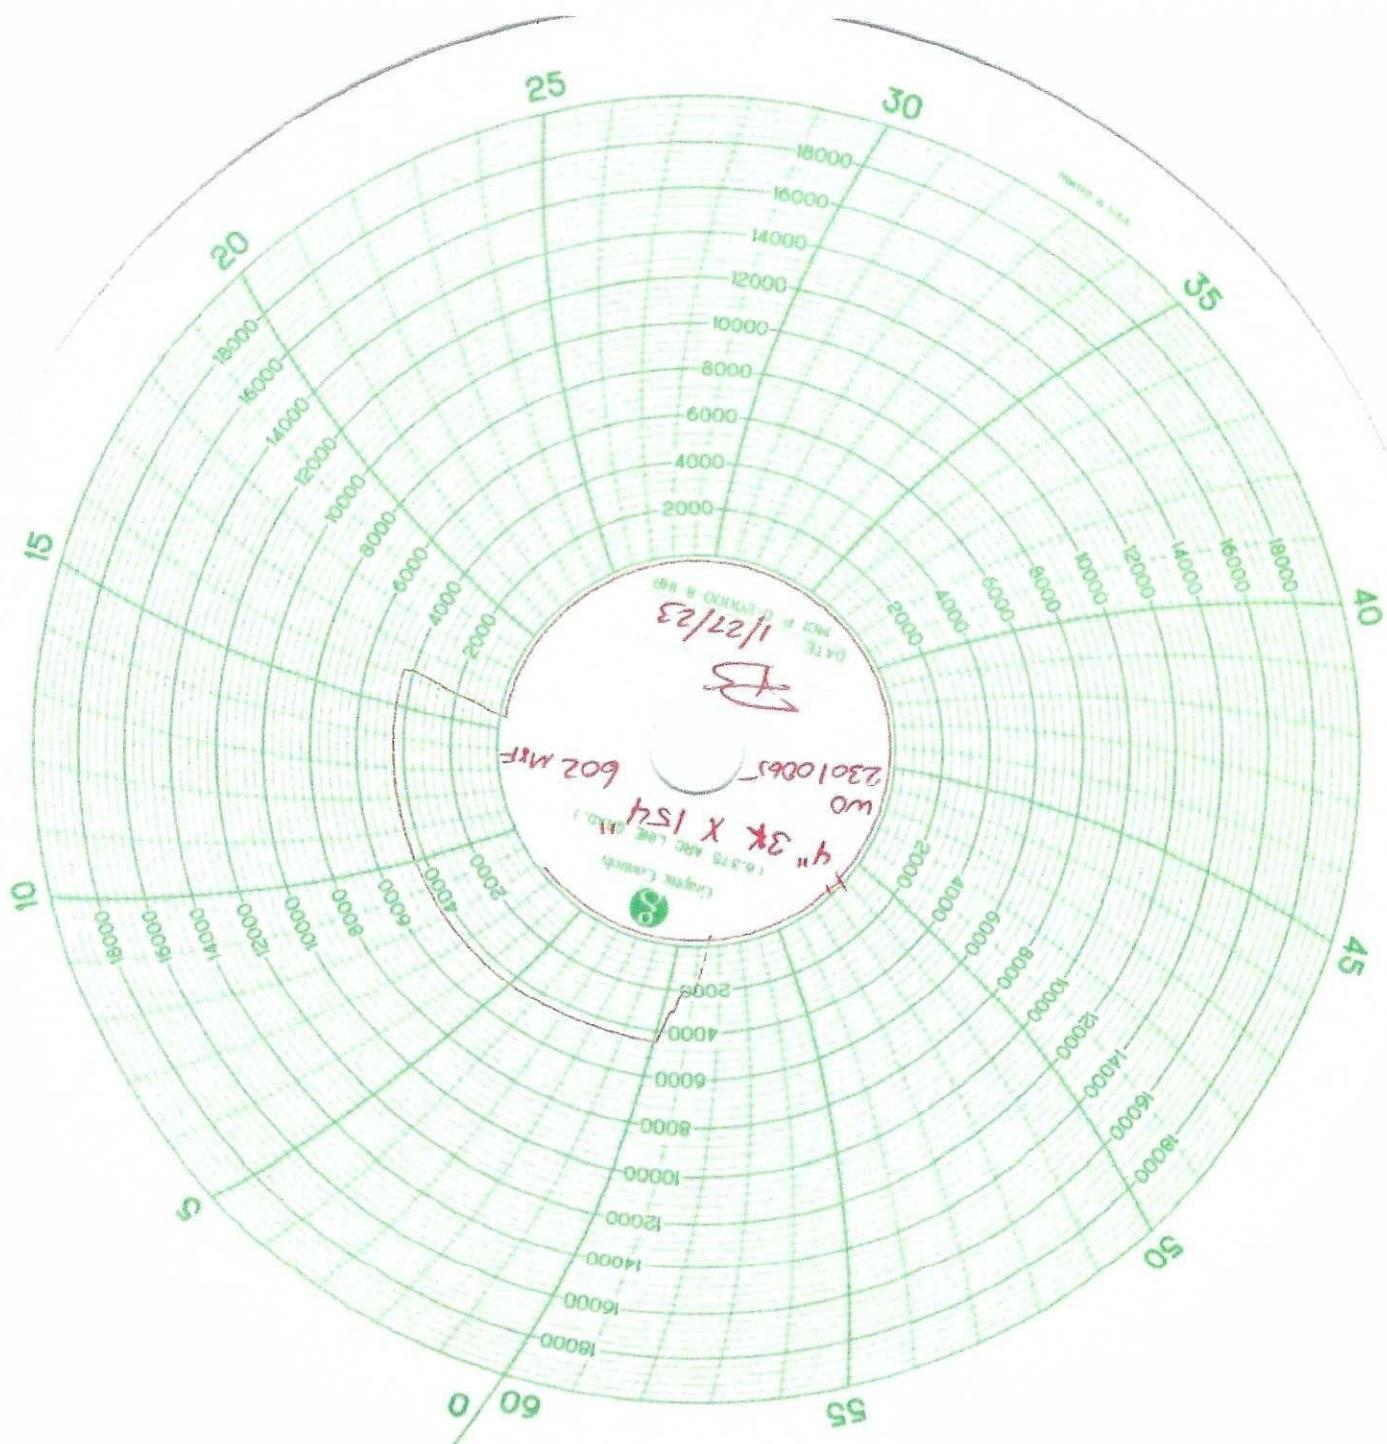


BLACK GOLD®

 IN SERVICE
 12-20-21

GATES ENGINEERING & SERVICES NORTH AMERICA
7603 Prairie Oak Dr. Suite 190
Houston, TX. 77086

PHONE: +1 (281) 602-4100
 FAX: +1 (281) 602-4147
 EMAIL: gesna.quality@gates.com
 WEB: www.gates.com/oilandgas

PRESSURE TEST CERTIFICATE

Customer:	A-7 AUSTIN INC DBA AUSTIN HOSE	Test Date:	10/15/2021
Customer Ref.:	00595477	Hose Serial No.:	H3-101521-2
Invoice No.:	521925	Created By:	Micky Mhina


Product Description: 3" X 35' GATES FIRE RATED CHOKE & KILL HOSE ASSEMBLY SUITED FOR H2S SERVICE C/W 4 1/16 10K FIXED X FLOAT HEAT TREATED FLANGES SUPPLIED WITH STAINLESS STEEL ARMOR SAFETY CLAMPS & LIFT EYES

End Fitting 1:	4 1/16 10K FIXED FLANGE	End Fitting 2:	4 1/16 10K FLOAT HEAT TREATED FLANGES
Oracle Star No.:	68703010-10074881	Assembly Code:	L41975 091719
CUSTOMER P/N:	10K3.035.0CK411610KFIIXFLTW/SSA/SC/LE	Test Pressure:	15,000 PSI.
		Working Pressure:	10,000 PSI.

Gates Engineering & Services North America certifies that:

The following hose assembly has successfully passed all pressure testing requirements set forth in Gates specifications: GTS-04-052 (for 5K assemblies) or GTS-04-053 (10K assemblies) or GTS-04-048 (15K assemblies), which include reference to Specification API 16C (2nd Edition); sections 7.5.4, 7.5.9, and 10.8.7. A test graph will accompany this test certificate to illustrate conformity to test requirements. This hose assembly was pressure tested using equipment and instrumentation that has been calibrated in accordance with the requirements set-forth in the GESNA management system.

Quality:	QUALITY
Date :	10/15/2021
Signature :	Micky Mhina

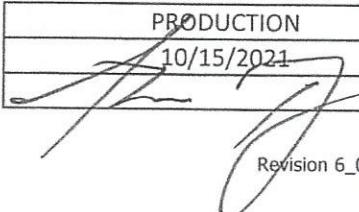Production:	PRODUCTION
Date :	10/15/2021
Signature :	

F-PRD-005B

Revision 6_05032021

**BLACK GOLD®**

GATES ENGINEERING & SERVICES NORTH AMERICA
7603 Prairie Oak Dr.
Houston, TX. 77086

PHONE: +1 (281) 602-4100
FAX: +1 (281) 602-4147
EMAIL: gesna.quality@gates.com
WEB: www.gates.com/oilandgas

CERTIFICATE OF CONFORMANCE

This is to certify that all parts and materials included in this shipment have manufactured and/or processed in accordance with various Gates and API assembly and test specifications. Records of required tests are on-file and subject to examination. Test reports and subsequent test graphs have been made available with this shipment. Additional supporting documentation related to materials, welding, weld inspections, and heat-treatment activities are available upon request.

CUSTOMER: A-7 AUSTIN INC DBA AUSTIN HOSE

CUSTOMER P.O.#: 00595477

CUSTOMER P./N.#: 10K3.035.0CK411610KFIIXFLTW/SSA/SC/LE

PART DESCRIPTION: 3" X 35' GATES FIRE RATED CHOKE & KILL HOSE ASSEMBLY SUITED FOR H2S

PART DESCRIPTION: SERVICE C/W 4 1/16 10K FIXED X FLOAT HEAT TREATED FLANGES SUPPLIED WITH STAINLESS STEEL ARMOR SAFETY CLAMPS & LIFT EYES

SALES ORDER #: 521925

QUANTITY: 1

SERIAL #: H3-101521-2

SIGNATURE: Mike Wuer

QUALITY ASSURANCE

TITLE: _____

DATE: 10/15/2021



H3-6963

10/15/2021 10:15:57 AM

TEST REPORT

CUSTOMER

Company: Austin Distributing

TEST OBJECT

Serial number: H3-101521-2

Production description:

Lot number: L41975091719

Sales order #: 521925

Description:

Customer reference:

Hose ID: 3" 10k ck

Part number:

TEST INFORMATION

Test procedure: GTS-04-053

Fitting 1: 3.0 x 4-1/16 10K

Test pressure: 15000.00 psi

Part number:

Test pressure hold: 3600.00 sec

Description:

Work pressure: 10000.00 psi

Fitting 2: 3.0 x 4-1/16 10K

Work pressure hold: 900.00 sec

Part number:

Length difference: 0.00 %

Description:

Length difference: 0.00 inch


Visual check:

Length: 35 feet

Pressure test result: PASS

Length measurement result:

Test operator: francisco

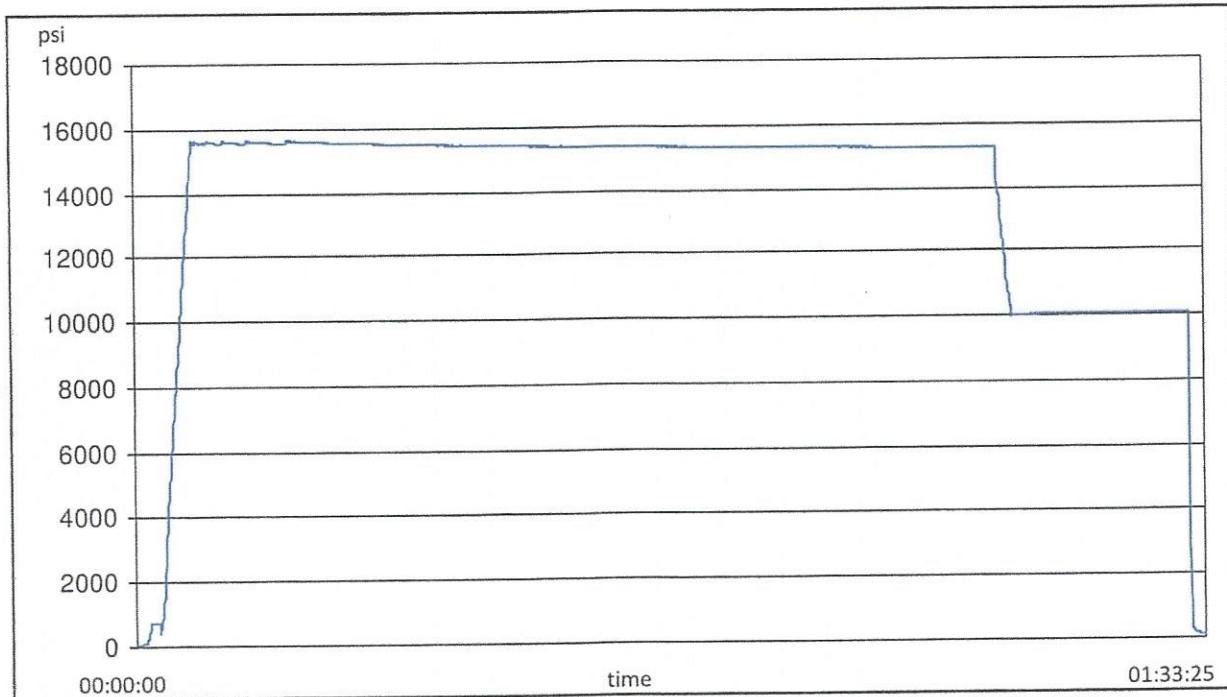



H3-6963

10/15/2021 10:15:57 AM

TEST REPORT

GAUGE TRACEABILITY

Description	Serial number	Calibration date	Calibration due date
S-25-A-W	110AQA1S	2021-02-24	2022-02-24
S-25-A-W	110D3PHQ	2021-03-11	2022-03-11

Comment

Hydrostatic Test Certificate


Certificate Number H100163	COM Order Reference 1429702	Customer Name & Address HELMERICH & PAYNE DRILLING CO 1434 SOUTH BOULDER AVE TULSA, OK 74119 USA	
Project:			
Test Center Address ContiTech Oil & Marine Corp. 11535 Brittmoore Park Drive Houston, TX 77041 USA	Accepted by COM Inspection Gerson Mejia-Lazo 		Accepted by Client Inspection
Signed: Date: 07/14/22			

We certify that the goods detailed hereon have been inspected as described below by our Quality Management System, and to the best of our knowledge are found to conform the requirements of the above referenced purchase order as issued to ContiTech Oil & Marine Corporation.

Item	Part No.	Description	Qty	Serial Number	Work. Press. (psi)	Test Press. (psi)	Test Time (minutes)
50	RECERTIFICATION	3" ID 10K Choke and Kill Hose x 35ft OAL	1	70025	10,000	15,000	60

Record Information	
Start Time	6/14/2022 11:42:08
End Time	6/14/2022 12:56:14
Interval	00:01:00
Number	75
MaxValue	15888
MinValue	-8
AvgValue	14184
RecordName	70025-sh
RecordNumber	237

Gauge Information	
Model	ADT680
SN	21817380014
Range	(0-40000)psi
Unit	psi

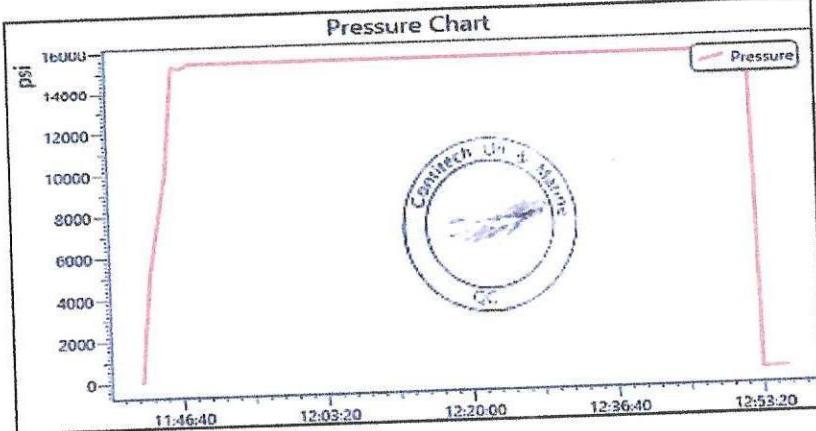



ContiTech

Certificate of Conformity

Certificate Number H100163	COM Order Reference 1429702	Customer Name & Address HELMERICH & PAYNE DRILLING CO 1434 SOUTH BOULDER AVE TULSA, OK 74119 USA	
Customer Purchase Order No: 740382384			
Project:			
Test Center Address ContiTech Oil & Marine Corp. 11535 Brittmoore Park Drive Houston, TX 77041 USA		Accepted by COM Inspection Gerson Mejia-Lazo 	Accepted by Client Inspection
Signed: Date: 07/14/22			

We certify that the items detailed below meet the requirements of the customer's Purchase Order referenced above, and are in conformance with the specifications given below.

Item	Part No.	Description	Qty	Serial Number	Specifications
------	----------	-------------	-----	---------------	----------------

50	RECERTIFICATION	3" ID 10K Choke and Kill Hose x 35ft OAL	1	70025	ContiTech Standard
----	-----------------	--	---	-------	--------------------

ARMORED CHOKE HOSE

Installed

8-29-22



ContiTech

CONTITECH RUBBER Industrial Kft.	No: QC-DB- 120 / 2019
	Page: 16 / 91

QUALITY CONTROL INSPECTION AND TEST CERTIFICATE		CERT. N°: 75819	
PURCHASER: ContiTech Oil & Marine Corp.		P.O. N°: 4501225327	
CONTITECH RUBBER order N°: 1127442	HOSE TYPE: 3" ID	Choke and Kill Hose	
HOSE SERIAL N°: 75819	NOMINAL / ACTUAL LENGTH: 10,67 m / 10,68 m		
W.P. 69,0 MPa 10000 psi	T.P. 103,5 MPa 15000 psi	Duration: 60 min.	
Pressure test with water at ambient temperature			
See attachment (1 page)			
COUPLINGS Type	Serial N°	Quality	Heat N°
3" coupling with 4 1/16" 10K API Swivel Flange end Hub	6026	AISI 4130 AISI 4130 AISI 4130	A0607J 040841 54194
3" coupling with 4 1/16" 10K API b.w. Flange end	6016	AISI 4130 AISI 4130	A0607J 040431
Not Designed For Well Testing		API Spec 16 C 2 nd Edition- FSL2	
		Temperature rate: "B"	
All metal parts are flawless			
WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER INSPECTED AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.			
STATEMENT OF CONFORMITY: We hereby certify that the above items/equipment supplied by us are in conformity with the terms, conditions and specifications of the above Purchaser Order and that these items/equipment were fabricated inspected and tested in accordance with the referenced standards, codes and specifications and meet the relevant acceptance criteria and design requirements.			
COUNTRY OF ORIGIN HUNGARY/EU			
Date: 08. April 2019.	Inspector	Quality Control	CentiTech Rubber Industrial Kft. Quality Control Dept. (1) 



Hose Assembly Evaluation Sheet

Prepared by	Cristian Rivera	Date:	8/27/2022	QIN:	N/A	
Customer:	HELMERICH & PAYNE, INC	Location:	H&P INT'L DRILLING CO 210 MAGNOLIA DR GALENA PARK, TX, 77547-2738			
User contact:	MITCH MCKINNIS	Phone:		e-mail:	mitch.mckinnis@hpinc.com	
	Parameters		Hose Details			
Application Information	PO	740398454 (88000240 SN:70035)			PASS	
	Gates SO	525035				
	Serial #:	88000240 SN:70035				
	As Tested Serial:	H2-082722-1 RE-TEST				
	Hose ID:	3 IN				
	Hose type:	INSPECT AND RETEST CUSTOMER HOSE 3IN X 35FT CHOKE & KILL ASSEMBLY C/W 4-1/16 FLANGES BX155 RING GROOVE EACH END				
	Working pressure:	10000 PSI.				

1. Visual Examination

An API 16C, IN X 35FT CHOKE & KILL ASSEMBLY C/W 4-1/16 FLANGES BX155 RING GROOVE EACH END received from HELMERICH & PAYNE, INC for inspection, testing and external cosmetic repairs. The hydrostatic pressure testing was requested to 15000 PSI., by the customer HELMERICH & PAYNE, INC

Visual inspection and examination of external hose assembly showed some cosmetic dents and repairable damages to the external armor at distance 32ft 9in. from EF2. (Need to fix a part of the hose.)

Both external & internal hose body and couplings of the hose were examined. Visual Inspection photos are in Table 2, while post inspection/testing pictures are in Table 4.

The hose was hydrostatically tested at 15000 PSI. test pressure with an hour-long hold. On completion of hydrostatic testing, an internal baroscopic examination was carried out, to check the condition of internal hose areas, mainly hose tube and coupling hose interface.

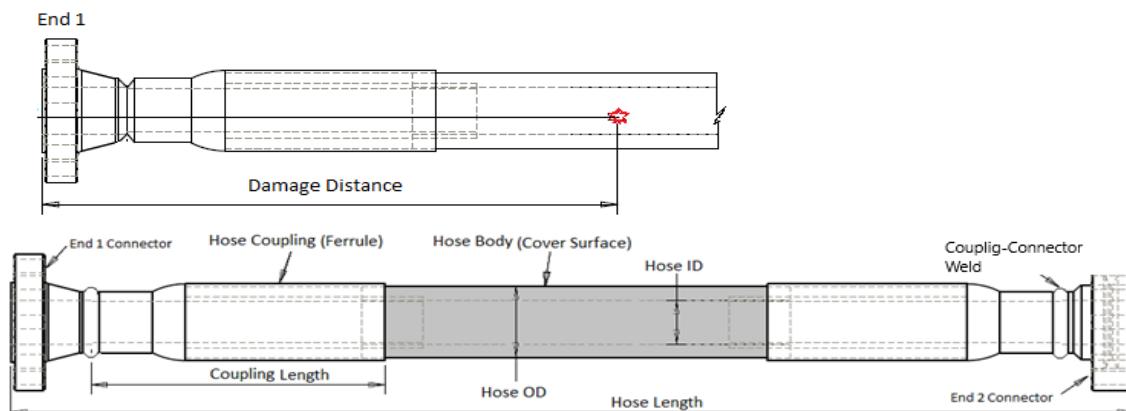


Figure 1: Generic Hose Assembly



Hose Assembly Evaluation Sheet

1.0 Observations and comments


	Comments
1	
2	



Hose Assembly Evaluation Sheet



Photos: At Shipping.

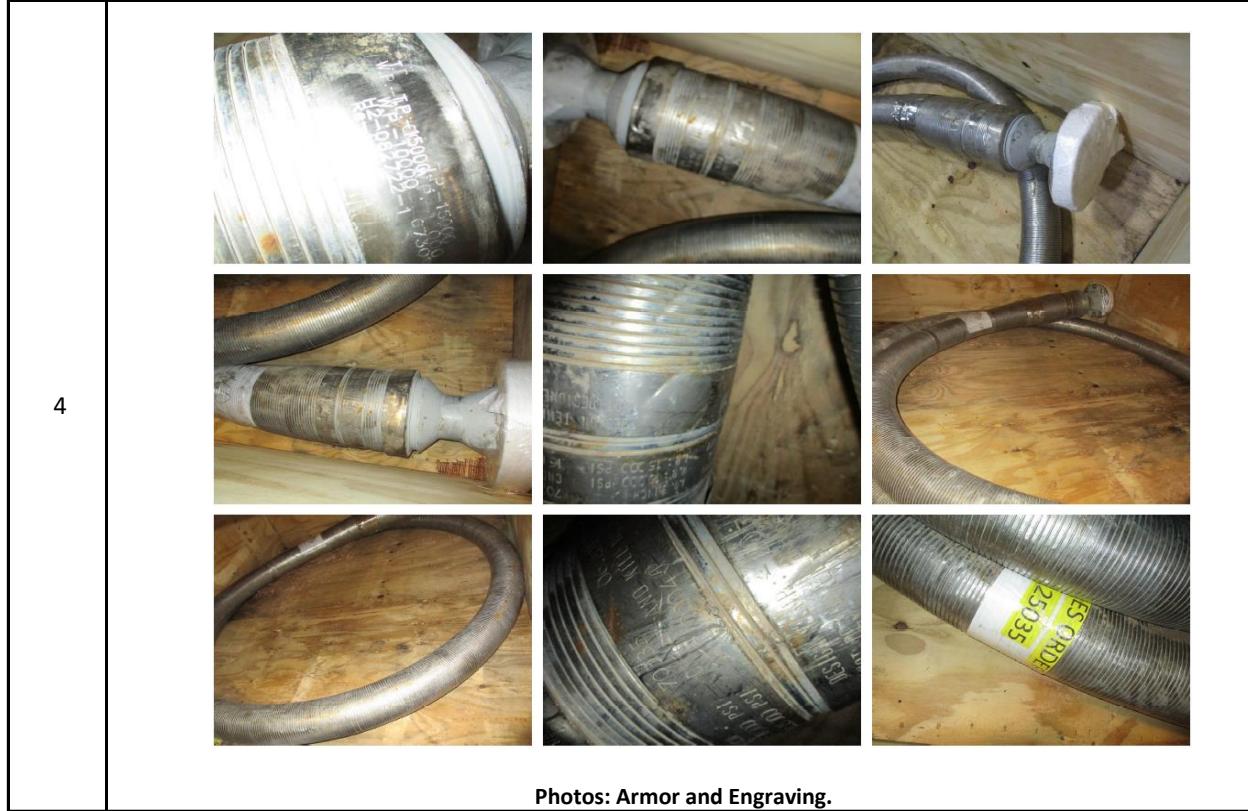


Photos: Armor and Engraving.



Hose Assembly Evaluation Sheet



2. Hydro Static Pressure test

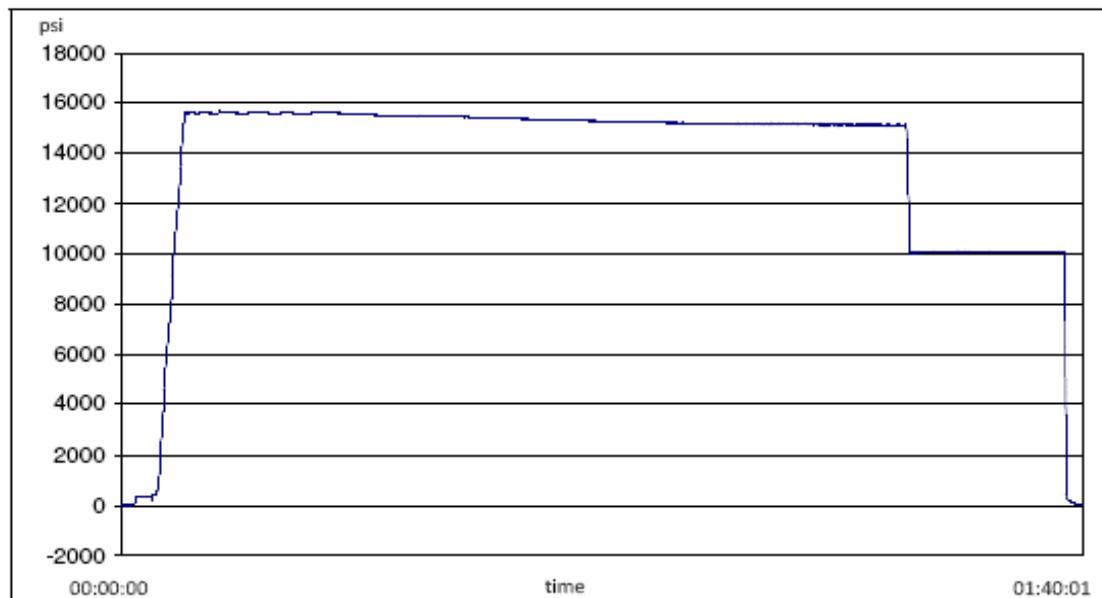

2.1 Hydrostatic Pressure test Procedures

	Hose Type	Test Specification	Test Date	Technician
1	IN X 35FT CHOKE & KILL ASSEMBLY C/W 4-1/16	3 10K C&K	2022-08-27	Martin Orozco

2.2 Gates Hydrostatic Pressure tester

	Test Equipment	Serial No	Last Cal Date	Cal Due Date
1	S-25-A-W	110AMCLO	2022-01-10	2023-01-10
2	S-25-A-W	110BSEUZ	2022-03-09	2023-03-09



Hose Assembly Evaluation Sheet

2.3 Hydro Static Test Pressure results

Details		Results
1	Hydrostatic Test Results ⁽¹⁾	Pass
2	Failure Mode	None
3	Hose Dispatched to the customer?	Yes


Note:

1. Hydrostatic Pressure report is given in Appendix 1

3. Hose borescope inspection

3.2 Internal Failure Details

	Type of Failure	Location of Defect	Ref. Photo	Defect Details
1	Liner breach/ collapse	None		None
2	Bulges/ Blisters	None		None
3	Other breach/failures	None		None

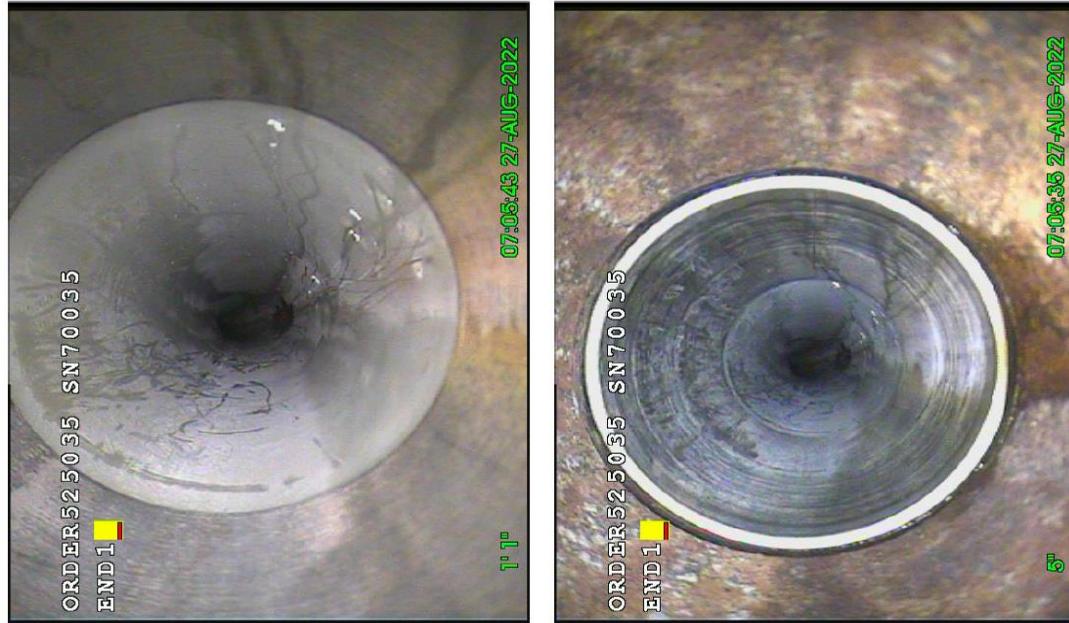

Photos: Liner/Coupling Interface END 1



Hose Assembly Evaluation Sheet



Photos: Liner/Coupling Interface END 2

Note

Borescope completed? Yes

4. Summary

Hose assembly successfully tested to requested test pressure of 15000 PSI. with an hour hold. It was then serialized and stamped, as H2-082722-1 RE-TEST. The bore scope showed no blisters or delamination in the internal lining/tube area. External damages were repaired as agreed with the customer.

Hose Assembly Evaluation Sheet

APPENDIX 1:
Pressure Chart

H2-8316

8/27/2022 8:51:22 AM

TEST REPORT

CUSTOMER

Company:

TEST OBJECT

Serial number: H2-082722-1

Production description:

Lot number:

Sales order #:

525035

Description:

Customer reference:

740398454 (88000240 |
SN:70035)

Hose ID:

3 10k C&K

Part number:

TEST INFORMATION

Test procedure:

3 10K C&K

Fitting 1:

3.0 x 4-1/16 10K

Test pressure:

15000.00 psi

Part number:

Test pressure hold:

3600.00 sec

Description:

Work pressure:

10000.00 psi

Work pressure hold:

900.00 sec

Fitting 2:

3.0 x 4-1/16 10K

Length difference:

0.00 %

Part number:

Length difference:

0.00 inch

Description:

Visual check:


Length:

35 feet

Pressure test result: PASS

Length measurement result:

Test operator: Martin

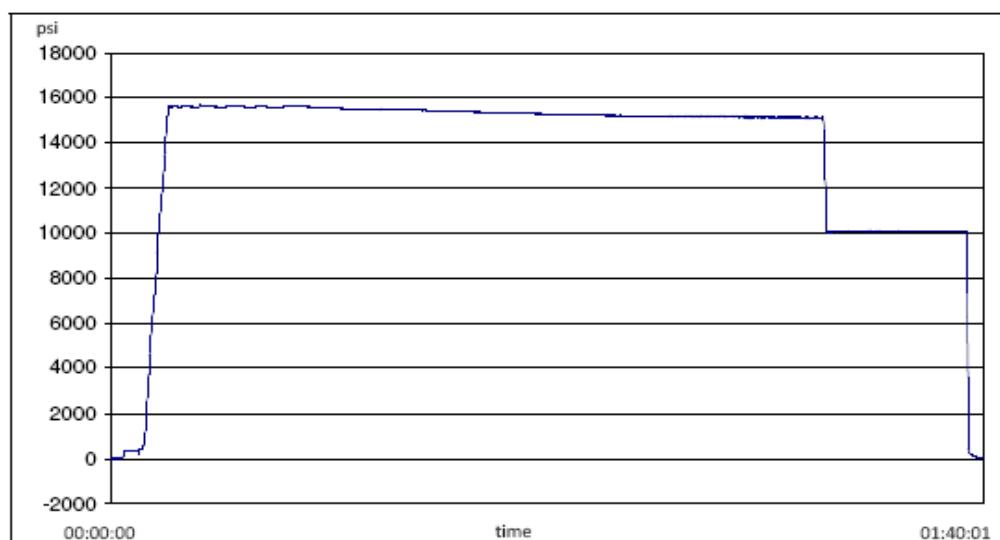

Hose Assembly Evaluation Sheet



H2-8316

8/27/2022 8:51:22 AM

TEST REPORT

GAUGE TRACEABILITY

Description	Serial number	Calibration date	Calibration due date
S-25-A-W	110AMCLO	2022-01-10	2023-01-10
S-25-A-W	110BSEUZ	2022-03-09	2023-03-09

Comment

Hose Assembly Evaluation Sheet



APPENDIX 2:
Certificate of Conformance



GATES ENGINEERING & SERVICES NORTH AMERICA
7603 Prairie Oak Dr.
Houston, TX. 77086

PHONE: +1 (281) 602-4100
FAX: +1 (281) 602-4147
EMAIL: gesna.quality@gates.com
WEB: www.gates.com/oilandgas

CERTIFICATE OF CONFORMANCE

This is to verify that the items detailed below meet the requirements of the Customer's Purchase Order referenced herein, and are in Conformance with applicable specifications, and that Records of Required Tests are on file and subject to examination. The following items were inspected and hydrostatically tested at **Gates Engineering & Services North America** facilities in Houston, TX, USA.

CUSTOMER: HELMERICH & PAYNE, INC
CUSTOMER P.O. #: 740398454 (88000240 | SN:70035)
CUSTOMER P/N: 88000240 | SN:70035

PART DESCRIPTION: INSPECT AND RETEST CUSTOMER HOSE 3IN X 35FT CHOKE & KILL ASSEMBLY C/W 4-1/16 FLANGES BX155 RING GROOVE EACH END

SALES ORDER #: 525035
QUANTITY: 1
SERIAL #: H2-082722-1 RE-TEST


SIGNATURE:

TITLE:

QUALITY ASSURANCE

DATE:

8/27/2022

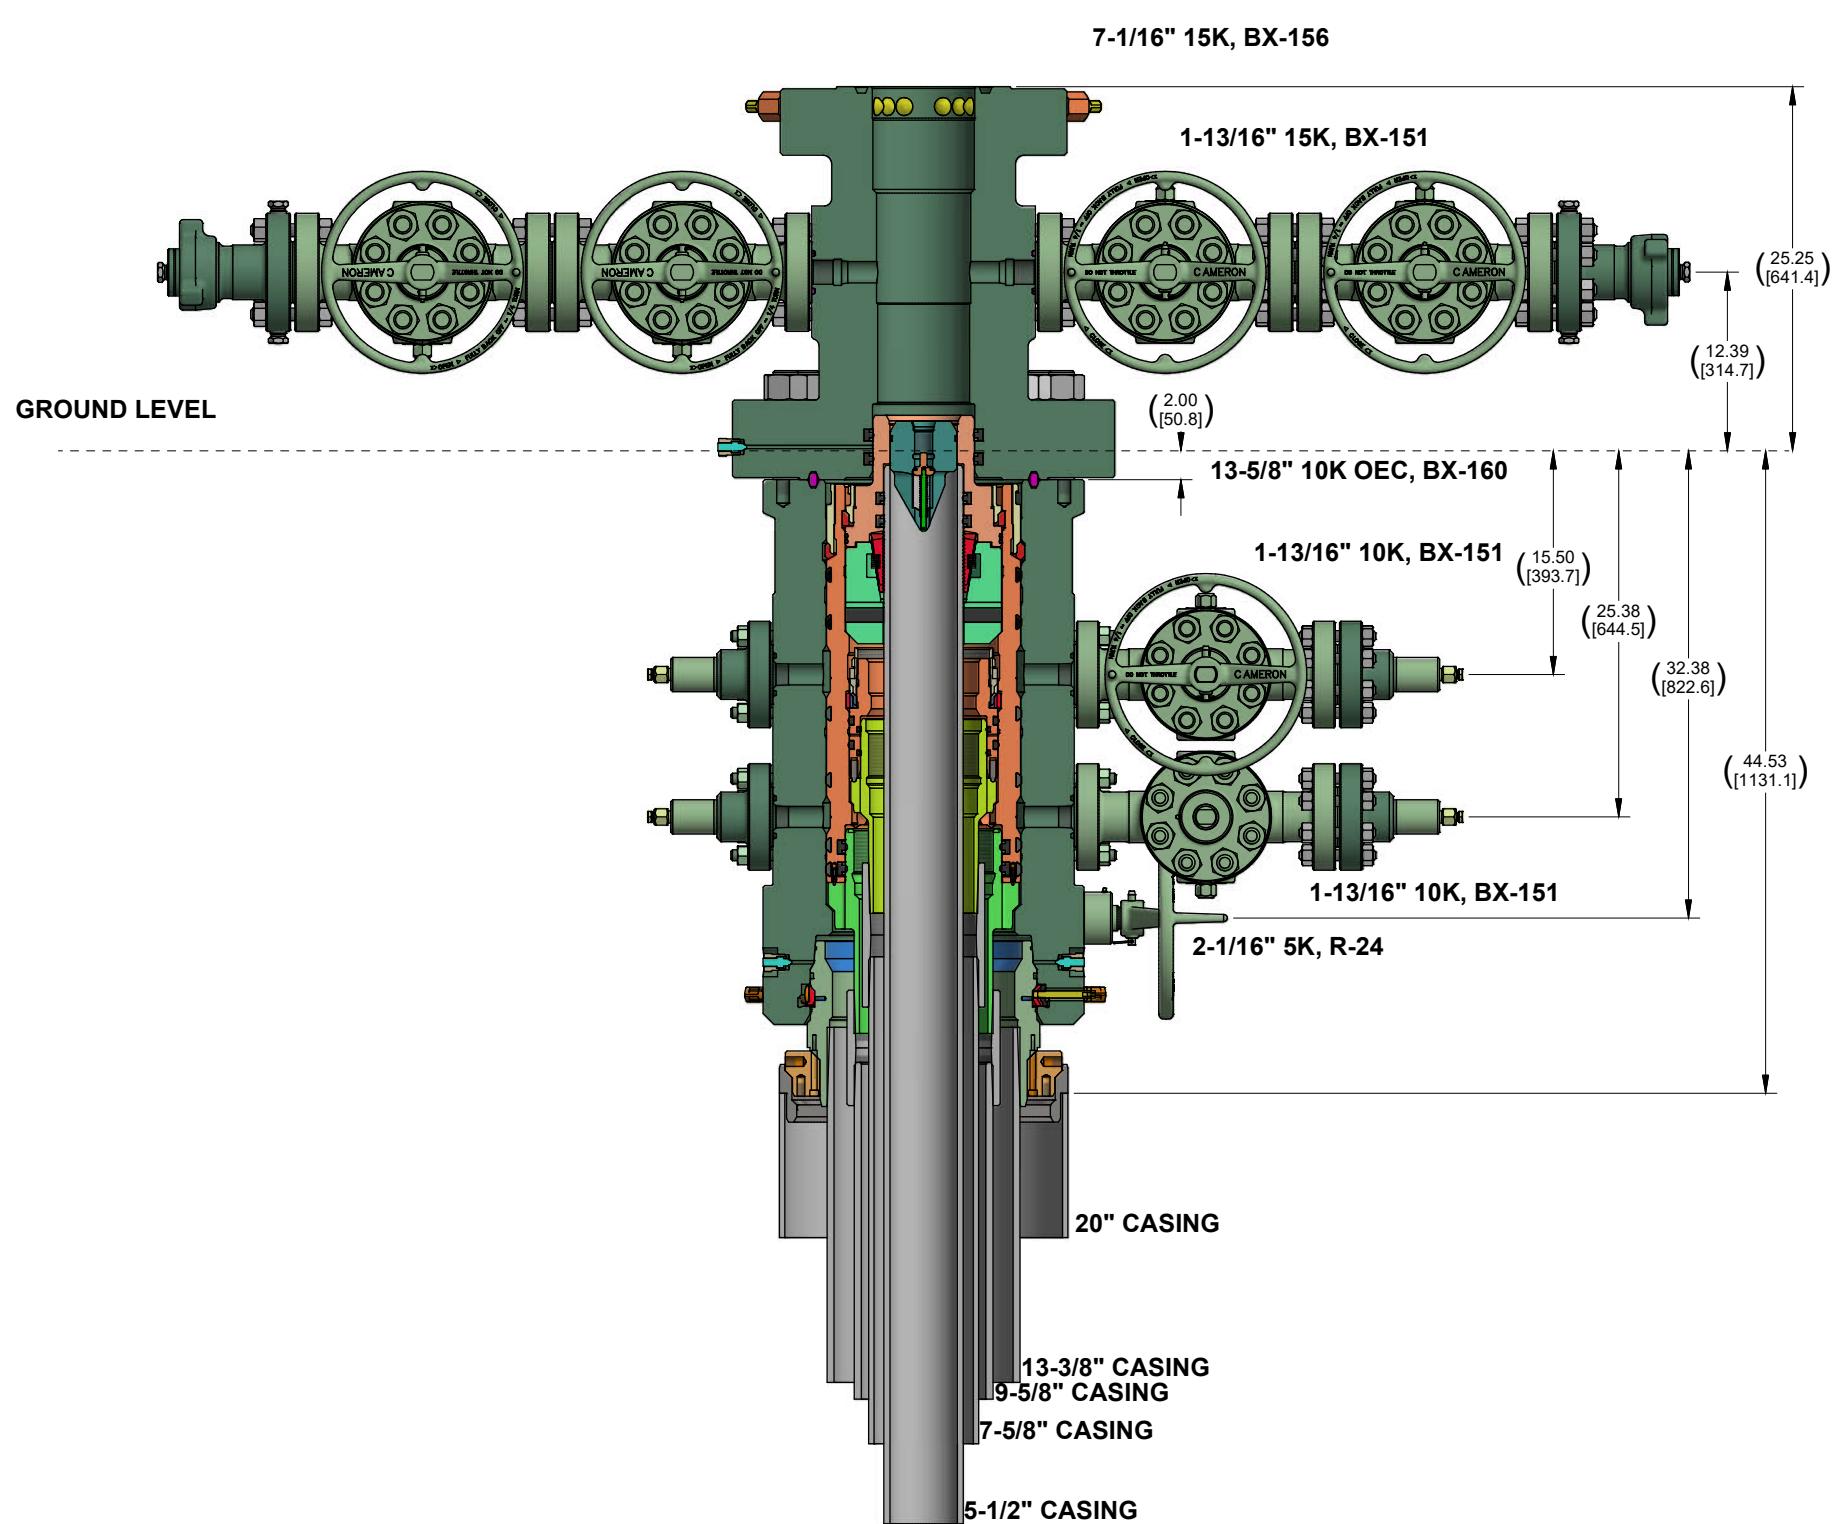

CONFIDENTIAL			
SURFACE TREATMENT	DO NOT SCALE		
DRAWN BY: A. SKLENKA	DATE: 26 Apr 22		
MATERIAL & HEAT TREAT	CHECKED BY: A. SKLENKA	DATE: 26 Apr 22	
	APPROVED BY: A. SKLENKA	DATE: 26 Apr 22	
ESTIMATED WEIGHT: 7968.4 LBS 3614.4 KG	INITIAL USE B/M: IT# 7836394	SHEET 1 OF 1	REV: 01
ADAPT NST 10K 3 STAGE WELLHEAD STANDARD / EMERGENCY SYSTEM			OXY
A Cameron Company			SURFACE SYSTEMS

OXY's Minimum Design Criteria

Burst, Collapse, and Tensile SF are calculated using Landmark's Stress Check (Casing Design) software. A sundry will be requested if any lesser grade or different size casing is substituted.

1) Casing Design Assumptions

a) Burst Loads

CSG Test (Surface)

- Internal: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both 43 CFR part 3170 Subpart 3172 and 19.15.16 of the OCD Rules.
- External: Pore pressure in open hole.

CSG Test (Intermediate)

- Internal: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both 43 CFR part 3170 Subpart 3172 and 19.15.16 of the OCD Rules.
- External: Mud Weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

CSG Test (Production)

- Internal:
 - For Drilling: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both 43 CFR part 3170 Subpart 3172 and 19.15.16 of the OCD Rules.
 - For Production: The design pressure test should be the greater of (1) the planned test pressure prior to stimulation down the casing. (2) the regulatory test pressure, and (3) the expected gas lift system pressure. The design test fluid should be the fluid associated with pressure test having the greatest pressure.
- External:
 - For Drilling: Mud Weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.
 - For Production: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Gas Column (Surface)

- Internal: Assumes a full column of gas in the casing with a Gas/Oil Gradient of 0.1 psi/ft in the absence of better information. It is limited to the controlling pressure based on the fracture pressure at the shoe or the maximum expected pore pressure within the next drilling interval, whichever results in a lower surface pressure.
- External: Fluid gradient below TOC, pore pressure from the TOC to the Intermediate CSG shoe (if applicable), and MW of the drilling mud that was in the hole when the CSG was run from Intermediate CSG shoe to surface.

Bullheading (Surface / Intermediate)

- Internal: The string must be designed to withstand a pressure profile based on the fracture pressure at the casing shoe with a column of water above the shoe plus an additional surface pressure (in psi) of $0.02 \times \text{MD}$ of the shoe to account for pumping friction pressure.
- External: Mud weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Gas Kick (Intermediate)

- The string must be designed to at least a gas kick load case unless the rig is unable to detect a kick. For the gas kick load case, the internal pressure profile must be based on a minimum volume of 50 bbl or the minimum kick detection capability of the rig, whichever is greater, and a kick intensity of 2.0 ppg for Class 1, 1.0 ppg of Class 2, and 0.5 ppg for Class 3 and 4 wells.
- Internal: Influx depth of the maximum pore pressure of 0.55 "gas kick gravity" of gas to surface while drilling the next hole section.
- External: Mud weight to the TOC, cement mix water gradient below TOC, and pore pressure in open hole.

Tubing Leak Near Surface While Producing (Production)

- Internal: SITP plus a packer fluid gradient to the shoe or top of packer.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Tubing Leak Near Surface While Stimulating (Production)

- Internal: Surface pressure or pressure-relief system pressure, whichever is lower plus packer fluid gradient.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Injection / Stimulation Down Casing (Production)

- Internal: Surface pressure plus injection fluid gradient.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

b) Collapse Loads

Lost Circulation (Surface / Intermediate)

- Internal: Lost circulation at the TD of the next hole section, and the fluid level falls to a depth where the hydrostatic of the mud equals pore pressure at the depth of the lost circulation zone.
- External: MW of the drilling mud that was in the hole when the casing was run. Cementing (Surface / Intermediate / Production)
- Internal: Displacement fluid density.
- External: Mud weight from TOC to surface and cement slurry weight from TOC to casing shoe.

Full Evacuation (Production)

- Internal: Full void pipe.
- External: MW of drilling mud in the hole when the casing was run.

c) Tension Loads

Running Casing (Surface / Intermediate / Production)

- Axial: Buoyant weight of the string plus the lesser of 100,000 lb or the string weight in air.

Green Cement (Surface / Intermediate / Production)

- Axial: Buoyant weight of the string plus cement plug bump pressure load.

OXY's Minimum Design Criteria

Burst, Collapse, and Tensile SF are calculated using Landmark's Stress Check (Casing Design) software. A sundry will be requested if any lesser grade or different size casing is substituted.

1) Casing Design Assumptions

a) Burst Loads

CSG Test (Surface)

- Internal: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both 43 CFR part 3170 Subpart 3172 and 19.15.16 of the OCD Rules.
- External: Pore pressure in open hole.

CSG Test (Intermediate)

- Internal: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both 43 CFR part 3170 Subpart 3172 and 19.15.16 of the OCD Rules.
- External: Mud Weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

CSG Test (Production)

- Internal:
 - For Drilling: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both 43 CFR part 3170 Subpart 3172 and 19.15.16 of the OCD Rules.
 - For Production: The design pressure test should be the greater of (1) the planned test pressure prior to stimulation down the casing. (2) the regulatory test pressure, and (3) the expected gas lift system pressure. The design test fluid should be the fluid associated with pressure test having the greatest pressure.
- External:
 - For Drilling: Mud Weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.
 - For Production: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Gas Column (Surface)

- Internal: Assumes a full column of gas in the casing with a Gas/Oil Gradient of 0.1 psi/ft in the absence of better information. It is limited to the controlling pressure based on the fracture pressure at the shoe or the maximum expected pore pressure within the next drilling interval, whichever results in a lower surface pressure.
- External: Fluid gradient below TOC, pore pressure from the TOC to the Intermediate CSG shoe (if applicable), and MW of the drilling mud that was in the hole when the CSG was run from Intermediate CSG shoe to surface.

Bullheading (Surface / Intermediate)

- Internal: The string must be designed to withstand a pressure profile based on the fracture pressure at the casing shoe with a column of water above the shoe plus an additional surface pressure (in psi) of $0.02 \times \text{MD}$ of the shoe to account for pumping friction pressure.
- External: Mud weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Gas Kick (Intermediate)

- The string must be designed to at least a gas kick load case unless the rig is unable to detect a kick. For the gas kick load case, the internal pressure profile must be based on a minimum volume of 50 bbl or the minimum kick detection capability of the rig, whichever is greater, and a kick intensity of 2.0 ppg for Class 1, 1.0 ppg of Class 2, and 0.5 ppg for Class 3 and 4 wells.
- Internal: Influx depth of the maximum pore pressure of 0.55 "gas kick gravity" of gas to surface while drilling the next hole section.
- External: Mud weight to the TOC, cement mix water gradient below TOC, and pore pressure in open hole.

Tubing Leak Near Surface While Producing (Production)

- Internal: SITP plus a packer fluid gradient to the shoe or top of packer.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Tubing Leak Near Surface While Stimulating (Production)

- Internal: Surface pressure or pressure-relief system pressure, whichever is lower plus packer fluid gradient.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Injection / Stimulation Down Casing (Production)

- Internal: Surface pressure plus injection fluid gradient.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

b) Collapse Loads

Lost Circulation (Surface / Intermediate)

- Internal: Lost circulation at the TD of the next hole section, and the fluid level falls to a depth where the hydrostatic of the mud equals pore pressure at the depth of the lost circulation zone.
- External: MW of the drilling mud that was in the hole when the casing was run. Cementing (Surface / Intermediate / Production)
- Internal: Displacement fluid density.
- External: Mud weight from TOC to surface and cement slurry weight from TOC to casing shoe.

Full Evacuation (Production)

- Internal: Full void pipe.
- External: MW of drilling mud in the hole when the casing was run.

c) Tension Loads

Running Casing (Surface / Intermediate / Production)

- Axial: Buoyant weight of the string plus the lesser of 100,000 lb or the string weight in air.

Green Cement (Surface / Intermediate / Production)

- Axial: Buoyant weight of the string plus cement plug bump pressure load.

OXY's Minimum Design Criteria

Burst, Collapse, and Tensile SF are calculated using Landmark's Stress Check (Casing Design) software. A sundry will be requested if any lesser grade or different size casing is substituted.

1) Casing Design Assumptions

a) Burst Loads

CSG Test (Surface)

- Internal: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both 43 CFR part 3170 Subpart 3172 and 19.15.16 of the OCD Rules.
- External: Pore pressure in open hole.

CSG Test (Intermediate)

- Internal: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both 43 CFR part 3170 Subpart 3172 and 19.15.16 of the OCD Rules.
- External: Mud Weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

CSG Test (Production)

- Internal:
 - For Drilling: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both 43 CFR part 3170 Subpart 3172 and 19.15.16 of the OCD Rules.
 - For Production: The design pressure test should be the greater of (1) the planned test pressure prior to stimulation down the casing. (2) the regulatory test pressure, and (3) the expected gas lift system pressure. The design test fluid should be the fluid associated with pressure test having the greatest pressure.
- External:
 - For Drilling: Mud Weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.
 - For Production: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Gas Column (Surface)

- Internal: Assumes a full column of gas in the casing with a Gas/Oil Gradient of 0.1 psi/ft in the absence of better information. It is limited to the controlling pressure based on the fracture pressure at the shoe or the maximum expected pore pressure within the next drilling interval, whichever results in a lower surface pressure.
- External: Fluid gradient below TOC, pore pressure from the TOC to the Intermediate CSG shoe (if applicable), and MW of the drilling mud that was in the hole when the CSG was run from Intermediate CSG shoe to surface.

Bullheading (Surface / Intermediate)

- Internal: The string must be designed to withstand a pressure profile based on the fracture pressure at the casing shoe with a column of water above the shoe plus an additional surface pressure (in psi) of $0.02 \times \text{MD}$ of the shoe to account for pumping friction pressure.
- External: Mud weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Gas Kick (Intermediate)

- The string must be designed to at least a gas kick load case unless the rig is unable to detect a kick. For the gas kick load case, the internal pressure profile must be based on a minimum volume of 50 bbl or the minimum kick detection capability of the rig, whichever is greater, and a kick intensity of 2.0 ppg for Class 1, 1.0 ppg of Class 2, and 0.5 ppg for Class 3 and 4 wells.
- Internal: Influx depth of the maximum pore pressure of 0.55 "gas kick gravity" of gas to surface while drilling the next hole section.
- External: Mud weight to the TOC, cement mix water gradient below TOC, and pore pressure in open hole.

Tubing Leak Near Surface While Producing (Production)

- Internal: SITP plus a packer fluid gradient to the shoe or top of packer.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Tubing Leak Near Surface While Stimulating (Production)

- Internal: Surface pressure or pressure-relief system pressure, whichever is lower plus packer fluid gradient.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Injection / Stimulation Down Casing (Production)

- Internal: Surface pressure plus injection fluid gradient.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

b) Collapse Loads

Lost Circulation (Surface / Intermediate)

- Internal: Lost circulation at the TD of the next hole section, and the fluid level falls to a depth where the hydrostatic of the mud equals pore pressure at the depth of the lost circulation zone.
- External: MW of the drilling mud that was in the hole when the casing was run. Cementing (Surface / Intermediate / Production)
- Internal: Displacement fluid density.
- External: Mud weight from TOC to surface and cement slurry weight from TOC to casing shoe.

Full Evacuation (Production)

- Internal: Full void pipe.
- External: MW of drilling mud in the hole when the casing was run.

c) Tension Loads

Running Casing (Surface / Intermediate / Production)

- Axial: Buoyant weight of the string plus the lesser of 100,000 lb or the string weight in air.

Green Cement (Surface / Intermediate / Production)

- Axial: Buoyant weight of the string plus cement plug bump pressure load.



CONNECTION DATA SHEET

OD: **5.500 in.** Grade: **P110 RY**
 Weight: **20.00 lb/ft** Drift: **4.653 in. (API)**
 Wall Th.: **0.361 in.**


VAM® SPRINT-SF



Semi-Flush

Field Torque Values

Make-up Torque (ft-lb)



Torque with Sealability (ft-lb)



Locked Flank Torque (ft-lb)



(2) MTS: Maximum Torque with Sealability.

PIPE BODY PROPERTIES

Nominal OD	5.500	in.
Nominal ID	4.778	in.
Nominal Wall Thickness	0.361	in.
Minimum Wall Thickness	87.5	%
Nominal Weight (API)	20.00	lb/ft
Plain End Weight	19.83	lb/ft
Drift	4.653	in.
Grade Type	Controlled Yield	
Minimum Yield Strength	110	ksi
Maximum Yield Strength	125	ksi
Minimum Ultimate Tensile Strength	140	ksi
Pipe Body Yield Strength	641	kib
Internal Yield Pressure	12,640	psi
Collapse Pressure	11,110	psi

CONNECTION PROPERTIES

Connection Type	Semi-Premium Integral	Semi-Flu
Nominal Connection OD	5.783	in.
Nominal Connection ID	4.718	in.
Make-up Loss	5.965	in.
Tension Efficiency	90	% Pipe Body
Compression Efficiency	90	% Pipe Body
Internal Pressure Efficiency	100	% Pipe Body
External Pressure Efficiency	100	% Pipe Body

JOINT PERFORMANCES

Tension Strength	577	kib
Compression Strength	577	kib
Internal Pressure Resistance	12,640	psi
External Pressure Resistance	11,110	psi
Maximum Bending, Structural	78	%/100 ft
Maximum Bending, with Sealability(1)	30	%/100 ft

(1) Sealability rating demonstrated as per API RP 5C5 / ISO 13679



BOOST YOUR EFFICIENCY, REDUCE COSTS
AND ENSURE 100% WELL INTEGRITY WITH
VAM® FIELD SERVICE

Scan the QR code
to contact us



The information available on this Site ('Information') is offered for general information. It is supposed to be correct at the time of publishing on the Site but is not intended to constitute professional advice and is provided 'as is'. Vallourec does not guarantee the completeness and accuracy of this Information. Under no circumstances will Vallourec be liable for damage, liability of any kind, or any loss or injury that may result from the credibility given to this Information or its use. The Information may be amended, corrected, or supplemented at any time without warning. Vallourec's products and services are subject to Vallourec's The Information may be amended, corrected, and/or supplemented at any time by Vallourec without warning. Standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services.

OXY's Minimum Design Criteria

Burst, Collapse, and Tensile SF are calculated using Landmark's Stress Check (Casing Design) software. A sundry will be requested if any lesser grade or different size casing is substituted.

1) Casing Design Assumptions

a) Burst Loads

CSG Test (Surface)

- Internal: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both 43 CFR part 3170 Subpart 3172 and 19.15.16 of the OCD Rules.
- External: Pore pressure in open hole.

CSG Test (Intermediate)

- Internal: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both 43 CFR part 3170 Subpart 3172 and 19.15.16 of the OCD Rules.
- External: Mud Weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

CSG Test (Production)

- Internal:
 - For Drilling: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both 43 CFR part 3170 Subpart 3172 and 19.15.16 of the OCD Rules.
 - For Production: The design pressure test should be the greater of (1) the planned test pressure prior to stimulation down the casing. (2) the regulatory test pressure, and (3) the expected gas lift system pressure. The design test fluid should be the fluid associated with pressure test having the greatest pressure.
- External:
 - For Drilling: Mud Weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.
 - For Production: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Gas Column (Surface)

- Internal: Assumes a full column of gas in the casing with a Gas/Oil Gradient of 0.1 psi/ft in the absence of better information. It is limited to the controlling pressure based on the fracture pressure at the shoe or the maximum expected pore pressure within the next drilling interval, whichever results in a lower surface pressure.
- External: Fluid gradient below TOC, pore pressure from the TOC to the Intermediate CSG shoe (if applicable), and MW of the drilling mud that was in the hole when the CSG was run from Intermediate CSG shoe to surface.

Bullheading (Surface / Intermediate)

- Internal: The string must be designed to withstand a pressure profile based on the fracture pressure at the casing shoe with a column of water above the shoe plus an additional surface pressure (in psi) of $0.02 \times \text{MD}$ of the shoe to account for pumping friction pressure.
- External: Mud weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Gas Kick (Intermediate)

- The string must be designed to at least a gas kick load case unless the rig is unable to detect a kick. For the gas kick load case, the internal pressure profile must be based on a minimum volume of 50 bbl or the minimum kick detection capability of the rig, whichever is greater, and a kick intensity of 2.0 ppg for Class 1, 1.0 ppg of Class 2, and 0.5 ppg for Class 3 and 4 wells.
- Internal: Influx depth of the maximum pore pressure of 0.55 "gas kick gravity" of gas to surface while drilling the next hole section.
- External: Mud weight to the TOC, cement mix water gradient below TOC, and pore pressure in open hole.

Tubing Leak Near Surface While Producing (Production)

- Internal: SITP plus a packer fluid gradient to the shoe or top of packer.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Tubing Leak Near Surface While Stimulating (Production)

- Internal: Surface pressure or pressure-relief system pressure, whichever is lower plus packer fluid gradient.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

Injection / Stimulation Down Casing (Production)

- Internal: Surface pressure plus injection fluid gradient.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

b) Collapse Loads

Lost Circulation (Surface / Intermediate)

- Internal: Lost circulation at the TD of the next hole section, and the fluid level falls to a depth where the hydrostatic of the mud equals pore pressure at the depth of the lost circulation zone.
- External: MW of the drilling mud that was in the hole when the casing was run. Cementing (Surface / Intermediate / Production)
- Internal: Displacement fluid density.
- External: Mud weight from TOC to surface and cement slurry weight from TOC to casing shoe.

Full Evacuation (Production)

- Internal: Full void pipe.
- External: MW of drilling mud in the hole when the casing was run.

c) Tension Loads

Running Casing (Surface / Intermediate / Production)

- Axial: Buoyant weight of the string plus the lesser of 100,000 lb or the string weight in air.

Green Cement (Surface / Intermediate / Production)

- Axial: Buoyant weight of the string plus cement plug bump pressure load.



API BTC -Special Clearance

Coupling	Pipe Body
Grade: L80-IC	Grade: L80-IC
Body: Red	1st Band: Red
1st Band: Brown	2nd Band: Brown
2nd Band: -	3rd Band: Pale Green
3rd Band: -	4th Band: -

Outside Diameter	10.750 in.	Wall Thickness	0.400 in.	Grade	L80-IC
Min. Wall Thickness	87.50 %	Pipe Body Drift	Alternative Drift	Type	Casing
Connection OD Option	Special Clearance				

Pipe Body Data

Geometry		Performance	
Nominal OD	10.750 in.	Drift	9.875 in.
Wall Thickness	0.400 in.	Plain End Weight	44.26 lb/ft
Nominal Weight	45.500 lb/ft	OD Tolerance	API
Nominal ID	9.950 in.		

Connection Data

Geometry	Performance
Thread per In	5
Connection OD	11.250 in.
Hand Tight Stand Off	1 in.

Notes

For products according to API Standards 5CT & 5B; Performance calculated considering API Technical Report 5C3 (Sections 9 & 10) equations.

For geometrical and steel grades combinations not considered in the API Standards 5CT and/or 5B; Performance calculations indirectly derived from API Technical Report 5C3 (Sections 9 & 10) equations.

Couplings OD are shown according to current API 5CT 10th Edition.

Tenaris has issued this document for general information only, and the information in this document, including, without limitation, any pictures, drawings or designs ("Information") is not intended to constitute professional or any other type of advice or recommendation and is provided on an "as is" basis. No warranty is given. Tenaris has not independently verified any information -if any- provided by the user in connection with, or for the purpose of, the Information contained hereunder. The use of the Information is at user's own risk and Tenaris does not assume any responsibility or liability of any kind for any loss, damage or injury resulting from, or in connection with any Information contained hereunder or any use thereof. The Information in this document is subject to change or modification without notice. Tenaris's products and services are subject to Tenaris's standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services, as the case may be, between petitioner and Tenaris. For more complete information please contact a Tenaris's representative or visit our website at www.tenaris.com. ©Tenaris 2023. All rights reserved.

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 523956

ACKNOWLEDGMENTS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 523956
	Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

ACKNOWLEDGMENTS

<input checked="" type="checkbox"/>	I hereby certify that no additives containing PFAS chemicals will be added to the completion or recompletion of this well.
-------------------------------------	--

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 523956

CONDITIONS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 523956
	Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

CONDITIONS

Created By	Condition	Condition Date
guthries	Cement is required to circulate on both surface and intermediate1 strings of casing.	11/6/2025
guthries	If cement does not circulate on any string, a Cement Bond Log (CBL) is required for that string of casing.	11/6/2025
ward.rikala	Notify the OCD 24 hours prior to casing & cement.	12/15/2025
ward.rikala	File As Drilled C-102 and a directional Survey with C-104 completion packet.	12/15/2025
ward.rikala	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string.	12/15/2025
ward.rikala	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.	12/15/2025
ward.rikala	Operator must comply with all of the R-111-Q requirements.	12/15/2025