

Form 3160-3
(October 2024)FORM APPROVED
OMB No. 1004-0220
Expires: October 31, 2027UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: ☒ DRILL ☐ REENTER			5. Lease Serial No. NMLC050349A
1b. Type of Well: ☒ Oil Well ☐ Gas Well ☐ Other			6. If Indian, Allottee or Tribe Name
1c. Type of Completion: ☐ Hydraulic Fracturing ☒ Single Zone ☐ Multiple Zone			7. If Unit or CA Agreement, Name and No.
2. Name of Operator LONGFELLOW ENERGY LP			8. Lease Name and Well No. BONZO 1924 ABX FED COM 005H
3a. Address 8115 PRESTON ROAD SUITE 800, DALLAS, TX 75225		3b. Phone No. (include area code) (972) 590-9900	9. API Well No. 30-015-57582
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface SWNW / 1455 FNL / 620 FWL / LAT 32.8229432 / LONG -104.204313 At proposed prod. zone SWNW / 2170 FNL / 20 FWL / LAT 32.8208967 / LONG -104.2407534			10. Field and Pool, or Exploratory EMPIRE/GLORIETA-YESO
11. Sec., T. R. M. or Blk. and Survey or Area SEC 20/T17S/R28E/NMP			
14. Distance in miles and direction from nearest town or post office* 11 miles		12. County or Parish EDDY	13. State NM
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 135 feet		16. No of acres in lease	17. Spacing Unit dedicated to this well 645.75
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 20 feet		19. Proposed Depth 3397 feet / 14620 feet	20. BLM/BIA Bond No. in file FED: NMB001490
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3632 feet		22. Approximate date work will start* 02/01/2026	23. Estimated duration 60 days
24. Attachments			

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be requested by the BLM. |

25. Signature (Electronic Submission)	Name (Printed/Typed) CORY WALK / Ph: (972) 590-9900	Date 08/27/2025
Title Permitting Agent		
Approved by (Signature) (Electronic Submission)	Name (Printed/Typed) CODY LAYTON / Ph: (575) 234-5959	Date 11/04/2025
Title Assistant Field Manager Lands & Minerals Carlsbad Field Office		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)



C-102 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION		Revised July 9, 2024	
	Submittal Type:	☒ Initial Submittal		
		☐ Amended Report		
		☐ As Drilled		

WELL LOCATION INFORMATION

API Number 30-015-57582	Pool Code 96210 96836	Pool Name Red Lake, Glorieta-Yeso, Northeast EMPIRE, GLORIETA-YESO
Property Code 338288	Property Name BONZO 1924 ABX FED COM	Well Number 005H
OGRID No. 372210	Operator Name LONGFELLOW ENERGY, LP	Ground Level Elevation 3632.3
Surface Owner: ☐ State ☐ Fee ☐ Tribal ☒ Federal		Mineral Owner: ☒ State ☐ Fee ☐ Tribal ☒ Federal

Surface Location

UL E	Section 20	Township 17S	Range 28E	Lot	Ft. from N/S 1455 NORTH	Ft. from E/W 620 WEST	Latitude 32.8229432°N	Longitude 104.2043130°W	County EDDY
---------	---------------	-----------------	--------------	-----	----------------------------	--------------------------	--------------------------	----------------------------	----------------

Bottom Hole Location

UL E	Section 24	Township 17S	Range 27E	Lot	Ft. from N/S 2170 NORTH	Ft. from E/W 20 WEST	Latitude 32.8208967°N	Longitude 104.2407534°W	County EDDY
---------	---------------	-----------------	--------------	-----	----------------------------	-------------------------	--------------------------	----------------------------	----------------

WILL FORM HSU

Dedicated Acres 645.75	Infill or Defining Well INFILL	Defining Well API BONZO 1924 ABX FED COM 003H	Overlapping Spacing Unit (Y/N) N	Consolidation Code C
Order Numbers.			Well setbacks are under Common Ownership: ☒ Yes ☐ No	

Kick Off Point (KOP)

UL E	Section 20	Township 17S	Range 28E	Lot	Ft. from N/S 1455 NORTH	Ft. from E/W 620 WEST	Latitude 32.8229432°N	Longitude 104.2043130°W	County EDDY
---------	---------------	-----------------	--------------	-----	----------------------------	--------------------------	--------------------------	----------------------------	----------------

First Take Point (FTP)

UL H	Section 19	Township 17S	Range 28E	Lot	Ft. from N/S 2173 NORTH	Ft. from E/W 100 EAST	Latitude 32.8209715°N	Longitude 104.2066482°W	County EDDY
---------	---------------	-----------------	--------------	-----	----------------------------	--------------------------	--------------------------	----------------------------	----------------

Last Take Point (LTP)

UL E	Section 24	Township 17S	Range 27E	Lot	Ft. from N/S 2170 NORTH	Ft. from E/W 100 WEST	Latitude 32.8208963°N	Longitude 104.2404931°W	County EDDY
---------	---------------	-----------------	--------------	-----	----------------------------	--------------------------	--------------------------	----------------------------	----------------

Unitized Area or Area of Uniform Interest	Spacing Unit Type ☒ Horizontal ☐ Vertical	Ground Floor Elevation:
---	--	-------------------------

OPERATOR CERTIFICATIONS

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest run leased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order here to fore entered by the division.

If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.

Brian Wood
Signature Date 8-15-25

BRIAN WOOD (505) 466-8120

Printed Name

brian@permitswest.com

Email Address

SURVEYOR CERTIFICATIONS

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.



Signature and Seal of Professional Surveyor
FILIMON F. JARAMILLO

Certificate Number

PLS 12797

Date of Survey

JUNE 12, 2025

SURVEY NO. 10454

Note: No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

This grid represents a standard section. You may superimpose a non-standard section, or larger area, over this grid. Operators must outline the dedicated acreage in a red box, clearly show the well surface location and bottom hole location, if it is directionally drilled, with the dimensions from the section lines in the cardinal directions. If this is a horizontal wellbore show on this plat the location of the First Take Point and Last Take Point, and the point within the Completed interval (other than the First Take Point or Last Take Point) that is closest to any outer boundary of the tract.

Surveyors shall use the latest United States government survey or dependent resurvey. Well locations will be in reference to the New Mexico Principal Meridian. If the land is not surveyed, contact the OCD Engineering Bureau. Independent subdivision surveys will not be acceptable.

BONZO 1924 ABX FED COM 005H
EL. = 3632.3

GEODETIC COORDINATES

NAD 83 NMSP EAST
SURFACE LOCATION
1455' FNL, 620' FWL
N.=663143.70
E.=580970.95
LAT.=32.8229432°N
LONG.=104.2043130°W

LAST TAKE POINT
2170' FNL, 100' FWL
N.=662387.35
E.=569857.52
LAT.=32.8208963°N
LONG.=104.2404931°W

PPP3
2158' FNL, 2625' FEL
N.=662396.60
E.=572382.79
LAT.=32.8209154°N
LONG.=104.2322726°W

KICK OFF POINT
1455' FNL, 620' FWL
N.=663143.70
E.=580970.95
LAT.=32.8229432°N
LONG.=104.2043130°W

BOTTOM OF HOLE
2170' FNL, 20' FWL
N.=662387.44
E.=569777.54
LAT.=32.8208963°N
LONG.=104.2407534°W

PPP4
2164' FNL, 1313' FWL
N.=662391.79
E.=571070.47
LAT.=32.8209055°N
LONG.=104.2365446°W

FIRST TAKE POINT
2173' FNL, 100' FEL
N.=662425.49
E.=580254.47
LAT.=32.8209715°N
LONG.=104.2066482°W


PPP2
2146' FNL, 0' FWL
N.=662406.23
E.=575006.87
LAT.=32.8209346°N
LONG.=104.2237305°W

CORNER COORDINATES TABLE

NAD 83 NMSP EAST
A - N.=664556.89 E.=569759.57
B - N.=664553.93 E.=572377.16
C - N.=664551.74 E.=574994.19
D - N.=664575.15 E.=577714.30
E - N.=664598.82 E.=580344.41
F - N.=664596.76 E.=582975.37
G - N.=664595.79 E.=585605.52
H - N.=661948.54 E.=585605.39
I - N.=659297.68 E.=585602.54
J - N.=659304.34 E.=582986.39
K - N.=659309.95 E.=580369.70
L - N.=659287.72 E.=577748.54
M - N.=659266.28 E.=575026.66
N - N.=659278.36 E.=572390.93
O - N.=659289.75 E.=569756.06
P - N.=661923.36 E.=569757.11
Q - N.=661909.71 E.=575009.81
R - N.=661953.21 E.=580356.63

LEGEND

--- SECTION LINE
--- QUARTER LINE
--- LEASE LINE
--- WELL PATH

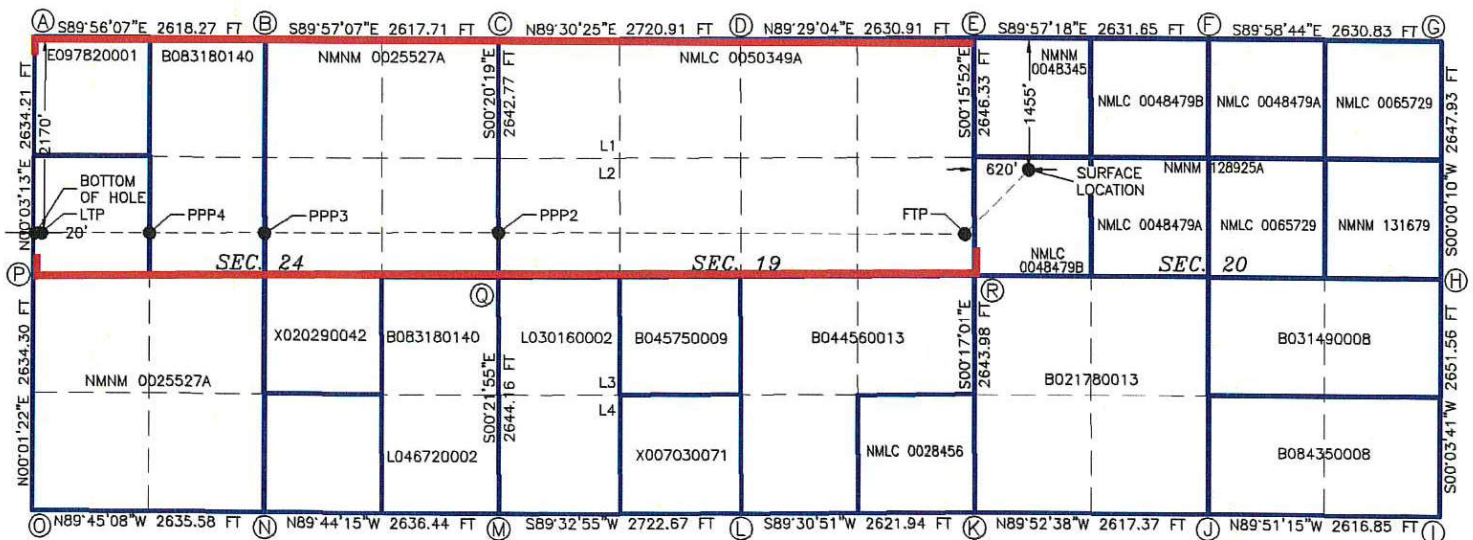

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: Longfellow Energy, LP **OGRID:** 372210 **Date:** 8-2-25

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
Bonzo 1924 ABX Fed Com 001H	30-015-	E-20-17S-28E	1375 FNL & 620 FWL	320	450	2600
Bonzo 1924 ABX Fed Com 002H	30-015-	E-20-17S-28E	1395 FNL & 620 FWL	320	450	2600
Bonzo 1924 ABX Fed Com 003H	30-015-	E-20-17S-28E	1415 FNL & 620 FWL	320	450	2600
Bonzo 1924 ABX Fed Com 004H	30-015-	E-20-17S-28E	1435 FNL & 620 FWL	320	450	2600
Bonzo 1924 ABX Fed Com 005H	30-015-	E-20-17S-28E	1455 FNL & 620 FWL	320	450	2600

IV. Central Delivery Point Name: Kinetik Gas Gathering, LLC (333008) in J-24-17s-27e [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
Bonzo 1924 ABX Fed Com 001H	30-015-	1-2-26	1-10-26	3-1-26	4-15-26	3-15-26
Bonzo 1924 ABX Fed Com 002H	30-015-	1-11-26	1-22-26	3-11-26	4-21-26	4-1-26
Bonzo 1924 ABX Fed Com 003H	30-015-	1-23-26	2-3-26	3-23-26	5-5-26	6-30-26
Bonzo 1924 ABX Fed Com 004H	30-015-	2-2-26	2-14-26	4-16-26	6-1-26	7-15-26
Bonzo 1924 ABX Fed Com 005H	30-015-	2-15-26	2-25-26	6-1-26	7-15-26	9-1-26

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan

EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☒ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature:
Printed Name: Brian Wood
Title: Consultant
E-mail Address: brian@permitswest.com
Date: 8-2-25
Phone: 505 466-8120
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)
Approved By:
Title:
Approval Date:
Conditions of Approval:

**Attachment VI. Separation Equipment:**

Longfellow Energy (LFE) production facilities include separation equipment designed to efficiently separate gas from liquid phases to optimize gas capture based on projected and estimated volumes from the completion project. LFE will utilize flowback separation equipment and production separation equipment designed and built to industry specifications after the completion to optimize gas capture and send gas to sales or flare based on analytical composition. LFE operates facilities that are typically multi-well facilities. Production separation equipment is upgraded or installed before new wells are completed. This equipment is on-site and tied into sales gas lines prior to flowback.

Attachment VII. Operational Practices:***19.15.27.8 Subsection A: Venting and Flaring of Natural Gas***

Longfellow Energy (LFE) understands the requirements of NMAC 19.15.27.8 which states that the venting and flaring of natural gas during drilling, completion, or production operations that constitutes waste as defined in 19.15.2 are prohibited.

19.15.27.8 Subsection B: Venting and flaring during drilling operations

1. LFE shall capture or combust natural gas if technically feasible using best industry practices
2. A properly-sized flare stack shall be located at a minimum of 100 feet from the nearest surface hole location unless otherwise approved by the division.
3. In an emergency or malfunction, LFE may vent natural gas to avoid a risk of an immediate and substantial adverse impact on safety, public health, or the environment. LFE will report natural gas vented or flared during an emergency or malfunction to the NMOCD.

19.15.27.8 Subsection C: Venting and flaring during completion or recompletion operations

1. During initial flowback, LFE shall route flowback fluids into a completion or storage tank and, if technically feasible under the applicable well conditions, flare rather than vent and commence operation of a separator as soon as it is technically feasible for a separator to function
2. During separation flowback, LFE shall capture and route natural gas from the separation equipment:
 - a. to a gas flowline or collection system, reinject into the well, or use on-site as a fuel source or other purpose that a purchased fuel or raw material would serve; or
 - b. to a flare if routing the natural gas to a gas flowline or collection system, reinjecting it into the well, or using it on-site as a fuel source or other purpose that a purchased fuel or raw material would serve would pose a risk to safe operation or personnel safety.
3. If natural gas does not meet gathering pipeline quality specifications, LFE may flare the natural gas for 60 days or until the natural gas meets the pipeline quality specifications, whichever is sooner, provided that:

19.15.27.8 Subsection D: Venting and flaring during production operations

LFE shall not vent or flare natural gas except:

1. during an emergency or malfunction;
2. to unload or clean-up liquid holdup in a well to atmospheric pressure, provided
 - a. LFE does not vent after the well achieves a stabilized rate and pressure;
 - b. for liquids unloading by manual purging, LFE remains present on-site until the end of unloading or posts at the well site the contact information of the personnel conducting the liquids unloading operation and ensures that personnel remains within 30 minutes' drive time of the well being unloaded until the end of unloading, takes all reasonable actions to achieve a stabilized rate and pressure at the earliest practical time and takes reasonable actions to minimize venting to the maximum extent practicable;
 - c. during downhole well maintenance, only when LFE uses a workover rig, swabbing rig, coiled tubing unit or similar specialty equipment and minimizes the venting of natural gas to the extent that it does not pose a risk to safe operations and personnel safety
3. during the following activities unless prohibited by applicable state or federal law, rule, or regulation for the emission of hydrocarbons and volatile organic compounds:
 - a. gauging or sampling a storage tank or other low-pressure production vessel;
 - b. loading out liquids from a storage tank or other low-pressure production vessel to a transport vehicle;
 - c. repair and maintenance, including blowing down and depressurizing production equipment to perform repair and maintenance;
 - d. normal operation of a gas-activated pneumatic controller or pump;
 - e. normal operation of a storage tank or other low-pressure production vessel, but not including venting from a thief hatch that is not properly closed or maintained
 - f. normal operations of valves, flanges and connectors that is not the result of inadequate equipment design or maintenance;
 - g. a packer leakage test;
 - h. a production test lasting less than 24 hours unless the division requires or approves a longer test period;
 - i. when natural gas does not meet the gathering pipeline specifications, provided LFE analyzes natural gas samples twice per week to determine whether the specifications have been achieved, routes the natural gas into a gathering pipeline as soon as the pipeline specifications are met and provides the pipeline specifications and natural gas analyses to the division upon request; or
 - j. Commissioning of pipelines, equipment, or facilities only for as long as necessary to purge introduced impurities from the pipeline or equipment.

19.15.27.8 Subsection E: Performance Standards

1. LFE designed completion and production separation equipment and storage tanks for maximum anticipated throughput and pressure to minimize waste.
2. LFE permanent storage tanks associated with production operations that is routed to a flare or control device are equipped with automatic gauging system that reduces the venting of natural gas.
3. LFE shall combust natural gas in a flare stack that is properly sized and designed to ensure proper combustion efficiency.
 - a. The flare stack shall be equipped with an automatic ignitor or continuous pilot.

4. The flare stack shall be securely anchored and located at least 100 feet from the well and storage tanks unless otherwise approved by the division.
5. LFE shall conduct an AVO inspection weekly to confirm that all production equipment is operating properly and there are no leaks or releases except as allowed in Subsection D of 19.15.27.8 NMAC.
 - a. During an AVO inspection the LFE shall inspect all components, including flare stacks, thief hatches, closed vent systems, pumps, compressors, pressure relief devices, valves, lines, flanges, connectors, and associated piping to identify defects, leaks, and releases by:
 - i. a comprehensive external visual inspection;
 - ii. listening for pressure and liquid leaks; and
 - iii. smelling for unusual and strong odors.
 - b. LFE shall make and keep a record of an AVO inspection for not less than five years and make such record available for inspection by the division upon request.
6. facilities shall be designed to minimize waste;
7. LFE has an obligation to minimize waste and shall resolve emergencies as quickly and safely as is feasible.

19.15.27.8 Subsection F: Measurement or estimation of vented and flared natural gas

1. LFE shall measure or estimate the volume of natural gas that it vents, flares, or beneficially uses during drilling, completion, and production operations regardless of the reason or authorization for such venting or flaring.
2. LFE shall install equipment to measure the volume of natural gas flared from existing process piping or a flowline piped from equipment such as high pressure separators, heater treaters, or vapor recovery units associated with a well or facility associated with a well authorized by the APD

Attachment VIII. Best Management Practices:

Longfellow Energy (LFE) utilizes the following best management practices to minimize venting during active and planned maintenance

1. LFE has a closed vent capture system to route emissions from the heater treater, tanks and vapor to the VRU with a flare for backup. The system is designed such that if the VRU is taken out of service for any reason, the vapors will be routed to the flare for combustion.
2. LFE will isolate and attempt to route all vapors to the VRU or flare prior to opening any lines for maintenance to minimize venting from the equipment when technically feasible
3. LFE will shut in wells in the event of a takeaway disruption, emergency situations, or other operations where venting or flaring may occur due to equipment failures.
4. Lease operators will be visiting the location daily to check and maintain all equipment ensuring all scrubbers, flame arrestors, and the flare ignitor is functioning properly.



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

11/04/2025

APD ID: 10400106660

Submission Date: 08/27/2025

Highlighted data
reflects the most
recent changes

Operator Name: LONGFELLOW ENERGY LP

Well Name: BONZO 1924 ABX FED COM

Well Number: 005H

Well Type: OIL WELL

Well Work Type: Drill

[Show Final Text](#)

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical	Measured Depth	Lithologies	Mineral Resources	Producing Formatio
16717941	QUATERNARY	3632	0	0	OTHER : Caliche	USEABLE WATER	N
16717930	RUSTLER ANHYDRITE	3532	100	100	ANHYDRITE	NONE	N
16717931	TOP SALT	3332	300	300	SALT	NONE	N
16717932	BOTTOM SALT	3267	365	365	SALT	NONE	N
16717933	YATES	3266	366	366	SANDSTONE	NATURAL GAS, OIL	N
16717934	SEVEN RIVERS	3030	602	602	GYPSUM	NATURAL GAS, OIL	N
16717935	QUEEN	2485	1147	1153	SANDSTONE	NATURAL GAS, OIL	N
16717936	GRAYBURG	2037	1595	1618	DOLOMITE	NATURAL GAS, OIL	N
16717937	SAN ANDRES	1703	1929	1965	DOLOMITE	NATURAL GAS, OIL	N
16717938	GLORIETA	300	3332	3542	DOLOMITE	NATURAL GAS, OIL	N
16717939	PADDOCK	278	3354	3581	DOLOMITE, OTHER : Yeso dolomite	NATURAL GAS, OIL	N
16717940	PADDOCK	75	3557	4140	DOLOMITE, OTHER : Yeso dolomite	NATURAL GAS, OIL	Y

Section 2 - Blowout Prevention

Pressure Rating (PSI): 3M

Rating Depth: 5000

Equipment: A 3000-psi BOP stack (rated to 5000') consisting of annular preventer and double (blind and pipe) ram will be used below surface casing to TD. Other accessories to the BOPE will include a speed head, Kelly cock and floor safety valve (inside BOP), and choke lines and choke manifold.

Requesting Variance? YES

Variance request: Variance is requested to use a flex-hose. Test certificate for a typical hose is attached. Certificate for the hose in use will be available on the rig before spud.

Operator Name: LONGFELLOW ENERGY LP

Well Name: BONZO 1924 ABX FED COMWell Number: 005H

Testing Procedure: BOP/BOPE will be tested by an independent service company to 250-psi low and 3000-psi high per 43 CFR 3172 requirements. The system may be upgraded to a higher pressure, but still tested as described above. If the system is upgraded, then all the installed components will be functional and tested. Pipe rams will be operationally checked each 24-hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.

Choke Diagram Attachment:

Bonzo1924_5H_Choke_20250826132737.pdf

BOP Diagram Attachment:

Bonzo1924_5H_BOP_20250826132755.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	360	0	360	3632	3272	360	J-55	54.5	LT&C	1.125	1.125	DRY	1.8	DRY	1.8
2	INTERMEDIATE	12.25	9.625	NEW	API	N	0	1345	0	1333	3634	2299	1345	J-55	36	LT&C	1.125	1.125	DRY	1.8	DRY	1.8
3	PRODUCTION	8.75	7.0	NEW	API	N	0	3982	0	3537	3634	95	3982	L-80	32	BUTT	1.125	1.125	DRY	1.8	DRY	1.8
4	PRODUCTION	8.75	5.5	NEW	API	N	3982	14620	3537	3397	95	235	10638	L-80	20	BUTT	1.125	1.125	DRY	1.8	DRY	1.8

Casing Attachments

Casing ID: 1StringSURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Bonzo1924_5H_Casing_Design_Assumptions_20250826132826.pdf

Operator Name: LONGFELLOW ENERGY LP

Well Name: BONZO 1924 ABX FED COM

Well Number: 005H

Casing Attachments

Casing ID: 2StringINTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Bonzo1924_5H_Casing_Design_Assumptions_20250826132848.pdf

Casing ID: 3StringPRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Bonzo1924_5H_Casing_Design_Assumptions_20250826132912.pdf

Casing ID: 4StringPRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Bonzo1924_5H_Casing_Design_Assumptions_20250826132940.pdf

Section 4 - Cement

Operator Name: LONGFELLOW ENERGY LP**Well Name:** BONZO 1924 ABX FED COM**Well Number:** 005H

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	360	295	1.72	13.5	507	100	Class C	None
SURFACE	Tail		0	360	100	1.33	14.8	133	100	Class C	None
PRODUCTION	Lead		0	1145	375	2.08	12.2	780	10	25/75 Poz C	None
PRODUCTION	Tail		1145	1462 0	2120	1.4	14.5	2968	10	Class C	None
INTERMEDIATE	Lead		0	1345	400	1.72	13.5	688	100	25/75 Poz Class C	None
INTERMEDIATE	Tail		0	1345	135	1.33	14.8	182	100	Class C	None

Section 5 - Circulating Medium

Mud System Type: Closed**Will an air or gas system be Used?** NO**Description of the equipment for the circulating system in accordance with 43 CFR 3172:****Diagram of the equipment for the circulating system in accordance with 43 CFR 3172:****Describe what will be on location to control well or mitigate other conditions:** All necessary mud products (LCM) will be on site to handle any abnormal hole condition that may be encountered while drilling this well.**Describe the mud monitoring system utilized:** An electronic/mechanical mud monitor with a minimum pit volume totalizer, stroke counter, and flow sensor will be used.

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	360	OTHER : Fresh Water Gel	8.4	9							
360	1345	SALT SATURATED	8.8	9.2							
1345	1462 0	OTHER : Cut Brine	8.8	9.2							

Operator Name: LONGFELLOW ENERGY LP**Well Name:** BONZO 1924 ABX FED COM**Well Number:** 005H

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

A mud logger will be used from GL to TD. Samples will be collected every 10' in the lateral pay zone.

A wireline MWD GR log will be run from the base of the surface casing to TD.

List of open and cased hole logs run in the well:

GAMMA RAY LOG, MUD LOG/GEOLOGICAL LITHOLOGY LOG,

Coring operation description for the well:

No core or drill stem test is planned.

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 1631**Anticipated Surface Pressure:** 848**Anticipated Bottom Hole Temperature(F):** 70**Anticipated abnormal pressures, temperatures, or potential geologic hazards?** NO**Describe:****Contingency Plans geohazards description:****Contingency Plans geohazards****Hydrogen Sulfide drilling operations plan required?** YES**Hydrogen sulfide drilling operations**

Bonzo1924_H2S_Plan_20250826133130.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

Bonzo1924_5H_Horizontal_Plan_20250826133212.pdf

Other proposed operations facets description:**Other proposed operations facets attachment:**

Bonzo1924_5H_Drill_Plan_20250826133229.pdf

Bonzo1924_5H_Anticollision_Report_20250826133252.pdf

Coflex_Certs_20250826133310.pdf

Bonzo1924_WMP_20250826133326.pdf

Other Variance request(s)?: N**Other Variance attachment:**



Company: Longfellow Energy
Project: Eddy Co., NM (Nad-83)
Site: BONZO FEDERAL COM 19-24 ABX
Well: BONZO-1924-ABX-FED-COM-005H
Wellbore: OH
Rig:
Design: PLAN 1 / 11:39, July 14 2025



DESIGN TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
5H SHL: 1455' FNL, 620' FWL	0.00	0.00	0.00	663143.70	580970.95	32.822943	-104.204313
5H KOP: 1455' FNL, 620' FWL	500.00	0.00	0.00	663143.70	580970.95	32.822943	-104.204313
5H BHL: 2170' FNL, 20' FWL	3397.30	-756.26	-11193.41	662387.44	569777.54	32.820897	-104.240753
5H LTP: 2170' FNL, 100' FWL	3398.52	-756.35	-11113.43	662387.35	569857.52	32.820896	-104.240493
5H PPP4: 2164' FNL, 1313' FWL	3417.05	-751.91	-9900.48	662391.79	571070.47	32.820906	-104.236545
5H PPP3: 2158' FNL, 2625' FEL	3437.09	-747.10	-8588.16	662396.60	572382.79	32.820915	-104.232273
5H PPP2: 2146' FNL, 0' FWL	3477.16	-737.47	-5964.08	662406.23	575006.87	32.820935	-104.223731
5H FTP: 2173' FNL, 100' FEL	3557.30	-718.21	-716.48	662425.49	580254.47	32.820971	-104.206648
5H PLAN 1 LP: 2146' FNL, 100' FEL	3557.30	-692.00	-716.48	662451.70	580254.47	32.821044	-104.206648

PROJECT DETAILS: Eddy Co., NM (Nad-83)

Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Eastern Zone
System Datum: Mean Sea Level

WELL DETAILS: BONZO-1924-ABX-FED-COM-005H


RKB = 20' @ 3652.30usft						
Ground Elevation: 3632.30						
+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	
0.00	0.00	663143.70	580970.95	32.822943	-104.204313	

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	Vsect	Target
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2	500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	
3	1297.23	15.94	152.97	1286.97	-98.18	50.09	2.00	-49.73	
4	2528.01	15.94	152.97	2470.41	-399.35	203.73	0.00	-202.27	
5	3631.71	60.00	262.00	3380.61	-626.81	-252.61	6.00	254.90	
6	3831.71	60.00	262.00	3480.61	-650.91	-424.13	0.00	426.51	
7	4140.46	90.87	262.00	3557.30	-692.00	-716.48	10.00	719.01	
8	4530.02	90.87	269.79	3551.34	-719.85	-1104.71	2.00	1107.34	
9	9390.00	90.87	269.79	3477.16	-737.47	-5964.08	0.00	5966.74	5H PPP2: 2146' FNL, 0' FWL
10	9433.86	90.87	269.79	3476.49	-737.63	-6007.94	0.00	6010.61	
11	12014.40	90.87	269.79	3437.09	-747.10	-8588.16	0.00	8590.84	5H PPP3: 2158' FNL, 2625' FEL
12	13326.88	90.87	269.79	3417.06	-751.86	-9900.48	0.00	9903.17	5H PPP4: 2164' FNL, 1313' FWL
13	13400.18	90.87	269.79	3415.94	-752.13	-9973.77	0.00	9976.46	
14	14539.98	90.87	269.79	3398.52	-756.35	-11113.43	0.00	11116.13	5H LTP: 2170' FNL, 100' FWL
15	14619.97	90.87	269.79	3397.30	-756.64	-11193.41	0.00	11196.11	5H BHL: 2170' FNL, 20' FWL

FORMATION TOP DETAILS

TVDPath	MDPath	Formation
1147.30	1152.94	Queen
1595.30	1617.89	Grayburg
1929.30	1965.25	San Andres
3332.30	3541.96	Glorieta
3354.30	3581.28	Top Paddock
3557.30	4140.46	Paddock Target

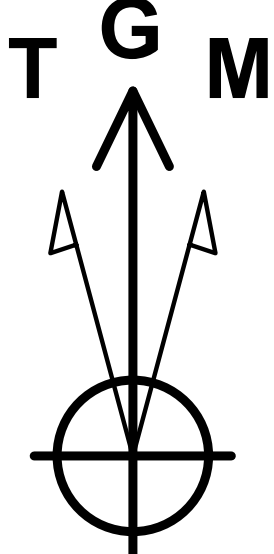


Azimuths to Grid North
True North: -0.07°
Magnetic North: 6.51°

Magnetic Field
Strength: 47291.1nT
Dip Angle: 60.20°
Date: 8/15/2025
Model: IGRF2025


CORRECTION REFERENCE DATA:

To convert a Magnetic Direction to a Grid Direction, Add 6.507°
Magnetic Declination: 6.577°
Magnetic Dip Angle: 60.200°
Magnetic Field Strength: 47291.12885639nT


West(-)/East(+) (400 usft/in)

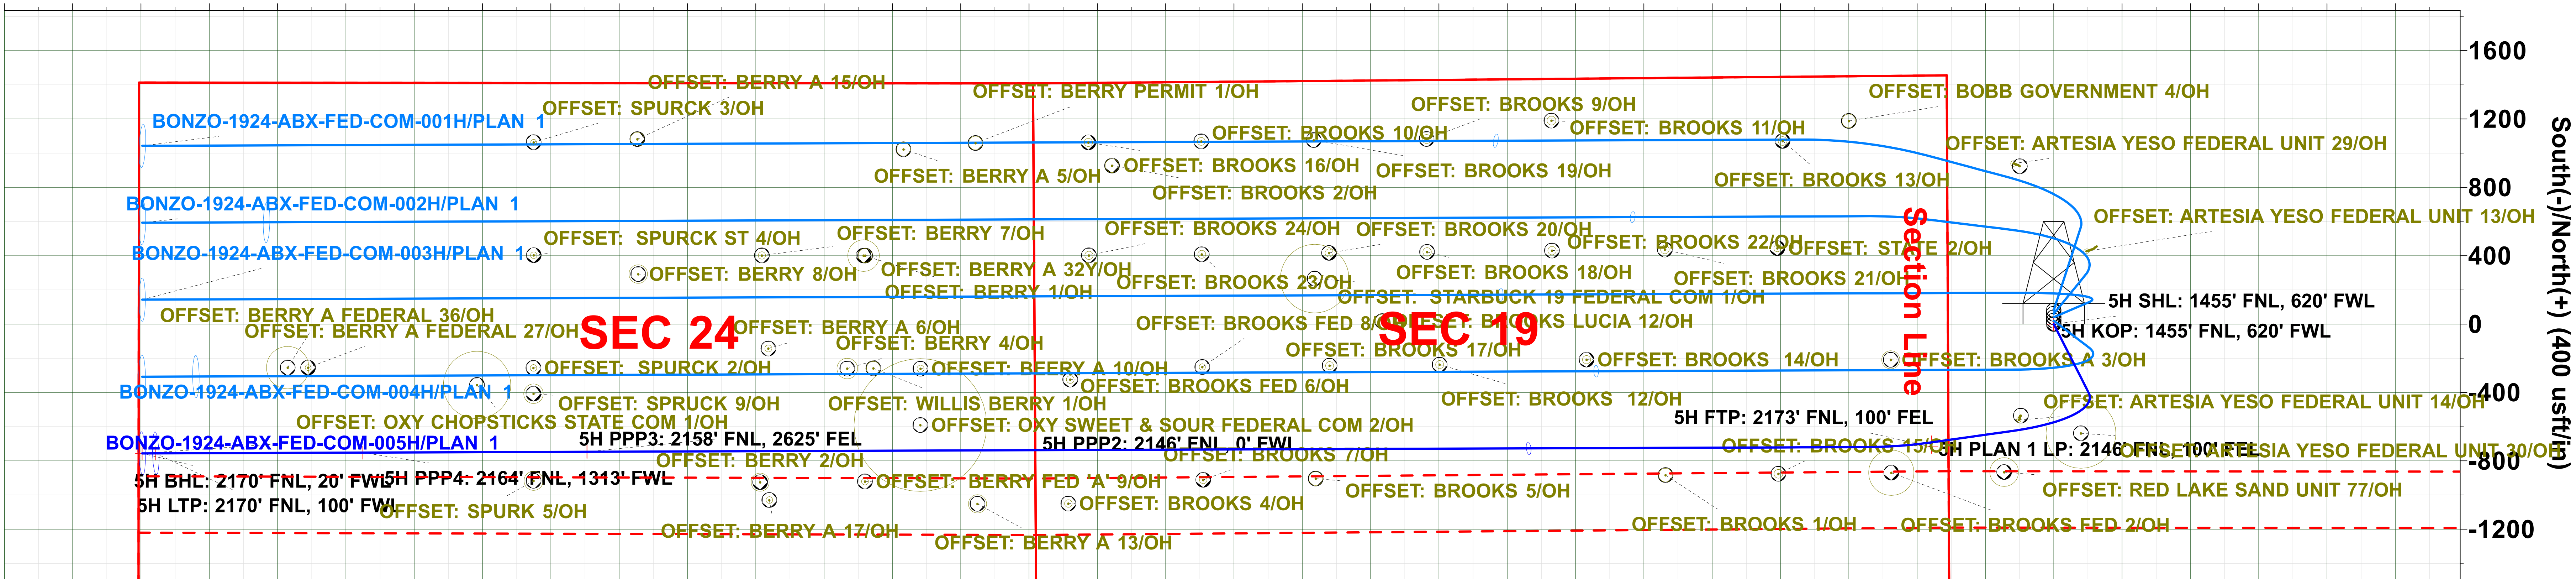

West(-)/East(+) (100 usft/in)

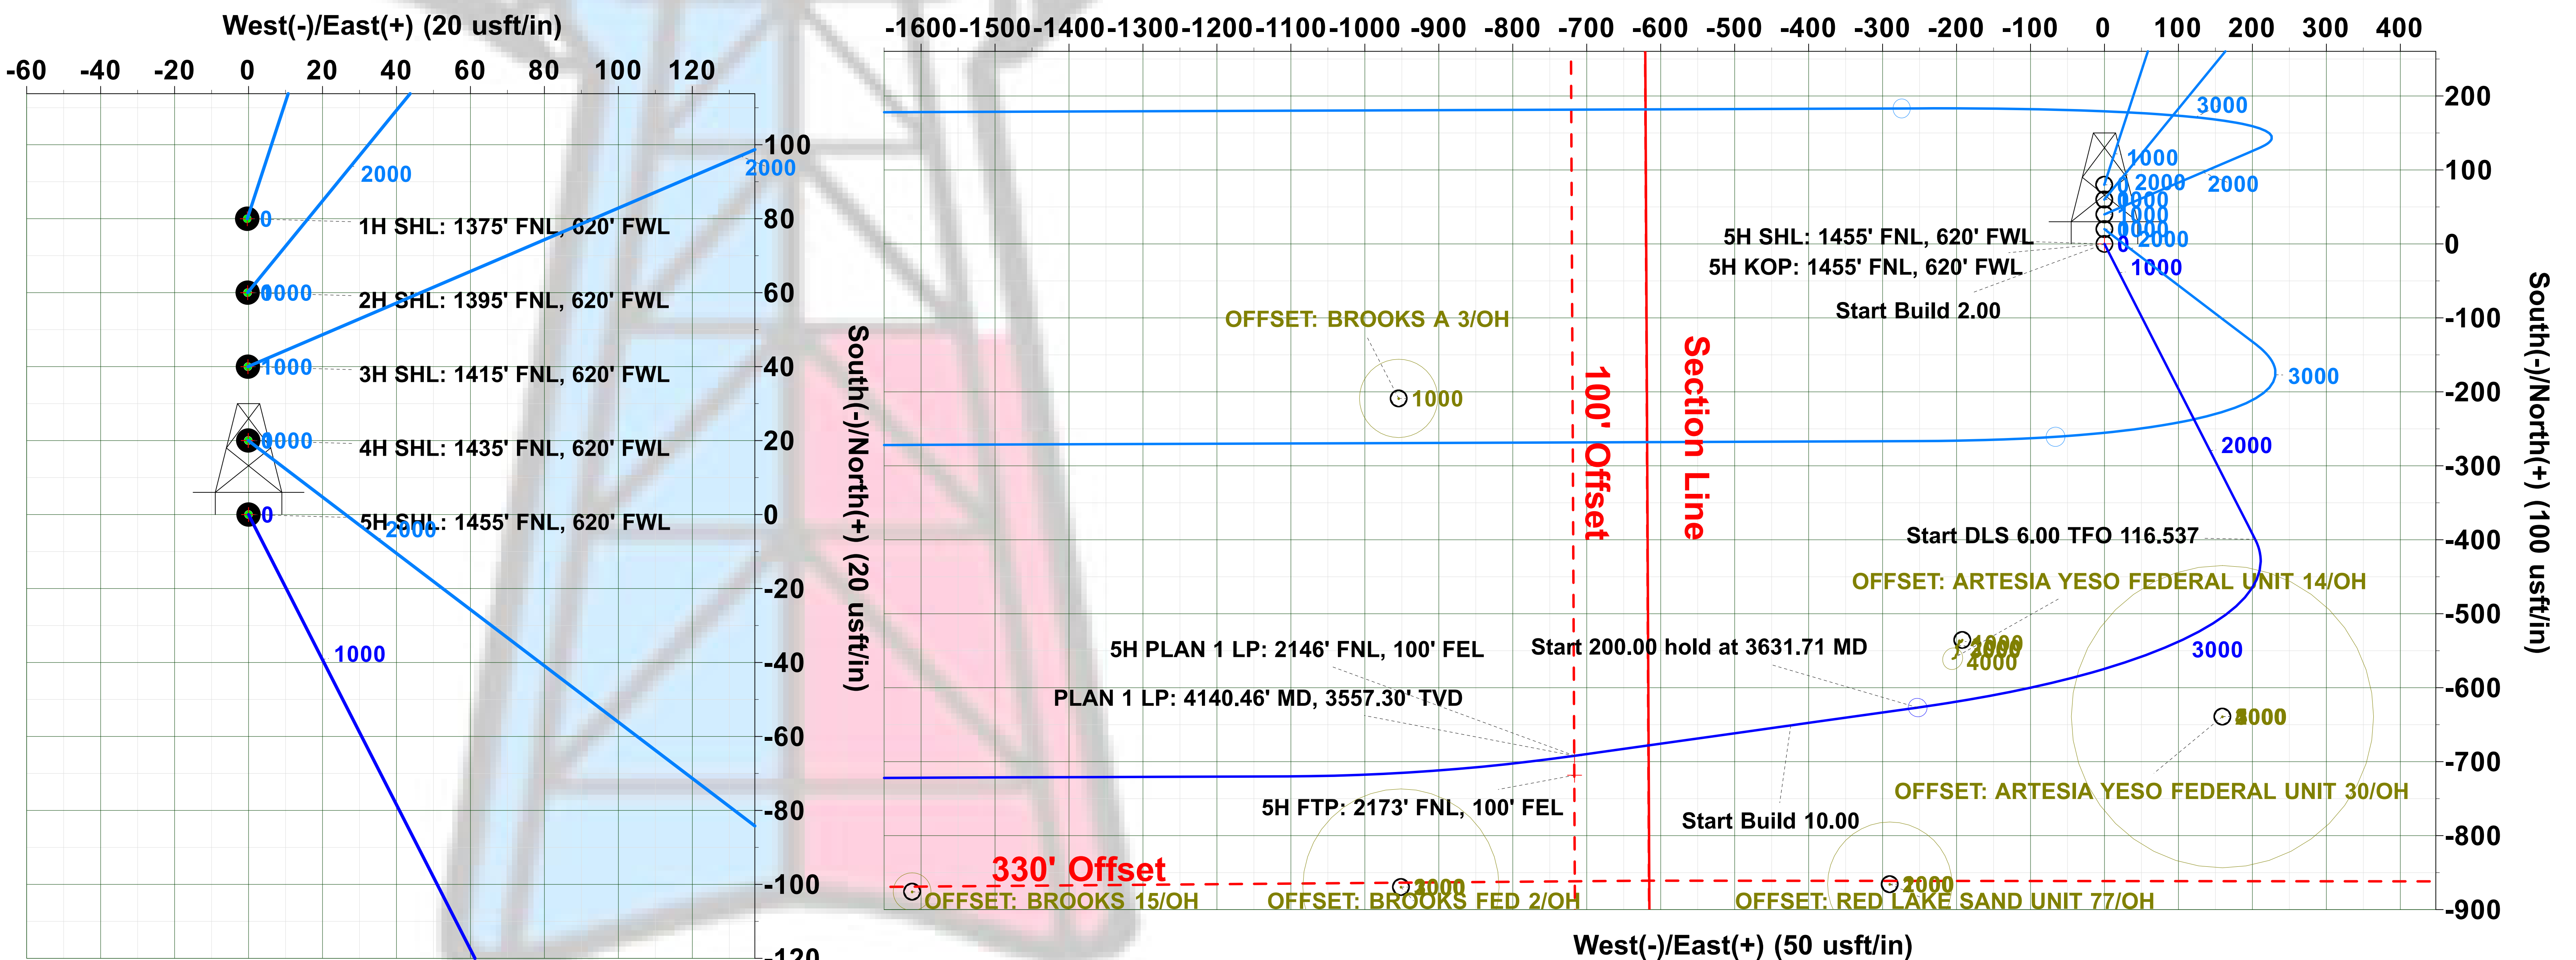

West(-)/East(+) (50 usft/in)

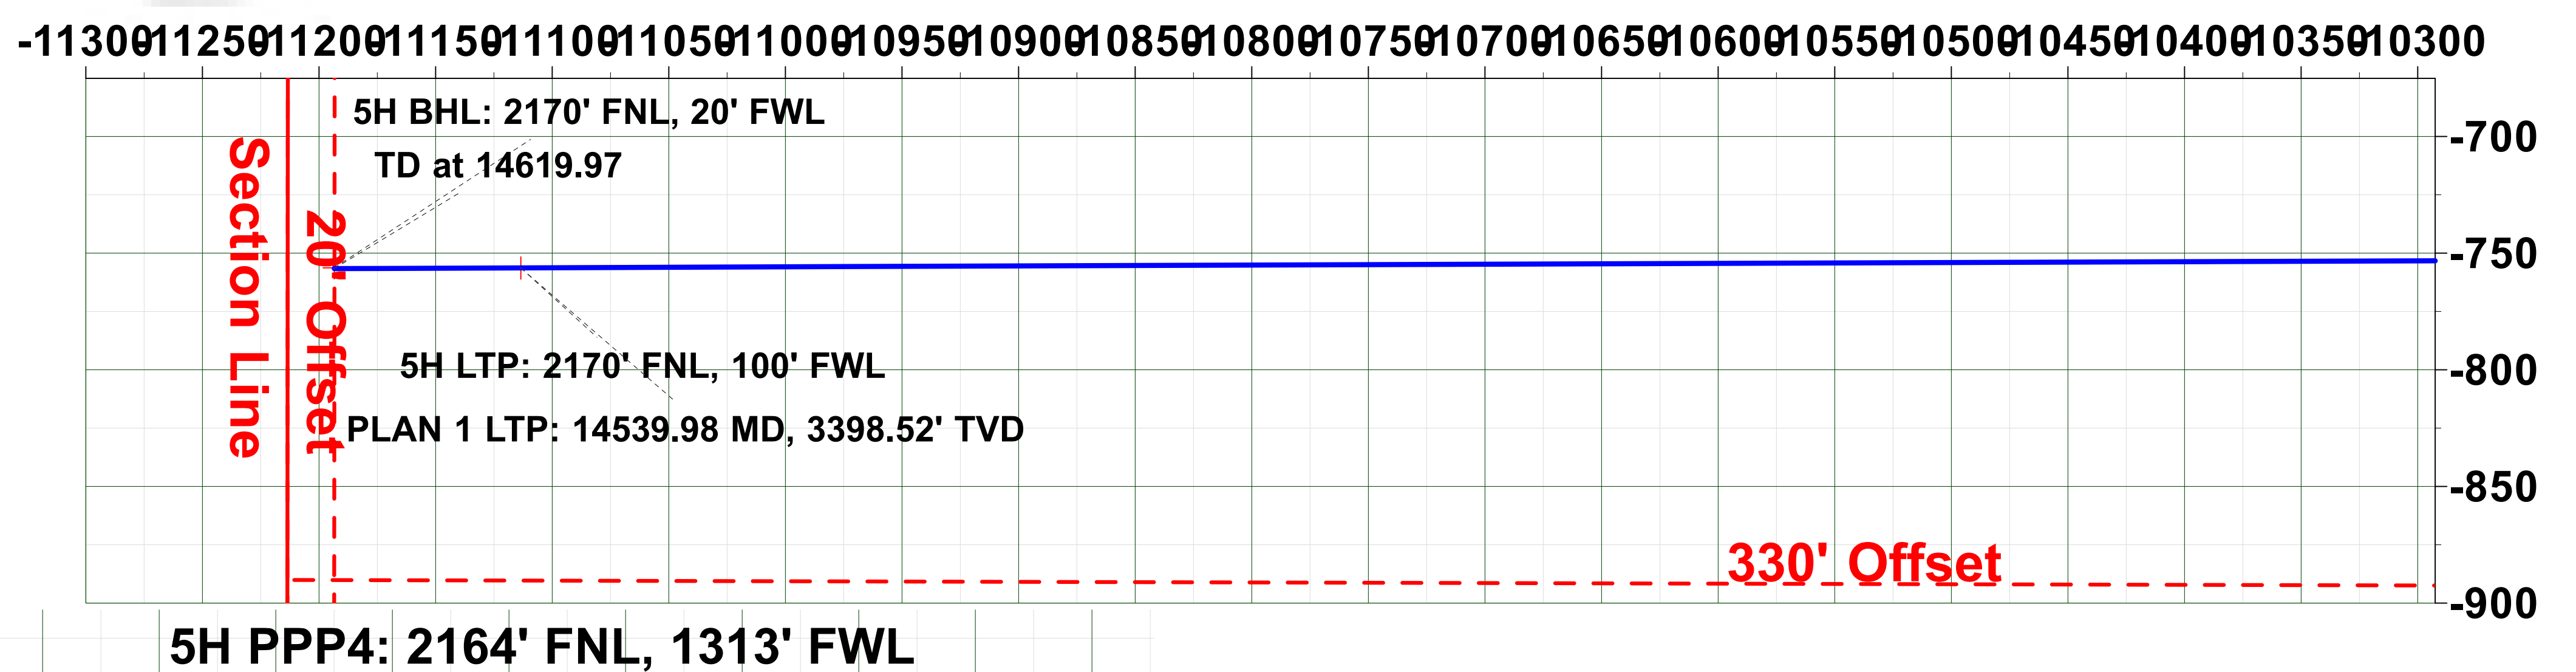

5H PPP4: 2164' FNL, 1313' FWL

5H LTP: 2170' FNL, 100' FWL

PLAN 1 LTP: 14539.98 MD, 3398.52' TVD

5H BHL: 2170' FNL, 20' FWL

TD at 14619.97

Plan: PLAN 1 (BONZO-1924-ABX-FED-COM-005H/OH)

Created By: Matthew May Date: 11:39, July 14 2025

Vertical Section at 269.79° (250 usft/in)

5H SHL: 1455' FNL, 620' FWL

5H KOP: 1455' FNL, 620' FWL

Start Build 2.00

Queen

Grayburg

San Andres

Start DLS 6.00 TFO 116.537

Glorieta

Top Paddock

Paddock Target

Basal Paddock

Upper Blinebry

Start 200.00 hold at 3631.71 MD

Start Build 10.00

PLAN 1 LP: 4140.46' MD, 3557.30' TVD

5H PLAN 1 LP: 2146' FNL, 100' FEL



Planning Report



Database:	WBDS_SQL_3	Local Co-ordinate Reference:	Well BONZO-1924-ABX-FED-COM-005H
Company:	Longfellow Energy	TVD Reference:	RKB = 20' @ 3652.30usft
Project:	Eddy Co., NM (Nad-83)	MD Reference:	RKB = 20' @ 3652.30usft
Site:	BONZO FEDERAL COM 19-24 ABX	North Reference:	Grid
Well:	BONZO-1924-ABX-FED-COM-005H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	PLAN 1		

Project	Eddy Co., NM (Nad-83)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Well	BONZO-1924-ABX-FED-COM-005H			
Well Position	+N/-S	0.00 usft	Northing:	663,143.70 usft
	+E/-W	0.00 usft	Easting:	580,970.95 usft
Position Uncertainty		0.00 usft	Wellhead Elevation:	usft
Grid Convergence:		0.070 °	Latitude:	32.822943
			Longitude:	-104.204313
			Ground Level:	3,632.30 usft

Design	PLAN 1			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W	Direction
	(usft)	(usft)	(usft)	(°)
	0.00	0.00	0.00	269.79

Plan Survey Tool Program	Date	7/14/2025			
Depth From	Depth To	Survey (Wellbore)	Tool Name	Remarks	
(usft)	(usft)				
1	0.00	14,619.97 PLAN 1 (OH)	MWD+IFR1+SAG+FDIR		
			OWSG MWD + IFR1 + Sag		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.000	
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.000	
1,297.23	15.94	152.97	1,286.97	-98.18	50.09	2.00	2.00	0.00	152.971	
2,528.01	15.94	152.97	2,470.41	-399.35	203.73	0.00	0.00	0.00	0.000	
3,631.71	60.00	262.00	3,380.61	-626.81	-252.61	6.00	3.99	9.88	116.537	
3,831.71	60.00	262.00	3,480.61	-650.91	-424.13	0.00	0.00	0.00	0.000	
4,140.46	90.87	262.00	3,557.30	-692.00	-716.48	10.00	10.00	0.00	0.000	
4,530.02	90.87	269.79	3,551.34	-719.85	-1,104.71	2.00	0.00	2.00	89.943	
9,390.00	90.87	269.79	3,477.16	-737.47	-5,964.08	0.00	0.00	0.00	0.000	5H PPP2: 2146' FN
9,433.87	90.87	269.79	3,476.49	-737.63	-6,007.94	0.00	0.00	0.00	0.000	
12,014.40	90.87	269.79	3,437.09	-747.10	-8,588.16	0.00	0.00	0.00	0.000	5H PPP3: 2158' FN
13,326.88	90.87	269.79	3,417.06	-751.86	-9,900.48	0.00	0.00	0.00	0.000	5H PPP4: 2164' FN
13,400.18	90.87	269.79	3,415.94	-752.13	-9,973.77	0.00	0.00	0.00	0.000	
14,539.98	90.87	269.79	3,398.52	-756.35	-11,113.43	0.00	0.00	0.00	0.000	5H LTP: 2170' FNL,
14,619.97	90.87	269.79	3,397.30	-756.64	-11,193.41	0.00	0.00	0.00	0.000	5H BHL: 2170' FNL



Planning Report



Database:	WBDS_SQL_3	Local Co-ordinate Reference:	Well BONZO-1924-ABX-FED-COM-005H
Company:	Longfellow Energy	TVD Reference:	RKB = 20' @ 3652.30usft
Project:	Eddy Co., NM (Nad-83)	MD Reference:	RKB = 20' @ 3652.30usft
Site:	BONZO FEDERAL COM 19-24 ABX	North Reference:	Grid
Well:	BONZO-1924-ABX-FED-COM-005H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	PLAN 1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	2.00	152.97	599.98	-1.55	0.79	-0.79	2.00	2.00	0.00
700.00	4.00	152.97	699.84	-6.22	3.17	-3.15	2.00	2.00	0.00
800.00	6.00	152.97	799.45	-13.98	7.13	-7.08	2.00	2.00	0.00
900.00	8.00	152.97	898.70	-24.83	12.67	-12.58	2.00	2.00	0.00
1,000.00	10.00	152.97	997.47	-38.77	19.78	-19.64	2.00	2.00	0.00
1,100.00	12.00	152.97	1,095.62	-55.77	28.45	-28.24	2.00	2.00	0.00
1,200.00	14.00	152.97	1,193.06	-75.80	38.67	-38.39	2.00	2.00	0.00
1,297.23	15.94	152.97	1,286.97	-98.18	50.09	-49.73	2.00	2.00	0.00
1,300.00	15.94	152.97	1,289.64	-98.86	50.43	-50.07	0.00	0.00	0.00
1,400.00	15.94	152.97	1,385.80	-123.33	62.92	-62.46	0.00	0.00	0.00
1,500.00	15.94	152.97	1,481.95	-147.80	75.40	-74.86	0.00	0.00	0.00
1,600.00	15.94	152.97	1,578.10	-172.27	87.88	-87.25	0.00	0.00	0.00
1,700.00	15.94	152.97	1,674.25	-196.74	100.37	-99.64	0.00	0.00	0.00
1,800.00	15.94	152.97	1,770.41	-221.21	112.85	-112.04	0.00	0.00	0.00
1,900.00	15.94	152.97	1,866.56	-245.68	125.33	-124.43	0.00	0.00	0.00
2,000.00	15.94	152.97	1,962.71	-270.15	137.82	-136.83	0.00	0.00	0.00
2,100.00	15.94	152.97	2,058.87	-294.62	150.30	-149.22	0.00	0.00	0.00
2,200.00	15.94	152.97	2,155.02	-319.09	162.79	-161.61	0.00	0.00	0.00
2,300.00	15.94	152.97	2,251.17	-343.56	175.27	-174.01	0.00	0.00	0.00
2,400.00	15.94	152.97	2,347.32	-368.03	187.75	-186.40	0.00	0.00	0.00
2,500.00	15.94	152.97	2,443.48	-392.50	200.24	-198.80	0.00	0.00	0.00
2,528.01	15.94	152.97	2,470.41	-399.35	203.73	-202.27	0.00	0.00	0.00
2,550.00	15.40	157.42	2,491.58	-404.74	206.23	-204.74	6.00	-2.48	20.23
2,600.00	14.52	168.56	2,539.90	-417.02	210.02	-208.49	6.00	-1.75	22.27
2,650.00	14.23	180.60	2,588.34	-429.31	211.20	-209.63	6.00	-0.59	24.09
2,700.00	14.54	192.63	2,636.79	-441.58	209.76	-208.14	6.00	0.63	24.06
2,750.00	15.43	203.73	2,685.09	-453.80	205.71	-204.05	6.00	1.78	22.20
2,800.00	16.81	213.35	2,733.14	-465.93	199.06	-197.35	6.00	2.75	19.24
2,850.00	18.56	221.38	2,780.78	-477.94	189.82	-188.07	6.00	3.50	16.07
2,900.00	20.59	227.98	2,827.89	-489.80	178.03	-176.23	6.00	4.07	13.19
2,950.00	22.83	233.39	2,874.35	-501.48	163.70	-161.86	6.00	4.48	10.82
3,000.00	25.22	237.85	2,920.01	-512.93	146.89	-145.01	6.00	4.78	8.92
3,050.00	27.72	241.57	2,964.77	-524.14	127.64	-125.72	6.00	5.00	7.44
3,100.00	30.31	244.71	3,008.50	-535.07	106.00	-104.04	6.00	5.17	6.28
3,150.00	32.96	247.40	3,051.07	-545.69	82.04	-80.04	6.00	5.30	5.37
3,200.00	35.66	249.72	3,092.36	-555.97	55.81	-53.77	6.00	5.40	4.65
3,250.00	38.39	251.76	3,132.28	-565.88	27.38	-25.31	6.00	5.48	4.07
3,300.00	41.16	253.56	3,170.70	-575.40	-3.15	5.26	6.00	5.54	3.61
3,350.00	43.96	255.17	3,207.53	-584.50	-35.72	37.86	6.00	5.59	3.23
3,400.00	46.77	256.63	3,242.66	-593.16	-70.23	72.40	6.00	5.63	2.91
3,450.00	49.61	257.96	3,275.99	-601.34	-106.58	108.78	6.00	5.66	2.66
3,500.00	52.45	259.18	3,307.43	-609.04	-144.68	146.91	6.00	5.69	2.44
3,550.00	55.31	260.31	3,336.90	-616.22	-184.42	186.67	6.00	5.72	2.26
3,600.00	58.18	261.36	3,364.32	-622.87	-225.69	227.97	6.00	5.73	2.11
3,631.71	60.00	262.00	3,380.61	-626.81	-252.61	254.90	6.00	5.75	2.00
3,700.00	60.00	262.00	3,414.75	-635.04	-311.17	313.50	0.00	0.00	0.00
3,800.00	60.00	262.00	3,464.75	-647.09	-396.93	399.30	0.00	0.00	0.00
3,831.71	60.00	262.00	3,480.61	-650.91	-424.13	426.51	0.00	0.00	0.00



Planning Report



Database:	WBDS_SQL_3	Local Co-ordinate Reference:	Well BONZO-1924-ABX-FED-COM-005H
Company:	Longfellow Energy	TVD Reference:	RKB = 20' @ 3652.30usft
Project:	Eddy Co., NM (Nad-83)	MD Reference:	RKB = 20' @ 3652.30usft
Site:	BONZO FEDERAL COM 19-24 ABX	North Reference:	Grid
Well:	BONZO-1924-ABX-FED-COM-005H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	PLAN 1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
3,850.00	61.83	262.00	3,489.50	-653.14	-439.96	442.35	10.00	10.00	0.00	
3,900.00	66.83	262.00	3,511.15	-659.41	-484.57	486.98	10.00	10.00	0.00	
3,950.00	71.83	262.00	3,528.79	-665.92	-530.88	533.32	10.00	10.00	0.00	
4,000.00	76.83	262.00	3,542.30	-672.61	-578.54	581.00	10.00	10.00	0.00	
4,050.00	81.83	262.00	3,551.55	-679.45	-627.18	629.67	10.00	10.00	0.00	
4,100.00	86.83	262.00	3,556.49	-686.37	-676.43	678.95	10.00	10.00	0.00	
4,140.46	90.87	262.00	3,557.30	-692.00	-716.48	719.01	10.00	10.00	0.00	
4,200.00	90.88	263.19	3,556.39	-699.67	-775.52	778.08	2.00	0.00	2.00	
4,300.00	90.88	265.19	3,554.86	-709.79	-874.99	877.59	2.00	0.00	2.00	
4,400.00	90.88	267.19	3,553.33	-716.43	-974.75	977.37	2.00	0.00	2.00	
4,500.00	90.88	269.19	3,551.80	-719.59	-1,074.69	1,077.32	2.00	0.00	2.00	
4,530.02	90.87	269.79	3,551.34	-719.85	-1,104.71	1,107.34	2.00	0.00	2.00	
4,600.00	90.87	269.79	3,550.28	-720.11	-1,174.67	1,177.30	0.00	0.00	0.00	
4,700.00	90.87	269.79	3,548.75	-720.47	-1,274.66	1,277.29	0.00	0.00	0.00	
4,800.00	90.87	269.79	3,547.22	-720.83	-1,374.65	1,377.28	0.00	0.00	0.00	
4,900.00	90.87	269.79	3,545.70	-721.20	-1,474.64	1,477.27	0.00	0.00	0.00	
5,000.00	90.87	269.79	3,544.17	-721.56	-1,574.62	1,577.26	0.00	0.00	0.00	
5,100.00	90.87	269.79	3,542.64	-721.92	-1,674.61	1,677.25	0.00	0.00	0.00	
5,200.00	90.87	269.79	3,541.12	-722.28	-1,774.60	1,777.23	0.00	0.00	0.00	
5,300.00	90.87	269.79	3,539.59	-722.65	-1,874.59	1,877.22	0.00	0.00	0.00	
5,400.00	90.87	269.79	3,538.06	-723.01	-1,974.57	1,977.21	0.00	0.00	0.00	
5,500.00	90.87	269.79	3,536.54	-723.37	-2,074.56	2,077.20	0.00	0.00	0.00	
5,600.00	90.87	269.79	3,535.01	-723.73	-2,174.55	2,177.19	0.00	0.00	0.00	
5,700.00	90.87	269.79	3,533.48	-724.10	-2,274.54	2,277.18	0.00	0.00	0.00	
5,800.00	90.87	269.79	3,531.96	-724.46	-2,374.52	2,377.16	0.00	0.00	0.00	
5,900.00	90.87	269.79	3,530.43	-724.82	-2,474.51	2,477.15	0.00	0.00	0.00	
6,000.00	90.87	269.79	3,528.91	-725.18	-2,574.50	2,577.14	0.00	0.00	0.00	
6,100.00	90.87	269.79	3,527.38	-725.55	-2,674.49	2,677.13	0.00	0.00	0.00	
6,200.00	90.87	269.79	3,525.85	-725.91	-2,774.48	2,777.12	0.00	0.00	0.00	
6,300.00	90.87	269.79	3,524.33	-726.27	-2,874.46	2,877.11	0.00	0.00	0.00	
6,400.00	90.87	269.79	3,522.80	-726.63	-2,974.45	2,977.09	0.00	0.00	0.00	
6,500.00	90.87	269.79	3,521.27	-726.99	-3,074.44	3,077.08	0.00	0.00	0.00	
6,600.00	90.87	269.79	3,519.75	-727.36	-3,174.43	3,177.07	0.00	0.00	0.00	
6,700.00	90.87	269.79	3,518.22	-727.72	-3,274.41	3,277.06	0.00	0.00	0.00	
6,800.00	90.87	269.79	3,516.69	-728.08	-3,374.40	3,377.05	0.00	0.00	0.00	
6,900.00	90.87	269.79	3,515.17	-728.44	-3,474.39	3,477.04	0.00	0.00	0.00	
7,000.00	90.87	269.79	3,513.64	-728.81	-3,574.38	3,577.02	0.00	0.00	0.00	
7,100.00	90.87	269.79	3,512.11	-729.17	-3,674.36	3,677.01	0.00	0.00	0.00	
7,200.00	90.87	269.79	3,510.59	-729.53	-3,774.35	3,777.00	0.00	0.00	0.00	
7,300.00	90.87	269.79	3,509.06	-729.89	-3,874.34	3,876.99	0.00	0.00	0.00	
7,400.00	90.87	269.79	3,507.54	-730.26	-3,974.33	3,976.98	0.00	0.00	0.00	
7,500.00	90.87	269.79	3,506.01	-730.62	-4,074.32	4,076.97	0.00	0.00	0.00	
7,600.00	90.87	269.79	3,504.48	-730.98	-4,174.30	4,176.95	0.00	0.00	0.00	
7,700.00	90.87	269.79	3,502.96	-731.34	-4,274.29	4,276.94	0.00	0.00	0.00	
7,800.00	90.87	269.79	3,501.43	-731.71	-4,374.28	4,376.93	0.00	0.00	0.00	
7,900.00	90.87	269.79	3,499.90	-732.07	-4,474.27	4,476.92	0.00	0.00	0.00	
8,000.00	90.87	269.79	3,498.38	-732.43	-4,574.25	4,576.91	0.00	0.00	0.00	
8,100.00	90.87	269.79	3,496.85	-732.79	-4,674.24	4,676.90	0.00	0.00	0.00	
8,200.00	90.87	269.79	3,495.32	-733.16	-4,774.23	4,776.88	0.00	0.00	0.00	
8,300.00	90.87	269.79	3,493.80	-733.52	-4,874.22	4,876.87	0.00	0.00	0.00	
8,400.00	90.87	269.79	3,492.27	-733.88	-4,974.20	4,976.86	0.00	0.00	0.00	
8,500.00	90.87	269.79	3,490.75	-734.24	-5,074.19	5,076.85	0.00	0.00	0.00	
8,600.00	90.87	269.79	3,489.22	-734.61	-5,174.18	5,176.84	0.00	0.00	0.00	
8,700.00	90.87	269.79	3,487.69	-734.97	-5,274.17	5,276.83	0.00	0.00	0.00	



Planning Report



Database:	WBDS_SQL_3	Local Co-ordinate Reference:	Well BONZO-1924-ABX-FED-COM-005H
Company:	Longfellow Energy	TVD Reference:	RKB = 20' @ 3652.30usft
Project:	Eddy Co., NM (Nad-83)	MD Reference:	RKB = 20' @ 3652.30usft
Site:	BONZO FEDERAL COM 19-24 ABX	North Reference:	Grid
Well:	BONZO-1924-ABX-FED-COM-005H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	PLAN 1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
8,800.00	90.87	269.79	3,486.17	-735.33	-5,374.16	5,376.81	0.00	0.00	0.00
8,900.00	90.87	269.79	3,484.64	-735.69	-5,474.14	5,476.80	0.00	0.00	0.00
9,000.00	90.87	269.79	3,483.11	-736.06	-5,574.13	5,576.79	0.00	0.00	0.00
9,100.00	90.87	269.79	3,481.59	-736.42	-5,674.12	5,676.78	0.00	0.00	0.00
9,200.00	90.87	269.79	3,480.06	-736.78	-5,774.11	5,776.77	0.00	0.00	0.00
9,300.00	90.87	269.79	3,478.53	-737.14	-5,874.09	5,876.76	0.00	0.00	0.00
9,390.00	90.87	269.79	3,477.16	-737.47	-5,964.08	5,966.74	0.00	0.00	0.00
9,400.00	90.87	269.79	3,477.01	-737.51	-5,974.08	5,976.74	0.00	0.00	0.00
9,433.87	90.87	269.79	3,476.49	-737.63	-6,007.94	6,010.61	0.00	0.00	0.00
9,500.00	90.87	269.79	3,475.48	-737.87	-6,074.07	6,076.73	0.00	0.00	0.00
9,600.00	90.87	269.79	3,473.95	-738.23	-6,174.06	6,176.72	0.00	0.00	0.00
9,700.00	90.87	269.79	3,472.43	-738.59	-6,274.04	6,276.71	0.00	0.00	0.00
9,800.00	90.87	269.79	3,470.90	-738.96	-6,374.03	6,376.70	0.00	0.00	0.00
9,900.00	90.87	269.79	3,469.38	-739.32	-6,474.02	6,476.69	0.00	0.00	0.00
10,000.00	90.87	269.79	3,467.85	-739.68	-6,574.01	6,576.67	0.00	0.00	0.00
10,100.00	90.87	269.79	3,466.32	-740.04	-6,674.00	6,676.66	0.00	0.00	0.00
10,200.00	90.87	269.79	3,464.80	-740.41	-6,773.98	6,776.65	0.00	0.00	0.00
10,300.00	90.87	269.79	3,463.27	-740.77	-6,873.97	6,876.64	0.00	0.00	0.00
10,400.00	90.87	269.79	3,461.74	-741.13	-6,973.96	6,976.63	0.00	0.00	0.00
10,500.00	90.87	269.79	3,460.22	-741.49	-7,073.95	7,076.62	0.00	0.00	0.00
10,600.00	90.87	269.79	3,458.69	-741.86	-7,173.93	7,176.60	0.00	0.00	0.00
10,700.00	90.87	269.79	3,457.16	-742.22	-7,273.92	7,276.59	0.00	0.00	0.00
10,800.00	90.87	269.79	3,455.64	-742.58	-7,373.91	7,376.58	0.00	0.00	0.00
10,900.00	90.87	269.79	3,454.11	-742.94	-7,473.90	7,476.57	0.00	0.00	0.00
11,000.00	90.87	269.79	3,452.58	-743.31	-7,573.88	7,576.56	0.00	0.00	0.00
11,100.00	90.87	269.79	3,451.06	-743.67	-7,673.87	7,676.55	0.00	0.00	0.00
11,200.00	90.87	269.79	3,449.53	-744.03	-7,773.86	7,776.53	0.00	0.00	0.00
11,300.00	90.87	269.79	3,448.01	-744.39	-7,873.85	7,876.52	0.00	0.00	0.00
11,400.00	90.87	269.79	3,446.48	-744.76	-7,973.84	7,976.51	0.00	0.00	0.00
11,500.00	90.87	269.79	3,444.95	-745.12	-8,073.82	8,076.50	0.00	0.00	0.00
11,600.00	90.87	269.79	3,443.43	-745.48	-8,173.81	8,176.49	0.00	0.00	0.00
11,700.00	90.87	269.79	3,441.90	-745.84	-8,273.80	8,276.48	0.00	0.00	0.00
11,800.00	90.87	269.79	3,440.37	-746.21	-8,373.79	8,376.46	0.00	0.00	0.00
11,900.00	90.87	269.79	3,438.85	-746.57	-8,473.77	8,476.45	0.00	0.00	0.00
12,000.00	90.87	269.79	3,437.32	-746.93	-8,573.76	8,576.44	0.00	0.00	0.00
12,014.40	90.87	269.79	3,437.09	-747.10	-8,588.16	8,590.84	0.00	0.00	0.00
12,100.00	90.87	269.79	3,435.78	-747.41	-8,673.75	8,676.43	0.00	0.00	0.00
12,200.00	90.87	269.79	3,434.26	-747.77	-8,773.74	8,776.42	0.00	0.00	0.00
12,300.00	90.87	269.79	3,432.73	-748.14	-8,873.72	8,876.41	0.00	0.00	0.00
12,400.00	90.87	269.79	3,431.20	-748.50	-8,973.71	8,976.39	0.00	0.00	0.00
12,500.00	90.87	269.79	3,429.68	-748.86	-9,073.70	9,076.38	0.00	0.00	0.00
12,600.00	90.87	269.79	3,428.15	-749.22	-9,173.69	9,176.37	0.00	0.00	0.00
12,700.00	90.87	269.79	3,426.63	-749.59	-9,273.67	9,276.36	0.00	0.00	0.00
12,800.00	90.87	269.79	3,425.10	-749.95	-9,373.66	9,376.35	0.00	0.00	0.00
12,900.00	90.87	269.79	3,423.57	-750.31	-9,473.65	9,476.34	0.00	0.00	0.00
13,000.00	90.87	269.79	3,422.05	-750.67	-9,573.64	9,576.32	0.00	0.00	0.00
13,100.00	90.87	269.79	3,420.52	-751.03	-9,673.63	9,676.31	0.00	0.00	0.00
13,200.00	90.87	269.79	3,418.99	-751.40	-9,773.61	9,776.30	0.00	0.00	0.00
13,300.00	90.87	269.79	3,417.47	-751.76	-9,873.60	9,876.29	0.00	0.00	0.00
13,326.88	90.87	269.79	3,417.06	-751.86	-9,900.48	9,903.17	0.00	0.00	0.00
13,400.18	90.87	269.79	3,415.94	-752.13	-9,973.77	9,976.46	0.00	0.00	0.00
13,500.00	90.87	269.79	3,414.41	-752.49	-10,073.58	10,076.27	0.00	0.00	0.00
13,600.00	90.87	269.79	3,412.89	-752.85	-10,173.56	10,176.26	0.00	0.00	0.00
13,700.00	90.87	269.79	3,411.36	-753.21	-10,273.55	10,276.24	0.00	0.00	0.00



Planning Report



Database:	WBDS_SQL_3	Local Co-ordinate Reference:	Well BONZO-1924-ABX-FED-COM-005H
Company:	Longfellow Energy	TVD Reference:	RKB = 20' @ 3652.30usft
Project:	Eddy Co., NM (Nad-83)	MD Reference:	RKB = 20' @ 3652.30usft
Site:	BONZO FEDERAL COM 19-24 ABX	North Reference:	Grid
Well:	BONZO-1924-ABX-FED-COM-005H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	PLAN 1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
13,800.00	90.87	269.79	3,409.83	-753.58	-10,373.54	10,376.23	0.00	0.00	0.00	
13,900.00	90.87	269.79	3,408.31	-753.94	-10,473.53	10,476.22	0.00	0.00	0.00	
14,000.00	90.87	269.79	3,406.78	-754.30	-10,573.51	10,576.21	0.00	0.00	0.00	
14,100.00	90.87	269.79	3,405.25	-754.66	-10,673.50	10,676.20	0.00	0.00	0.00	
14,200.00	90.87	269.79	3,403.73	-755.02	-10,773.49	10,776.19	0.00	0.00	0.00	
14,300.00	90.87	269.79	3,402.20	-755.39	-10,873.48	10,876.17	0.00	0.00	0.00	
14,400.00	90.87	269.79	3,400.68	-755.75	-10,973.47	10,976.16	0.00	0.00	0.00	
14,500.00	90.87	269.79	3,399.15	-756.11	-11,073.45	11,076.15	0.00	0.00	0.00	
14,539.98	90.87	269.79	3,398.52	-756.35	-11,113.43	11,116.13	0.00	0.00	0.00	
14,600.00	90.87	269.79	3,397.60	-756.57	-11,173.44	11,176.14	0.00	0.00	0.00	
14,619.97	90.87	269.79	3,397.30	-756.64	-11,193.41	11,196.11	0.00	0.00	0.00	

Design Targets										
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
5H SHL: 1455' FNL, 6 - hit/miss target - Shape - Point	0.00	0.00	0.00	0.00	0.00	663,143.70	580,970.95	32.822943	-104.204313	
5H KOP: 1455' FNL, 6 - plan hits target center - Point	0.00	0.00	500.00	0.00	0.00	663,143.70	580,970.95	32.822943	-104.204313	
5H BHL: 2170' FNL, 2 - plan misses target center by 0.38usft at 14619.97usft MD (3397.30 TVD, -756.64 N, -11193.41 E) - Point	0.00	0.00	3,397.30	-756.26	-11,193.41	662,387.44	569,777.54	32.820897	-104.240754	
5H LTP: 2170' FNL, 1 - plan hits target center - Point	0.00	0.00	3,398.52	-756.35	-11,113.43	662,387.35	569,857.52	32.820896	-104.240493	
5H PPP4: 2164' FNL, - plan misses target center by 0.05usft at 13326.88usft MD (3417.06 TVD, -751.86 N, -9900.48 E) - Point	0.00	0.00	3,417.05	-751.91	-9,900.48	662,391.79	571,070.47	32.820906	-104.236545	
5H PPP3: 2158' FNL, - plan hits target center - Point	0.00	0.00	3,437.09	-747.10	-8,588.16	662,396.60	572,382.79	32.820915	-104.232273	
5H PPP2: 2146' FNL, - plan hits target center - Point	0.00	0.00	3,477.16	-737.47	-5,964.08	662,406.23	575,006.87	32.820935	-104.223731	
5H FTP: 2173' FNL, 1 - plan misses target center by 25.96usft at 4143.83usft MD (3557.25 TVD, -692.47 N, -719.82 E) - Point	0.00	0.00	3,557.30	-718.21	-716.48	662,425.49	580,254.47	32.820972	-104.206648	
5H PLAN 1 LP: 2146' - plan hits target center - Point	0.00	0.00	3,557.30	-692.00	-716.48	662,451.70	580,254.47	32.821044	-104.206648	



Planning Report



Database:	WBDS_SQL_3	Local Co-ordinate Reference:	Well BONZO-1924-ABX-FED-COM-005H
Company:	Longfellow Energy	TVD Reference:	RKB = 20' @ 3652.30usft
Project:	Eddy Co., NM (Nad-83)	MD Reference:	RKB = 20' @ 3652.30usft
Site:	BONZO FEDERAL COM 19-24 ABX	North Reference:	Grid
Well:	BONZO-1924-ABX-FED-COM-005H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	PLAN 1		

Formations						
	Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
	1,152.94	1,147.30	Queen		0.000	
	1,617.89	1,595.30	Grayburg		0.000	
	1,965.25	1,929.30	San Andres		0.000	
	3,541.96	3,332.30	Glorieta		0.000	
	3,581.28	3,354.30	Top Paddock		0.000	
	4,140.46	3,557.30	Paddock Target		0.000	

**PECOS DISTRICT
DRILLING CONDITIONS OF APPROVAL**

OPERATOR'S NAME:	Longfellow Energy LP
LOCATION:	Section 20, T.17 S., R.28 E., NMPM
COUNTY:	Eddy County, New Mexico

WELL NAME & NO.:	Bonzo 1924 ABX Fed Com 1H
ATS/API ID:	ATS-25-2262
APD ID:	1040010568
Sundry ID:	N/a

WELL NAME & NO.:	Bonzo 1924 ABX Fed Com 3H
ATS/API ID:	ATS-25-226055
APD ID:	10400105
Sundry ID:	N/a

WELL NAME & NO.:	Bonzo 1924 ABX Fed Com 4H
ATS/API ID:	ATS-25-225957
APD ID:	10400105
Sundry ID:	N/a

WELL NAME & NO.:	Bonzo 1924 ABX Fed Com 5H
ATS/API ID:	ATS-25-225860
APD ID:	10400105
Sundry ID:	N/a

COA

H2S	No		
Potash	None	None	
Cave/Karst Potential	Medium		
Cave/Karst Potential	☐ Critical		
Variance	☒ None	☒ Flex Hose	☒ Other
Wellhead	Conventional		
Other	☐ 4 String ☐ 5 String	Capitan Reef None	☐ WIPP
Other	Pilot Hole None	☐ Open Annulus	
Cementing	Contingency Squeeze None	Echo-Meter None	Primary Cement Squeeze None
Special Requirements	☐ Water Disposal/Injection	☒ COM	☐ Unit
Special Requirements	☐ Batch Sundry	Waste Prevention Waste MP	
Special Requirements Variance	☐ BOPE Break Testing ☐ Offline BOPE Testing	☐ Offline Cementing	☐ Casing Clearance

A. HYDROGEN SULFIDE

Hydrogen Sulfide (H₂S) monitors shall be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet **43 CFR part 3170 Subpart 3176**, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

1. The **13-3/8** inch surface casing shall be set at approximately **360 feet** (a minimum of 70 feet into the Rustler Anhydrite and above the salt when present, and below usable fresh water) and cemented to the surface. The surface hole shall be **17 1/2** inch in diameter.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The minimum required fill of cement behind the **9-5/8** inch intermediate casing shall be set at approximately **1345 feet** is:
 - Cement to surface. If cement does not circulate see B.1.a, c-d above.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.
 - ❖ In Medium Cave/Karst Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.
3. The minimum required fill of cement behind the **7** inch production casing is:
 - Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
2. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **3000 (3M)** psi.
3. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the **9-5/8** inch intermediate casing shoe shall be **3000 (3M)** psi.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- The operator will submit an as-drilled survey well plat of the well completion, but are not limited to, those specified in **43 CFR part 3170 Subpart 3171**
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

EMAIL or call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,

BLM_NM_CFO_DrillingNotifications@BLM.GOV

(575) 361-2822

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per **43 CFR part 3170 Subpart 3172** as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or

if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.

2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends of both lead and tail cement, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in **43 CFR part 3170 Subpart 3172 and API STD 53 Sec. 5.3**.

2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been

done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (only applies to single stage cement jobs, prior to the cement setting up.)

- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR part 3170 Subpart 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for 8 hours or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per **43 CFR part 3170 Subpart 3172**.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

Long Vo (LVO) 10/14/2025



H₂S Drilling Operations Plan

- a. All personnel will be trained in H₂S working conditions as required by Onshore Order 6 before drilling out of the surface casing.
- b. Two briefing areas will be established. Each will be $\geq 150'$ from the wellheads, perpendicular from one another, and easily entered and exited. See H₂S page 5 for more details.
- c. H₂S Safety Equipment/Systems:
 - i. Well Control Equipment
 - Flare line will be $\geq 150'$ from the wellheads and ignited by a pilot light.
 - Beware of SO₂ created by flaring.
 - Choke manifold will include a remotely operated choke.
 - Mud gas separator
 - ii. Protective Equipment for Essential Personnel
 - Every person on site will be required to wear a personal H₂S and SO₂ monitor at all times while on site. Monitors will not be worn on hard hats. Monitors will be worn on the front of the chest – not on the belt.
 - One self-contained breathing apparatus (SCBA) 30-minute rescue pack will be at each briefing area. Two 30-minute SCBA packs will be stored in the safety trailer.
 - Four work/escape packs will be on the rig floor. Each pack will have a long enough hose to allow unimpaired work activity.
 - Four emergency escape packs will be in the doghouse for emergency evacuation.
 - Hand signals will be used when wearing protective breathing apparatus.
 - Stokes litter or stretcher
 - Two full OSHA compliant body harnesses
 - A 100' long x 5/8" OSHA compliant rope
 - One 20-pound ABC fire extinguisher
 - iii. H₂S Detection & Monitoring Equipment
 - Every person on site will be required to wear a personal H₂S and SO₂ monitor at all times while on site. Monitors will not be worn on hard hats. Monitors will be worn on the front of the chest.



- A stationary detector with 3 sensors will be in the doghouse.
- Sensors will be installed on the rig floor, bell nipple, and at the end of the flow line or where drilling fluids are discharged.
- Visual alarm will be triggered at 10 ppm.
- Audible alarm will be triggered at 10 ppm.
- Calibration will occur at least every 30 days. Gas sample tubes will be kept in the safety trailer.

iv. Visual Warning System

- Color-coded H₂S condition sign will be set at the entrance to the pad.
- Color-coded condition flag will be installed to indicate current H₂S conditions.
- Two windsocks will be installed and will be visible from all sides.

v. Mud Program

- A water-based mud with a pH of ≥ 10 will be maintained to control corrosion, H₂S gas returns to the surface, and minimize sulfide stress cracking and embrittlement.
- Drilling mud containing H₂S gas will be degassed at an optimum location for the rig configuration.
- This gas will be piped into the flare system.
- Enough mud additives will be on location to scavenge and/or neutralize H₂S where formation pressures are unknown.

vi. Metallurgy

- All equipment that has the potential to be exposed to H₂S will be suitable for H₂S service.
- Equipment that will meet the metallurgical standards include the drill string, casing, wellheads, BOP assembly, casing head & spool, rotating head, kill lines, choke, choke manifold & lines, valves, mud-gas separators, DST tools, test units, tubing, flanges, and other related equipment (elastomer packings and seals).

vii. Communication from well site

- Cell phones and/or two-way radios will be used to communicate from the well site.

d. A remote-controlled choke, mud-gas separator, and a rotating head will be installed before drilling or testing any formation expected to contain H₂S.



Office: (972) 590-9905

Mobile: (405) 306-6169

Riverside Fire Department

911 or (575) 746-2597

Artesia Fire Department

911 or (575) 746-5051

Loco Hills Fire Department

911 or (575) 628-5450

Eddy County Sheriff (Carlsbad)

911 or (575) 887-7551

Eddy County Sheriff sub-office (Artesia)

911 or (575) 746-9888

Eddy County Emergency Management (Carlsbad)

(575) 887-9511

Artesia General Hospital

(575) 748-3333

Eddy County North Road Department (Artesia)

(575) 746-9540

NM State Police (Artesia)

(575) 748-9718

NM Oil Conservation (Artesia)

(575) 748-1283

NM Oil Conservation (Santa Fe)

(505) 476-3440

NM Dept. of Transportation (Roswell)

(575) 637-7201

BLM Carlsbad Field Office

(575) 234-5972

National Response Center

(800) 424-8802

US EPA Region 6 (Dallas)

(800) 887-6063



(214) 665-6444

Residents within 2 miles (none)

Air Evacuation

Med Flight Air Ambulance (Albuquerque)

(800) 842-4431

Lifeguard (Albuquerque)

(888) 866-7256

Veterinarian

Artesia Animal Clinic

(575) 748-2042

BONZO 1924 ABX FED COM WELL PAD
LONGFELLOW ENERGY, LP
 IN THE W/2 NW/4 OF
 SECTION 20, TOWNSHIP 17 SOUTH, RANGE 28 EAST, N.M.P.M.
 EDDY COUNTY, STATE OF NEW MEXICO
 JUNE 12, 2025

highest ground
to the Northeast

flare line (straight)
& flare >150'
from well head

PRIMARY safety briefing
area >150' from well heads
& egress (exit) route


windsocks on
rig floor & at
mud tanks

warning signs
& windsock

prevailing winds
blow from South

safety briefing area
>150' from well

secondary egress



GENERAL NOTES

1.) THE INTENT OF THIS SURVEY IS TO ACQUIRE A BUSINESS LEASE FOR THE PURPOSE OF BUILDING A WELL PAD

2.) BASIS OF BEARING IS NEW MEXICO STATE PLANE EAST ZONE MODIFIED TO THE SURFACE (NAD83), COORDINATES ARE NAD 83, ELEVATIONS ARE NAVD 88

DRIVING DIRECTIONS: FROM THE INTERSECTION OF U.S. HWY. 82 AND ST. ROAD 360 (BLUESTEM), GO WEST ON ST. HWY. 82 APPROX 1.12 MILES, TURN RIGHT (NORTH) ON CALICHE ROAD AND GO APPROX. 2 MILES, TURN LEFT (WEST) AND GO APPROX. 0.56 MILES TO A ROAD SURVEY ON LEFT (SOUTH) FOLLOW ROAD SURVEY SOUTHWEST AND WEST APPROX. 278' TO THE NORTHEAST PAD CORNER FOR THIS LOCATION.

SURVEYOR CERTIFICATE

I, FILMON F. JARAMILLO, A NEW MEXICO PROFESSIONAL SURVEYOR NO. 12797, HEREBY CERTIFY THAT I HAVE CONDUCTED AND AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF, AND THAT THIS SURVEY AND PLAT MEET THE MINIMUM STANDARDS FOR LAND SURVEYING IN THE STATE OF NEW MEXICO.

IN WITNESS WHEREOF, THIS CERTIFICATE IS EXECUTED AT CARLSBAD, NEW MEXICO, THIS 12TH DAY OF JUNE 2025

NEW MEXICO

FILMON F. JARAMILLO

12797

PROFESSIONAL SURVEYOR

STATE OF NEW MEXICO

12797

FILMON F. JARAMILLO PLS

301 SOUTH CANAL

CARLSBAD, NEW MEXICO 88220

(575) 234-3327

MADRON SURVEYING, INC.
301 SOUTH CANAL
CARLSBAD, NEW MEXICO 88220
Phone (575) 234-3327

SURVEY NO. 10449


MADRON SURVEYING, INC. 301 SOUTH CANAL CARLSBAD, NEW MEXICO

Longfellow Energy, L.P.

Bonzo 1924 ABX
Fed Com Pad
H₂S Contingency Plan:
Radius Map

Section 20, Township 17S, Range 28E
Eddy County, New Mexico


 Well Pad Location




NAD 1983 New Mexico State Plane East
FIPS 3001 Feet



Prepared by Permits West, Inc., August 8, 2025
for Longfellow Energy, L.P.

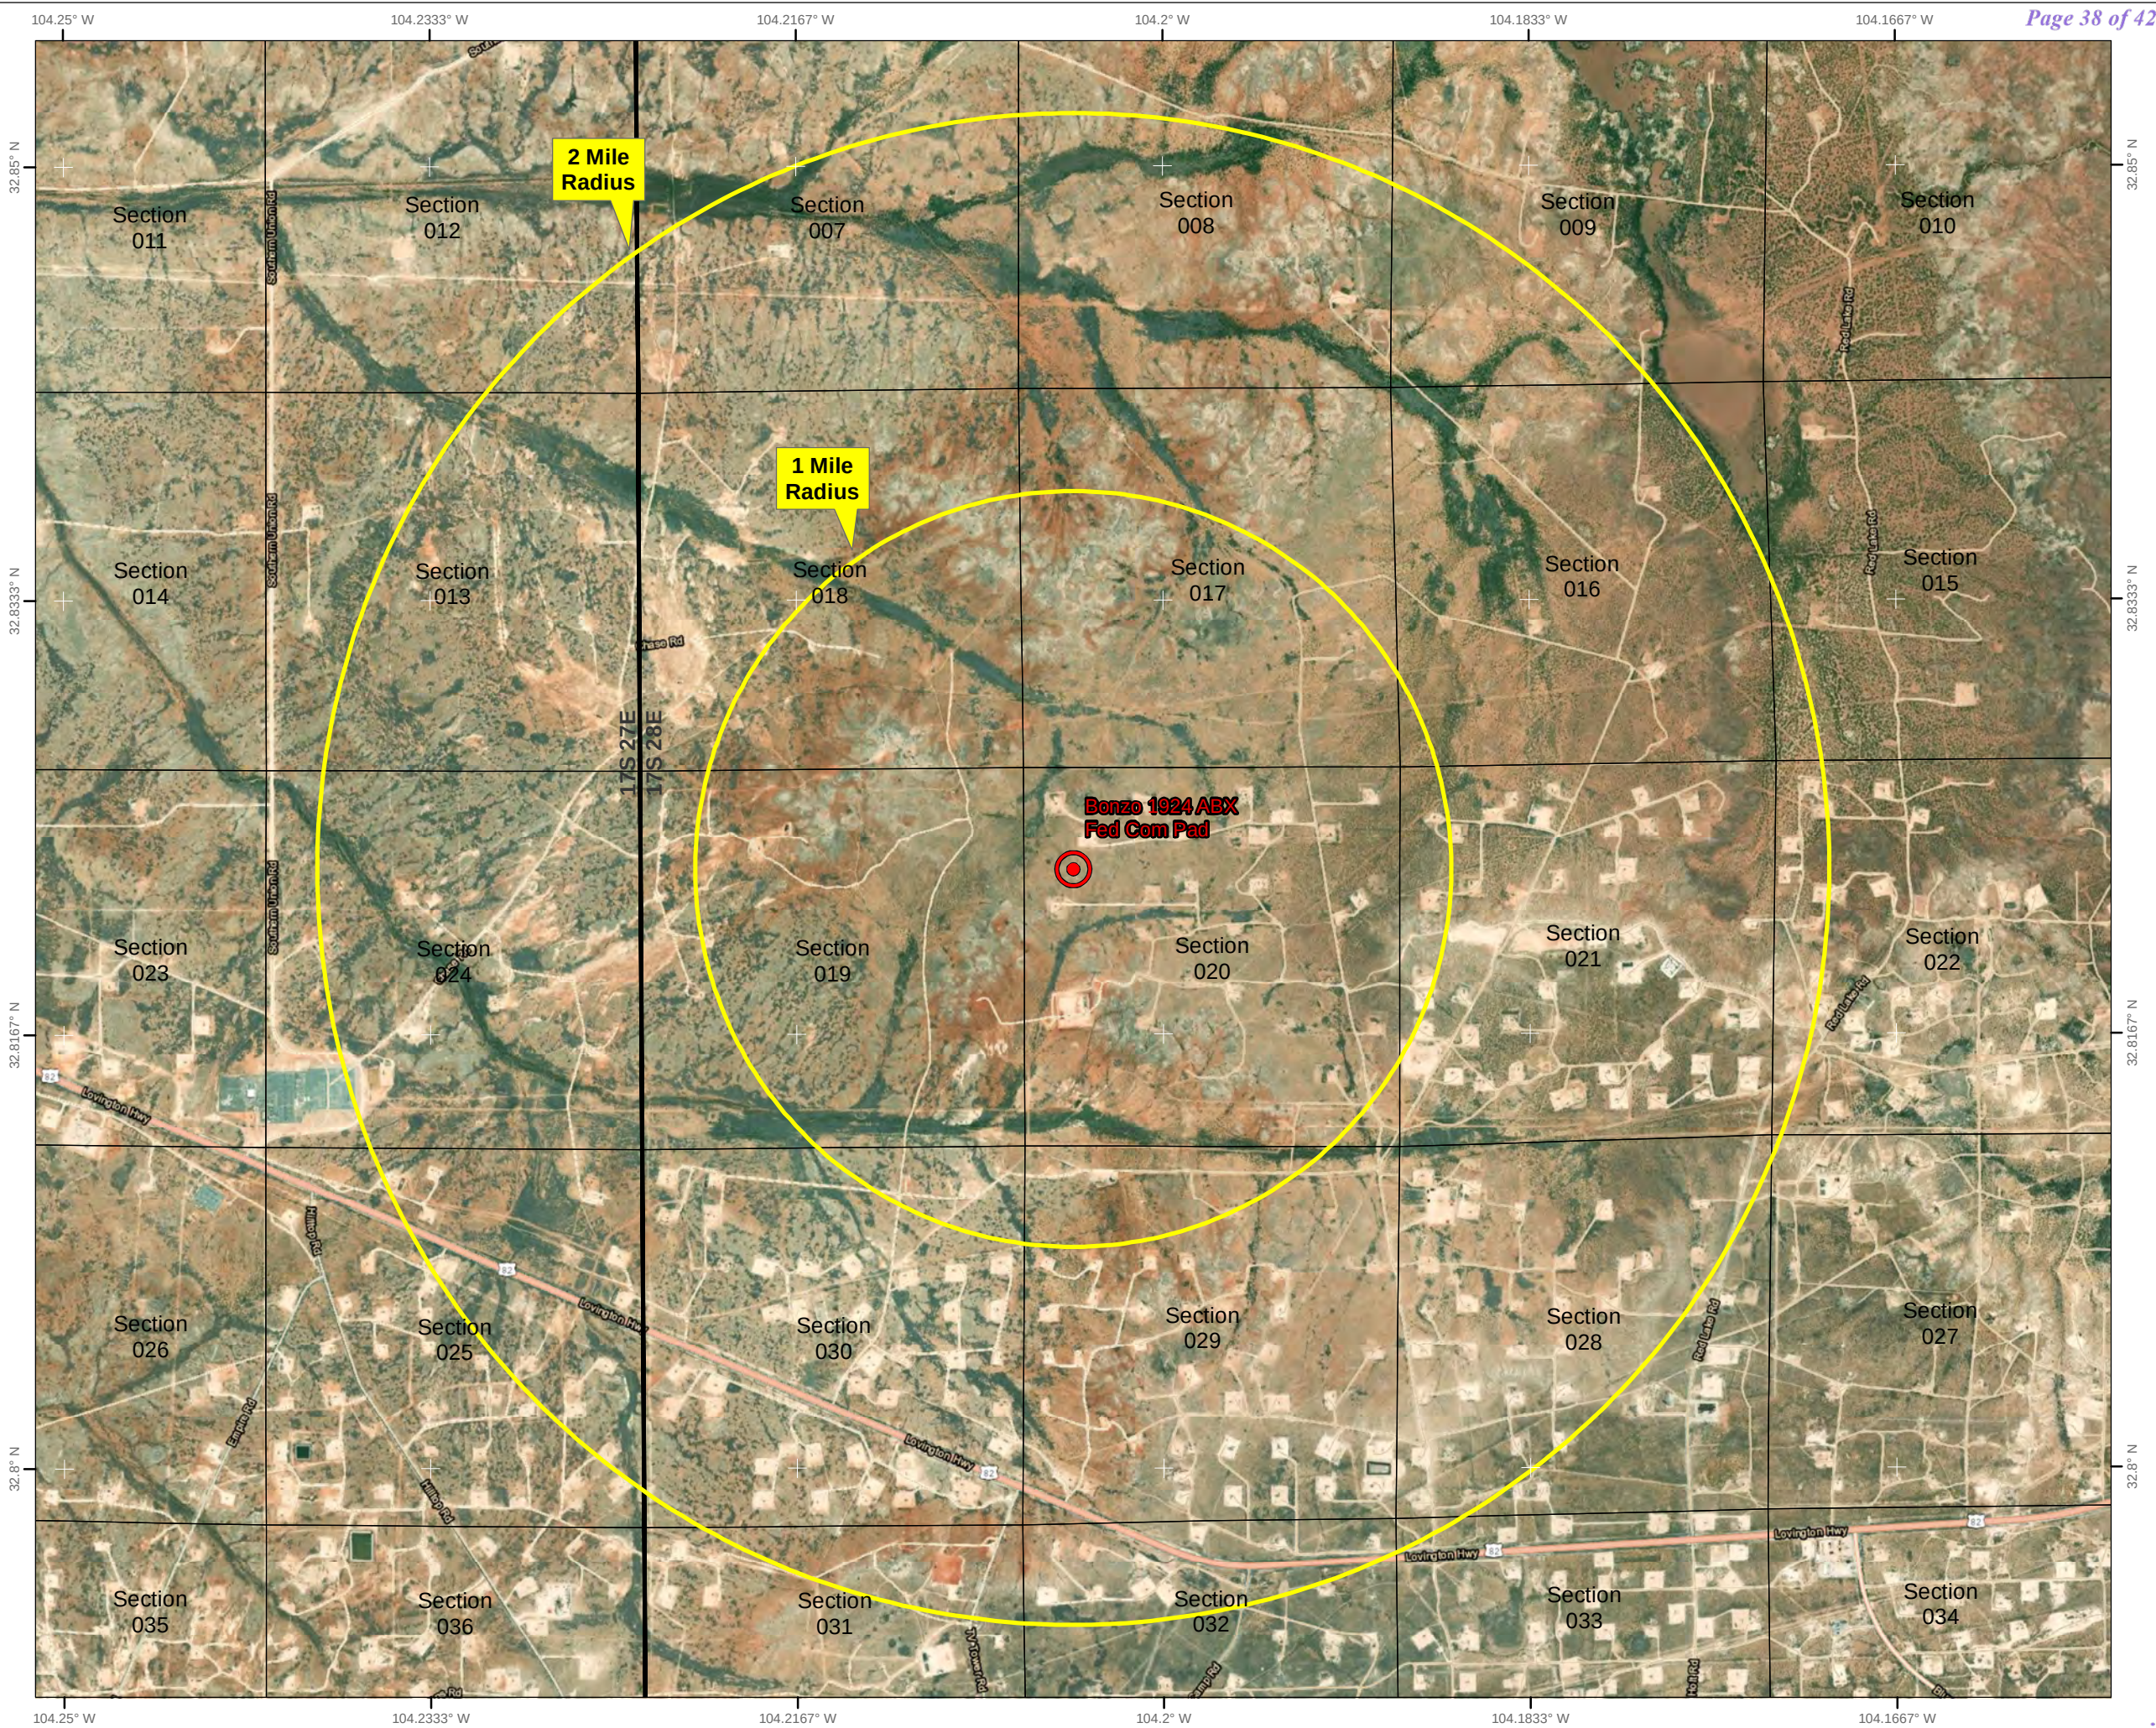

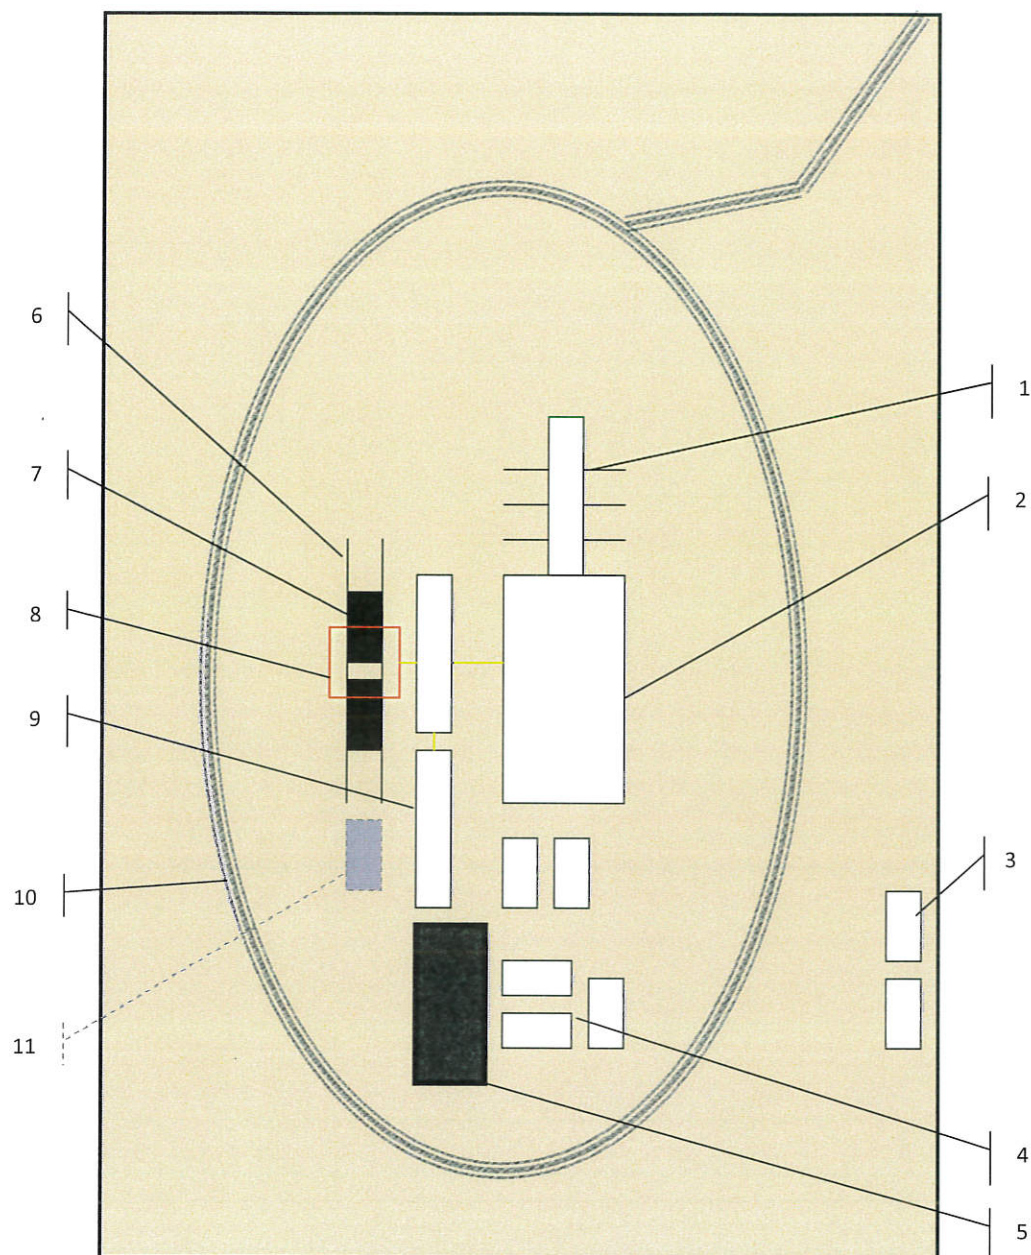

Schematic Closed Loop Drilling Rig*

1. Pipe Rack
2. Drill Rig
3. House Trailers/ Offices
4. Generator/Fuel/Storage
5. Overflow-Frac Tank
6. Skids
7. Roll Offs
8. Hopper or Centrifuge
9. Mud Tanks
10. Loop Drive
11. Generator (only for use with centrifuge)

*Not drawn to scale: Closed loop system requires at least 30 feet beyond mud tanks. Ideally 60 feet would be available

PERMITS WEST INC.
 PROVIDING PERMITS for LAND USERS
 37Verano Loop, Santa Fe, New Mexico 87508 (505) 466-8120




Above: Centrifugal Closed Loop System



Closed Loop Drilling System: Mud tanks to right (1)
 Hopper in air to settle out solids (2)
 Water return pipe (3)
 Shaker between hopper and mud tanks (4)
 Roll offs on skids (5)

Flow Chart for Drilling Fluids and Solids

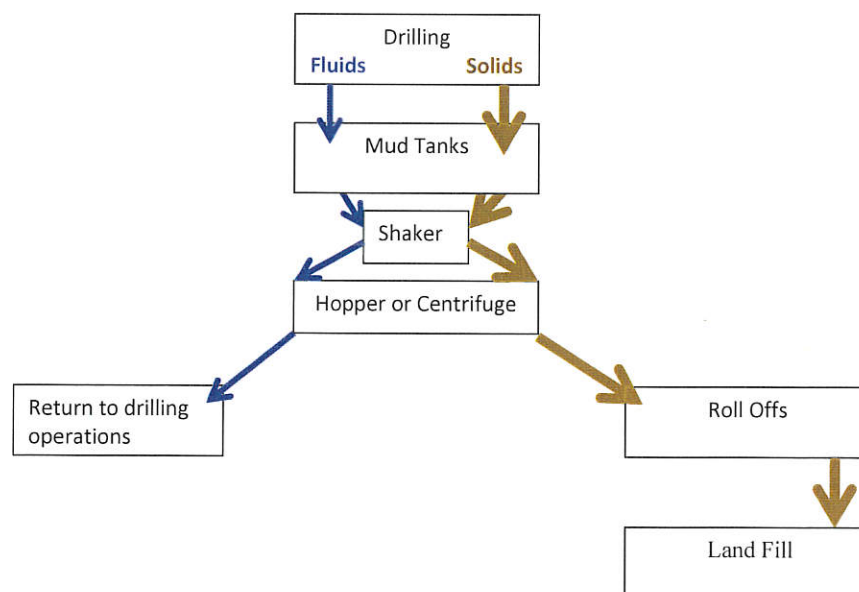

Photos Courtesy of Gandy Corporation Oil
 Field Service

PERMITS WEST, INC.
 PROVIDING PERMITS for LAND USERS
 17Verano Loop, Santa Fe, New Mexico 87508 (505) 466-8120

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 524242

ACKNOWLEDGMENTS

Operator: LONGFELLOW ENERGY, LP 8115 Preston Road Dallas, TX 75225	OGRID: 372210
	Action Number: 524242
	Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

ACKNOWLEDGMENTS

☒	I hereby certify that no additives containing PFAS chemicals will be added to the completion or recompletion of this well.
-------------------------------------	--

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 524242

CONDITIONS

Operator: LONGFELLOW ENERGY, LP 8115 Preston Road Dallas, TX 75225	OGRID: 372210
	Action Number: 524242
	Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

CONDITIONS

Created By	Condition	Condition Date
permitsw	Cement is required to circulate on both surface and intermediate1 strings of casing.	11/7/2025
permitsw	If cement does not circulate on any string, a Cement Bond Log (CBL) is required for that string of casing.	11/7/2025
ward.rikala	Notify the OCD 24 hours prior to casing & cement.	12/16/2025
ward.rikala	File As Drilled C-102 and a directional Survey with C-104 completion packet.	12/16/2025
ward.rikala	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string.	12/16/2025
ward.rikala	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.	12/16/2025