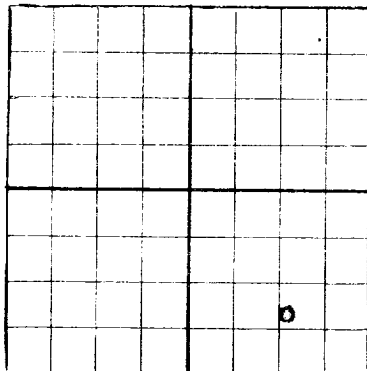


N

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

A. W. Rutter Operator **Hotel Paso del Norte, El Paso, Texas** Address
Ohio Oil Co. (State) Well No. **1** In **SE/4** of Sec. **21**, T. **20**
R. **28** N. M. P. M. **Wildcat** Field, **Eddy** County.
Well is **990** feet north of the line **South 590** feet west of the East line of **Sec. 21**
If State land the oil and gas lease is No. **8 958** Assignment No. _____
If patented land the owner is _____ Address _____
If Government land the permittee is _____ Address _____
The Lessee is **Ohio Oil Company** Address **Houston, Texas**
Drilling commenced **Dec. 30** 19 **45** Drilling was completed **Jan 9** 19 **46**
Name of drilling contractor **H. W. Drilling Co.** Address **Carlsbad, New Mexico**
Elevation above sea level at top of casing **3248** feet.
The information given is to be kept confidential until **Not confidential** 19 _____

OIL SANDS OR ZONES

No. 1, from **721** to **750 Gas sand** No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from **No water** to _____ feet. **470**
No. 2, from _____ to _____ feet.
No. 3, from _____ to _____ feet.
No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
7"	17"	8	DEW	616	Tex. Type				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
8-3/4	7"	616	25	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing **Not Producing** 19 _____
The production of the first 24 hours was _____ barrels of fluid of which _____ % was oil; _____ % emulsion; _____ % water; and _____ % sediment. Gravity, Be _____
If gas well, cu. ft. per 24 hours **259000** Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

Tom Martin Driller **W. E. Wilson** Driller
Bill Buckner Driller **W. E. Wilson** Driller
Tool Dresser **Tool Dresser**

FORMATION RECORD ON **Tool Dresser**

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **7th** day of **February**, 19**46**, at **El Paso, Tex.**
day of **February** 19**46** Name **W. E. Wilson**

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
1	94	94	Red Bed
94	165	71	Red Bed
165	216	51	Anhydrite & Red Bed
216	340	124	Sand Potash & Salt
340	405	65	Salt Anhydrite
405	470	65	Salt Anhydrite
470	505	35	Anhydrite & Lime
505	530	25	Anhydrite & lime
530	540	10	Anhydrite & Lime
540	560	20	Anhydrite
560	570	10	Grey Lime
570	575	5	Brown Lime
575	595	20	Lime & Anhydrite
595	615	20	Anhydrite
615	616	1	Brown Lime
616	623	7	Lime
623	625	2	Grey Lime
625	638	13	Grey Lime
638	650	12	Anhydrite
650	653	3	Anhydrite
653	662	11	Grey lime
662	675	13	Sand Anhydrite
675	680	5	Lime
680	688	8	Anhydrite
688	690	2	"
690	695	5	"
695	700	5	"
700	705	5	Grey lime
705	710	5	Grey Lime
710	715	5	Brown Lime <i>top pay 721'</i>
715	730	15	Lime & Sand (Gas at 7218)
730	752	22	Sand
752	754	2	Lime (Total Depth)