

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED
NOV 19 1993

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☐ Oil Well ☒ Gas Well ☒ Other

RECOMPLETION

2. Name of Operator

YATES PETROLEUM CORPORATION

(505) 748-1471

3. Address and Telephone No.

105 South 4th St., Artesia, NM 88210

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Unit G, 1980' FNL, 1980' FEL, Sec. 33-T20S-R29E

5. Lease Designation and Serial No.

NM 0473817

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Chamois AKE Federal Com #1

9. API Well No.

30-015-26923

10. Field and Pool, or Exploratory Area

Und. Morrow/Atoka/Strawn

11. County or Parish, State

Eddy County, NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☐ Abandonment
☐ Recompletion
☒ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other Plugback, test Strawn

- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations: (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)


6-12-93. RUPU. Loaded tubing with 2% KCL water. ND wellhead and installed BOP. Unset packer at 11004'. Unset RBP at 11131'. TOH with 2-7/8" tubing, packer and RBP. TIH and set CIBP 11050' and cap with 35' of cement. Perforated Strawn 10594-10636' w/28 - .42" holes (2 SPF) as follows: 10594, 595, 602, 603, 608, 612, 617, 621, 625, 626, 627, 632, 634, and 10636'.

Acidized perforations 10594-10636' w/4200 gals 15% NEFE acid.

6-19-22-93. Swabbed and flowed well.

6-23-93. Acidized Strawn perforations 10594-10636' w/20000 gals 15% NEFE acid, 500# Block + 20 ball sealers.

6-24-93. Turned over to production to put well on line.

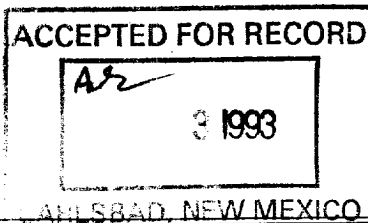

14. I hereby certify that the foregoing is true and correct

Signed

Title Production Supervisor

Date 11-17-93

(This space for Federal or State office use)

Approved by

Title

Date

Conditions of approval, if any: