



WITT FED, S.C. 30 #10
MINIMUM BLOW-OUT PREVENTER REQUIREMENTS
ALL 5000 PSI WP EQUIPMENT
 (Except Casinghead & Spools as noted below)

Exhibit #1

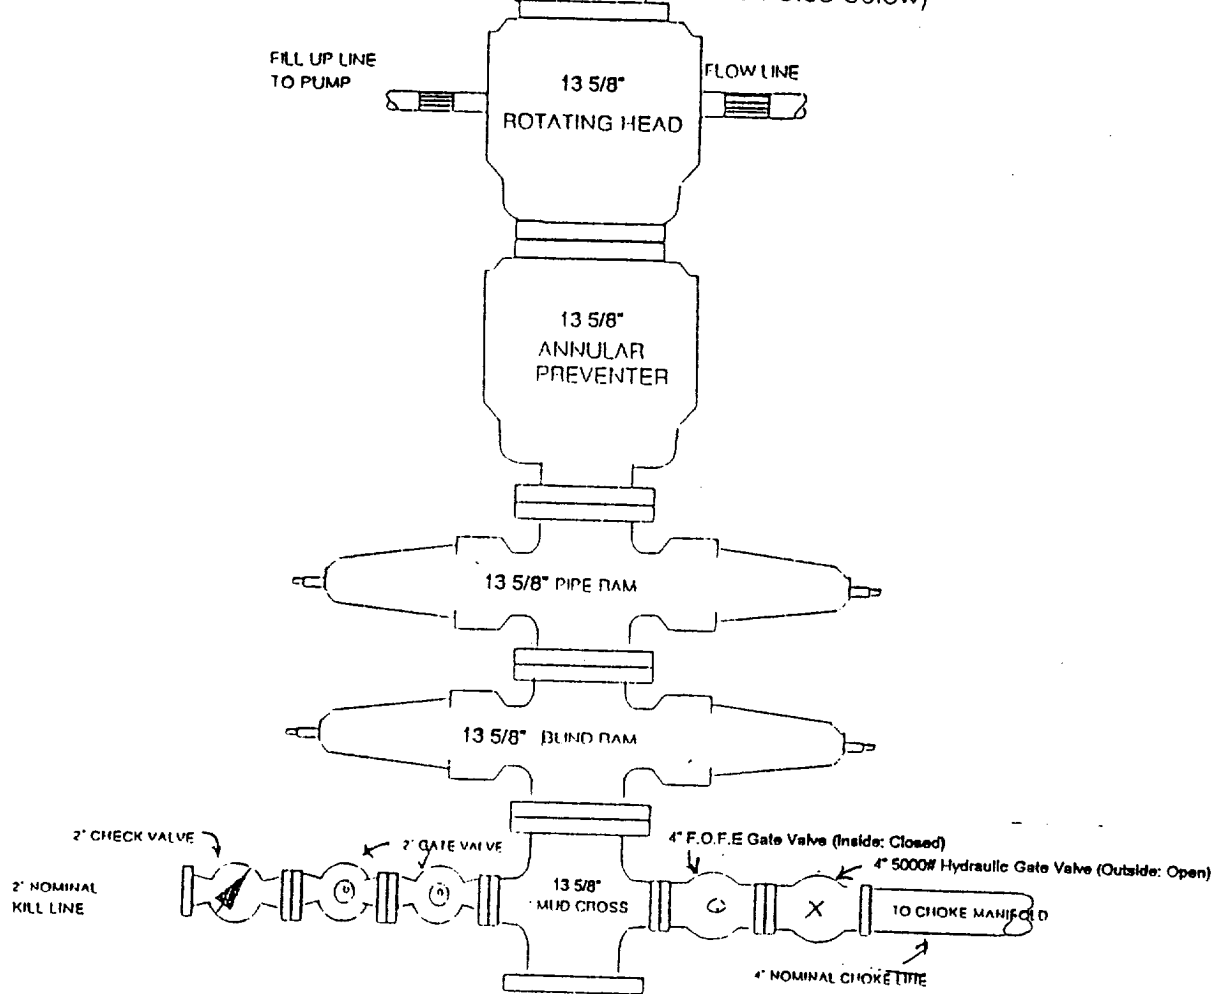

WELLHEAD EQUIPMENT:
Surface Profile:
750' - 2350'

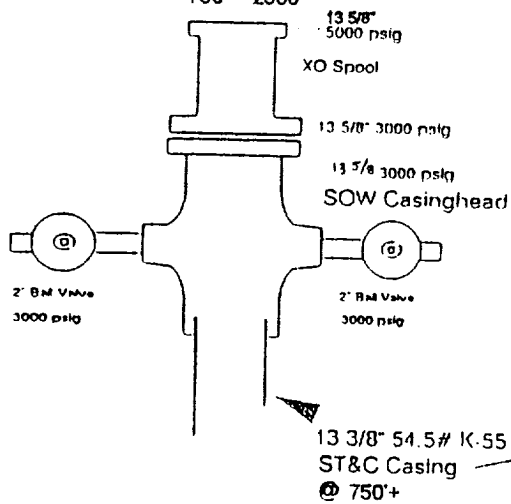

WELLHEAD EQUIPMENT:
Intermediate Profile:
2350' - TD

