

Form 3160-5 (October 2024)	UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT	FORM APPROVED OMB No. 1004-0220 Expires: October 31, 2027
SUNDRY NOTICES AND REPORTS ON WELLS <i>Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.</i>		5. Lease Serial No. NMNM12559
		6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 2		7. If Unit of CA/Agreement, Name and/or No.
1. Type of Well ☒ Oil Well ☐ Gas Well ☐ Other		8. Well Name and No. TATER SALAD FEDERAL COM/901H
2. Name of Operator COG OPERATING LLC		9. API Well No. 3001557152
3a. Address 600 West Illinois Ave, Midland, TX 79701	3b. Phone No. (include area code) (432) 683-7443	10. Field and Pool or Exploratory Area PURPLE SAGE/Wolfcamp, Gas
4. Location of Well (Footage, Sec., T.,R.,M., or Survey Description) SEC 24/T26S/R28E/NMP		11. Country or Parish, State EDDY/NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA				
TYPE OF SUBMISSION	TYPE OF ACTION			
☒ Notice of Intent	☐ Acidize	☐ Deepen	☐ Production (Start/Resume)	☐ Water Shut-Off
☐ Subsequent Report	☐ Alter Casing	☐ Hydraulic Fracturing	☐ Reclamation	☐ Well Integrity
☐ Final Abandonment Notice	☐ Casing Repair	☐ New Construction	☐ Recomplete	☐ Other
	☒ Change Plans	☐ Plug and Abandon	☐ Temporarily Abandon	
	☐ Convert to Injection	☐ Plug Back	☐ Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be perfonned or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has detennined that the site is ready for final inspection.)

COG Operating LLC, respectfully requests approval for the following changes to the original approved APD.

Summary of changes:
No changes in targets
MD at TD changed to 20,942'
TVD of target changed to 10,542'
7-5/8" casing shoe @ 10,150' MD (min)
Contingency cement program to include bradenhead cement job if severe losses are encountered
Request surface and intermediate cement jobs to be performed offline
Request variance to perform BOPE break testing on intermediate skids

Drilling program, directional plan, AC report, bradenhead and break testing attached.

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed) MAYTE REYES / Ph: (281) 293-1000	Title Regulatory Analyst
Signature (Electronic Submission)	Date 02/04/2026

THE SPACE FOR FEDERAL OR STATE OFFICE USE		
Approved by CHRISTOPHER WALLS / Ph: (575) 234-2234 / Approved	Title Petroleum Engineer	Date 02/18/2026
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office CARLSBAD	

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

Additional Information

Location of Well

0. SHL: NENE / 265 FNL / 1150 FEL / TWSP: 26S / RANGE: 28E / SECTION: 24 / LAT: 32.034638 / LONG: -104.03591 (TVD: 0 feet, MD: 0 feet)

PPP: SESE / 330 FSL / 330 FEL / TWSP: 26S / RANGE: 28E / SECTION: 13 / LAT: 32.036282 / LONG: -104.033264 (TVD: 10549 feet, MD: 10923 feet)

PPP: SWNE / 1321 FNL / 330 FEL / TWSP: 26S / RANGE: 28E / SECTION: 13 / LAT: 32.042638 / LONG: -104.033252 (TVD: 10568 feet, MD: 12863 feet)

BHL: NENE / 200 FNL / 330 FEL / TWSP: 26S / RANGE: 28E / SECTION: 12 / LAT: 32.063843 / LONG: -104.033212 (TVD: 10570 feet, MD: 20970 feet)

CONFIDENTIAL

BOPE Break Testing Variance

Initial and 21 Day Testing of 10K BOP's:

Component	High Test Pressure	Low Test Pressure	Duration
Annular Preventer	5,000 psig	250 psig	10 min
Rams	5,000 psig	250 psig	10 min
Manifold	5,000 psig	250 psig	10 min
Wellhead	1,500 psig	-	10 min
Upper / Lower / Kelly Valves	5,000 psig	250 psig	10 min
TIW safety valves / Dart	5,000 psig	250 psig	10 min
Standpipe and mud line to pumps	5,000 psig	250 psig	10 min
Surface Casing (with 8.4 ppg fluid)	1,500 psig	-	30 min

*Equipment satisfies 10M BOPE but break test variance applies to 5M system

COG Production LLC formally requests variance from the minimum standards for well control equipment testing of Onshore Order No. 2 (item III.A.2.a.i) to allow break/shell testing of blowout preventor (BOP) and blowout prevention equipment (BOPE) during batch drilling operations of the intermediate hole section. This variance only applies to 5M BOPE or less formation.

Initial testing of the BOP will be conducted, verifying all components of BOP, BOPE, and choke manifold meet the minimum and maximum anticipated surface pressure (MASP) in accordance with API RP 53 and Onshore Order No. 2, reference table above. Once initial test pressures are achieved, shell testing of the BOP and choke manifold would be conducted within the time limit from initial test to the congruent 21-day test. A complete pressure test of the BOPE components will be completed no later than 21 days following the completion of the initial pressure test or latest complete BOP pressure test date succeeding the initial test, per API RP 53 (6.5.3.4.1 (d)).

BOP and BOPE Testing

- Minimum of Class 3 stack arrangement with one set of blind/blind shear rams and pipe rams shall be installed for a 5K pressure rated system per API RP 53 (6.1.2.9)
 - Classification - COP minimum of Class 3 arrangement apply for all Delaware Basin area wells.
 - Arrangement - Annular preventer, upper pipe rams, blind rams, mud cross, lower pipe rams
- Complete BOP and BOPE test performed at initial installation on well pad.
 - Initial test performed on well with deepest planned intermediate hole section (allowable 200' TVD variance between intermediate hole sections)
 - Annular preventer tested to 100 percent of MASP, or 70 percent of rated working pressure (RWP), whichever is greater.
 - Notify BLM 4 Hrs. prior to testing
- Complete BOP and BOPE test every 21 days in accordance with API RP 53 (6.5.3.4.1 (d)).
- BOP/BOPE shell test (inclusive of manifold shell test) performed during batch drilling operations during rig transition between wells (within the 21-day time limit per API RP 53).
- Function test BOP elements per API RP 53 (6.5.3.1).
 - Required on (1) initial installation of stack, (2) every 7 days, (3) after repair/replacement of any control components
 - Alternate between drillers panel and remote panel

Securing the Wellhead

- Prior to moving rig off check for flow
 - Ensure floats are holding, casing is full of kill mud and backside is static.
- Secure the well with sleeve/plug with BPV
- Disconnect BOP from the wellhead and walk with the rig to another well on the pad.
 - Utilizing BOP wrangler/cradle, maintaining control and upright position of the BOP during movement
- Once BOP is separated from wellhead the Temporary Abandonment (TA) cap will be installed per Wellhead vendor procedure and pressure inside the casing will be monitored via the valve on the TA cap as per standard batch drilling ops.
- Test TA cap to 5,000 psi for 10 min.

COG Production LLC believes that the combination of drilling fluid inside the casing, abandonment plug with BPV, casing and annular valves and the TA cap provide multiple barriers to ensure complete closure of the wellbore prior to skidding/walking the rig.

Break Testing

- Skid rig over the next well on pad and center over wellhead, N/U BOP with the use of the BOP quick connect.
- Shell test the BOP and choke manifold to 5,000 psig and 250 psig. Hold each test for 10 minutes.
 - In accordance with API RP 53 (6.5.3.4.1(b)) BOP shell test will satisfy pressure test of quick connect seals
 - Notify BLM 4 hours prior to testing
- RWP of BOP quick connect is 10K (Certificate of Conformance attached)

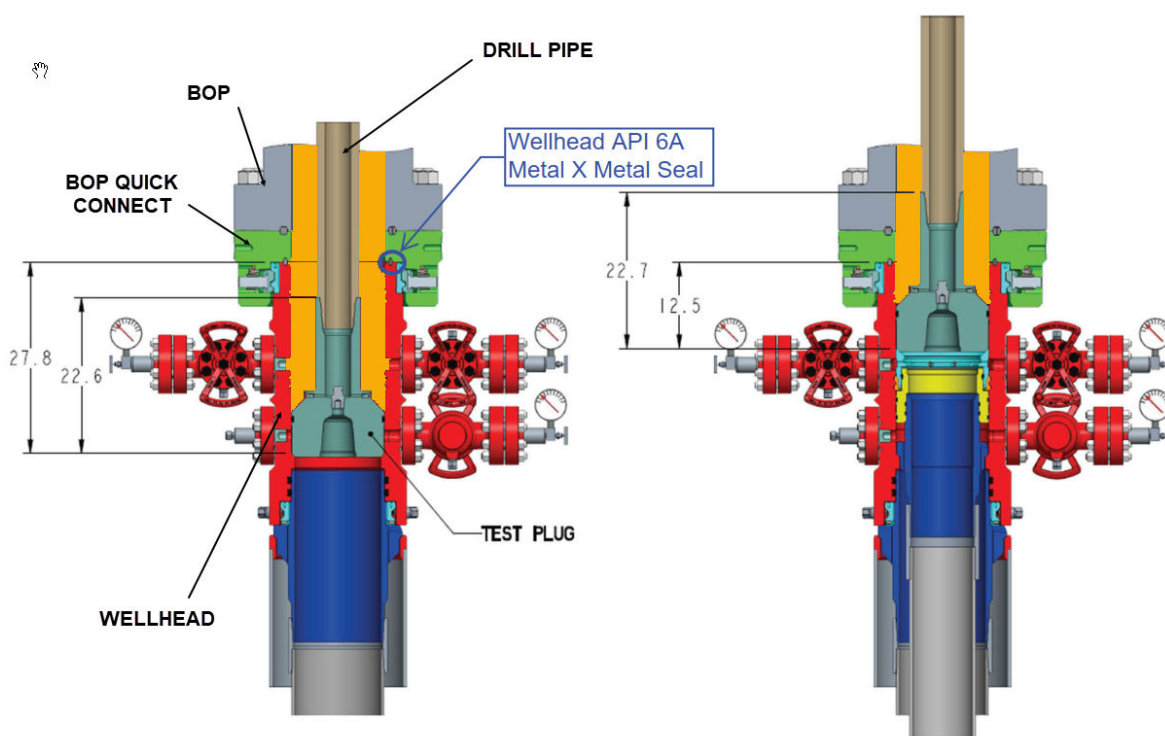


Figure 1: Test plug installed (The orange sections above indicate the areas exposed to the pressure test)

Example Well Control Plan Content

A. Well Control Component Table

This table, combined with the mud program, documents that two barriers to flow can be maintained at all times, independent of the BOP nipped up to the wellhead.

Intermediate hole section, 5M requirement

Component	RWP
Pack-off	10M
Casing Wellhead Valves	10M
Annular Wellhead Valves	5M
TA Plug	10M
Float Valves	5M
2" 1502 Lo-Torque Valves	10M

B. Well Control Procedures

Well control procedures are specific to the rig equipment and the operation at the time the kick occurs. Below are the minimal high-level tasks prescribed to assure a proper shut-in while circulating.

General Procedure

1. Sound alarm (alert crew).
2. Shut down pumps.
3. Shut-in Well (close valves to rig pits and open valve to rig choke line. Rig choke will already be in the closed position).
4. Confirm shut in.
5. Notify tool pusher/company representative.
6. Read and record the following:
 - a. SICP (Shut in Casing Pressure) and AP (Annular Pressure)
 - b. Pit gain
 - c. Time
 - d. Regroup and identify forward plan to continue circulating out kick via rig choke and mud/gas separator. Circulate and adjust mud density as needed to control well.

COG Production LLC requests variance to pump 1st Intermediate (9-5/8") Offline. Will pump conventional cement job as planned and outlined in approved APD/Sundry.

Wellhead & Offline Cementing:

COG Production LLC respectfully requests a variance from the minimum standards for well control equipment testing of Onshore Order No. 2 (item III.A.2.a.i) to allow a testing schedule of the blow out preventer (BOP) and blow out prevention equipment (BOPE) along with Batch Drilling & Offline cement operations to include the following:

- Full BOPE test at first installation on the pad.
- Full BOPE test every 21 days per Onshore Order No. 2.
- Function test BOP elements per Onshore Order No. 2.
- After the well section is secured, the BOP will be disconnected from the wellhead and walked with the rig to another well on the pad.
- TA cap will also be installed per Wellhead vendor procedure and pressure inside the casing will be monitored via the valve on the TA cap as per standard batch drilling ops.
- See attached "Offline Cement Intermediate Operational Procedure"

COG Production LLC believes that the combination of drilling fluid inside the casing, the abandonment plug with BPV, casing and annular valves and the TA cap provide multiple barriers to ensure complete closure of the wellbore prior to skidding/walking the rig.

Summarized Operational Procedure for Intermediate Casing

1. Run casing as per normal operations.
 - a. Float equipment is equipped with two back pressure valves rated to a minimum of 5,000 psi.
2. Land intermediate casing on mandrel hanger through BOP.
 - a. If casing is unable to be landed with a mandrel hanger, then the **casing will be cemented online.**
 - b. If time from landing mandrel hanger to skidding/walking rig off well exceeds 8 hours, BLM will be notified.
3. Break circulation and confirm no restrictions.
 - a. Ensure no blockage of float equipment and appropriate annular returns.
 - b. Perform flow check to confirm well is static.
4. Set pack-off
 - a. If utilizing a fluted/ported mandrel hanger, ensure well is static on the annulus and inside the casing by ensuring pipe is full of drilling fluid, remove landing joint, and set annular packoff through BOP. Pressure test to 5,000 psi for 10 min.
 - b. If utilizing a solid mandrel hanger, ensure well is static on the annulus and inside the casing by ensuring pipe is full of drilling fluid. Pressure test seals to 5,000 psi for 10 min. Remove landing joint through BOP.
5. After confirmation of both annular barriers and the two casing barriers, install TA plug/BPV and pressure test to 5,000 psi for 10 min. Notify the BLM with intent to proceed with nipple down and offline cementing.
6. With the well secured and BLM notified, nipple down BOP and secure on BOP handler.
 - a. **Note, if any of the barriers fail to test, the BOP stack will not be nipped down until after the cement job has concluded and tail cement has reached 500 psi**
7. Skid/Walk rig off current well.
8. Confirm well is static before removing TA Plug.
 - a. Cementing operations will not proceed until well is under control. (If well is not static, notify BLM and proceed to kill)
 - b. Casing outlet valves will provide access to both the casing ID and annulus. Rig or third party pump truck will kill well prior to cementing, if needed.
 - c. Well control plan can be seen in Section B, Well Control Procedures.
 - d. If need be, rig can be moved back over well and BOP nipped back up for any further remediation.
9. Rig up return lines to take returns from wellhead to pits and rig choke.
 - a. Test all connections and lines from wellhead to choke manifold to 5,000 psi high for 10 min.
 - b. If either test fails, perform corrections and retest before proceeding.
 - c. Return line schematics can be seen in Figure 2.
10. Remove TA Plug/BPV from the casing.
11. Install offline cement tool.
 - a. Current offline cement tool schematics can be seen in Figure 1 (Streamflo)
12. Rig up cement head and cementing lines.
 - a. Pressure test cement lines against cement head to 80% of casing burst for 10 min.
13. Break circulation on well to confirm no restrictions.
 - a. If gas is present on circulation, well will be shut in and returns rerouted through gas buster.
 - b. Max anticipated time before circulating with cement truck is 6 hrs.
14. Pump cement job as per plan.
 - a. At plug bump, test casing to 0.22 psi/ft or 1500 psi, whichever is greater.
 - b. If plug does not bump on calculated displacement, shut down and wait 8 hrs or 500 psi compressive strength, whichever is greater before testing casing.

6. Confirm well is static and floats are holding after cement job.
 - a. With floats holding and backside static:
 - i. Remove cement head.
 - b. If floats are leaking:
 - i. Shut-in well and WOC (Wait on Cement) until tail slurry reaches 500 psi compressive strength and the casing is static prior to removing cement head.
 - c. If there is flow on the backside:
 - i. Shut in well and WOC until tail slurry reaches 500 psi compressive strength. Ensure that the casing is static prior to removing cement head.
7. Remove offline cement tool.
8. Install night cap with pressure gauge for monitoring.
9. Test night cap to 5,000 psi for 10 min.

Example Well Control Plan Content

A. Well Control Component Table

The table below, which covers the cementing of the **5M MASP (Maximum Allowable Surface Pressure) portion of the well**, outlines the well control component rating in use. This table, combined with the mud program, documents that two barriers to flow can be maintained at all times, independent of the BOP nipped up to the wellhead.

Intermediate hole section, 5M requirement

Component	RWP
Pack-off	10M
Casing Wellhead Valves	10M
Annular Wellhead Valves	5M
TA Plug	10M
Float Valves	5M
2" 1502 Lo-Torque Valves	10M

B. Well Control Procedures

Well control procedures are specific to the rig equipment and the operation at the time the kick occurs. Below are the minimal high-level tasks prescribed to assure a proper shut-in while circulating and cementing through the Offline Cement Adapter.

General Procedure While Circulating

1. Sound alarm (alert crew).
2. Shut down pumps.
3. Shut-in Well (close valves to rig pits and open valve to rig choke line. Rig choke will already be in the closed position).
4. Confirm shut-in.
5. Notify tool pusher/company representative.
6. Read and record the following:
 - a. SICP (Shut in Casing Pressure) and AP (Annular Pressure)
 - b. Pit gain
 - c. Time
 - d. Regroup and identify forward plan to continue circulating out kick via rig choke and mud/gas separator. Circulate and adjust mud density as needed to control well.

General Procedure While Cementing


1. Sound alarm (alert crew).
2. Shut down pumps.
3. Shut-in Well (close valves to rig pits and open valve to rig choke line. Rig choke will already be in the closed position).
4. Confirm shut-in.
5. Notify tool pusher/company representative.
6. Open rig choke and begin pumping again taking returns through choke manifold and mud/gas separator.

7. Continue to place cement until plug bumps.
8. At plug bump close rig choke and cement head.
9. Read and record the following
 - a. SICP and AP
 - b. Pit gain
 - c. Time
 - d. Shut-in annulus valves on wellhead

General Procedure After Cementing


1. Sound alarm (alert crew).
2. Shut-in Well (close valves to rig pits and open valve to rig choke line. Rig choke will already be in the closed position).
3. Confirm shut-in.
4. Notify tool pusher/company representative.
5. Read and record the following:
 - a. SICP and AP
 - b. Pit gain
 - c. Time
 - d. Shut-in annulus valves on wellhead

Figure 1: Offline Cement Tool Schematics

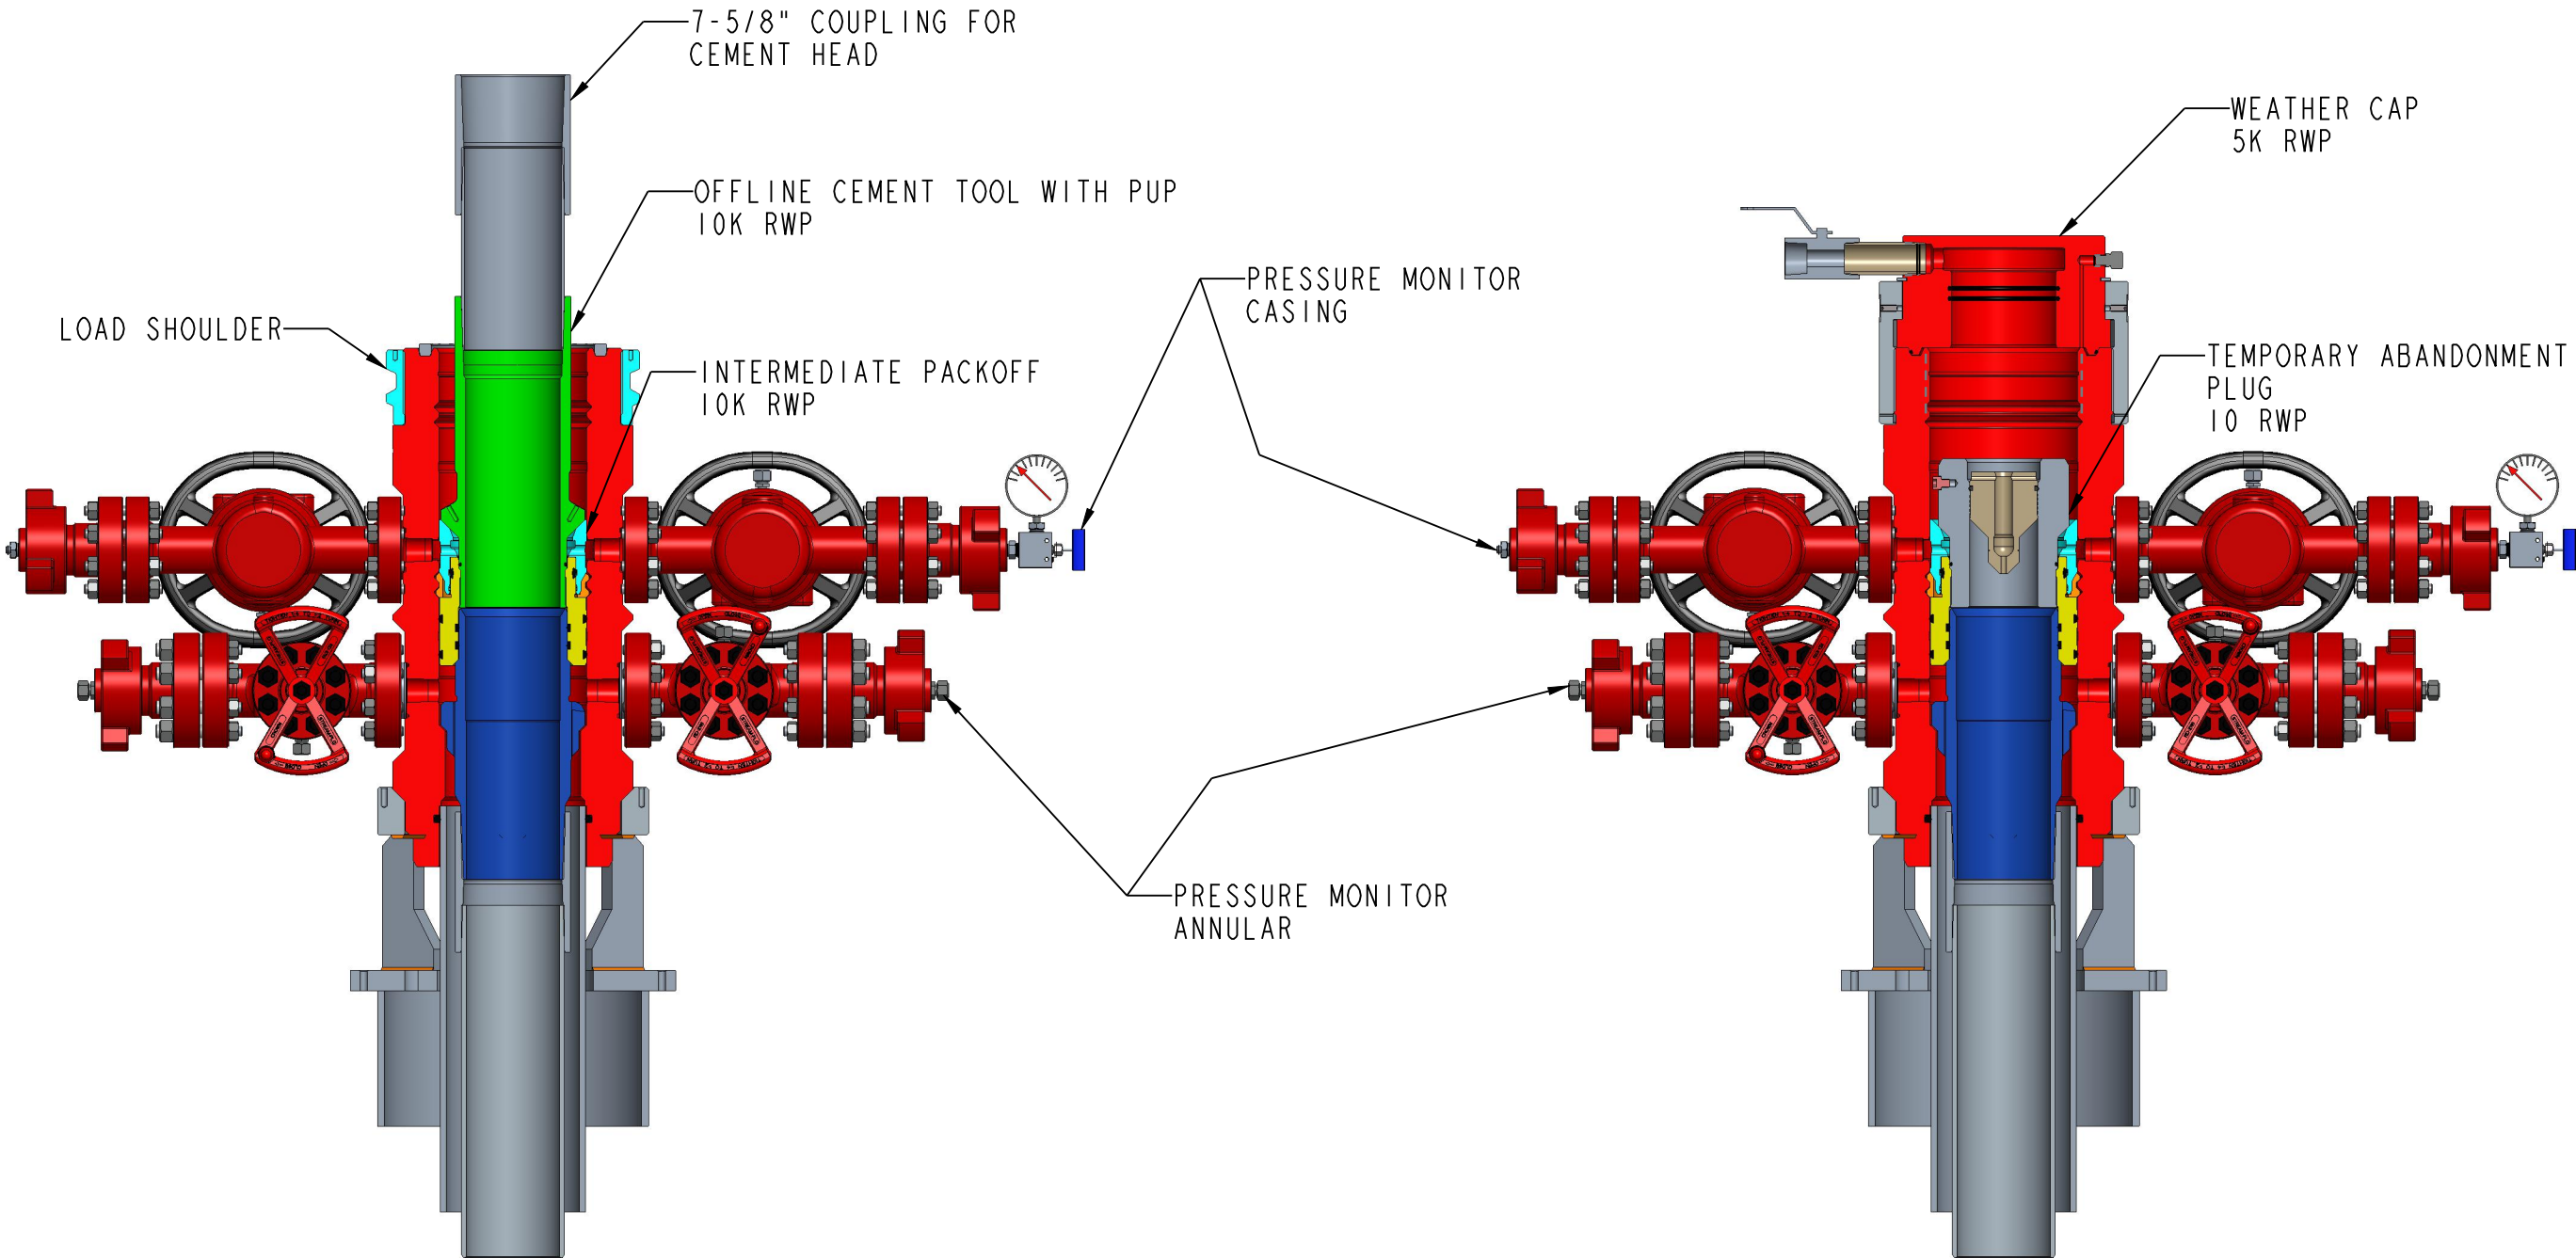

CONOCOPHILLIPS COMPANY 7-5/8" OFFLINE CEMENT AND ABANDAMENT PLUG LAYOUT DMLX WELLHEAD ASSEMBLY		DWN.	CWB	03-09-23	 Worldwide Expertise - Global Strength	DRAWING No. WH - 24621
		CHK.				
		APPR.				
			BY	DATE		
XX-XXXX XX-XXXX	Commonspace		WH-24621		WH-24621	

Figure 2: Back Yard Rig Up

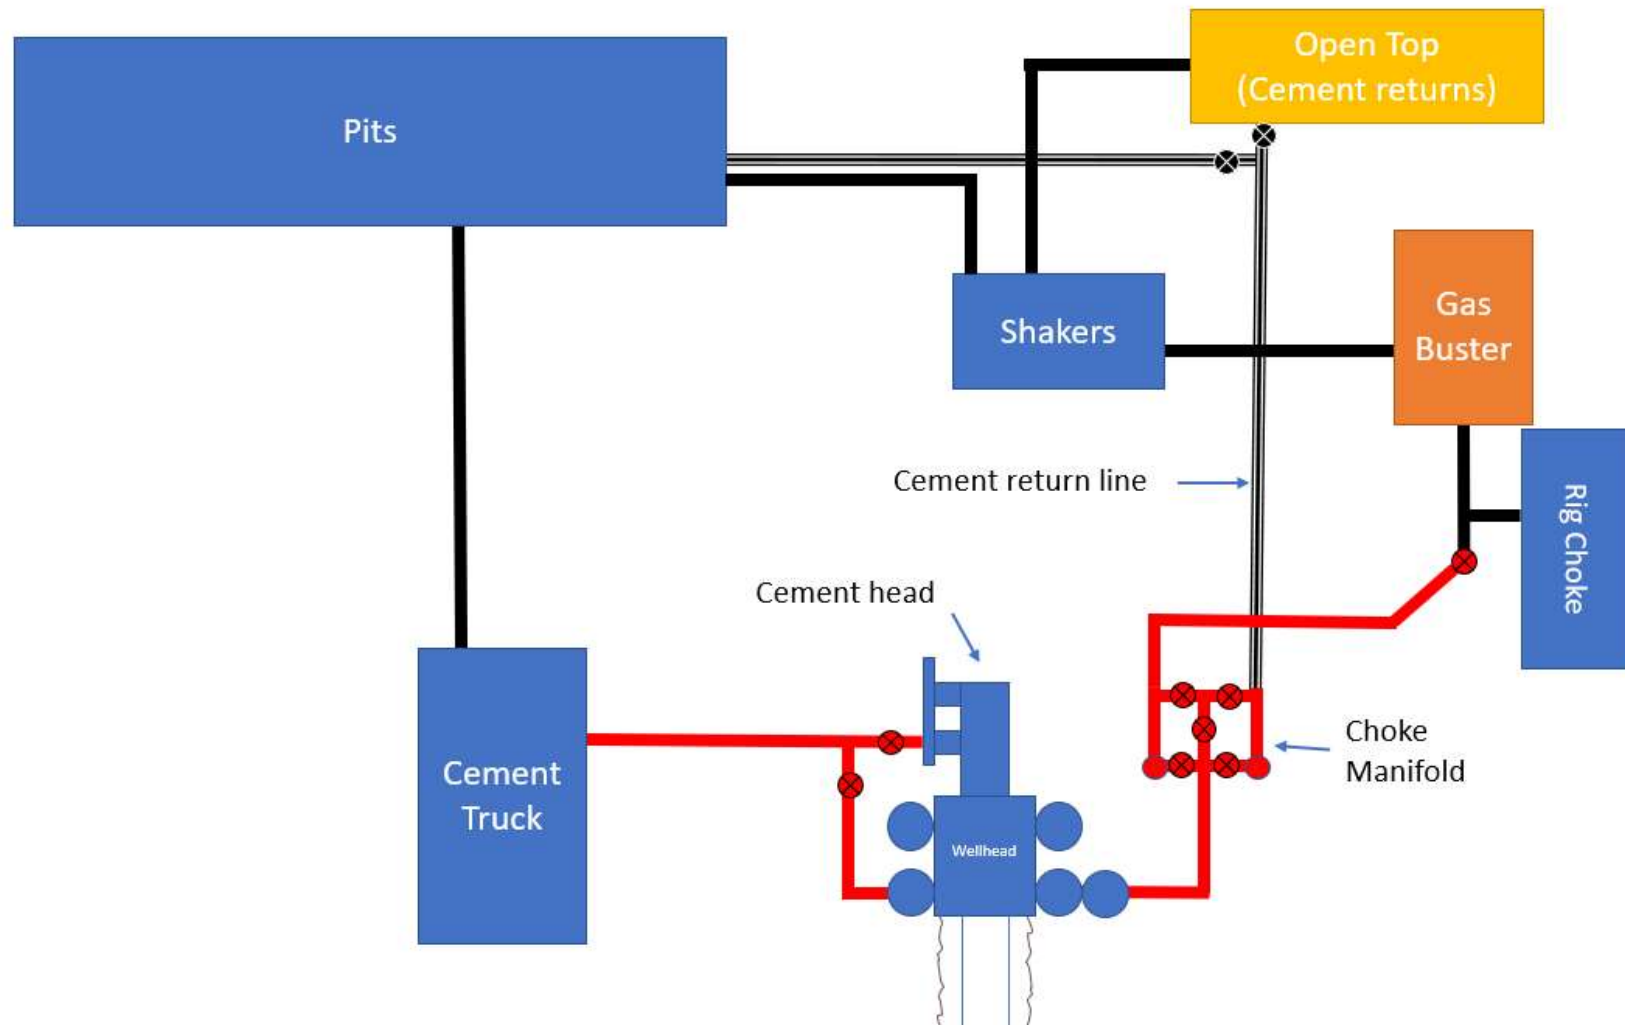

*All lines rated to 10M working pressure

**Cement head rated to 7.5M working pressure

Casing Program:

Depth	No. Sacks	Wt. ppg	Yld Ft3/sk	Slurry Description
11,945' 9-7/8"	465	15.6	1.196	1st Stage: Halliburton Halcem (TOC @ Brushy Canyon)
	1000	14.8	1.519	2nd Stage (Bradenhead squeeze): Halliburton Thixotropic Halcem + 5% Cal-Seal 60, .6% HR-800 + 10% Salt + 3% Microbond
	400	14.8	1.332	Top out Slurry: Halliburton Halcem (TOC @ surface)

COG Production LLC requests variance from minimum standards to pump a two stage cement job on the 7-5/8" intermediate casing string with the first stage being pumped conventionally with the calculated top of cement at the Brushy Canyon and the second stage performed as a 1000 sack bradenhead squeeze with planned cement from the Brushy Canyon to surface. After the bradenhead squeeze, 50 sacks of the 14.8 ppg top out slurry will be pumped followed by shutting down and waiting on cement (WOC) 2 hours. After 2 hours, if necessary, a top out consisting of 350 sacks of Halliburton's Halcem at 14.8 ppg (1.332 yld) will be executed as a contingency. When washing valves, 2 bbls of water will be utilized. If the valves still contain cement, washing will occur in 1 bbl increments up to a maximum of 5 bbls.

COG Production will run a cement bond log (CBL) after the cement job is performed to evaluate the quality of the cement job.

Wellhead & Offline Cementing:

COG Production LLC respectfully requests a variance from the minimum standards for well control equipment testing of Onshore Order No. 2 (item III.A.2.a.i) to allow a testing schedule of the blow out preventer (BOP) and blow out prevention equipment (BOPE) along with Batch Drilling & Offline cement operations to include the following:

- Full BOPE test at first installation on the pad.
- Full BOPE test every 21 days per Onshore Order No. 2.
- Function test BOP elements per Onshore Order No. 2.
- After the well section is secured, the BOP will be disconnected from the wellhead and walked with the rig to another well on the pad.
- TA cap will also be installed per Wellhead vendor procedure and pressure inside the casing will be monitored via the valve on the TA cap as per standard batch drilling ops.
- See attached "Offline Cement Intermediate Operational Procedure"

COG Production LLC believes that the combination of drilling fluid inside the casing, the abandonment plug with BPV, casing and annular valves and the TA cap provide multiple barriers to ensure complete closure of the wellbore prior to skidding/walking the rig.

Bradenhead Cementing Procedure for Intermediate Casing

1. R/U cement head and test lines
2. Pump first stage conventionally down the 7-5/8" intermediate casing
 - a. 15.6 ppg slurry with TOC @ the Brushy Canyon
3. Displace with drilling fluid and bump plug
4. Bump at 500 psi over FCP, hold 5 mins.
5. Bleed back to cement truck to check floats
6. Rig up on 10-3/4" x 7-5/8" annulus by lining up to pump down both valves.
7. Establish injection rate and displace annulus with FW
8. Pump bradenhead squeeze with 14.8 ppg thixotropic slurry
 - a. Limit pressure to 1500 psi (10-3/4" surf csg test)
9. After pumping 14.8 ppg thixotropic slurry, pump 50 sacks of 14.8 ppg top out slurry to flush valves of thixotropic cement.
10. WOC 2 hours
11. Top out with 350 sacks of 14.8 ppg top out slurry. If more cement is necessary, note in report and notify BLM.
12. Displace cement with fresh water and clear valves. Start with 2 bbls of fresh water. If more water is necessary, 1 bbl increments will be used to a maximum of 5 bbls.
13. Shut down and monitor the shut-in pressure on the 10-3/4" x 7-5/8" annulus.

Summarized Operational Procedure for Intermediate Casing

1. Run casing as per normal operations.
 - a. Float equipment is equipped with two back pressure valves rated to a minimum of 5,000 psi.
2. Land intermediate casing on mandrel hanger through BOP.
 - a. If casing is unable to be landed with a mandrel hanger, then the **casing will be cemented online.**
 - b. If time from landing mandrel hanger to skidding/walking rig off well exceeds 8 hours, BLM will be notified.
3. Break circulation and confirm no restrictions.
 - a. Ensure no blockage of float equipment and appropriate annular returns.
 - b. Perform flow check to confirm well is static.
4. Set pack-off
 - a. If utilizing a fluted/ported mandrel hanger, ensure well is static on the annulus and inside the casing by ensuring pipe is full of drilling fluid, remove landing joint, and set annular packoff through BOP. Pressure test to 5,000 psi for 10 min.
 - b. If utilizing a solid mandrel hanger, ensure well is static on the annulus and inside the casing by ensuring pipe is full of drilling fluid. Pressure test seals to 5,000 psi for 10 min. Remove landing joint through BOP.
5. After confirmation of both annular barriers and the two casing barriers, install TA plug/BPV and pressure test to 5,000 psi for 10 min. Notify the BLM with intent to proceed with nipple down and offline cementing.

- a. Minimum 4 hrs notice.
6. With the well secured and BLM notified, nipple down BOP and secure on BOP handler.
 - a. **Note, if any of the barriers fail to test, the BOP stack will not be nipped down until after the cement job has concluded and tail cement has reached 500 psi**
7. Skid/Walk rig off current well.
8. Confirm well is static before removing TA Plug.
 - a. Cementing operations will not proceed until well is under control. (If well is not static, notify BLM and proceed to kill)
 - b. Casing outlet valves will provide access to both the casing ID and annulus. Rig or third party pump truck will kill well prior to cementing, if needed.
 - c. Well control plan can be seen in Section B, Well Control Procedures.
 - d. If need be, rig can be moved back over well and BOP nipped back up for any further remediation.
9. Rig up return lines to take returns from wellhead to pits and rig choke.
 - a. Test all connections and lines from wellhead to choke manifold to 5,000 psi high for 10 min.
 - b. If either test fails, perform corrections and retest before proceeding.
 - c. Return line schematics can be seen in Figure 2.
10. Remove TA Plug/BPV from the casing.
11. Install offline cement tool.
 - a. Current offline cement tool schematics can be seen in Figure 1 (Streamflo)
12. Rig up cement head and cementing lines.
 - a. Pressure test cement lines against cement head to 80% of casing burst for 10 min.
13. Break circulation on well to confirm no restrictions.
 - a. If gas is present on circulation, well will be shut in and returns rerouted through gas buster.
 - b. Max anticipated time before circulating with cement truck is 6 hrs.
14. Pump cement job as per plan.
 - a. At plug bump, test casing to 0.22 psi/ft or 1500 psi, whichever is greater.
 - b. If plug does not bump on calculated displacement, shut down and wait 8 hrs or 500 psi compressive strength, whichever is greater before testing casing.
15. Confirm well is static and floats are holding after cement job.
 - a. With floats holding and backside static:
 - i. Remove cement head.
 - b. If floats are leaking:
 - i. Shut-in well and WOC (Wait on Cement) until tail slurry reaches 500 psi compressive strength and the casing is static prior to removing cement head.
 - c. If there is flow on the backside:
 - i. Shut in well and WOC until tail slurry reaches 500 psi compressive strength. Ensure that the casing is static prior to removing cement head.
16. Remove offline cement tool.
17. Install night cap with pressure gauge for monitoring.
18. Test night cap to 5,000 psi for 10 min.

Example Well Control Plan Content

A. Well Control Component Table

The table below, which covers the cementing of the **5M MASP (Maximum Allowable Surface Pressure) portion of the well**, outlines the well control component rating in use. This table, combined with the mud program, documents that two barriers to flow can be maintained at all times, independent of the BOP nipped up to the wellhead.

Intermediate hole section, 5M requirement

Component	RWP
Pack-off	10M
Casing Wellhead Valves	10M
Annular Wellhead Valves	5M
TA Plug	10M
Float Valves	5M
2" 1502 Lo-Torque Valves	10M

B. Well Control Procedures

Well control procedures are specific to the rig equipment and the operation at the time the kick occurs. Below are the minimal high-level tasks prescribed to assure a proper shut-in while circulating and cementing through the Offline Cement Adapter.

General Procedure While Circulating

1. Sound alarm (alert crew).
2. Shut down pumps.
3. Shut-in Well (close valves to rig pits and open valve to rig choke line. Rig choke will already be in the closed position).
4. Confirm shut-in.
5. Notify tool pusher/company representative.
6. Read and record the following:
 - a. SICP (Shut in Casing Pressure) and AP (Annular Pressure)
 - b. Pit gain
 - c. Time
 - d. Regroup and identify forward plan to continue circulating out kick via rig choke and mud/gas separator. Circulate and adjust mud density as needed to control well.

General Procedure While Cementing


1. Sound alarm (alert crew).
2. Shut down pumps.
3. Shut-in Well (close valves to rig pits and open valve to rig choke line. Rig choke will already be in the closed position).
4. Confirm shut-in.
5. Notify tool pusher/company representative.
6. Open rig choke and begin pumping again taking returns through choke manifold and mud/gas separator.

7. Continue to place cement until plug bumps.
8. At plug bump close rig choke and cement head.
9. Read and record the following
 - a. SICP and AP
 - b. Pit gain
 - c. Time
 - d. Shut-in annulus valves on wellhead

General Procedure After Cementing


1. Sound alarm (alert crew).
2. Shut-in Well (close valves to rig pits and open valve to rig choke line. Rig choke will already be in the closed position).
3. Confirm shut-in.
4. Notify tool pusher/company representative.
5. Read and record the following:
 - a. SICP and AP
 - b. Pit gain
 - c. Time
 - d. Shut-in annulus valves on wellhead

Figure 1: Offline Cement Tool Schematics

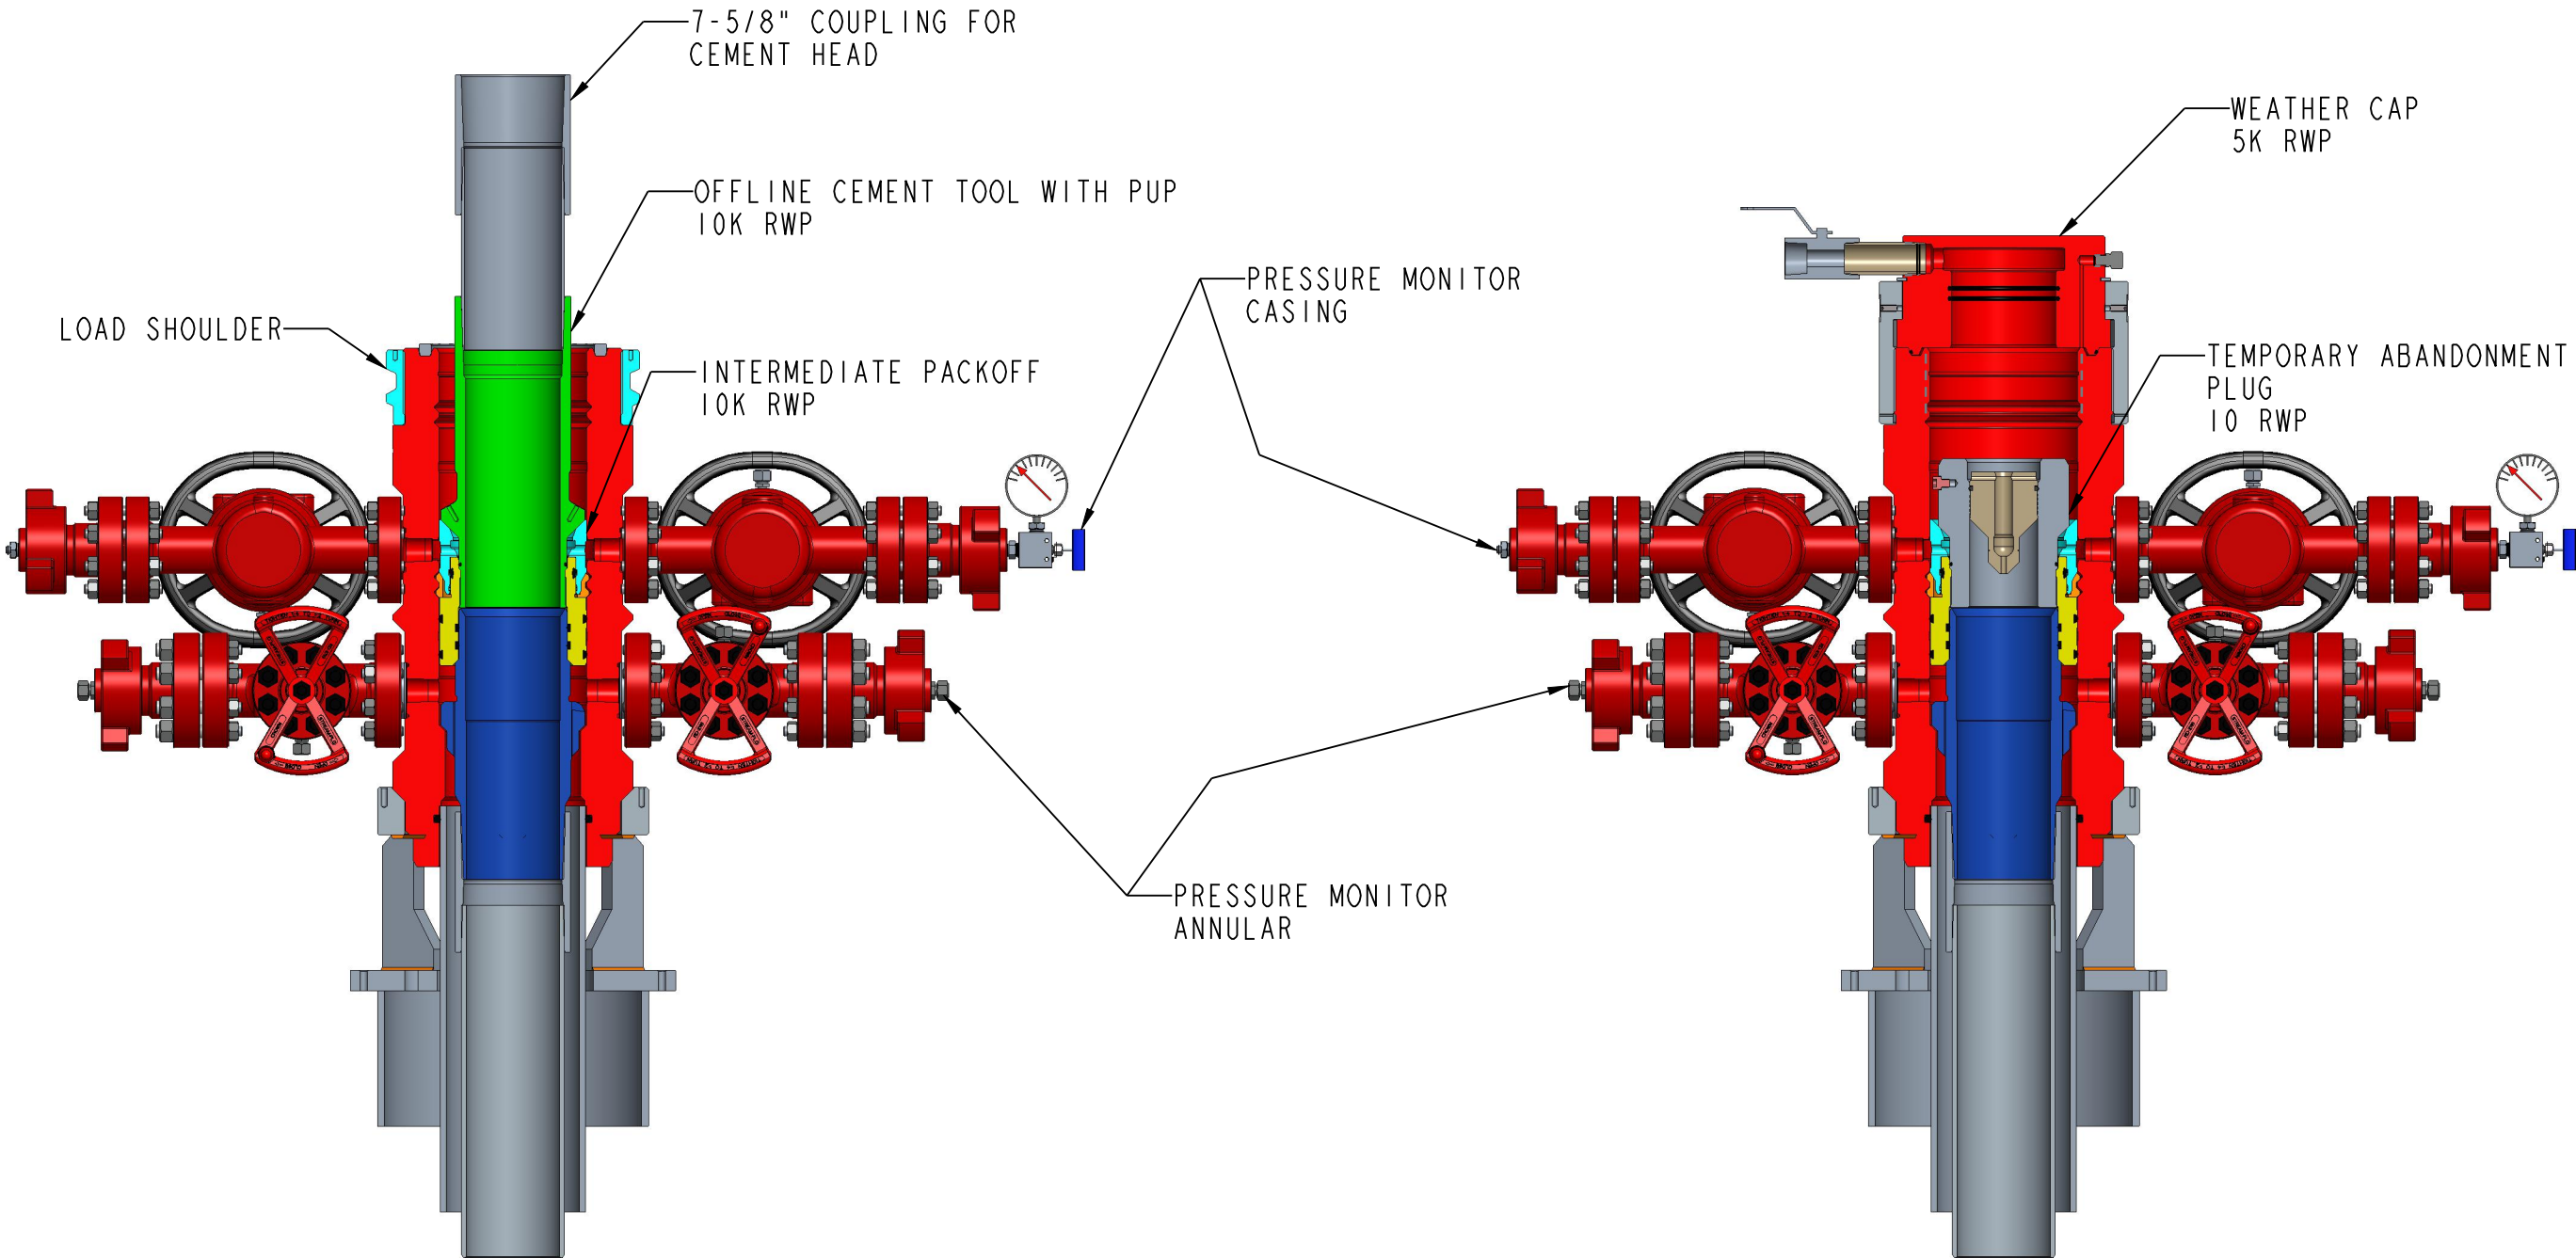

CONOCOPHILLIPS COMPANY 7-5/8" OFFLINE CEMENT AND ABANDAMENT PLUG LAYOUT DMLX WELLHEAD ASSEMBLY		DWN.	CWB	03-09-23	 Worldwide Expertise - Global Strength	DRAWING No.
		CHK.				WH - 24621
		APPR.				
			BY	DATE		
XX-XXXX XX-XXXX	Commonspace		WH-24621		WH-24621	

Figure 2: Back Yard Rig Up

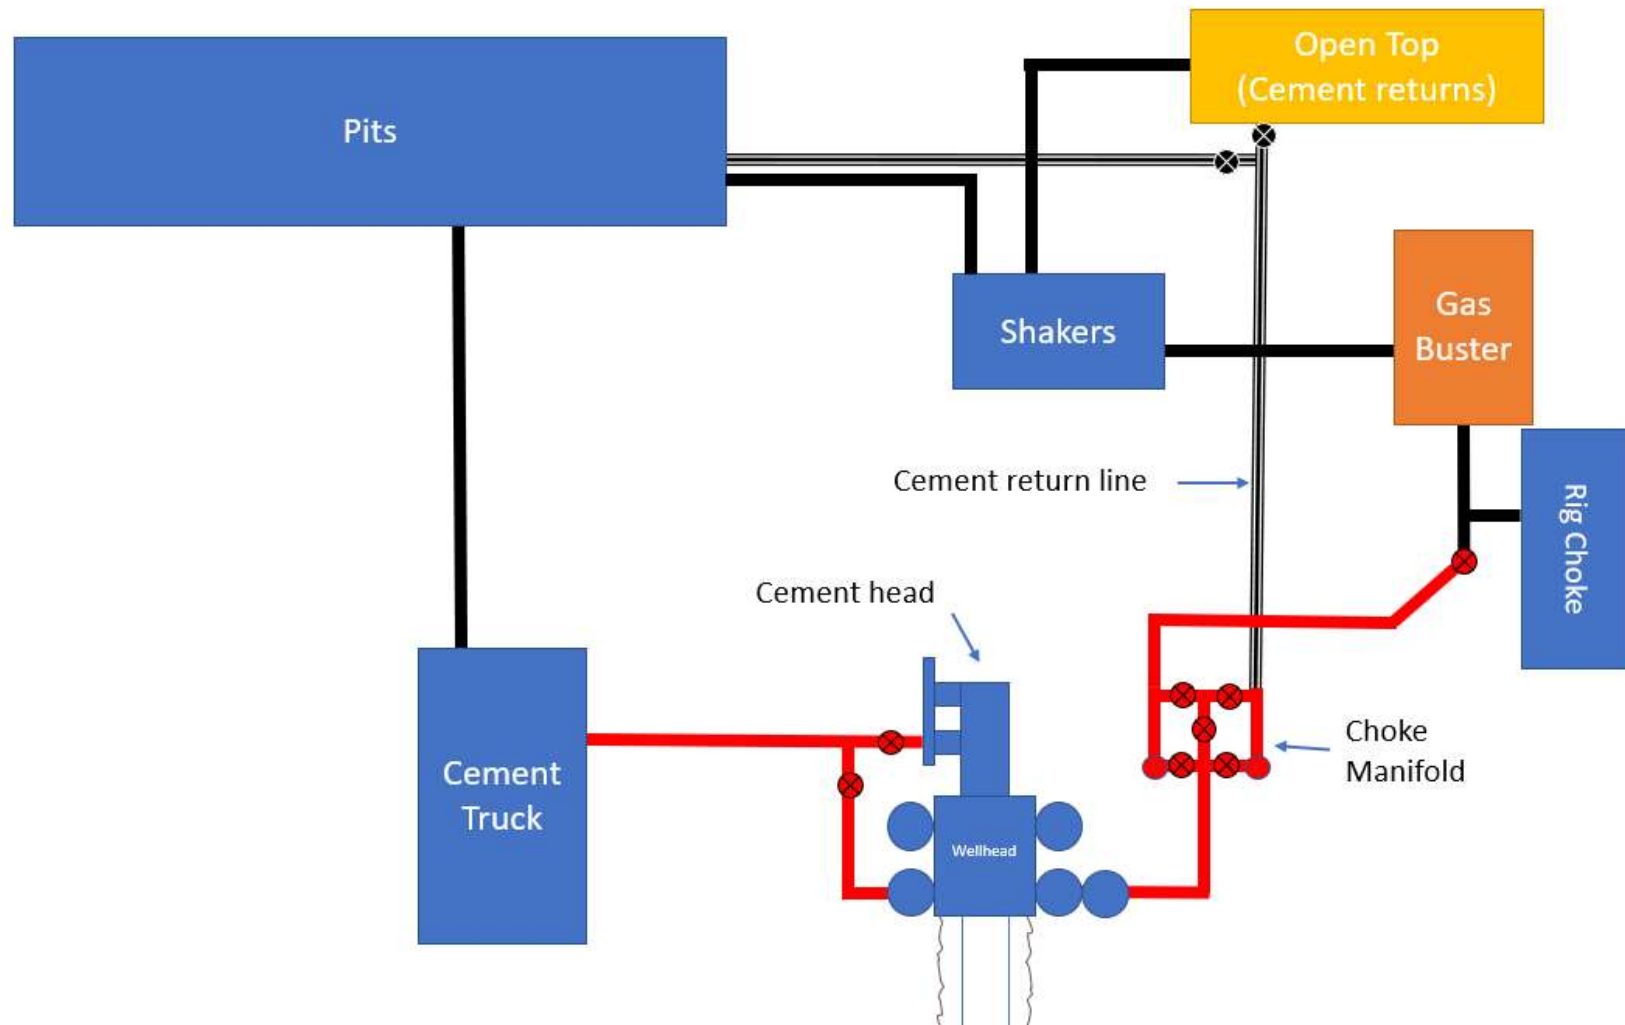

*All lines rated to 10M working pressure

**Cement head rated to 7.5M working pressure

DELAWARE BASIN WEST

ATLAS PROSPECT_NME

TATER SALAD & MOMBA FEDERAL

TATER SALAD FEDERAL COM 901H

300154774800

OWB

PWP2

Anticollision Report

31 January, 2026

ConocoPhillips
Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Summary						
Site Name	Reference Measured Depth (usft)	Offset Measured Depth (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Separation Factor	Warning
Offset Well - Wellbore - Design						
TATER SALAD & MOMBA FEDERAL						
TATER SALAD FEDERAL COM 904H - OWB - PWP2	2,000.00	1,999.90	60.00	48.56	5.245 CC, ES	
TATER SALAD FEDERAL COM 904H - OWB - PWP2	2,200.00	2,198.92	61.48	49.50	5.131 SF	
TATER SALAD FEDERAL COM 905H - OWB - PWP2	2,000.00	1,999.90	40.00	28.56	3.497 CC	
TATER SALAD FEDERAL COM 905H - OWB - PWP2	2,100.00	2,099.85	40.05	28.33	3.418 ES	
TATER SALAD FEDERAL COM 905H - OWB - PWP2	2,200.00	2,199.56	40.65	28.68	3.395 SF	

Offset Design: PUDGE FED COM PROJECT - RICK VAUGHN 7 WA FED COM 014H - OWB - AWP													Offset Site Error: 0.00 usft	
Survey Program: 133-r.5 MWD+IFR1												Offset Well Error: 0.00 usft		
Reference		Offset		Semi Major Axis		Offset Wellbore Centre			Rule Assigned: Distance			Warning		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor		
16,700.00	10,583.71	10,430.18	9,848.12	59.26	30.85	42.41	6,414.96	1,483.73	996.86	921.71	75.15	13.265		
16,800.00	10,584.42	10,515.47	9,848.94	60.04	31.05	42.33	6,500.21	1,481.57	995.06	919.16	75.90	13.110		
16,860.87	10,584.86	10,566.95	9,849.17	60.52	31.18	42.30	6,551.68	1,480.91	994.71	918.34	76.37	13.025 CC		
16,900.00	10,585.14	10,599.58	9,849.23	60.83	31.26	42.29	6,584.32	1,480.79	994.79	918.11	76.68	12.973		
17,000.00	10,585.86	10,687.51	9,848.52	61.62	31.50	42.25	6,672.24	1,481.05	996.17	918.72	77.45	12.862		
17,100.00	10,586.57	10,805.31	9,846.75	62.40	31.86	42.09	6,790.02	1,479.47	996.98	918.94	78.04	12.775		
17,200.00	10,587.29	10,913.98	9,844.60	63.20	32.23	41.80	6,898.57	1,475.15	996.40	917.79	78.61	12.675		
17,271.92	10,587.80	10,974.18	9,843.67	63.77	32.46	41.65	6,958.72	1,472.89	995.92	916.76	79.16	12.581		
17,300.00	10,588.00	10,991.25	9,843.39	63.99	32.54	41.63	6,975.79	1,472.63	996.16	916.74	79.42	12.543 ES		
17,400.00	10,588.72	11,055.18	9,842.05	64.78	32.83	41.61	7,039.69	1,473.86	999.53	919.18	80.35	12.440 SF		

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: RICK VAUGHN FED COM PROJECT - RICK VAUGHN 7 WA FED COM 014H - OWB - AWP													Offset Site Error: 0.00 usft
Survey Program: 133-r.5 MWD+IFR1													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		No-Go Distance (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
16,700.00	10,583.71	10,430.19	9,848.12	59.26	30.85	42.41	6,414.95	1,483.71	996.85	921.70	75.15	13.264	
16,800.00	10,584.42	10,515.48	9,848.94	60.04	31.05	42.33	6,500.21	1,481.55	995.05	919.15	75.90	13.110	
16,860.85	10,584.86	10,566.94	9,849.17	60.52	31.18	42.30	6,551.67	1,480.90	994.70	918.33	76.37	13.025 CC	
16,900.00	10,585.14	10,599.59	9,849.23	60.83	31.26	42.29	6,584.31	1,480.77	994.78	918.10	76.68	12.973	
17,000.00	10,585.86	10,687.53	9,848.51	61.62	31.50	42.25	6,672.24	1,481.03	996.16	918.71	77.45	12.862	
17,100.00	10,586.57	10,805.33	9,846.75	62.40	31.86	42.09	6,790.02	1,479.46	996.97	918.93	78.04	12.774	
17,200.00	10,587.29	10,913.99	9,844.60	63.20	32.23	41.80	6,898.57	1,475.13	996.39	917.78	78.61	12.675	
17,271.91	10,587.80	10,974.18	9,843.67	63.77	32.46	41.65	6,958.71	1,472.88	995.91	916.75	79.16	12.581	
17,300.00	10,588.00	10,991.26	9,843.39	63.99	32.54	41.63	6,975.78	1,472.62	996.15	916.73	79.42	12.542 ES	
17,400.00	10,588.72	11,055.20	9,842.05	64.78	32.83	41.61	7,039.69	1,473.84	999.52	919.17	80.35	12.440 SF	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips
Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - GOLDEN GRAHAM 1 STATE COM 764H - OWB - AWP													Offset Site Error:	0.00 usft
Survey Program: 182-r.5 MWD													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Rule Assigned:			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor	Warning	
20,400.00	10,610.22	10,303.74	10,209.87	89.14	33.01	-18.70	10,923.16	668.83	940.33	883.84	56.49	16.645		
20,500.00	10,610.93	10,320.97	10,225.33	89.97	32.99	-19.43	10,930.77	668.45	852.13	794.19	57.93	14.708		
20,600.00	10,611.65	10,358.00	10,257.70	90.79	32.94	-21.14	10,948.71	667.65	766.18	706.70	59.48	12.881		
20,700.00	10,612.36	10,358.00	10,257.70	91.62	32.94	-21.14	10,948.71	667.65	681.54	619.48	62.07	10.981		
20,800.00	10,613.08	10,392.04	10,286.44	92.45	32.89	-22.88	10,966.93	666.98	599.86	535.16	64.70	9.271		
20,900.00	10,613.80	10,424.64	10,313.08	93.27	32.84	-24.73	10,985.72	666.47	521.32	453.11	68.21	7.642		
20,942.26	10,614.10	10,449.00	10,332.37	93.62	32.80	-26.22	11,000.58	666.17	489.39	419.70	69.69	7.023		
20,943.16	10,614.11	10,449.00	10,332.37	93.63	32.80	-26.22	11,000.58	666.17	488.71	411.49	77.21	6.329 CC, ES, SF		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - MOMBA 24 FEDERAL COM 1H (P&A) - OWB - AWP													Offset Site Error: 0.00 usft
Survey Program: 100-r.5 SDI_KPR_ADK, 6533-r.5 MWD													Offset Well Error: 3.00 usft
Reference	Offset	Semi Major Axis	Reference	Offset	Highside	Offset Wellbore Centre			Distance			Separation	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	No-Go Distance (usft)	Factor	
0.00	0.00	0.00	13.10	0.00	3.00	157.53	-393.80	162.90	426.36				
100.00	100.00	82.89	95.99	0.77	3.02	157.57	-394.29	162.74	426.57	421.75	4.82	88.437	
200.00	200.00	182.55	195.63	1.44	3.10	157.71	-395.66	162.20	427.64	422.41	5.23	81.708	
300.00	300.00	281.11	294.18	1.88	3.22	157.85	-397.11	161.64	428.79	423.14	5.65	75.865	
400.00	400.00	377.87	390.92	2.25	3.36	157.94	-398.90	161.62	430.49	424.41	6.08	70.842	
500.00	500.00	472.36	485.38	2.56	3.52	157.94	-401.23	162.63	433.18	426.67	6.51	66.491	
600.00	600.00	569.94	582.89	2.84	3.72	157.84	-404.38	164.66	436.95	429.98	6.97	62.694	
700.00	700.00	671.58	684.45	3.10	3.94	157.72	-407.61	166.98	440.76	433.31	7.45	59.141	
800.00	800.00	770.62	783.42	3.34	4.18	157.57	-410.39	169.38	444.28	436.34	7.93	56.003	
900.00	900.00	869.07	881.80	3.57	4.44	157.47	-413.66	171.59	448.20	439.78	8.42	53.209	
1,000.00	1,000.00	970.46	983.11	3.79	4.74	157.43	-417.25	173.47	452.19	443.26	8.93	50.622	
1,100.00	1,100.00	1,072.73	1,085.31	3.99	5.04	157.39	-420.42	175.09	455.66	446.21	9.45	48.236	
1,200.00	1,200.00	1,173.38	1,185.92	4.19	5.35	157.36	-423.20	176.53	458.76	448.81	9.95	46.084	
1,300.00	1,300.00	1,276.29	1,288.79	4.38	5.67	157.33	-425.81	177.84	461.59	451.12	10.47	44.093	
1,400.00	1,400.00	1,377.31	1,389.77	4.56	5.98	157.32	-427.88	178.78	463.84	452.87	10.97	42.280	
1,500.00	1,500.00	1,479.92	1,492.37	4.74	6.29	157.28	-429.62	179.87	465.82	454.35	11.46	40.635	
1,600.00	1,600.00	1,581.38	1,593.81	4.91	6.58	157.20	-430.70	181.08	467.26	455.32	11.94	39.146	
1,700.00	1,700.00	1,681.42	1,693.84	5.08	6.88	157.14	-431.74	181.97	468.56	456.15	12.41	37.770	
1,800.00	1,800.00	1,781.27	1,793.68	5.24	7.18	157.12	-432.90	182.64	469.89	457.01	12.88	36.484	
1,900.00	1,900.00	1,880.77	1,893.18	5.40	7.49	157.15	-434.25	182.99	471.28	457.92	13.36	35.288	
2,000.00	2,000.00	1,978.41	1,990.80	5.56	7.79	157.10	-435.57	184.02	472.94	459.11	13.83	34.202	
2,100.00	2,100.00	2,075.15	2,087.48	5.70	8.07	156.81	-436.66	187.10	475.22	460.96	14.26	33.332	
2,200.00	2,200.00	2,171.92	2,184.14	5.83	8.36	156.39	-437.93	191.42	478.20	463.52	14.68	32.580	
2,300.00	2,300.00	2,267.97	2,280.07	5.95	8.67	155.97	-439.75	196.09	481.90	466.79	15.11	31.888	
2,400.00	2,400.00	2,364.11	2,375.98	6.08	8.98	155.40	-441.77	202.24	486.45	470.90	15.56	31.271	
2,500.00	2,500.00	2,466.16	2,477.74	6.20	9.32	154.72	-443.89	209.64	491.41	475.38	16.02	30.667	
2,600.00	2,599.98	2,570.93	2,582.29	6.40	9.67	71.38	-445.39	216.27	494.88	478.39	16.49	30.008	
2,700.00	2,699.84	2,676.81	2,688.04	6.61	10.01	71.48	-446.46	221.40	496.23	479.30	16.93	29.305	
2,800.00	2,799.45	2,778.22	2,789.38	6.83	10.32	72.11	-447.08	225.08	495.60	478.27	17.33	28.597	
2,900.00	2,898.70	2,880.32	2,891.43	7.07	10.64	73.19	-447.57	228.44	493.76	476.06	17.70	27.901	
3,000.00	2,997.47	2,980.51	2,991.58	7.34	10.93	74.72	-447.78	231.22	490.69	472.68	18.02	27.237	
3,099.97	3,095.59	3,079.90	3,090.94	7.62	11.23	76.68	-447.94	233.74	487.00	468.71	18.29	26.625	
3,200.00	3,193.44	3,179.88	3,190.89	7.86	11.51	78.85	-447.99	235.88	483.27	464.76	18.52	26.100	
3,300.00	3,291.25	3,278.44	3,289.43	8.12	11.78	81.05	-447.85	237.69	479.99	461.29	18.70	25.663	
3,400.00	3,389.07	3,376.05	3,387.03	8.39	12.06	83.28	-447.83	239.24	477.50	458.62	18.88	25.295	
3,500.00	3,486.88	3,474.31	3,485.28	8.69	12.34	85.56	-447.90	240.70	475.84	456.79	19.05	24.984	
3,600.00	3,584.70	3,572.65	3,583.62	9.00	12.62	87.90	-447.99	241.70	474.91	455.70	19.21	24.727	
3,660.07	3,643.46	3,631.34	3,642.30	9.19	12.79	89.33	-448.06	242.09	474.74	455.43	19.30	24.594	
3,700.00	3,682.51	3,670.18	3,681.14	9.32	12.90	90.28	-448.13	242.34	474.81	455.45	19.37	24.514	
3,800.00	3,780.33	3,767.42	3,778.38	9.66	13.19	92.64	-448.41	242.98	475.71	456.16	19.56	24.326	
3,900.00	3,878.14	3,865.69	3,876.65	10.01	13.48	95.03	-448.77	243.51	477.54	457.78	19.76	24.169	
4,000.00	3,975.96	3,963.68	3,974.64	10.37	13.76	97.41	-449.03	243.91	480.11	460.15	19.97	24.042	
4,100.00	4,073.77	4,060.17	4,071.12	10.73	14.04	99.74	-449.39	244.18	483.66	463.45	20.21	23.929	
4,200.00	4,171.59	4,156.77	4,167.73	11.11	14.29	102.04	-450.08	244.33	488.39	467.89	20.50	23.825	
4,300.00	4,269.40	4,254.31	4,265.27	11.49	14.55	104.34	-450.91	244.37	494.09	473.27	20.82	23.731	
4,400.00	4,367.22	4,351.54	4,362.49	11.88	14.80	106.56	-451.77	244.48	500.62	479.45	21.17	23.652	
4,500.00	4,465.03	4,449.06	4,460.00	12.28	15.05	108.75	-452.76	244.42	508.08	486.54	21.54	23.591	
4,600.00	4,562.85	4,547.56	4,558.49	12.68	15.31	110.88	-453.71	244.48	516.20	494.26	21.93	23.533	
4,700.00	4,660.66	4,646.11	4,657.04	13.08	15.60	112.92	-454.57	244.75	524.88	502.54	22.34	23.492	
4,800.00	4,758.48	4,743.46	4,754.38	13.49	15.90	114.84	-455.44	245.40	534.13	511.37	22.76	23.468	
4,900.00	4,856.29	4,839.10	4,850.01	13.91	16.20	116.66	-456.60	245.96	544.30	521.10	23.20	23.462	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - MOMBA 24 FEDERAL COM 1H (P&A) - OWB - AWP												Offset Site Error:	0.00 usft
Survey Program: 100-r.5 SDI_KPR_ADK, 6533-r.5 MWD												Offset Well Error:	3.00 usft
Rule Assigned:												Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Semi Major Axis Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor	
5,000.00	4,954.11	4,935.40	4,946.30	14.33	16.51	118.40	-458.22	246.62	555.41	531.74	23.67	23.461	
5,100.00	5,051.92	5,032.86	5,043.75	14.75	16.82	120.10	-459.96	247.18	567.18	543.00	24.18	23.457	
5,200.00	5,149.74	5,130.77	5,141.64	15.17	17.12	121.76	-461.65	247.45	579.51	554.79	24.71	23.450	
5,300.00	5,247.55	5,229.64	5,240.50	15.60	17.42	123.38	-463.18	247.71	592.16	566.89	25.27	23.436	
5,400.00	5,345.37	5,327.20	5,338.05	16.03	17.73	124.89	-464.71	248.18	605.18	579.35	25.83	23.431 SF	
5,500.00	5,443.18	5,423.86	5,434.69	16.47	18.04	126.32	-466.43	248.63	618.80	592.40	26.40	23.440	
5,600.00	5,541.00	5,521.50	5,532.31	16.90	18.35	127.70	-468.22	249.12	632.82	605.83	26.99	23.444	
5,700.00	5,638.81	5,616.67	5,627.46	17.34	18.65	128.98	-470.25	249.50	647.50	619.91	27.59	23.470	
5,800.00	5,736.63	5,714.51	5,725.28	17.78	18.96	130.25	-472.40	249.69	662.66	634.45	28.22	23.486	
5,900.00	5,834.44	5,812.29	5,823.04	18.22	19.26	131.47	-474.54	249.84	678.15	649.30	28.85	23.503	
6,000.00	5,932.26	5,911.73	5,922.45	18.67	19.58	132.64	-476.62	250.12	693.79	664.28	29.51	23.513	
6,100.00	6,030.07	6,009.93	6,020.63	19.11	19.89	133.76	-478.50	250.41	709.54	679.38	30.16	23.525	
6,200.00	6,127.89	6,105.77	6,116.45	19.56	20.19	134.81	-480.44	250.62	725.68	694.88	30.81	23.554	
6,300.00	6,225.70	6,204.14	6,214.79	20.01	20.51	135.82	-482.62	250.93	742.15	710.67	31.48	23.576	
6,367.65	6,291.87	6,271.52	6,282.17	20.30	20.73	136.49	-484.04	251.18	753.33	721.41	31.93	23.595	
6,400.00	6,323.55	6,303.65	6,314.29	20.44	20.84	136.85	-484.65	251.28	758.58	726.44	32.14	23.605	
6,500.00	6,421.78	6,400.00	6,410.62	20.89	21.15	137.82	-486.57	251.58	773.73	740.94	32.79	23.598	
6,600.00	6,520.48	6,497.83	6,508.43	21.32	21.39	138.68	-488.14	251.21	787.26	753.82	33.44	23.544	
6,700.00	6,619.56	6,576.88	6,587.47	21.74	21.43	139.37	-488.54	249.90	799.24	765.42	33.82	23.629	
6,800.00	6,718.96	6,613.88	6,624.32	22.15	21.45	139.63	-491.44	248.85	815.31	781.44	33.87	24.073	
6,900.00	6,818.61	6,658.00	6,667.62	22.53	21.47	139.72	-499.55	246.88	837.17	803.36	33.82	24.756	
7,000.00	6,918.44	6,689.00	6,697.35	22.88	21.48	139.77	-508.02	244.60	864.33	830.80	33.53	25.777	
7,100.00	7,018.39	6,720.00	6,726.32	23.18	21.49	139.79	-518.63	241.70	896.58	863.46	33.12	27.070	
7,167.61	7,086.00	6,735.51	6,740.51	23.27	21.50	-137.30	-524.68	240.14	920.90	888.22	32.67	28.187	
7,200.00	7,118.39	6,751.00	6,754.48	23.28	21.51	-137.52	-531.20	238.52	933.39	900.88	32.51	28.712	
7,300.00	7,218.39	6,783.00	6,782.58	23.31	21.53	-138.03	-546.15	235.41	975.46	943.57	31.88	30.594	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips
Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design:		TATER SALAD & MOMBA FEDERAL - MOMBA FEDERAL COM 701H - OWB - AWP												Offset Site Error:		0.00 usft
Survey Program:		100-Standard Keeper 104, 9101-r.5 MWD+IFR1+FDIR							Rule Assigned:					Offset Well Error:		3.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		No-Go Distance (usft)	Separation Factor	Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)						
0.00	0.00	0.00	11.10	0.00	3.00	-30.41	582.80	-342.00	675.83							
100.00	100.00	92.14	103.23	0.77	3.00	-30.46	582.29	-342.44	675.52	670.72	4.80	140.771				
200.00	200.00	192.63	203.71	1.44	3.00	-30.62	581.03	-343.92	675.20	670.08	5.12	131.859				
300.00	300.00	294.88	305.94	1.88	3.02	-30.77	579.49	-345.04	674.46	669.04	5.43	124.279				
400.00	400.00	398.30	409.34	2.25	3.03	-30.87	577.67	-345.29	673.07	667.35	5.72	117.614				
500.00	500.00	497.59	508.62	2.56	3.05	-30.98	575.94	-345.78	671.82	665.82	6.01	111.816				
600.00	600.00	591.76	602.76	2.84	3.07	-31.14	574.44	-347.09	671.16	664.88	6.28	106.854				
623.53	623.53	612.53	623.53	2.91	3.08	-31.17	574.19	-347.39	671.10	664.76	6.34	105.825				
700.00	700.00	687.51	698.49	3.10	3.10	-31.31	573.58	-348.86	671.34	664.80	6.54	102.623				
800.00	800.00	785.03	795.98	3.34	3.13	-31.52	572.60	-351.19	671.73	664.94	6.79	98.860				
900.00	900.00	882.35	893.23	3.57	3.17	-31.82	571.44	-354.56	672.53	665.49	7.04	95.520				
1,000.00	1,000.00	1,007.45	1,018.24	3.79	3.22	-32.18	568.62	-357.82	672.08	664.79	7.29	92.237				
1,100.00	1,100.00	1,104.78	1,115.52	3.99	3.26	-32.34	565.53	-358.02	669.50	661.97	7.53	88.908				
1,200.00	1,200.00	1,205.71	1,216.39	4.19	3.31	-32.53	562.11	-358.46	666.88	659.11	7.77	85.819				
1,285.71	1,285.71	1,275.00	1,285.66	4.35	3.33	-32.60	560.70	-358.56	665.54	657.57	7.97	83.505				
1,300.00	1,300.00	1,288.21	1,298.87	4.38	3.33	-32.60	560.73	-358.54	665.56	657.56	8.00	83.173				
1,400.00	1,400.00	1,389.21	1,399.88	4.56	3.33	-32.58	560.93	-358.50	665.71	657.48	8.22	80.953				
1,500.00	1,500.00	1,490.86	1,501.52	4.74	3.38	-32.61	560.59	-358.70	665.53	657.08	8.45	78.766				
1,600.00	1,600.00	1,595.96	1,606.59	4.91	3.38	-32.43	561.31	-356.64	665.06	656.39	8.67	76.691				
1,700.00	1,700.00	1,694.73	1,705.30	5.08	3.38	-32.12	562.61	-353.25	664.33	655.44	8.89	74.735				
1,800.00	1,800.00	1,794.31	1,804.82	5.24	3.38	-31.84	563.90	-350.20	663.81	654.70	9.10	72.920				
1,900.00	1,900.00	1,892.84	1,903.31	5.40	3.38	-31.63	564.74	-347.79	663.25	653.94	9.32	71.202				
2,000.00	2,000.00	2,003.29	2,013.72	5.56	3.40	-31.39	565.21	-344.85	662.24	652.71	9.53	69.502				
2,100.00	2,100.00	2,132.84	2,142.82	5.70	3.43	-30.65	564.87	-334.69	657.97	648.25	9.73	67.648				
2,200.00	2,200.00	2,235.34	2,244.57	5.83	3.47	-29.72	564.54	-322.26	651.57	641.65	9.91	65.742				
2,300.00	2,300.00	2,349.04	2,357.08	5.95	3.51	-28.49	563.60	-305.92	643.81	633.72	10.09	63.792				
2,400.00	2,400.00	2,453.21	2,459.76	6.08	3.56	-27.19	561.65	-288.49	634.23	623.96	10.28	61.710				
2,500.00	2,500.00	2,540.91	2,546.62	6.20	3.60	-26.32	559.37	-276.66	625.79	615.32	10.47	59.774				
2,600.00	2,599.98	2,629.65	2,634.79	6.40	3.65	-108.66	557.79	-266.75	619.83	609.16	10.66	58.123				
2,700.00	2,699.84	2,725.00	2,729.64	6.61	3.70	-108.37	557.17	-256.97	616.44	605.59	10.85	56.798				
2,800.00	2,799.45	2,827.25	2,831.36	6.83	3.76	-108.35	556.53	-246.56	614.23	603.19	11.05	55.611				
2,900.00	2,898.70	2,926.50	2,929.85	7.07	3.82	-108.44	556.38	-234.45	612.68	601.44	11.24	54.496				
2,993.85	2,991.41	3,022.56	3,025.13	7.32	3.89	-108.73	556.60	-222.21	612.34	600.91	11.44	53.545				
3,000.00	2,997.47	3,028.71	3,031.23	7.34	3.89	-108.75	556.61	-221.41	612.35	600.90	11.45	53.485				
3,099.97	3,095.59	3,127.41	3,129.11	7.62	3.96	-109.34	556.73	-208.70	613.02	601.35	11.67	52.531				
3,200.00	3,193.44	3,237.47	3,238.30	7.86	4.03	-110.24	556.13	-194.89	613.96	602.06	11.90	51.608				
3,300.00	3,291.25	3,342.50	3,342.41	8.12	4.11	-111.13	553.72	-181.23	613.22	601.08	12.14	50.512				
3,400.00	3,389.07	3,440.94	3,439.98	8.39	4.19	-111.96	551.45	-168.35	612.58	600.18	12.40	49.409				
3,470.25	3,457.78	3,508.15	3,506.64	8.60	4.25	-112.56	549.89	-159.94	612.40	599.81	12.59	48.644				
3,500.00	3,486.88	3,535.70	3,533.97	8.69	4.27	-112.82	549.32	-156.59	612.46	599.79	12.67	48.335				
3,600.00	3,584.70	3,634.62	3,632.21	9.00	4.35	-113.75	547.38	-145.07	613.13	600.17	12.96	47.314				
3,700.00	3,682.51	3,732.87	3,729.77	9.32	4.44	-114.69	545.46	-133.66	613.99	600.73	13.26	46.300				
3,800.00	3,780.33	3,826.40	3,822.66	9.66	4.52	-115.55	544.06	-122.85	615.44	601.86	13.58	45.332				
3,900.00	3,878.14	3,924.42	3,920.00	10.01	4.60	-116.40	543.43	-111.31	617.64	603.73	13.90	44.422				
4,000.00	3,975.96	4,028.71	4,023.54	10.37	4.70	-117.29	542.63	-98.88	619.78	605.53	14.25	43.498				
4,100.00	4,073.77	4,126.40	4,120.56	10.73	4.79	-118.15	541.59	-87.47	621.95	607.35	14.61	42.579				
4,200.00	4,171.59	4,223.37	4,216.91	11.11	4.88	-119.04	540.30	-76.68	624.40	609.42	14.98	41.674				
4,300.00	4,269.40	4,320.00	4,313.06	11.49	4.97	-120.00	539.22	-66.98	627.82	612.44	15.38	40.830				
4,400.00	4,367.22	4,416.36	4,408.98	11.88	5.06	-121.00	538.03	-58.02	631.78	615.99	15.79	40.016				
4,500.00	4,465.03	4,513.61	4,505.84	12.28	5.15	-122.01	536.90	-49.25	636.19	619.98	16.22	39.229				
4,600.00	4,562.85	4,614.65	4,606.45	12.68	5.25	-123.05	535.68	-40.11	640.76	624.09	16.67	38.445				

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - MOMBA FEDERAL COM 701H - OWB - AWP													Offset Site Error:	0.00 usft
Survey Program:		100-Standard Keeper 104, 9101-r.5 MWD+IFR1+FDIR						Rule Assigned:					Offset Well Error:	3.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		No-Go Distance (usft)	Separation Factor	Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)				
4,700.00	4,660.66	4,711.61	4,703.02	13.08	5.35	-124.04	534.51	-31.53	645.65	628.53	17.13	37.695		
4,800.00	4,758.48	4,809.85	4,800.89	13.49	5.45	-125.03	533.54	-22.95	650.99	633.39	17.61	36.977		
4,900.00	4,856.29	4,923.49	4,913.91	13.91	5.57	-126.08	531.89	-11.39	655.16	637.04	18.11	36.169		
5,000.00	4,954.11	5,022.39	5,012.24	14.33	5.67	-126.97	530.14	-0.84	658.97	640.35	18.62	35.397		
5,100.00	5,051.92	5,120.11	5,109.41	14.75	5.77	-127.87	528.09	9.26	662.94	643.80	19.14	34.644		
5,200.00	5,149.74	5,217.48	5,206.29	15.17	5.88	-128.80	525.99	18.77	667.44	647.77	19.67	33.930		
5,300.00	5,247.55	5,315.25	5,303.65	15.60	5.98	-129.76	523.99	27.59	672.75	652.53	20.22	33.265		
5,400.00	5,345.37	5,421.31	5,408.82	16.03	6.10	-130.40	524.26	41.14	676.98	656.23	20.76	32.614		
5,500.00	5,443.18	5,518.40	5,505.09	16.47	6.20	-130.95	524.73	53.83	681.25	659.97	21.28	32.008		
5,600.00	5,541.00	5,641.59	5,627.16	16.90	6.34	-131.68	524.44	70.29	685.06	663.20	21.86	31.339		
5,700.00	5,638.81	5,740.07	5,724.51	17.34	6.45	-132.28	522.39	85.04	686.34	663.92	22.42	30.616		
5,800.00	5,736.63	5,838.02	5,821.41	17.78	6.56	-132.93	520.02	99.07	687.98	664.99	22.99	29.922		
5,900.00	5,834.44	5,933.27	5,915.74	18.22	6.67	-133.61	517.43	112.01	690.10	666.52	23.58	29.267		
6,000.00	5,932.26	6,026.95	6,008.67	18.67	6.77	-134.35	514.81	123.61	693.22	669.04	24.18	28.667		
6,100.00	6,030.07	6,120.51	6,101.61	19.11	6.88	-135.14	512.12	134.01	697.41	672.61	24.80	28.120		
6,200.00	6,127.89	6,212.73	6,193.31	19.56	6.99	-135.94	509.56	143.45	702.53	677.10	25.43	27.626		
6,300.00	6,225.70	6,305.91	6,286.08	20.01	7.09	-136.79	507.12	151.82	708.89	682.82	26.07	27.187		
6,367.65	6,291.87	6,396.89	6,376.49	20.30	7.20	-137.49	505.23	161.72	712.51	685.95	26.56	26.826		
6,400.00	6,323.55	6,429.81	6,409.11	20.44	7.24	-137.70	504.59	166.10	713.52	686.77	26.75	26.671		
6,500.00	6,421.78	6,522.73	6,501.27	20.89	7.34	-138.25	502.64	177.79	715.93	688.57	27.36	26.170		
6,600.00	6,520.48	6,605.17	6,583.24	21.32	7.44	-138.73	500.59	186.26	718.12	690.21	27.91	25.730		
6,700.00	6,619.56	6,686.49	6,664.30	21.74	7.53	-139.15	499.08	192.58	720.85	692.43	28.42	25.366		
6,800.00	6,718.96	6,797.49	6,775.01	22.15	7.66	-139.48	498.58	200.53	723.00	694.03	28.97	24.954		
6,886.21	6,804.85	6,868.05	6,845.26	22.48	7.74	-139.44	499.51	207.00	722.62	693.33	29.29	24.672		
6,900.00	6,818.61	6,879.73	6,856.91	22.53	7.75	-139.43	499.74	207.90	722.63	693.29	29.34	24.631		
7,000.00	6,918.44	6,997.30	6,973.88	22.88	7.88	-139.08	502.40	219.23	720.11	690.38	29.74	24.217		
7,100.00	7,018.39	7,075.00	7,051.20	23.18	7.96	-138.69	504.69	226.56	716.25	686.32	29.93	23.934		
7,167.61	7,086.00	7,167.23	7,143.09	23.27	8.06	-55.34	507.04	234.08	713.36	683.29	30.06	23.728		
7,200.00	7,118.39	7,202.91	7,178.51	23.28	8.10	-55.11	507.74	238.23	710.61	680.56	30.05	23.646		
7,300.00	7,218.39	7,282.27	7,257.43	23.31	8.19	-54.59	509.75	246.35	703.66	673.69	29.97	23.479		
7,400.00	7,318.39	7,408.26	7,382.79	23.35	8.33	-53.78	513.30	258.32	697.92	667.90	30.02	23.250		
7,500.00	7,418.39	7,508.50	7,482.23	23.38	8.45	-53.14	513.58	270.94	687.95	657.94	30.00	22.928		
7,600.00	7,518.39	7,622.64	7,595.56	23.42	8.59	-52.53	512.50	284.33	678.06	648.01	30.05	22.562		
7,700.00	7,618.39	7,707.73	7,680.13	23.45	8.69	-52.23	509.93	293.44	667.73	637.67	30.06	22.216		
7,800.00	7,718.39	7,800.00	7,772.02	23.49	8.80	-52.00	507.25	301.23	659.26	629.16	30.10	21.903		
7,900.00	7,818.39	7,890.12	7,861.85	23.52	8.91	-51.79	504.87	308.03	651.71	621.57	30.14	21.624		
8,000.00	7,918.39	8,009.81	7,981.16	23.56	9.05	-51.50	501.89	317.07	644.38	614.10	30.29	21.275		
8,100.00	8,018.39	8,110.90	8,081.58	23.60	9.18	-51.03	499.57	328.35	634.22	603.90	30.33	20.914		
8,200.00	8,118.39	8,204.07	8,174.22	23.63	9.29	-50.62	497.46	338.05	624.71	594.37	30.34	20.590		
8,300.00	8,218.39	8,305.88	8,275.41	23.67	9.42	-50.03	496.63	349.11	615.81	585.46	30.36	20.286		
8,400.00	8,318.39	8,398.56	8,367.41	23.71	9.53	-49.29	497.31	360.35	607.02	576.72	30.31	20.030		
8,500.00	8,418.39	8,513.04	8,480.95	23.75	9.67	-48.35	497.76	374.87	597.69	567.38	30.31	19.717		
8,600.00	8,518.39	8,593.74	8,561.07	23.78	9.77	-47.72	497.82	384.47	588.86	558.63	30.23	19.479		
8,700.00	8,618.39	8,700.00	8,666.80	23.82	9.90	-47.13	496.32	394.99	580.57	550.30	30.28	19.175		
8,800.00	8,718.39	8,794.33	8,760.72	23.86	10.02	-46.65	494.81	403.58	572.82	542.52	30.29	18.910		
8,900.00	8,818.39	8,926.21	8,891.56	23.90	10.18	-45.89	490.28	419.24	561.59	531.15	30.44	18.449		
9,000.00	8,918.39	9,015.78	8,980.30	23.94	10.29	-45.37	486.08	430.67	549.20	518.77	30.43	18.048		
9,100.00	9,018.39	9,101.00	9,064.94	23.98	10.43	-44.97	482.33	439.80	538.59	508.17	30.42	17.708		
9,200.00	9,118.39	9,195.60	9,159.18	24.02	10.44	-44.64	479.02	447.34	530.48	500.08	30.40	17.450		
9,300.00	9,218.39	9,636.97	9,547.77	24.05	10.83	-50.36	329.98	544.68	485.18	451.50	33.68	14.404		
9,400.00	9,318.39	9,761.77	9,628.72	24.09	11.01	-58.97	243.90	584.30	413.91	378.75	35.16	11.774		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - MOMBA FEDERAL COM 701H - OWB - AWP												Offset Site Error: 0.00 usft
Survey Program: 100-Standard Keeper 104, 9101-r.5 MWD+IFR1+FDIR												Offset Well Error: 3.00 usft
Reference												
Offset												
Semi Major Axis												
Reference												
Offset												
Highside												
Toolface												
Offset Wellbore Centre												
Distance												
Between												
Centres												
Between												
Ellipses												
No-Go												
Distance												
Separation												
Factor												
Warning												
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor
9,500.00	9,418.39	9,852.60	9,677.02	24.13	11.18	-71.06	173.03	614.05	337.40	300.90	36.50	9.243
9,600.00	9,518.39	9,910.24	9,703.48	24.17	11.31	-82.98	125.58	633.28	263.20	225.60	37.59	7.001
9,700.00	9,618.39	9,954.60	9,721.55	24.21	11.41	-95.03	87.60	647.35	200.83	162.44	38.40	5.231
9,800.00	9,718.39	9,989.36	9,734.07	24.25	11.49	-105.86	56.85	657.63	168.49	130.67	37.81	4.456 SF
9,817.57	9,735.96	9,994.89	9,735.96	24.26	11.51	-107.64	51.90	659.21	167.67	130.16	37.50	4.471 CC, ES
9,900.00	9,818.39	10,019.00	9,743.92	24.29	11.57	-115.36	30.16	665.95	185.02	149.04	35.98	5.143
10,000.00	9,918.39	10,045.09	9,751.99	24.34	11.65	-123.41	6.37	672.98	241.43	206.07	35.36	6.828
10,100.00	10,018.39	10,066.00	9,758.05	24.38	11.71	-129.43	-12.89	678.44	317.64	281.92	35.72	8.893
10,146.26	10,064.65	10,076.82	9,761.01	24.39	11.75	-132.36	-22.91	681.23	356.31	320.36	35.94	9.914
10,150.00	10,068.39	10,077.51	9,761.19	24.39	11.75	-131.92	-23.55	681.41	359.50	323.70	35.80	10.041
10,175.00	10,093.37	10,081.51	9,762.25	24.39	11.77	-128.95	-27.27	682.45	381.32	345.37	35.96	10.605
10,200.00	10,118.28	10,084.50	9,763.02	24.39	11.78	-124.91	-30.05	683.23	403.83	367.72	36.11	11.184
10,225.00	10,143.03	10,086.55	9,763.54	24.40	11.78	-119.55	-31.96	683.76	426.88	390.63	36.25	11.777
10,250.00	10,167.57	10,087.70	9,763.83	24.40	11.79	-112.63	-33.03	684.06	450.35	413.97	36.38	12.381
10,275.00	10,191.83	10,088.00	9,763.91	24.40	11.79	-103.97	-33.31	684.14	474.13	437.63	36.49	12.992
10,300.00	10,215.75	10,087.52	9,763.78	24.40	11.79	-93.68	-32.87	684.02	498.11	461.51	36.60	13.610
10,325.00	10,239.24	10,086.31	9,763.48	24.40	11.78	-82.34	-31.73	683.70	522.21	485.52	36.69	14.232
10,350.00	10,262.26	10,084.40	9,762.99	24.41	11.78	-70.91	-29.95	683.20	546.34	509.56	36.78	14.855
10,375.00	10,284.74	10,081.85	9,762.33	24.41	11.77	-60.39	-27.58	682.53	570.42	533.57	36.85	15.480
10,400.00	10,306.61	10,078.69	9,761.51	24.41	11.76	-51.37	-24.64	681.71	594.38	557.47	36.91	16.103
10,425.00	10,327.82	10,066.00	9,758.05	24.42	11.71	-42.83	-12.89	678.44	618.28	581.24	37.04	16.693
10,450.00	10,348.31	10,066.00	9,758.05	24.42	11.71	-37.60	-12.89	678.44	641.73	604.68	37.04	17.325
10,475.00	10,368.02	10,066.00	9,758.05	24.43	11.71	-33.27	-12.89	678.44	664.93	627.89	37.03	17.955
10,500.00	10,386.90	10,066.00	9,758.05	24.43	11.71	-29.68	-12.89	678.44	687.85	650.83	37.01	18.585
10,525.00	10,404.90	10,053.67	9,754.52	24.44	11.68	-26.35	-1.51	675.24	710.27	673.19	37.08	19.157
10,550.00	10,421.97	10,046.76	9,752.49	24.44	11.65	-23.85	4.84	673.42	732.27	695.19	37.08	19.746
10,575.00	10,438.05	10,039.39	9,750.28	24.45	11.63	-21.80	11.59	671.47	753.78	716.70	37.08	20.327
10,600.00	10,453.11	10,031.60	9,747.89	24.46	11.61	-20.11	18.71	669.38	774.74	737.67	37.07	20.897
10,625.00	10,467.11	10,019.00	9,743.92	24.47	11.57	-18.72	30.16	665.95	795.15	758.06	37.09	21.440
10,650.00	10,480.00	10,019.00	9,743.92	24.49	11.57	-17.51	30.16	665.95	814.91	777.91	37.00	22.025
10,675.00	10,491.76	10,005.93	9,739.66	24.50	11.54	-16.54	41.98	662.33	834.01	797.01	37.00	22.543
10,700.00	10,502.34	9,996.70	9,736.57	24.51	11.51	-15.71	50.28	659.73	852.44	815.49	36.96	23.067
10,725.00	10,511.73	9,987.18	9,733.31	24.53	11.49	-15.00	58.80	657.00	870.17	833.26	36.91	23.578
10,750.00	10,519.89	9,972.00	9,727.97	24.55	11.45	-14.46	72.30	652.58	887.19	850.30	36.89	24.052
10,775.00	10,526.80	9,972.00	9,727.97	24.57	11.45	-13.84	72.30	652.58	903.41	866.66	36.75	24.580
10,800.00	10,532.44	9,972.00	9,727.97	24.59	11.45	-13.27	72.30	652.58	919.06	882.45	36.61	25.104
10,825.00	10,536.80	9,952.21	9,720.64	24.62	11.40	-13.03	89.69	646.62	933.62	897.02	36.60	25.509
10,850.00	10,539.87	9,943.96	9,717.43	24.65	11.38	-12.70	96.85	644.07	947.58	911.08	36.50	25.961
10,875.00	10,541.64	9,924.00	9,709.33	24.67	11.34	-12.59	113.95	637.74	960.93	924.46	36.47	26.345
10,892.84	10,542.10	9,924.00	9,709.33	24.70	11.34	-12.33	113.95	637.74	969.71	933.36	36.35	26.677
10,900.00	10,542.15	9,924.00	9,709.33	24.70	11.34	-12.33	113.95	637.74	973.19	936.89	36.30	26.811

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - MOMBA FEDERAL COM 702H - OWB - AWP													Offset Site Error: 0.00 usft
Survey Program: 100-Standard Keeper 104, 8694-r.5 MWD+IFR1+FDIR													Offset Well Error: 3.00 usft
Rule Assigned:													Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Semi Major Axis Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Distance Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor	
0.00	0.00	0.00	10.10	0.00	3.00	-32.55	582.60	-371.90	691.26				
100.00	100.00	91.36	101.46	0.77	3.00	-32.59	582.27	-372.23	691.09	686.29	4.80	144.015	
200.00	200.00	192.03	202.12	1.44	3.00	-32.69	581.44	-373.07	690.84	685.72	5.12	134.915	
300.00	300.00	293.64	303.72	1.88	3.02	-32.81	580.29	-374.10	690.44	685.01	5.43	127.234	
400.00	400.00	394.92	404.99	2.25	3.03	-32.92	578.94	-374.84	689.71	683.99	5.72	120.576	
500.00	500.00	494.72	504.77	2.56	3.05	-33.04	577.55	-375.66	688.99	682.98	6.00	114.776	
600.00	600.00	592.41	602.45	2.84	3.08	-33.16	576.26	-376.53	688.37	682.10	6.28	109.686	
649.67	649.67	639.63	649.67	2.97	3.09	-33.23	575.69	-377.19	688.26	681.85	6.40	107.461	
700.00	700.00	687.98	698.00	3.10	3.11	-33.32	575.22	-378.09	688.36	681.82	6.54	105.292	
800.00	800.00	786.27	796.27	3.34	3.14	-33.50	574.33	-380.10	688.73	681.94	6.79	101.419	
900.00	900.00	892.98	902.97	3.57	3.15	-33.49	574.50	-380.14	688.89	681.85	7.04	97.877	
1,000.00	1,000.00	991.15	1,001.12	3.79	3.14	-33.31	575.47	-378.09	688.56	681.28	7.28	94.563	
1,100.00	1,100.00	1,091.55	1,101.49	3.99	3.14	-33.15	576.32	-376.43	688.37	680.85	7.52	91.543	
1,200.00	1,200.00	1,191.01	1,200.96	4.19	3.14	-33.08	576.73	-375.65	688.28	680.53	7.75	88.781	
1,293.76	1,293.76	1,283.81	1,293.75	4.36	3.14	-33.04	576.83	-375.13	688.08	680.11	7.97	86.352	
1,300.00	1,300.00	1,289.63	1,299.57	4.38	3.14	-33.04	576.84	-375.12	688.08	680.10	7.98	86.199	
1,400.00	1,400.00	1,384.52	1,394.46	4.56	3.16	-33.06	577.13	-375.60	688.61	680.41	8.20	83.951	
1,500.00	1,500.00	1,485.09	1,495.02	4.74	3.19	-33.16	577.13	-377.05	689.40	680.98	8.42	81.854	
1,600.00	1,600.00	1,584.00	1,593.91	4.91	3.21	-33.08	578.25	-376.72	690.17	681.53	8.64	79.886	
1,700.00	1,700.00	1,682.57	1,692.45	5.08	3.22	-32.91	580.23	-375.49	691.17	682.31	8.85	78.062	
1,800.00	1,800.00	1,782.59	1,792.46	5.24	3.24	-32.81	581.72	-375.10	692.21	683.15	9.07	76.340	
1,900.00	1,900.00	1,878.40	1,888.26	5.40	3.27	-32.79	582.94	-375.58	693.55	684.27	9.28	74.743	
2,000.00	2,000.00	1,977.07	1,986.91	5.56	3.31	-32.80	584.38	-376.63	695.36	685.87	9.49	73.257	
2,100.00	2,100.00	2,105.36	2,115.04	5.70	3.34	-32.38	587.10	-372.32	695.36	685.67	9.69	71.755	
2,200.00	2,200.00	2,204.35	2,213.67	5.83	3.37	-31.70	589.83	-364.29	693.39	683.52	9.87	70.286	
2,300.00	2,300.00	2,325.96	2,334.65	5.95	3.41	-30.73	592.55	-352.24	690.21	680.17	10.04	68.763	
2,400.00	2,400.00	2,436.87	2,444.46	6.08	3.45	-29.57	593.75	-336.83	684.09	673.88	10.21	67.009	
2,500.00	2,500.00	2,525.00	2,531.91	6.20	3.48	-28.76	594.03	-325.97	678.34	667.96	10.39	65.318	
2,600.00	2,599.98	2,613.51	2,620.09	6.40	3.52	-111.21	594.44	-318.35	675.25	664.68	10.57	63.889	
2,667.42	2,667.33	2,675.07	2,681.48	6.54	3.55	-111.08	595.08	-313.79	674.63	663.94	10.69	63.099 CC	
2,700.00	2,699.84	2,708.14	2,714.46	6.61	3.56	-111.06	595.49	-311.51	674.67	663.92	10.75	62.757 ES	
2,800.00	2,799.45	2,805.08	2,811.17	6.83	3.61	-111.16	596.83	-304.95	675.84	664.90	10.94	61.796	
2,900.00	2,898.70	2,901.01	2,906.89	7.07	3.66	-111.50	598.52	-298.79	678.77	667.64	11.13	60.988	
3,000.00	2,997.47	3,000.96	3,006.65	7.34	3.72	-112.13	600.31	-292.87	683.31	671.98	11.33	60.286	
3,099.97	3,095.59	3,100.00	3,105.53	7.62	3.78	-113.03	601.80	-287.41	689.28	677.73	11.56	59.649	
3,200.00	3,193.44	3,197.11	3,202.51	7.86	3.85	-114.18	603.18	-282.78	696.50	684.72	11.78	59.123	
3,300.00	3,291.25	3,295.33	3,300.64	8.12	3.91	-115.37	604.25	-278.58	703.99	691.97	12.02	58.564	
3,400.00	3,389.07	3,392.88	3,398.09	8.39	3.98	-116.52	605.46	-274.54	711.98	699.70	12.28	57.992	
3,500.00	3,486.88	3,491.45	3,496.60	8.69	4.06	-117.71	606.38	-270.85	720.24	707.69	12.55	57.382	
3,600.00	3,584.70	3,587.09	3,592.18	9.00	4.13	-118.88	607.15	-267.95	729.13	716.28	12.84	56.772	
3,700.00	3,682.51	3,684.85	3,689.91	9.32	4.21	-120.08	607.82	-265.44	738.51	725.36	13.15	56.142	
3,800.00	3,780.33	3,782.30	3,787.33	9.66	4.29	-121.25	608.65	-263.11	748.46	734.98	13.48	55.510	
3,900.00	3,878.14	3,878.71	3,883.71	10.01	4.37	-122.37	609.51	-260.74	758.72	744.89	13.83	54.863	
4,000.00	3,975.96	3,975.00	3,979.97	10.37	4.45	-123.47	610.59	-258.59	769.58	755.39	14.19	54.228	
4,100.00	4,073.77	4,071.97	4,076.91	10.73	4.54	-124.55	611.60	-256.66	780.85	766.28	14.57	53.583	
4,200.00	4,171.59	4,168.13	4,173.06	11.11	4.63	-125.63	612.52	-255.17	792.62	777.65	14.97	52.946	
4,300.00	4,269.40	4,264.13	4,269.06	11.49	4.72	-126.72	613.16	-254.33	804.94	789.56	15.39	52.316	
4,400.00	4,367.22	4,362.02	4,366.94	11.88	4.80	-127.84	613.49	-253.97	817.70	801.88	15.82	51.678	
4,500.00	4,465.03	4,460.46	4,465.38	12.28	4.87	-128.96	613.49	-253.85	830.70	814.41	16.28	51.012	
4,600.00	4,562.85	4,555.25	4,560.17	12.68	4.95	-129.99	613.72	-253.74	844.17	827.43	16.74	50.419	
4,700.00	4,660.66	4,651.89	4,656.81	13.08	4.97	-131.03	614.02	-254.11	858.34	841.12	17.22	49.855	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - MOMBA FEDERAL COM 702H - OWB - AWP												Offset Site Error:	0.00 usft
Survey Program: 100-Standard Keeper 104, 8694-r.5 MWD+IFR1+FDIR												Offset Well Error:	3.00 usft
Reference	Offset	Semi Major Axis	Rule Assigned:										
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor	Warning
4,800.00	4,758.48	4,750.00	4,754.92	13.49	4.97	-132.08	613.94	-254.66	872.68	854.96	17.71	49.275	
4,900.00	4,856.29	4,846.57	4,851.48	13.91	4.98	-133.08	613.99	-255.29	887.45	869.23	18.21	48.728	
5,000.00	4,954.11	4,944.76	4,949.67	14.33	4.98	-134.08	613.76	-256.07	902.41	883.68	18.73	48.170	
5,100.00	5,051.92	5,041.23	5,046.14	14.75	4.98	-135.04	613.48	-257.00	917.75	898.48	19.26	47.639	
5,200.00	5,149.74	5,138.71	5,143.60	15.17	4.99	-136.00	612.79	-258.10	933.23	913.42	19.81	47.103	
5,300.00	5,247.55	5,240.98	5,245.87	15.60	5.00	-136.98	612.04	-259.20	948.91	928.53	20.38	46.552	
5,400.00	5,345.37	5,355.68	5,360.53	16.03	5.09	-137.83	613.03	-256.83	963.10	942.12	20.98	45.906	
5,500.00	5,443.18	5,454.30	5,459.10	16.47	5.18	-138.48	614.44	-253.97	977.15	955.61	21.54	45.366	
5,600.00	5,541.00	5,559.31	5,564.02	16.90	5.27	-139.10	616.51	-250.06	990.92	968.80	22.11	44.808	
9,300.00	9,218.39	9,903.83	9,661.60	24.05	10.12	-87.52	140.79	-59.39	984.61	947.23	37.38	26.342	
9,400.00	9,318.39	9,927.91	9,667.04	24.09	10.22	-89.04	117.41	-57.63	943.53	906.02	37.51	25.154	
9,500.00	9,418.39	9,959.75	9,673.25	24.13	10.36	-91.08	86.26	-55.44	910.98	873.37	37.61	24.222	
9,600.00	9,518.39	9,981.35	9,676.55	24.17	10.46	-92.48	64.96	-53.98	888.00	850.44	37.56	23.644	
9,700.00	9,618.39	9,992.64	9,678.02	24.21	10.51	-93.21	53.79	-53.25	875.65	838.27	37.38	23.428 SF	
9,760.36	9,678.75	9,998.72	9,678.75	24.24	10.54	-93.61	47.77	-52.86	873.59	836.35	37.24	23.457	
9,800.00	9,718.39	10,002.35	9,679.16	24.25	10.55	-93.84	44.17	-52.64	874.48	837.33	37.15	23.540	
9,900.00	9,818.39	10,010.44	9,680.03	24.29	10.59	-94.37	36.14	-52.15	884.57	847.66	36.92	23.962	
10,000.00	9,918.39	10,017.29	9,680.71	24.34	10.62	-94.82	29.33	-51.74	905.58	868.86	36.72	24.662	
10,100.00	10,018.39	10,026.00	9,681.49	24.38	10.66	-95.38	20.67	-51.25	936.78	900.18	36.60	25.592	
10,146.26	10,064.65	10,026.00	9,681.49	24.39	10.66	-95.38	20.67	-51.25	954.40	917.84	36.56	26.107	
10,150.00	10,068.39	10,026.00	9,681.49	24.39	10.66	-95.12	20.67	-51.25	955.91	919.55	36.35	26.294	
10,175.00	10,093.37	10,026.00	9,681.49	24.39	10.66	-93.74	20.67	-51.25	966.36	930.03	36.33	26.598	
10,200.00	10,118.28	10,026.00	9,681.49	24.39	10.66	-92.27	20.67	-51.25	977.42	941.10	36.31	26.916	
10,225.00	10,143.03	10,026.00	9,681.49	24.40	10.66	-90.69	20.67	-51.25	989.03	952.72	36.30	27.243	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips
Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design:		TATER SALAD & MOMBA FEDERAL - MOMBA FEDERAL COM 703H - OWB - AWP												Offset Site Error:		0.00 usft
Survey Program:		100-Standard Keeper 104, 9164-r.5 MWD+IFR1+FDIR							Rule Assigned:					Offset Well Error:		3.00 usft
Measured Depth	Vertical Depth	Measured Depth	Vertical Depth	Reference	Offset	Highside Toolface	Offset Wellbore Centre		Distance		No-Go Distance	Separation Factor	Warning			
(usft)	(usft)	(usft)	(usft)	(usft)	(usft)	(°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	(usft)					
0.00	0.00	0.00	11.10	0.00	3.00	-34.61	582.40	-401.90	707.70							
100.00	100.00	93.64	104.73	0.77	3.00	-34.65	581.86	-402.13	707.31	702.51	4.80	147.395				
200.00	200.00	194.52	205.61	1.44	3.00	-34.76	580.32	-402.70	706.38	701.26	5.12	137.916				
300.00	300.00	293.94	305.02	1.88	3.02	-34.86	579.00	-403.28	705.62	700.19	5.43	129.957				
400.00	400.00	395.23	406.30	2.25	3.03	-34.97	577.60	-403.96	704.87	699.15	5.72	123.127				
500.00	500.00	498.77	509.81	2.56	3.05	-35.08	575.72	-404.34	703.59	697.58	6.01	117.043				
600.00	600.00	598.57	609.59	2.84	3.08	-35.19	573.82	-404.60	702.19	695.90	6.29	111.636				
700.00	700.00	690.69	701.70	3.10	3.11	-35.30	572.33	-405.28	701.30	694.74	6.56	106.954				
711.01	711.01	700.00	711.01	3.13	3.11	-35.32	572.22	-405.42	701.28	694.70	6.58	106.505 CC, ES				
800.00	800.00	781.97	792.96	3.34	3.14	-35.46	571.45	-407.07	701.65	694.85	6.81	103.065				
900.00	900.00	875.98	886.92	3.57	3.16	-35.67	571.32	-410.04	703.36	696.31	7.05	99.793				
1,000.00	1,000.00	977.69	988.57	3.79	3.19	-35.93	570.83	-413.63	705.03	697.74	7.29	96.765				
1,100.00	1,100.00	1,077.83	1,088.62	3.99	3.23	-36.23	569.97	-417.65	706.70	699.18	7.52	93.978				
1,200.00	1,200.00	1,176.57	1,187.26	4.19	3.28	-36.57	568.82	-422.00	708.38	700.63	7.75	91.406				
1,300.00	1,300.00	1,276.13	1,286.70	4.38	3.32	-36.93	567.60	-426.68	710.21	702.24	7.98	89.038				
1,400.00	1,400.00	1,383.97	1,394.44	4.56	3.38	-37.28	566.29	-431.15	711.76	703.56	8.20	86.778				
1,500.00	1,500.00	1,480.98	1,491.40	4.74	3.44	-37.50	565.30	-433.81	712.62	704.20	8.42	84.613				
1,600.00	1,600.00	1,578.80	1,589.17	4.91	3.50	-37.72	564.77	-436.81	714.06	705.42	8.64	82.652				
1,700.00	1,700.00	1,682.11	1,692.46	5.08	3.54	-37.82	565.09	-438.68	715.42	706.57	8.86	80.780				
1,800.00	1,800.00	1,780.59	1,790.94	5.24	3.56	-37.80	566.11	-439.20	716.56	707.49	9.07	78.988				
1,900.00	1,900.00	1,875.00	1,885.33	5.40	3.60	-37.84	567.04	-440.53	718.20	708.92	9.29	77.350				
2,000.00	2,000.00	1,975.66	1,985.96	5.56	3.66	-37.94	567.95	-442.78	720.29	710.79	9.50	75.821				
2,100.00	2,100.00	2,089.93	2,100.22	5.70	3.70	-37.97	568.58	-443.73	721.24	711.53	9.70	74.329				
2,200.00	2,200.00	2,192.83	2,203.11	5.83	3.68	-37.86	569.23	-442.54	721.02	711.15	9.88	72.998				
2,300.00	2,300.00	2,310.31	2,320.53	5.95	3.66	-37.63	569.62	-439.10	719.51	709.47	10.05	71.609				
2,400.00	2,400.00	2,427.56	2,437.55	6.08	3.66	-37.20	568.87	-431.87	715.22	705.00	10.21	70.026				
2,500.00	2,500.00	2,511.33	2,521.12	6.20	3.66	-36.87	568.19	-426.12	710.53	700.15	10.38	68.421				
2,549.06	2,549.06	2,545.30	2,555.08	6.30	3.66	-119.69	568.19	-425.11	709.85	699.37	10.48	67.732				
2,600.00	2,599.98	2,591.64	2,601.41	6.40	3.66	-119.72	568.37	-424.59	710.31	699.74	10.57	67.169				
2,700.00	2,699.84	2,691.46	2,701.23	6.61	3.66	-119.96	568.88	-423.62	712.75	701.98	10.77	66.183				
2,800.00	2,799.45	2,791.50	2,801.27	6.83	3.67	-120.41	569.34	-422.74	716.97	706.00	10.97	65.344				
2,900.00	2,898.70	2,888.53	2,898.29	7.07	3.68	-121.06	569.68	-422.03	723.07	711.88	11.19	64.637				
3,000.00	2,997.47	2,987.65	2,997.41	7.34	3.69	-121.90	570.19	-421.38	731.29	719.87	11.42	64.042				
3,099.97	3,095.59	3,085.69	3,095.44	7.62	3.71	-122.89	570.71	-420.75	741.64	729.97	11.67	63.537				
3,200.00	3,193.44	3,183.46	3,193.20	7.86	3.74	-124.15	571.25	-420.25	753.38	741.46	11.92	63.186				
3,300.00	3,291.25	3,280.74	3,290.48	8.12	3.77	-125.36	571.74	-419.80	765.48	753.28	12.19	62.786				
3,400.00	3,389.07	3,378.03	3,387.77	8.39	3.80	-126.54	572.19	-419.45	777.94	765.46	12.48	62.335				
3,500.00	3,486.88	3,476.88	3,486.62	8.69	3.84	-127.70	572.70	-418.99	790.70	777.91	12.79	61.831				
3,600.00	3,584.70	3,573.75	3,583.49	9.00	3.88	-128.82	573.01	-418.72	803.77	790.66	13.11	61.289				
3,700.00	3,682.51	3,671.31	3,681.05	9.32	3.93	-129.92	573.32	-418.66	817.31	803.84	13.46	60.707				
3,800.00	3,780.33	3,766.89	3,776.63	9.66	3.99	-130.97	573.65	-418.78	831.29	817.46	13.83	60.104				
3,900.00	3,878.14	3,861.46	3,871.20	10.01	4.04	-131.98	574.12	-419.16	845.85	831.64	14.22	59.496				
4,000.00	3,975.96	3,956.70	3,966.43	10.37	4.10	-132.96	574.82	-419.77	861.03	846.41	14.62	58.887				
4,100.00	4,073.77	4,053.95	4,063.67	10.73	4.17	-133.93	575.67	-420.52	876.64	861.59	15.05	58.263				
4,200.00	4,171.59	4,150.00	4,159.72	11.11	4.23	-134.87	576.25	-421.48	892.51	877.03	15.49	57.630				
4,300.00	4,269.40	4,246.35	4,256.06	11.49	4.29	-135.80	576.82	-422.75	908.86	892.92	15.94	57.003				
4,400.00	4,367.22	4,346.88	4,356.58	11.88	4.36	-136.75	577.15	-424.10	925.32	908.90	16.42	56.338				
4,500.00	4,465.03	4,447.68	4,457.37	12.28	4.44	-137.65	577.44	-425.15	941.75	924.83	16.92	55.659				
4,600.00	4,562.85	4,542.63	4,552.32	12.68	4.50	-138.50	577.36	-426.25	958.29	940.87	17.42	55.021				
4,700.00	4,660.66	4,632.49	4,642.16	13.08	4.56	-139.30	577.18	-427.69	975.35	957.43	17.91	54.444				
4,800.00	4,758.48	4,700.85	4,710.47	13.49	4.62	-139.88	577.99	-430.27	994.98	976.61	18.37	54.165 SF				

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - MOMBA FEDERAL COM 901H - OWB - PWP1													Offset Site Error: 0.00 usft
Survey Program: 0-Standard Keeper 104, 10279-r.5 MWD+IFR1+FDIR													Offset Well Error: 3.00 usft
Rule Assigned:													Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Semi Major Axis Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Distance Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor	
0.00	0.00	0.00	13.60	0.00	3.00	-23.58	782.80	-341.70	854.24				
100.00	100.00	86.40	100.00	0.77	3.00	-23.58	782.80	-341.70	854.13	849.33	4.80	177.983	
200.00	200.00	186.40	200.00	1.44	3.00	-23.58	782.80	-341.70	854.13	849.00	5.12	166.704	
300.00	300.00	286.40	300.00	1.88	3.01	-23.58	782.80	-341.70	854.13	848.69	5.44	157.129	
400.00	400.00	386.40	400.00	2.25	3.03	-23.58	782.80	-341.70	854.13	848.39	5.74	148.863	
500.00	500.00	486.40	500.00	2.56	3.05	-23.58	782.80	-341.70	854.13	848.10	6.03	141.626	
600.00	600.00	586.40	600.00	2.84	3.08	-23.58	782.80	-341.70	854.13	847.81	6.32	135.218	
700.00	700.00	686.40	700.00	3.10	3.11	-23.58	782.80	-341.70	854.13	847.53	6.60	129.490	
800.00	800.00	786.40	800.00	3.34	3.15	-23.58	782.80	-341.70	854.13	847.26	6.87	124.326	
900.00	900.00	886.40	900.00	3.57	3.19	-23.58	782.80	-341.70	854.13	846.99	7.14	119.639	
1,000.00	1,000.00	986.40	1,000.00	3.79	3.24	-23.58	782.80	-341.70	854.13	846.72	7.40	115.360	
1,100.00	1,100.00	1,086.40	1,100.00	3.99	3.29	-23.58	782.80	-341.70	854.13	846.46	7.67	111.431	
1,200.00	1,200.00	1,186.40	1,200.00	4.19	3.35	-23.58	782.80	-341.70	854.13	846.21	7.92	107.807	
1,300.00	1,300.00	1,286.40	1,300.00	4.38	3.41	-23.58	782.80	-341.70	854.13	845.95	8.18	104.450	
1,400.00	1,400.00	1,386.40	1,400.00	4.56	3.47	-23.58	782.80	-341.70	854.13	845.70	8.43	101.329	
1,500.00	1,500.00	1,486.40	1,500.00	4.74	3.54	-23.58	782.80	-341.70	854.13	845.45	8.68	98.418	
1,600.00	1,600.00	1,586.40	1,600.00	4.91	3.61	-23.58	782.80	-341.70	854.13	845.20	8.93	95.694	
1,700.00	1,700.00	1,686.40	1,700.00	5.08	3.69	-23.58	782.80	-341.70	854.13	844.96	9.17	93.137	
1,800.00	1,800.00	1,786.40	1,800.00	5.24	3.76	-23.58	782.80	-341.70	854.13	844.71	9.41	90.733	
1,900.00	1,900.00	1,886.40	1,900.00	5.40	3.84	-23.58	782.80	-341.70	854.13	844.47	9.65	88.465	
2,000.00	2,000.00	1,986.40	2,000.00	5.56	3.93	-23.58	782.80	-341.70	854.13	844.23	9.89	86.322	
2,100.00	2,100.00	2,086.40	2,100.00	5.70	4.01	-23.58	782.80	-341.70	854.13	844.01	10.12	84.402	
2,200.00	2,200.00	2,186.40	2,200.00	5.83	4.10	-23.58	782.80	-341.70	854.13	843.80	10.33	82.676	
2,300.00	2,300.00	2,286.40	2,300.00	5.95	4.19	-23.58	782.80	-341.70	854.13	843.59	10.54	81.021	
2,400.00	2,400.00	2,386.40	2,400.00	6.08	4.29	-23.58	782.80	-341.70	854.13	843.38	10.75	79.432	
2,500.00	2,500.00	2,486.40	2,500.00	6.20	4.38	-23.58	782.80	-341.70	854.13	843.16	10.96	77.905	
2,600.00	2,599.98	2,598.11	2,611.69	6.40	4.46	-106.46	782.80	-340.02	854.03	842.88	11.15	76.573	
2,700.00	2,699.84	2,711.66	2,725.06	6.61	4.49	-106.48	782.80	-333.88	853.35	842.05	11.30	75.525	
2,800.00	2,799.45	2,816.22	2,829.25	6.83	4.53	-106.53	782.80	-325.03	852.42	840.97	11.45	74.457	
2,852.04	2,851.16	2,868.24	2,881.07	6.96	4.55	-106.64	782.80	-320.49	852.28	840.75	11.53	73.927	
2,900.00	2,898.70	2,916.15	2,928.80	7.07	4.57	-106.78	782.80	-316.32	852.40	840.80	11.60	73.468	
3,000.00	2,997.47	3,015.89	3,028.16	7.34	4.61	-107.24	782.80	-307.63	853.43	841.66	11.76	72.553	
3,099.97	3,095.59	3,115.29	3,127.18	7.62	4.65	-107.89	782.80	-298.96	855.58	843.64	11.93	71.696	
3,200.00	3,193.44	3,214.56	3,226.08	7.86	4.70	-108.68	782.80	-290.31	858.41	846.30	12.11	70.890	
3,300.00	3,291.25	3,313.80	3,324.94	8.12	4.75	-109.47	782.80	-281.66	861.41	849.12	12.30	70.053	
3,400.00	3,389.07	3,413.04	3,423.80	8.39	4.81	-110.26	782.80	-273.01	864.58	852.08	12.50	69.183	
3,500.00	3,486.88	3,512.28	3,522.67	8.69	4.87	-111.03	782.80	-264.36	867.91	855.20	12.71	68.284	
3,600.00	3,584.70	3,611.52	3,621.53	9.00	4.93	-111.81	782.80	-255.71	871.40	858.46	12.94	67.357	
3,700.00	3,682.51	3,710.76	3,720.39	9.32	4.99	-112.57	782.80	-247.06	875.05	861.87	13.18	66.405	
3,800.00	3,780.33	3,810.01	3,819.25	9.66	5.06	-113.33	782.80	-238.41	878.85	865.42	13.43	65.431	
3,900.00	3,878.14	3,909.25	3,918.12	10.01	5.13	-114.08	782.80	-229.76	882.81	869.11	13.70	64.437	
4,000.00	3,975.96	4,008.49	4,016.98	10.37	5.20	-114.83	782.80	-221.11	886.93	872.94	13.98	63.428	
4,100.00	4,073.77	4,107.73	4,115.84	10.73	5.27	-115.57	782.80	-212.46	891.19	876.91	14.28	62.407	
4,200.00	4,171.59	4,206.97	4,214.71	11.11	5.35	-116.30	782.80	-203.82	895.60	881.01	14.59	61.376	
4,300.00	4,269.40	4,306.21	4,313.57	11.49	5.42	-117.03	782.80	-195.17	900.16	885.24	14.92	60.340	
4,400.00	4,367.22	4,405.45	4,412.43	11.88	5.50	-117.74	782.80	-186.52	904.86	889.61	15.26	59.303	
4,500.00	4,465.03	4,504.69	4,511.30	12.28	5.58	-118.45	782.80	-177.87	909.71	894.10	15.61	58.266	
4,600.00	4,562.85	4,603.93	4,610.16	12.68	5.67	-119.16	782.80	-169.22	914.70	898.71	15.98	57.234	
4,700.00	4,660.66	4,703.17	4,709.02	13.08	5.75	-119.85	782.80	-160.57	919.82	903.45	16.36	56.210	
4,800.00	4,758.48	4,802.41	4,807.88	13.49	5.84	-120.54	782.80	-151.92	925.08	908.32	16.76	55.195	
4,900.00	4,856.29	4,901.65	4,906.75	13.91	5.93	-121.22	782.80	-143.27	930.47	913.30	17.17	54.193	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - MOMBA FEDERAL COM 901H - OWB - PWP1												Offset Site Error: 0.00 usft
Survey Program: 0-Standard Keeper 104, 10279-r.5 MWD+IFR1+FDIR												Offset Well Error: 3.00 usft
Reference												
Offset												
Semi Major Axis												
Highside												
Toolface												
Offset Wellbore Centre												
Distance												
Between Centres												
Between Ellipses												
No-Go Distance												
Separation Factor												
Warning												
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor
5,000.00	4,954.11	5,000.89	5,005.61	14.33	6.02	-121.89	782.80	-134.62	935.99	918.40	17.59	53.205
5,100.00	5,051.92	5,100.13	5,104.47	14.75	6.11	-122.55	782.80	-125.97	941.64	923.61	18.03	52.233
5,200.00	5,149.74	5,199.37	5,203.34	15.17	6.20	-123.21	782.80	-117.32	947.41	928.94	18.48	51.280
5,300.00	5,247.55	5,298.62	5,302.20	15.60	6.30	-123.86	782.80	-108.67	953.31	934.38	18.94	50.346
5,400.00	5,345.37	5,397.86	5,401.06	16.03	6.39	-124.50	782.80	-100.02	959.33	939.93	19.41	49.433
5,500.00	5,443.18	5,497.10	5,499.93	16.47	6.49	-125.13	782.80	-91.37	965.47	945.58	19.89	48.541
5,600.00	5,541.00	5,596.34	5,598.79	16.90	6.59	-125.75	782.80	-82.72	971.73	951.35	20.38	47.672
5,700.00	5,638.81	5,695.58	5,697.65	17.34	6.69	-126.37	782.80	-74.07	978.10	957.21	20.89	46.825
5,800.00	5,736.63	5,794.82	5,796.51	17.78	6.79	-126.98	782.80	-65.43	984.59	963.18	21.40	46.001
5,900.00	5,834.44	5,894.06	5,895.38	18.22	6.89	-127.58	782.80	-56.78	991.18	969.25	21.93	45.201
6,000.00	5,932.26	5,993.30	5,994.24	18.67	6.99	-128.17	782.80	-48.13	997.88	975.42	22.46	44.424
7,600.00	7,518.39	7,587.22	7,582.10	23.42	8.73	-46.96	782.80	90.79	998.44	970.63	27.81	35.903
7,700.00	7,618.39	7,686.84	7,681.34	23.45	8.85	-46.61	782.80	99.48	992.08	964.24	27.84	35.637
7,800.00	7,718.39	7,786.46	7,780.58	23.49	8.96	-46.27	782.80	108.16	985.75	957.88	27.87	35.372
7,900.00	7,818.39	7,886.08	7,879.82	23.52	9.08	-45.91	782.80	116.84	979.46	951.56	27.90	35.108
8,000.00	7,918.39	7,985.70	7,979.06	23.56	9.19	-45.56	782.80	125.52	973.20	945.28	27.93	34.846
8,100.00	8,018.39	8,085.32	8,078.30	23.60	9.31	-45.20	782.80	134.21	966.99	939.03	27.96	34.584
8,200.00	8,118.39	8,184.94	8,177.54	23.63	9.43	-44.83	782.80	142.89	960.81	932.82	27.99	34.324
8,300.00	8,218.39	8,284.56	8,276.78	23.67	9.54	-44.46	782.80	151.57	954.68	926.65	28.03	34.064
8,400.00	8,318.39	8,384.18	8,376.02	23.71	9.66	-44.09	782.80	160.25	948.58	920.52	28.06	33.806
8,500.00	8,418.39	8,483.80	8,475.26	23.75	9.78	-43.71	782.80	168.93	942.53	914.43	28.09	33.549
8,600.00	8,518.39	8,583.42	8,574.50	23.78	9.89	-43.32	782.80	177.62	936.51	908.38	28.13	33.294
8,700.00	8,618.39	8,683.04	8,673.74	23.82	10.01	-42.93	782.80	186.30	930.54	902.38	28.16	33.039
8,800.00	8,718.39	8,782.66	8,772.98	23.86	10.13	-42.54	782.80	194.98	924.62	896.41	28.20	32.786
8,900.00	8,818.39	8,882.28	8,872.22	23.90	10.25	-42.14	782.80	203.66	918.73	890.49	28.24	32.534
9,000.00	8,918.39	8,981.90	8,971.46	23.94	10.37	-41.73	782.80	212.35	912.90	884.62	28.28	32.284
9,100.00	9,018.39	9,081.52	9,070.70	23.98	10.49	-41.32	782.80	221.03	907.11	878.79	28.32	32.034
9,200.00	9,118.39	9,181.13	9,169.95	24.02	10.61	-40.91	782.80	229.71	901.36	873.01	28.36	31.786
9,300.00	9,218.39	9,280.75	9,269.19	24.05	10.73	-40.49	782.80	238.39	895.67	867.27	28.40	31.539
9,400.00	9,318.39	9,380.37	9,368.43	24.09	10.85	-40.06	782.80	247.08	890.02	861.58	28.44	31.294
9,500.00	9,418.39	9,479.99	9,467.67	24.13	10.97	-39.63	782.80	255.76	884.42	855.94	28.48	31.049
9,600.00	9,518.39	9,579.61	9,566.91	24.17	11.09	-39.19	782.80	264.44	878.88	850.35	28.53	30.807
9,700.00	9,618.39	9,679.23	9,666.15	24.21	11.21	-38.75	782.80	273.12	873.38	844.81	28.57	30.565
9,800.00	9,718.39	9,778.85	9,765.39	24.25	11.34	-38.30	782.80	281.81	867.94	839.32	28.62	30.325
9,900.00	9,818.39	9,878.47	9,864.63	24.29	11.46	-37.85	782.80	290.49	862.55	833.88	28.67	30.086
10,000.00	9,918.39	9,978.09	9,963.87	24.34	11.58	-37.39	782.80	299.17	857.22	828.50	28.72	29.848
10,100.00	10,018.39	11,400.00	10,813.43	24.38	14.33	-110.76	50.56	681.44	808.54	766.70	41.84	19.325
10,146.26	10,064.65	11,400.00	10,813.43	24.39	14.33	-110.76	50.56	681.44	763.10	721.13	41.97	18.181
10,150.00	10,068.39	11,400.00	10,813.43	24.39	14.33	-112.79	50.56	681.44	759.43	717.31	42.12	18.031
10,175.00	10,093.37	11,400.00	10,813.43	24.39	14.33	-124.92	50.56	681.44	735.00	692.80	42.19	17.419
10,200.00	10,118.28	11,395.74	10,813.46	24.39	14.31	-132.80	54.60	680.07	710.77	668.51	42.26	16.820
10,225.00	10,143.03	11,392.51	10,813.47	24.40	14.29	-138.94	57.66	679.02	686.83	644.51	42.32	16.228
10,250.00	10,167.57	11,388.12	10,813.49	24.40	14.27	-143.33	61.81	677.60	663.26	620.88	42.39	15.648
10,275.00	10,191.83	11,382.58	10,813.52	24.40	14.25	-146.50	67.04	675.79	640.15	597.71	42.44	15.082
10,300.00	10,215.75	11,375.93	10,813.56	24.40	14.22	-148.80	73.33	673.61	617.59	575.09	42.50	14.532
10,325.00	10,239.24	11,368.18	10,813.60	24.40	14.18	-150.47	80.64	671.05	595.65	553.10	42.55	14.000
10,350.00	10,262.26	11,359.36	10,813.64	24.41	14.14	-151.64	88.96	668.11	574.43	531.84	42.59	13.488
10,375.00	10,284.74	11,349.50	10,813.69	24.41	14.09	-152.43	98.25	664.80	554.02	511.40	42.62	12.998
10,400.00	10,306.61	11,338.63	10,813.75	24.41	14.04	-152.91	108.47	661.11	534.51	491.86	42.65	12.533
10,425.00	10,327.82	11,326.80	10,813.81	24.42	13.99	-153.13	119.58	657.04	515.99	473.33	42.67	12.094
10,450.00	10,348.31	11,314.04	10,813.87	24.42	13.93	-153.13	131.54	652.61	498.56	455.89	42.67	11.684

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - MOMBA FEDERAL COM 901H - OWB - PWP1												Offset Site Error:	0.00 usft
Survey Program: 0-Standard Keeper 104, 10279-r.5 MWD+IFR1+FDIR												Offset Well Error:	3.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		No-Go Distance (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
10,475.00	10,368.02	11,300.00	10,813.95	24.43	13.86	-152.90	144.68	647.67	482.30	439.64	42.66	11.304	
10,500.00	10,386.90	11,285.93	10,814.02	24.43	13.80	-152.58	157.83	642.66	467.30	424.65	42.65	10.957	
10,525.00	10,404.90	11,270.68	10,814.10	24.44	13.74	-152.06	172.05	637.15	453.65	411.03	42.62	10.644	
10,550.00	10,421.97	11,254.70	10,814.18	24.44	13.67	-151.40	186.92	631.30	441.42	398.85	42.57	10.369	
10,575.00	10,438.05	11,238.04	10,814.26	24.45	13.60	-150.61	202.39	625.11	430.67	388.17	42.51	10.132	
10,600.00	10,453.11	11,220.76	10,814.35	24.46	13.53	-149.70	218.39	618.60	421.48	379.05	42.43	9.934	
10,625.00	10,467.11	11,200.00	10,814.46	24.47	13.44	-148.43	237.57	610.65	413.88	371.55	42.34	9.776	
10,650.00	10,480.00	11,184.58	10,814.53	24.49	13.38	-147.54	251.78	604.65	407.88	365.66	42.22	9.661	
10,675.00	10,491.76	11,165.79	10,814.63	24.50	13.31	-146.31	269.04	597.24	403.53	361.43	42.09	9.587	
10,700.00	10,502.34	11,128.33	10,813.85	24.51	13.17	-143.52	303.35	582.24	400.42	358.41	42.01	9.531	
10,725.00	10,511.73	11,087.99	10,810.30	24.53	13.03	-140.34	340.07	565.94	397.81	355.93	41.88	9.498	
10,750.00	10,519.89	11,049.77	10,804.34	24.55	12.91	-137.20	374.49	550.44	395.77	354.07	41.71	9.489 SF	
10,775.00	10,526.80	11,013.43	10,796.36	24.57	12.79	-134.11	406.73	535.71	394.39	352.89	41.51	9.502	
10,800.00	10,532.44	10,978.75	10,786.68	24.59	12.69	-131.05	436.94	521.71	393.73	352.44	41.29	9.536 ES	
10,809.53	10,534.26	10,965.94	10,782.60	24.60	12.66	-129.90	447.94	516.57	393.67	352.47	41.21	9.554 CC	
10,825.00	10,536.80	10,945.56	10,775.54	24.62	12.60	-128.03	465.24	508.42	393.82	352.75	41.07	9.589	
10,850.00	10,539.87	10,913.66	10,763.16	24.65	12.53	-125.03	491.78	495.78	394.69	353.84	40.86	9.660	
10,875.00	10,541.64	10,882.90	10,749.70	24.67	12.46	-122.07	516.68	483.76	396.36	355.70	40.66	9.749	
10,892.84	10,542.10	10,861.58	10,739.51	24.70	12.41	-119.96	533.50	475.55	398.02	357.49	40.52	9.822	
10,900.00	10,542.15	10,853.20	10,735.31	24.70	12.39	-119.20	540.02	472.35	398.77	358.30	40.47	9.853	
11,000.00	10,542.87	10,751.77	10,676.48	24.86	12.22	-109.29	613.62	435.16	411.83	371.95	39.88	10.327	
11,100.00	10,543.58	10,675.46	10,623.18	25.04	12.14	-101.14	661.76	409.54	433.89	394.55	39.34	11.030	
11,200.00	10,544.30	10,617.86	10,578.44	25.25	12.09	-94.76	693.40	391.86	468.11	429.49	38.62	12.120	
11,300.00	10,545.02	10,573.66	10,541.80	25.49	12.06	-89.83	714.70	379.38	514.63	476.92	37.71	13.647	
11,400.00	10,545.73	10,539.06	10,511.86	25.76	12.04	-86.00	729.48	370.32	571.87	535.17	36.70	15.580	
11,500.00	10,546.45	10,511.42	10,487.24	26.05	12.03	-82.97	740.05	363.57	637.78	602.06	35.72	17.856	
11,600.00	10,547.17	10,488.94	10,466.79	26.37	12.02	-80.55	747.83	358.39	710.43	675.61	34.82	20.403	
11,700.00	10,547.88	10,470.34	10,449.61	26.71	12.01	-78.57	753.69	354.34	788.24	754.21	34.04	23.159	
11,800.00	10,548.60	10,450.00	10,430.57	27.08	12.01	-76.45	759.50	350.15	870.04	836.64	33.41	26.044	
11,900.00	10,549.32	10,450.00	10,430.57	27.47	12.01	-76.45	759.50	350.15	954.94	922.19	32.75	29.163	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - MOMBA FEDERAL COM 902H - OWB - PWP2													Offset Site Error: 0.00 usft
Survey Program: 0-Standard Keeper 104, 10198-r.5 MWD+IFR1+FDIR													Offset Well Error: 3.00 usft
Reference													Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor	
0.00	0.00	0.00	13.70	0.00	3.00	-25.40	782.60	-371.60	866.45				
100.00	100.00	86.30	100.00	0.77	3.00	-25.40	782.60	-371.60	866.34	861.54	4.80	180.528	
200.00	200.00	186.30	200.00	1.44	3.00	-25.40	782.60	-371.60	866.34	861.22	5.12	169.091	
300.00	300.00	286.30	300.00	1.88	3.01	-25.40	782.60	-371.60	866.34	860.91	5.44	159.385	
400.00	400.00	386.30	400.00	2.25	3.03	-25.40	782.60	-371.60	866.34	860.61	5.74	151.007	
500.00	500.00	486.30	500.00	2.56	3.05	-25.40	782.60	-371.60	866.34	860.31	6.03	143.674	
600.00	600.00	586.30	600.00	2.84	3.08	-25.40	782.60	-371.60	866.34	860.03	6.32	137.182	
700.00	700.00	686.30	700.00	3.10	3.11	-25.40	782.60	-371.60	866.34	859.75	6.59	131.379	
800.00	800.00	786.30	800.00	3.34	3.15	-25.40	782.60	-371.60	866.34	859.47	6.87	126.148	
900.00	900.00	886.30	900.00	3.57	3.19	-25.40	782.60	-371.60	866.34	859.21	7.14	121.401	
1,000.00	1,000.00	986.30	1,000.00	3.79	3.24	-25.40	782.60	-371.60	866.34	858.94	7.40	117.067	
1,100.00	1,100.00	1,086.30	1,100.00	3.99	3.29	-25.40	782.60	-371.60	866.34	858.68	7.66	113.088	
1,200.00	1,200.00	1,186.30	1,200.00	4.19	3.35	-25.40	782.60	-371.60	866.34	858.42	7.92	109.417	
1,300.00	1,300.00	1,286.30	1,300.00	4.38	3.41	-25.40	782.60	-371.60	866.34	858.17	8.17	106.018	
1,400.00	1,400.00	1,386.30	1,400.00	4.56	3.47	-25.40	782.60	-371.60	866.34	857.92	8.42	102.857	
1,500.00	1,500.00	1,486.30	1,500.00	4.74	3.54	-25.40	782.60	-371.60	866.34	857.67	8.67	99.909	
1,600.00	1,600.00	1,586.30	1,600.00	4.91	3.61	-25.40	782.60	-371.60	866.34	857.42	8.92	97.150	
1,700.00	1,700.00	1,686.30	1,700.00	5.08	3.69	-25.40	782.60	-371.60	866.34	857.18	9.16	94.561	
1,800.00	1,800.00	1,786.30	1,800.00	5.24	3.76	-25.40	782.60	-371.60	866.34	856.94	9.40	92.126	
1,900.00	1,900.00	1,886.30	1,900.00	5.40	3.84	-25.40	782.60	-371.60	866.34	856.70	9.64	89.829	
2,000.00	2,000.00	1,986.30	2,000.00	5.56	3.93	-25.40	782.60	-371.60	866.34	856.46	9.88	87.659	
2,100.00	2,100.00	2,086.30	2,100.00	5.70	4.01	-25.40	782.60	-371.60	866.34	856.24	10.11	85.715	
2,200.00	2,200.00	2,186.30	2,200.00	5.83	4.10	-25.40	782.60	-371.60	866.34	856.02	10.32	83.968	
2,300.00	2,300.00	2,286.30	2,300.00	5.95	4.19	-25.40	782.60	-371.60	866.34	855.81	10.53	82.292	
2,400.00	2,400.00	2,386.30	2,400.00	6.08	4.29	-25.40	782.60	-371.60	866.34	855.60	10.74	80.683	
2,500.00	2,500.00	2,486.30	2,500.00	6.20	4.38	-25.40	782.60	-371.60	866.34	855.40	10.95	79.138 CC, ES	
2,600.00	2,599.98	2,586.28	2,599.98	6.40	4.48	-108.35	782.60	-371.60	866.89	855.73	11.16	77.663	
2,700.00	2,699.84	2,686.14	2,699.84	6.61	4.58	-108.65	782.60	-371.60	868.55	857.18	11.37	76.363	
2,800.00	2,799.45	2,785.75	2,799.45	6.83	4.68	-109.13	782.60	-371.60	871.39	859.80	11.59	75.201	
2,900.00	2,898.70	2,885.00	2,898.70	7.07	4.78	-109.81	782.60	-371.60	875.48	863.67	11.80	74.163	
3,000.00	2,997.47	2,983.77	2,997.47	7.34	4.88	-110.65	782.60	-371.60	880.94	868.92	12.03	73.237	
3,099.97	3,095.59	3,081.89	3,095.59	7.62	4.98	-111.65	782.60	-371.60	887.94	875.68	12.26	72.408	
3,200.00	3,193.44	3,179.74	3,193.44	7.86	5.09	-112.87	782.60	-371.60	895.97	883.47	12.50	71.684	
3,300.00	3,291.25	3,277.55	3,291.25	8.12	5.19	-114.06	782.60	-371.60	904.40	891.65	12.75	70.952	
3,400.00	3,389.07	3,375.37	3,389.07	8.39	5.30	-115.23	782.60	-371.60	913.23	900.22	13.01	70.210	
3,500.00	3,486.88	3,473.18	3,486.88	8.69	5.41	-116.38	782.60	-371.60	922.44	909.16	13.28	69.455	
3,600.00	3,584.70	3,571.00	3,584.70	9.00	5.51	-117.50	782.60	-371.60	932.03	918.46	13.57	68.689	
3,700.00	3,682.51	3,668.81	3,682.51	9.32	5.62	-118.60	782.60	-371.60	941.97	928.10	13.87	67.911	
3,800.00	3,780.33	3,766.63	3,780.33	9.66	5.73	-119.68	782.60	-371.60	952.27	938.08	14.19	67.123	
3,900.00	3,878.14	3,864.44	3,878.14	10.01	5.84	-120.74	782.60	-371.60	962.91	948.39	14.52	66.326	
4,000.00	3,975.96	3,962.26	3,975.96	10.37	5.95	-121.78	782.60	-371.60	973.87	959.01	14.86	65.522	
4,100.00	4,073.77	4,060.07	4,073.77	10.73	6.06	-122.79	782.60	-371.60	985.15	969.93	15.22	64.714	
4,200.00	4,171.59	4,157.89	4,171.59	11.11	6.18	-123.78	782.60	-371.60	996.74	981.14	15.60	63.903	
10,425.00	10,327.82	11,331.73	10,792.23	24.42	13.45	-106.54	174.35	-61.22	995.16	955.10	40.07	24.838	
10,450.00	10,348.31	11,317.26	10,792.33	24.42	13.43	-106.98	188.81	-61.29	985.86	945.91	39.95	24.679	
10,475.00	10,368.02	11,301.75	10,792.44	24.43	13.40	-107.31	204.32	-61.36	977.24	937.41	39.83	24.537	
10,500.00	10,386.90	11,285.24	10,792.56	24.43	13.38	-107.54	220.84	-61.44	969.29	929.58	39.71	24.410	
10,525.00	10,404.90	11,267.76	10,792.68	24.44	13.35	-107.67	238.31	-61.52	962.00	922.41	39.59	24.299	
10,550.00	10,421.97	11,249.37	10,792.81	24.44	13.33	-107.72	256.70	-61.61	955.36	915.88	39.47	24.202	
10,575.00	10,438.05	11,230.13	10,792.95	24.45	13.30	-107.72	275.95	-61.70	949.34	909.98	39.36	24.120	
10,600.00	10,453.11	11,210.07	10,793.09	24.46	13.28	-107.63	296.00	-61.79	943.93	904.68	39.25	24.050	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - MOMBA FEDERAL COM 902H - OWB - PWP2													Offset Site Error: 0.00 usft
Survey Program: 0-Standard Keeper 104, 10198-r.5 MWD+IFR1+FDIR													Offset Well Error: 3.00 usft
Reference		Offset		Semi Major Axis			Offset Wellbore Centre		Distance			Rule Assigned:	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor	Warning
10,625.00	10,467.11	11,189.26	10,793.24	24.47	13.25	-107.51	316.81	-61.89	939.10	899.96	39.14	23.991	
10,650.00	10,480.00	11,167.76	10,793.39	24.49	13.23	-107.36	338.31	-61.99	934.83	895.78	39.05	23.941	
10,675.00	10,491.76	11,145.61	10,793.54	24.50	13.21	-107.18	360.46	-62.10	931.07	892.12	38.96	23.901	
10,700.00	10,502.34	11,122.48	10,793.71	24.51	13.19	-106.98	383.59	-62.20	927.82	888.96	38.87	23.871	
10,725.00	10,511.73	11,083.82	10,792.61	24.53	13.15	-106.40	422.23	-62.47	924.84	886.15	38.69	23.902	
10,750.00	10,519.89	11,046.51	10,789.09	24.55	13.11	-105.80	459.36	-62.87	921.96	883.44	38.52	23.934	
10,775.00	10,526.80	11,010.49	10,783.41	24.57	13.08	-105.19	494.92	-63.39	919.20	880.84	38.36	23.962	
10,800.00	10,532.44	10,975.67	10,775.81	24.59	13.04	-104.57	528.89	-64.01	916.58	878.37	38.21	23.986	
10,825.00	10,536.80	10,941.96	10,766.50	24.62	13.01	-103.94	561.27	-64.73	914.12	876.04	38.08	24.006	
10,850.00	10,539.87	10,909.30	10,755.68	24.65	12.97	-103.31	592.08	-65.53	911.84	873.88	37.96	24.022	
10,875.00	10,541.64	10,877.60	10,743.52	24.67	12.94	-102.67	621.34	-66.40	909.75	871.89	37.86	24.029	
10,892.84	10,542.10	10,855.53	10,734.12	24.70	12.91	-102.21	641.28	-67.06	908.39	870.59	37.80	24.032	
10,900.00	10,542.15	10,846.83	10,730.20	24.70	12.90	-101.96	649.05	-67.34	907.86	870.08	37.78	24.033	
11,000.00	10,542.87	10,739.52	10,672.52	24.86	12.79	-98.27	739.28	-71.22	900.65	863.00	37.64	23.925	
11,100.00	10,543.58	10,656.61	10,617.05	25.04	12.71	-94.69	800.69	-74.83	896.21	858.43	37.78	23.725	
11,134.00	10,543.83	10,633.11	10,599.77	25.11	12.69	-93.58	816.57	-75.94	895.85	857.99	37.87	23.659	
11,200.00	10,544.30	10,593.10	10,568.90	25.25	12.66	-91.59	841.93	-77.90	897.31	859.25	38.06	23.576 SF	
11,300.00	10,545.02	10,544.02	10,528.73	25.49	12.63	-89.01	870.00	-80.43	905.74	867.36	38.38	23.600	
11,400.00	10,545.73	10,500.00	10,490.79	25.76	12.60	-86.60	892.17	-82.79	922.47	883.83	38.63	23.878	
11,500.00	10,546.45	10,474.65	10,468.20	26.05	12.59	-85.17	903.58	-84.19	947.72	908.92	38.80	24.427	
11,600.00	10,547.17	10,450.00	10,445.77	26.37	12.57	-83.76	913.72	-85.58	981.36	942.53	38.83	25.274	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - MOMBA FEDERAL COM 903H - OWB - PWP2													Offset Site Error: 0.00 usft
Survey Program: 0-Standard Keeper 104, 10195-r.5 MWD+IFR1+FDIR													Offset Well Error: 3.00 usft
Reference	Offset	Semi Major Axis	Rule Assigned:										
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor	Warning
0.00	0.00	0.00	14.10	0.00	3.00	-27.17	782.40	-401.60	879.56				
100.00	100.00	85.90	100.00	0.77	3.00	-27.17	782.40	-401.60	879.45	874.65	4.80	183.260	
200.00	200.00	185.90	200.00	1.44	3.00	-27.17	782.40	-401.60	879.45	874.33	5.12	171.653	
300.00	300.00	285.90	300.00	1.88	3.01	-27.17	782.40	-401.60	879.45	874.01	5.44	161.806	
400.00	400.00	385.90	400.00	2.25	3.03	-27.17	782.40	-401.60	879.45	873.71	5.74	153.309	
500.00	500.00	485.90	500.00	2.56	3.05	-27.17	782.40	-401.60	879.45	873.42	6.03	145.873	
600.00	600.00	585.90	600.00	2.84	3.08	-27.17	782.40	-401.60	879.45	873.14	6.31	139.290	
700.00	700.00	685.90	700.00	3.10	3.11	-27.17	782.40	-401.60	879.45	872.86	6.59	133.406	
800.00	800.00	785.90	800.00	3.34	3.15	-27.17	782.40	-401.60	879.45	872.58	6.87	128.104	
900.00	900.00	885.90	900.00	3.57	3.19	-27.17	782.40	-401.60	879.45	872.32	7.13	123.292	
1,000.00	1,000.00	985.90	1,000.00	3.79	3.24	-27.17	782.40	-401.60	879.45	872.05	7.40	118.898	
1,100.00	1,100.00	1,085.90	1,100.00	3.99	3.29	-27.17	782.40	-401.60	879.45	871.79	7.66	114.865	
1,200.00	1,200.00	1,185.90	1,200.00	4.19	3.35	-27.17	782.40	-401.60	879.45	871.54	7.91	111.145	
1,300.00	1,300.00	1,285.90	1,300.00	4.38	3.41	-27.17	782.40	-401.60	879.45	871.28	8.17	107.700	
1,400.00	1,400.00	1,385.90	1,400.00	4.56	3.47	-27.17	782.40	-401.60	879.45	871.03	8.42	104.496	
1,500.00	1,500.00	1,485.90	1,500.00	4.74	3.54	-27.17	782.40	-401.60	879.45	870.79	8.66	101.508	
1,600.00	1,600.00	1,585.90	1,600.00	4.91	3.61	-27.17	782.40	-401.60	879.45	870.54	8.91	98.712	
1,700.00	1,700.00	1,685.90	1,700.00	5.08	3.68	-27.17	782.40	-401.60	879.45	870.30	9.15	96.088	
1,800.00	1,800.00	1,785.90	1,800.00	5.24	3.76	-27.17	782.40	-401.60	879.45	870.06	9.39	93.620	
1,900.00	1,900.00	1,885.90	1,900.00	5.40	3.84	-27.17	782.40	-401.60	879.45	869.82	9.63	91.292	
2,000.00	2,000.00	1,985.90	2,000.00	5.56	3.93	-27.17	782.40	-401.60	879.45	869.58	9.87	89.092	
2,100.00	2,100.00	2,085.90	2,100.00	5.70	4.01	-27.17	782.40	-401.60	879.45	869.36	10.09	87.122	
2,200.00	2,200.00	2,185.90	2,200.00	5.83	4.10	-27.17	782.40	-401.60	879.45	869.15	10.30	85.352	
2,300.00	2,300.00	2,285.90	2,300.00	5.95	4.19	-27.17	782.40	-401.60	879.45	868.94	10.51	83.655	
2,400.00	2,400.00	2,385.90	2,400.00	6.08	4.29	-27.17	782.40	-401.60	879.45	868.73	10.72	82.025	
2,500.00	2,500.00	2,485.90	2,500.00	6.20	4.38	-27.17	782.40	-401.60	879.45	868.52	10.93	80.459 CC, ES	
2,600.00	2,599.98	2,585.88	2,599.98	6.40	4.48	-110.12	782.40	-401.60	880.05	868.90	11.15	78.957	
2,700.00	2,699.84	2,685.74	2,699.84	6.61	4.58	-110.40	782.40	-401.60	881.86	870.51	11.36	77.637	
2,800.00	2,799.45	2,785.35	2,799.45	6.83	4.68	-110.87	782.40	-401.60	884.95	873.37	11.57	76.463	
2,900.00	2,898.70	2,884.60	2,898.70	7.07	4.78	-111.52	782.40	-401.60	889.38	877.59	11.79	75.418	
3,000.00	2,997.47	2,983.37	2,997.47	7.34	4.88	-112.33	782.40	-401.60	895.29	883.27	12.02	74.489	
3,099.97	3,095.59	3,081.49	3,095.59	7.62	4.98	-113.30	782.40	-401.60	902.80	890.54	12.26	73.659	
3,200.00	3,193.44	3,179.34	3,193.44	7.86	5.09	-114.47	782.40	-401.60	911.38	898.88	12.49	72.942	
3,300.00	3,291.25	3,277.15	3,291.25	8.12	5.19	-115.63	782.40	-401.60	920.34	907.60	12.74	72.213	
3,400.00	3,389.07	3,374.97	3,389.07	8.39	5.30	-116.77	782.40	-401.60	929.69	916.68	13.01	71.468	
3,500.00	3,486.88	3,472.78	3,486.88	8.69	5.40	-117.88	782.40	-401.60	939.40	926.11	13.29	70.706	
3,600.00	3,584.70	3,570.60	3,584.70	9.00	5.51	-118.97	782.40	-401.60	949.46	935.89	13.58	69.928	
3,700.00	3,682.51	3,668.41	3,682.51	9.32	5.62	-120.04	782.40	-401.60	959.87	945.99	13.88	69.136	
3,800.00	3,780.33	3,766.23	3,780.33	9.66	5.73	-121.08	782.40	-401.60	970.62	956.42	14.20	68.331	
3,900.00	3,878.14	3,864.04	3,878.14	10.01	5.84	-122.11	782.40	-401.60	981.69	967.15	14.54	67.515	
4,000.00	3,975.96	3,961.86	3,975.96	10.37	5.95	-123.11	782.40	-401.60	993.07	978.18	14.89	66.691 SF	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - TATER SALAD FEDERAL COM 701H - OWB - PWP2													Offset Site Error: 0.00 usft
Survey Program: 0-r.5 MWD+IFR1+SAG+FDIR, 2000-r.5 MWD+IFR1, 9199-r.5 MWD+IFR1+SAG+FDIR													Offset Well Error: 0.00 usft
Reference	Offset	Semi Major Axis	Distance	Rule Assigned:									
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor	Warning
0.00	0.00	0.90	0.00	0.00	0.01	67.84	81.20	199.40	215.30				
100.00	100.00	100.90	100.00	0.77	0.77	67.84	81.20	199.40	215.30	213.30	2.00	107.801	
200.00	200.00	200.90	200.00	1.44	1.44	67.84	81.20	199.40	215.30	211.98	3.32	64.937	
300.00	300.00	300.90	300.00	1.88	1.89	67.84	81.20	199.40	215.30	211.10	4.20	51.279	
400.00	400.00	400.90	400.00	2.25	2.25	67.84	81.20	199.40	215.30	210.38	4.91	43.807	
500.00	500.00	500.90	500.00	2.56	2.56	67.84	81.20	199.40	215.30	209.76	5.54	38.894	
600.00	600.00	600.90	600.00	2.84	2.85	67.84	81.20	199.40	215.30	209.21	6.09	35.338	
700.00	700.00	700.90	700.00	3.10	3.11	67.84	81.20	199.40	215.30	208.70	6.60	32.605	
800.00	800.00	800.90	800.00	3.34	3.35	67.84	81.20	199.40	215.30	208.22	7.08	30.415	
900.00	900.00	900.90	900.00	3.57	3.57	67.84	81.20	199.40	215.30	207.77	7.53	28.609	
1,000.00	1,000.00	1,000.90	1,000.00	3.79	3.79	67.84	81.20	199.40	215.30	207.35	7.95	27.084	
1,100.00	1,100.00	1,100.90	1,100.00	3.99	3.99	67.84	81.20	199.40	215.30	206.95	8.35	25.774	
1,200.00	1,200.00	1,200.90	1,200.00	4.19	4.19	67.84	81.20	199.40	215.30	206.56	8.74	24.631	
1,300.00	1,300.00	1,300.90	1,300.00	4.38	4.38	67.84	81.20	199.40	215.30	206.19	9.11	23.622	
1,400.00	1,400.00	1,400.90	1,400.00	4.56	4.56	67.84	81.20	199.40	215.30	205.82	9.47	22.723	
1,500.00	1,500.00	1,500.90	1,500.00	4.74	4.74	67.84	81.20	199.40	215.30	205.47	9.82	21.915	
1,600.00	1,600.00	1,600.90	1,600.00	4.91	4.91	67.84	81.20	199.40	215.30	205.14	10.16	21.183	
1,700.00	1,700.00	1,700.90	1,700.00	5.08	5.08	67.84	81.20	199.40	215.30	204.80	10.49	20.515	
1,800.00	1,800.00	1,800.90	1,800.00	5.24	5.24	67.84	81.20	199.40	215.30	204.48	10.82	19.904	
1,900.00	1,900.00	1,900.90	1,900.00	5.40	5.40	67.84	81.20	199.40	215.30	204.17	11.13	19.340	
1,966.36	1,966.36	1,967.26	1,966.36	5.50	5.50	67.84	81.20	199.40	215.30	203.96	11.34	18.991	
2,000.00	2,000.00	2,000.00	1,999.10	5.56	5.56	67.84	81.20	199.40	215.30	203.86	11.44	18.821	
2,100.00	2,100.00	2,093.94	2,093.02	5.70	5.77	67.92	81.49	200.91	216.92	205.14	11.79	18.406	
2,200.00	2,200.00	2,186.84	2,185.81	5.83	5.98	68.15	82.35	205.38	221.73	209.63	12.11	18.316	
2,300.00	2,300.00	2,279.35	2,278.01	5.95	6.21	68.51	83.78	212.76	229.72	217.29	12.43	18.483	
2,400.00	2,400.00	2,371.28	2,369.35	6.08	6.44	68.97	85.75	222.99	240.87	228.11	12.76	18.880	
2,500.00	2,500.00	2,462.45	2,459.55	6.20	6.70	69.49	88.25	235.97	255.16	242.07	13.10	19.484	
2,600.00	2,599.98	2,552.97	2,548.65	6.40	6.93	-12.80	91.28	251.64	270.89	257.42	13.47	20.111	
2,700.00	2,699.84	2,649.81	2,643.55	6.61	7.15	-12.35	94.92	270.52	285.47	271.59	13.88	20.567	
2,800.00	2,799.45	2,749.16	2,740.91	6.83	7.42	-12.08	98.67	289.96	296.77	282.40	14.37	20.653	
2,900.00	2,898.70	2,848.84	2,838.59	7.07	7.70	-11.98	102.43	309.48	304.68	289.78	14.90	20.454	
3,000.00	2,997.47	2,948.73	2,936.48	7.34	8.00	-12.04	106.21	329.03	309.17	293.71	15.46	19.996	
3,099.97	3,095.59	3,048.68	3,034.42	7.62	8.32	-12.24	109.98	348.60	310.26	294.20	16.06	19.314	
3,200.00	3,193.44	3,148.70	3,132.43	7.86	8.66	-12.51	113.76	368.18	309.65	293.01	16.64	18.607	
3,300.00	3,291.25	3,248.69	3,230.41	8.12	9.00	-12.78	117.53	387.76	309.05	291.80	17.25	17.915	
3,400.00	3,389.07	3,348.68	3,328.39	8.39	9.36	-13.06	121.31	407.33	308.45	290.56	17.89	17.243	
3,500.00	3,486.88	3,448.66	3,426.37	8.69	9.72	-13.33	125.08	426.90	307.86	289.31	18.55	16.596	
3,600.00	3,584.70	3,548.65	3,524.35	9.00	10.10	-13.61	128.86	446.48	307.28	288.04	19.23	15.976	
3,700.00	3,682.51	3,648.64	3,622.33	9.32	10.48	-13.89	132.64	466.05	306.70	286.77	19.94	15.384	
3,800.00	3,780.33	3,748.62	3,720.31	9.66	10.87	-14.17	136.41	485.63	306.13	285.48	20.66	14.820	
3,900.00	3,878.14	3,848.61	3,818.29	10.01	11.26	-14.45	140.19	505.20	305.57	284.18	21.39	14.284	
4,000.00	3,975.96	3,948.60	3,916.27	10.37	11.66	-14.73	143.96	524.77	305.02	282.88	22.14	13.777	
4,100.00	4,073.77	4,048.59	4,014.25	10.73	12.07	-15.01	147.74	544.35	304.47	281.57	22.90	13.295	
4,200.00	4,171.59	4,148.57	4,112.23	11.11	12.48	-15.29	151.52	563.92	303.94	280.26	23.67	12.840	
4,300.00	4,269.40	4,248.56	4,210.21	11.49	12.89	-15.58	155.29	583.50	303.40	278.95	24.45	12.409	
4,400.00	4,367.22	4,348.55	4,308.19	11.88	13.31	-15.86	159.07	603.07	302.88	277.64	25.24	12.002	
4,500.00	4,465.03	4,448.54	4,406.17	12.28	13.73	-16.15	162.84	622.64	302.36	276.33	26.03	11.616	
4,600.00	4,562.85	4,548.52	4,504.15	12.68	14.16	-16.44	166.62	642.22	301.86	275.03	26.83	11.251	
4,700.00	4,660.66	4,648.51	4,602.13	13.08	14.59	-16.73	170.39	661.79	301.35	273.72	27.63	10.905	
4,800.00	4,758.48	4,748.50	4,700.11	13.49	15.02	-17.02	174.17	681.37	300.86	272.42	28.44	10.577	
4,900.00	4,856.29	4,848.48	4,798.09	13.91	15.44	-17.31	177.95	700.94	300.38	271.13	29.25	10.270	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - TATER SALAD FEDERAL COM 701H - OWB - PWP2												Offset Site Error:	0.00 usft
Survey Program: 0-r.5 MWD+IFR1+SAG+FDIR, 2000-r.5 MWD+IFR1, 9199-r.5 MWD+IFR1+SAG+FDIR												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Offset Wellbore Centre		Distance		Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor	
5,000.00	4,954.11	4,952.45	4,900.07	14.33	15.88	-17.63	181.77	720.78	299.40	269.33	30.07	9.956	
5,100.00	5,051.92	5,057.70	5,003.66	14.75	16.33	-18.06	185.30	739.06	296.72	265.82	30.90	9.603	
5,200.00	5,149.74	5,162.80	5,107.42	15.17	16.77	-18.58	188.46	755.45	292.28	260.58	31.69	9.222	
5,300.00	5,247.55	5,267.67	5,211.25	15.60	17.20	-19.23	191.26	769.94	286.09	253.64	32.45	8.815	
5,400.00	5,345.37	5,372.25	5,315.04	16.03	17.62	-20.01	193.68	782.53	278.19	245.02	33.17	8.386	
5,500.00	5,443.18	5,476.46	5,418.68	16.47	18.02	-20.95	195.75	793.22	268.61	234.76	33.84	7.936	
5,600.00	5,541.00	5,580.25	5,522.07	16.90	18.41	-22.10	197.45	802.03	257.38	222.92	34.46	7.470	
5,700.00	5,638.81	5,683.53	5,625.12	17.34	18.78	-23.49	198.78	808.96	244.56	209.57	34.99	6.989	
5,800.00	5,736.63	5,786.26	5,727.72	17.78	19.12	-25.20	199.77	814.05	230.23	194.81	35.43	6.499	
5,900.00	5,834.44	5,888.38	5,829.77	18.22	19.43	-27.33	200.40	817.32	214.49	178.76	35.73	6.003	
6,000.00	5,932.26	5,989.81	5,931.19	18.67	19.68	-30.01	200.68	818.80	197.49	161.65	35.84	5.510	
6,100.00	6,030.07	6,088.69	6,030.07	19.11	19.74	-33.33	200.70	818.90	179.78	144.13	35.65	5.043	
6,200.00	6,127.89	6,186.51	6,127.89	19.56	19.78	-37.32	200.70	818.90	162.68	127.45	35.23	4.618	
6,300.00	6,225.70	6,284.32	6,225.70	20.01	19.82	-42.21	200.70	818.90	146.54	112.04	34.50	4.248	
6,367.65	6,291.87	6,350.49	6,291.87	20.30	19.85	-46.14	200.70	818.90	136.34	102.57	33.77	4.038	
6,400.00	6,323.55	6,382.16	6,323.55	20.44	19.86	-48.13	200.70	818.90	131.80	98.46	33.34	3.953	
6,500.00	6,421.78	6,480.40	6,421.78	20.89	19.90	-54.56	200.70	818.90	119.99	88.08	31.91	3.760	
6,600.00	6,520.48	6,579.09	6,520.48	21.32	19.94	-61.14	200.70	818.90	111.33	80.96	30.37	3.666	
6,700.00	6,619.56	6,678.17	6,619.56	21.74	19.98	-67.45	200.70	818.90	105.42	76.48	28.94	3.643	
6,800.00	6,718.96	6,777.57	6,718.96	22.15	20.02	-73.05	200.70	818.90	101.71	73.88	27.82	3.656	
6,900.00	6,818.61	6,877.23	6,818.61	22.53	20.06	-77.58	200.70	818.90	99.59	72.49	27.10	3.675	
7,000.00	6,918.44	6,977.06	6,918.44	22.88	20.10	-80.80	200.70	818.90	98.52	71.77	26.75	3.683	
7,100.00	7,018.39	7,077.01	7,018.39	23.18	20.15	-82.57	200.70	818.90	98.08	71.41	26.66	3.678	
7,167.61	7,086.00	7,144.62	7,086.00	23.27	20.17	-0.06	200.70	818.90	98.00	71.29	26.71	3.669	
7,200.00	7,118.39	7,177.01	7,118.39	23.28	20.19	-0.06	200.70	818.90	98.00	71.26	26.74	3.665	
7,300.00	7,218.39	7,277.01	7,218.39	23.31	20.23	-0.06	200.70	818.90	98.00	71.13	26.87	3.647	
7,400.00	7,318.39	7,377.01	7,318.39	23.35	20.27	-0.06	200.70	818.90	98.00	70.99	27.01	3.629	
7,500.00	7,418.39	7,477.01	7,418.39	23.38	20.32	-0.06	200.70	818.90	98.00	70.86	27.14	3.611	
7,600.00	7,518.39	7,577.01	7,518.39	23.42	20.36	-0.06	200.70	818.90	98.00	70.72	27.28	3.593	
7,700.00	7,618.39	7,677.01	7,618.39	23.45	20.40	-0.06	200.70	818.90	98.00	70.59	27.41	3.575	
7,800.00	7,718.39	7,777.01	7,718.39	23.49	20.45	-0.06	200.70	818.90	98.00	70.45	27.55	3.557	
7,900.00	7,818.39	7,877.01	7,818.39	23.52	20.49	-0.06	200.70	818.90	98.00	70.31	27.69	3.540	
8,000.00	7,918.39	7,977.01	7,918.39	23.56	20.54	-0.06	200.70	818.90	98.00	70.18	27.82	3.522	
8,100.00	8,018.39	8,077.01	8,018.39	23.60	20.58	-0.06	200.70	818.90	98.00	70.04	27.96	3.505	
8,200.00	8,118.39	8,177.01	8,118.39	23.63	20.62	-0.06	200.70	818.90	98.00	69.90	28.10	3.488	
8,300.00	8,218.39	8,277.01	8,218.39	23.67	20.67	-0.06	200.70	818.90	98.00	69.77	28.23	3.471	
8,400.00	8,318.39	8,377.01	8,318.39	23.71	20.71	-0.06	200.70	818.90	98.00	69.63	28.37	3.454	
8,500.00	8,418.39	8,477.01	8,418.39	23.75	20.76	-0.06	200.70	818.90	98.00	69.49	28.51	3.437	
8,600.00	8,518.39	8,577.01	8,518.39	23.78	20.80	-0.06	200.70	818.90	98.00	69.35	28.65	3.421	
8,700.00	8,618.39	8,677.01	8,618.39	23.82	20.85	-0.06	200.70	818.90	98.00	69.21	28.79	3.404	
8,800.00	8,718.39	8,777.01	8,718.39	23.86	20.90	-0.06	200.70	818.90	98.00	69.07	28.93	3.388	
8,900.00	8,818.39	8,877.01	8,818.39	23.90	20.94	-0.06	200.70	818.90	98.00	68.94	29.06	3.372	
9,000.00	8,918.39	8,977.01	8,918.39	23.94	20.99	-0.06	200.70	818.90	98.00	68.80	29.20	3.356	
9,100.00	9,018.39	9,077.01	9,018.39	23.98	21.04	-0.06	200.70	818.90	98.00	68.66	29.34	3.340	
9,200.00	9,118.39	9,177.01	9,118.39	24.02	21.08	-0.06	200.70	818.90	98.00	68.52	29.48	3.324 CC, ES, SF	
9,300.00	9,218.39	9,263.38	9,204.57	24.05	21.10	-0.06	205.00	818.89	103.23	73.38	29.85	3.458	
9,400.00	9,318.39	9,342.30	9,281.55	24.09	21.11	-0.06	221.97	818.88	124.83	94.33	30.50	4.093	
9,500.00	9,418.39	9,413.96	9,348.18	24.13	21.11	-0.06	248.16	818.84	161.52	130.22	31.30	5.161	
9,600.00	9,518.39	9,475.00	9,401.31	24.17	21.12	-0.06	278.13	818.81	210.91	178.72	32.20	6.551	
9,700.00	9,618.39	9,530.09	9,445.63	24.21	21.14	-0.06	310.80	818.77	270.47	237.48	32.99	8.198	
9,800.00	9,718.39	9,575.00	9,478.78	24.25	21.15	-0.06	341.07	818.74	337.98	304.21	33.77	10.007	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips
Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - TATER SALAD FEDERAL COM 701H - OWB - PWP2												Offset Site Error:	0.00 usft
Survey Program: 0-r.5 MWD+IFR1+SAG+FDIR, 2000-r.5 MWD+IFR1, 9199-r.5 MWD+IFR1+SAG+FDIR												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Separation Factor	Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
9,900.00	9,818.39	9,613.14	9,504.61	24.29	21.16	-0.06	369.13	818.70	411.64	377.15	34.48	11.937	
10,000.00	9,918.39	9,650.00	9,527.35	24.34	21.18	-0.06	398.12	818.67	490.08	455.01	35.07	13.974	
10,100.00	10,018.39	9,675.00	9,541.48	24.38	21.19	-0.06	418.74	818.64	572.12	536.43	35.70	16.027	
10,146.26	10,064.65	9,683.31	9,545.93	24.39	21.19	-0.06	425.75	818.64	611.09	575.11	35.98	16.984	
10,150.00	10,068.39	9,684.18	9,546.39	24.39	21.19	0.00	426.49	818.64	614.26	578.20	36.06	17.034	
10,175.00	10,093.37	9,690.14	9,549.50	24.39	21.20	0.00	431.58	818.63	635.13	598.93	36.20	17.547	
10,200.00	10,118.28	9,700.00	9,554.51	24.39	21.20	0.00	440.07	818.62	655.46	619.16	36.30	18.058	
10,225.00	10,143.03	9,700.00	9,554.51	24.40	21.20	0.00	440.07	818.62	675.17	638.69	36.48	18.506	
10,250.00	10,167.57	9,709.37	9,559.10	24.40	21.21	0.00	448.25	818.61	694.27	657.67	36.60	18.971	
10,275.00	10,191.83	9,716.18	9,562.34	24.40	21.21	0.00	454.23	818.60	712.75	676.02	36.73	19.405	
10,300.00	10,215.75	9,725.00	9,566.40	24.40	21.22	0.00	462.06	818.59	730.58	693.73	36.85	19.825	
10,325.00	10,239.24	9,725.00	9,566.40	24.40	21.22	0.00	462.06	818.59	747.79	710.75	37.03	20.191	
10,350.00	10,262.26	9,737.57	9,571.94	24.41	21.23	0.00	473.34	818.58	764.21	727.07	37.13	20.581	
10,375.00	10,284.74	9,750.00	9,577.13	24.41	21.24	0.00	484.64	818.57	780.01	742.78	37.23	20.950	
10,400.00	10,306.61	9,750.00	9,577.13	24.41	21.24	0.00	484.64	818.57	795.02	757.61	37.41	21.252	
10,425.00	10,327.82	9,760.17	9,581.15	24.42	21.24	0.00	493.98	818.56	809.31	771.79	37.52	21.569	
10,450.00	10,348.31	9,775.00	9,586.66	24.42	21.26	0.00	507.75	818.54	822.95	785.34	37.61	21.883	
10,475.00	10,368.02	9,775.00	9,586.66	24.43	21.26	0.00	507.75	818.54	835.65	797.88	37.77	22.122	
10,500.00	10,386.90	9,783.71	9,589.69	24.43	21.26	0.00	515.91	818.53	847.66	809.77	37.89	22.371	
10,525.00	10,404.90	9,791.72	9,592.35	24.44	21.27	0.00	523.47	818.52	858.88	820.87	38.01	22.597	
10,550.00	10,421.97	9,800.00	9,594.97	24.44	21.28	0.00	531.32	818.51	869.30	831.17	38.12	22.804	
10,575.00	10,438.05	9,800.00	9,594.97	24.45	21.28	0.00	531.32	818.51	879.01	840.74	38.27	22.971	
10,600.00	10,453.11	9,816.17	9,599.68	24.46	21.29	0.00	546.79	818.50	887.69	849.36	38.34	23.154	
10,625.00	10,467.11	9,825.00	9,602.03	24.47	21.30	0.00	555.30	818.49	895.66	857.22	38.44	23.301	
10,650.00	10,480.00	9,825.00	9,602.03	24.49	21.30	0.00	555.30	818.49	902.88	864.32	38.57	23.411	
10,675.00	10,491.76	9,841.10	9,605.91	24.50	21.32	0.00	570.92	818.47	909.08	870.44	38.63	23.531	
10,700.00	10,502.34	9,850.00	9,607.83	24.51	21.33	0.00	579.62	818.46	914.52	875.80	38.72	23.618	
10,725.00	10,511.73	9,850.00	9,607.83	24.53	21.33	0.00	579.62	818.46	919.21	880.38	38.83	23.672	
10,750.00	10,519.89	9,866.33	9,610.92	24.55	21.34	0.00	595.66	818.44	922.84	883.96	38.89	23.730	
10,775.00	10,526.80	9,875.00	9,612.34	24.57	21.35	0.00	604.20	818.43	925.72	886.76	38.96	23.758	
10,800.00	10,532.44	9,883.27	9,613.55	24.59	21.36	0.00	612.38	818.42	927.74	888.70	39.04	23.766	
10,825.00	10,536.80	9,900.00	9,615.57	24.62	21.38	0.00	628.99	818.40	929.00	889.91	39.09	23.768	
10,850.00	10,539.87	9,900.00	9,615.57	24.65	21.38	0.00	628.99	818.40	929.18	890.01	39.17	23.724	
10,875.00	10,541.64	9,908.72	9,616.39	24.67	21.39	0.00	637.67	818.39	928.60	889.37	39.22	23.675	
10,892.84	10,542.10	9,914.77	9,616.86	24.70	21.40	0.00	643.70	818.38	927.66	888.40	39.26	23.629	
10,900.00	10,542.15	9,925.00	9,617.49	24.70	21.42	0.00	653.92	818.37	927.31	888.05	39.26	23.619	
10,985.10	10,542.76	9,946.72	9,618.10	24.83	21.45	0.00	675.62	818.34	924.68	885.26	39.42	23.457	
11,000.00	10,542.87	9,959.92	9,618.17	24.86	21.47	0.00	688.83	818.33	924.71	885.27	39.44	23.448	
11,100.00	10,543.58	10,059.92	9,618.70	25.04	21.64	0.00	788.83	818.21	924.89	885.34	39.56	23.381	
11,200.00	10,544.30	10,159.92	9,619.24	25.25	21.85	0.00	888.83	818.09	925.08	885.38	39.70	23.301	
11,300.00	10,545.02	10,259.92	9,619.77	25.49	22.09	0.00	988.82	817.98	925.26	885.40	39.86	23.210	
11,400.00	10,545.73	10,359.92	9,620.30	25.76	22.36	0.00	1,088.82	817.86	925.45	885.40	40.05	23.108	
11,500.00	10,546.45	10,459.92	9,620.83	26.05	22.67	0.00	1,188.82	817.74	925.63	885.38	40.25	22.997	
11,600.00	10,547.17	10,559.92	9,621.37	26.37	23.00	0.00	1,288.82	817.63	925.81	885.34	40.47	22.875	
11,700.00	10,547.88	10,659.92	9,621.90	26.71	23.36	0.00	1,388.82	817.51	926.00	885.28	40.71	22.745	
11,800.00	10,548.60	10,759.92	9,622.43	27.08	23.75	0.00	1,488.82	817.39	926.18	885.21	40.97	22.606	
11,900.00	10,549.32	10,859.92	9,622.96	27.47	24.16	0.00	1,588.81	817.28	926.36	885.12	41.25	22.459	
12,000.00	10,550.03	10,959.92	9,623.50	27.88	24.60	0.00	1,688.81	817.16	926.55	885.01	41.54	22.304	
12,100.00	10,550.75	11,059.92	9,624.03	28.31	25.06	0.00	1,788.81	817.04	926.73	884.88	41.85	22.142	
12,200.00	10,551.47	11,159.92	9,624.56	28.76	25.54	0.00	1,888.81	816.92	926.92	884.73	42.18	21.974	
12,300.00	10,552.18	11,259.92	9,625.09	29.23	26.04	0.00	1,988.81	816.81	927.10	884.57	42.53	21.800	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - TATER SALAD FEDERAL COM 701H - OWB - PWP2													Offset Site Error: 0.00 usft	
Survey Program:		0-r.5 MWD+IFR1+SAG+FDIR, 2000-r.5 MWD+IFR1, 9199-r.5 MWD+IFR1+SAG+FDIR							Rule Assigned:				Offset Well Error: 0.00 usft	
Reference		Offset		Semi Major Axis		Offset Wellbore Centre			Distance					
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor	Warning	
12,400.00	10,552.90	11,359.92	9,625.63	29.72	26.56	0.00	2,088.81	816.69	927.28	884.39	42.89	21.620		
12,500.00	10,553.61	11,459.92	9,626.16	30.22	27.10	0.00	2,188.80	816.57	927.47	884.20	43.27	21.436		
12,600.00	10,554.33	11,559.92	9,626.69	30.74	27.65	0.00	2,288.80	816.46	927.65	883.99	43.66	21.248		
12,700.00	10,555.05	11,659.92	9,627.23	31.28	28.22	0.00	2,388.80	816.34	927.84	883.77	44.07	21.055		
12,800.00	10,555.76	11,759.92	9,627.76	31.83	28.80	0.00	2,488.80	816.22	928.02	883.53	44.49	20.860		
12,900.00	10,556.48	11,859.92	9,628.29	32.39	29.40	0.00	2,588.80	816.11	928.20	883.28	44.92	20.661		
13,000.00	10,557.20	11,959.92	9,628.82	32.96	30.01	0.00	2,688.80	815.99	928.39	883.01	45.37	20.461		
13,100.00	10,557.91	12,059.92	9,629.36	33.55	30.63	0.00	2,788.79	815.87	928.57	882.73	45.84	20.258		
13,200.00	10,558.63	12,159.92	9,629.89	34.15	31.27	0.00	2,888.79	815.75	928.75	882.44	46.31	20.054		
13,300.00	10,559.35	12,259.92	9,630.42	34.76	31.91	0.00	2,988.79	815.64	928.94	882.14	46.80	19.849		
13,400.00	10,560.06	12,359.92	9,630.95	35.38	32.57	0.00	3,088.79	815.52	929.12	881.82	47.30	19.643		
13,500.00	10,560.78	12,459.92	9,631.49	36.01	33.23	0.00	3,188.79	815.40	929.31	881.49	47.81	19.436		
13,600.00	10,561.50	12,559.92	9,632.02	36.65	33.90	0.00	3,288.79	815.29	929.49	881.15	48.34	19.230		
13,700.00	10,562.21	12,659.92	9,632.55	37.30	34.58	0.00	3,388.78	815.17	929.67	880.80	48.87	19.023		
13,800.00	10,562.93	12,759.92	9,633.08	37.96	35.27	0.00	3,488.78	815.05	929.86	880.44	49.42	18.817		
13,900.00	10,563.65	12,859.92	9,633.62	38.62	35.97	0.00	3,588.78	814.94	930.04	880.07	49.97	18.612		
14,000.00	10,564.36	12,959.92	9,634.15	39.29	36.67	0.00	3,688.78	814.82	930.22	879.69	50.54	18.407		
14,100.00	10,565.08	13,059.92	9,634.68	39.97	37.38	0.00	3,788.78	814.70	930.41	879.30	51.11	18.204		
14,200.00	10,565.79	13,159.92	9,635.22	40.66	38.10	0.00	3,888.78	814.58	930.59	878.90	51.69	18.002		
14,300.00	10,566.51	13,259.92	9,635.75	41.35	38.82	0.00	3,988.77	814.47	930.78	878.49	52.29	17.801		
14,400.00	10,567.23	13,359.92	9,636.28	42.05	39.54	0.00	4,088.77	814.35	930.96	878.07	52.89	17.602		
14,500.00	10,567.94	13,459.92	9,636.81	42.75	40.28	0.00	4,188.77	814.23	931.14	877.65	53.50	17.405		
14,600.00	10,568.66	13,559.92	9,637.35	43.46	41.01	0.00	4,288.77	814.12	931.33	877.21	54.12	17.210		
14,700.00	10,569.38	13,659.92	9,637.88	44.17	41.75	0.00	4,388.77	814.00	931.51	876.77	54.74	17.017		
14,800.00	10,570.09	13,759.92	9,638.41	44.89	42.50	0.00	4,488.77	813.88	931.70	876.32	55.37	16.825		
14,900.00	10,570.81	13,859.92	9,638.94	45.62	43.25	0.00	4,588.76	813.76	931.88	875.86	56.01	16.636		
15,000.00	10,571.53	13,959.92	9,639.48	46.35	44.00	0.00	4,688.76	813.65	932.06	875.40	56.66	16.450		
15,100.00	10,572.24	14,059.92	9,640.01	47.08	44.76	0.00	4,788.76	813.53	932.25	874.93	57.32	16.265		
15,200.00	10,572.96	14,159.92	9,640.54	47.82	45.52	0.00	4,888.76	813.41	932.43	874.45	57.98	16.083		
15,300.00	10,573.68	14,259.92	9,641.07	48.56	46.29	0.00	4,988.76	813.30	932.61	873.97	58.64	15.903		
15,400.00	10,574.39	14,359.92	9,641.61	49.30	47.05	0.00	5,088.76	813.18	932.80	873.48	59.32	15.726		
15,500.00	10,575.11	14,459.92	9,642.14	50.05	47.82	0.00	5,188.75	813.06	932.98	872.99	60.00	15.551		
15,600.00	10,575.82	14,559.92	9,642.67	50.80	48.60	0.00	5,288.75	812.95	933.17	872.49	60.68	15.378		
15,700.00	10,576.54	14,659.92	9,643.20	51.56	49.37	0.00	5,388.75	812.83	933.35	871.98	61.37	15.209		
15,800.00	10,577.26	14,759.92	9,643.74	52.32	50.15	0.00	5,488.75	812.71	933.53	871.47	62.07	15.041		
15,900.00	10,577.97	14,859.92	9,644.27	53.08	50.93	0.00	5,588.75	812.59	933.72	870.95	62.77	14.876		
16,000.00	10,578.69	14,959.92	9,644.80	53.84	51.72	0.00	5,688.75	812.48	933.90	870.43	63.47	14.714		
16,100.00	10,579.41	15,059.92	9,645.34	54.61	52.50	0.00	5,788.74	812.36	934.09	869.90	64.18	14.554		
16,200.00	10,580.12	15,159.92	9,645.87	55.38	53.29	0.00	5,888.74	812.24	934.27	869.37	64.90	14.396		
16,300.00	10,580.84	15,259.92	9,646.40	56.15	54.08	0.00	5,988.74	812.13	934.45	868.84	65.62	14.241		
16,400.00	10,581.56	15,359.92	9,646.93	56.92	54.87	0.00	6,088.74	812.01	934.64	868.30	66.34	14.089		
16,500.00	10,582.27	15,459.92	9,647.47	57.70	55.67	0.00	6,188.74	811.89	934.82	867.75	67.07	13.938		
16,600.00	10,582.99	15,559.92	9,648.00	58.48	56.47	0.00	6,288.74	811.78	935.00	867.20	67.80	13.791		
16,700.00	10,583.71	15,659.92	9,648.53	59.26	57.26	0.00	6,388.73	811.66	935.19	866.65	68.54	13.645		
16,800.00	10,584.42	15,759.91	9,649.06	60.04	58.06	0.00	6,488.73	811.54	935.37	866.10	69.28	13.502		
16,900.00	10,585.14	15,859.91	9,649.60	60.83	58.86	0.00	6,588.73	811.42	935.56	865.54	70.02	13.361		
17,000.00	10,585.86	15,959.91	9,650.13	61.62	59.67	0.00	6,688.73	811.31	935.74	864.97	70.77	13.223		
17,100.00	10,586.57	16,059.91	9,650.66	62.40	60.47	0.00	6,788.73	811.19	935.92	864.41	71.52	13.087		
17,200.00	10,587.29	16,159.91	9,651.19	63.20	61.28	0.00	6,888.73	811.07	936.11	863.84	72.27	12.953		
17,300.00	10,588.00	16,259.91	9,651.73	63.99	62.08	0.00	6,988.73	810.96	936.29	863.26	73.03	12.821		
17,400.00	10,588.72	16,359.91	9,652.26	64.78	62.89	0.00	7,088.72	810.84	936.48	862.69	73.79	12.691		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - TATER SALAD FEDERAL COM 701H - OWB - PWP2												Offset Site Error:	0.00 usft
Survey Program: 0-r.5 MWD+IFR1+SAG+FDIR, 2000-r.5 MWD+IFR1, 9199-r.5 MWD+IFR1+SAG+FDIR												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Offset Wellbore Centre		Distance		Rule Assigned:		Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor	
17,500.00	10,589.44	16,459.91	9,652.79	65.58	63.70	0.00	7,188.72	810.72	936.66	862.11	74.55	12.564	
17,600.00	10,590.15	16,559.91	9,653.32	66.37	64.51	0.00	7,288.72	810.61	936.84	861.52	75.32	12.438	
17,700.00	10,590.87	16,659.91	9,653.86	67.17	65.32	0.00	7,388.72	810.49	937.03	860.94	76.09	12.315	
17,800.00	10,591.59	16,759.91	9,654.39	67.97	66.14	0.00	7,488.72	810.37	937.21	860.35	76.86	12.194	
17,900.00	10,592.30	16,859.91	9,654.92	68.77	66.95	0.00	7,588.72	810.25	937.39	859.76	77.63	12.075	
18,000.00	10,593.02	16,959.91	9,655.46	69.58	67.77	0.00	7,688.71	810.14	937.58	859.17	78.41	11.957	
18,100.00	10,593.74	17,059.91	9,655.99	70.38	68.58	0.00	7,788.71	810.02	937.76	858.57	79.19	11.842	
18,200.00	10,594.45	17,159.91	9,656.52	71.19	69.40	0.00	7,888.71	809.90	937.95	857.97	79.97	11.728	
18,300.00	10,595.17	17,259.91	9,657.05	71.99	70.22	0.00	7,988.71	809.79	938.13	857.37	80.76	11.617	
18,400.00	10,595.89	17,359.91	9,657.59	72.80	71.04	0.00	8,088.71	809.67	938.31	856.77	81.54	11.507	
18,500.00	10,596.60	17,459.91	9,658.12	73.61	71.86	0.00	8,188.71	809.55	938.50	856.16	82.33	11.399	
18,600.00	10,597.32	17,559.91	9,658.65	74.42	72.68	0.00	8,288.70	809.44	938.68	855.56	83.12	11.292	
18,700.00	10,598.04	17,659.91	9,659.18	75.23	73.50	0.00	8,388.70	809.32	938.86	854.95	83.92	11.188	
18,800.00	10,598.75	17,759.91	9,659.72	76.04	74.32	0.00	8,488.70	809.20	939.05	854.33	84.71	11.085	
18,900.00	10,599.47	17,859.91	9,660.25	76.85	75.15	0.00	8,588.70	809.08	939.23	853.72	85.51	10.984	
19,000.00	10,600.18	17,959.91	9,660.78	77.67	75.97	0.00	8,688.70	808.97	939.42	853.11	86.31	10.884	
19,100.00	10,600.90	18,059.91	9,661.31	78.48	76.80	0.00	8,788.70	808.85	939.60	852.49	87.11	10.786	
19,200.00	10,601.62	18,159.91	9,661.85	79.30	77.62	0.00	8,888.69	808.73	939.78	851.87	87.92	10.690	
19,300.00	10,602.33	18,259.91	9,662.38	80.11	78.45	0.00	8,988.69	808.62	939.97	851.25	88.72	10.595	
19,400.00	10,603.05	18,359.91	9,662.91	80.93	79.28	0.00	9,088.69	808.50	940.15	850.62	89.53	10.501	
19,500.00	10,603.77	18,459.91	9,663.44	81.75	80.10	0.00	9,188.69	808.38	940.34	850.00	90.34	10.409	
19,600.00	10,604.48	18,559.91	9,663.98	82.57	80.93	0.00	9,288.69	808.26	940.52	849.37	91.15	10.319	
19,700.00	10,605.20	18,659.91	9,664.51	83.39	81.76	0.00	9,388.69	808.15	940.70	848.75	91.96	10.230	
19,800.00	10,605.92	18,759.91	9,665.04	84.21	82.59	0.00	9,488.68	808.03	940.89	848.12	92.77	10.142	
19,900.00	10,606.63	18,859.91	9,665.58	85.03	83.42	0.00	9,588.68	807.91	941.07	847.48	93.59	10.056	
20,000.00	10,607.35	18,959.91	9,666.11	85.85	84.25	0.00	9,688.68	807.80	941.25	846.85	94.40	9.971	
20,100.00	10,608.07	19,059.91	9,666.64	86.67	85.08	0.00	9,788.68	807.68	941.44	846.22	95.22	9.887	
20,200.00	10,608.78	19,159.91	9,667.17	87.50	85.91	0.00	9,888.68	807.56	941.62	845.58	96.04	9.805	
20,300.00	10,609.50	19,259.91	9,667.71	88.32	86.74	0.00	9,988.68	807.45	941.81	844.95	96.86	9.723	
20,400.00	10,610.22	19,359.91	9,668.24	89.14	87.58	0.00	10,088.67	807.33	941.99	844.31	97.68	9.643	
20,500.00	10,610.93	19,459.91	9,668.77	89.97	88.41	0.00	10,188.67	807.21	942.17	843.67	98.51	9.565	
20,600.00	10,611.65	19,559.91	9,669.30	90.79	89.24	0.00	10,288.67	807.09	942.36	843.03	99.33	9.487	
20,700.00	10,612.36	19,659.91	9,669.84	91.62	90.08	0.00	10,388.67	806.98	942.54	842.39	100.16	9.411	
20,800.00	10,613.08	19,759.91	9,670.37	92.45	90.91	0.00	10,488.67	806.86	942.73	841.74	100.98	9.336	
20,900.00	10,613.80	19,859.91	9,670.90	93.27	91.74	0.00	10,588.67	806.74	942.91	841.10	101.81	9.261	
20,942.26	10,614.10	19,897.14	9,671.10	93.62	92.06	0.00	10,625.90	806.70	943.00	840.80	102.20	9.227	
20,943.16	10,614.11	19,897.14	9,671.10	93.63	92.06	0.00	10,625.90	806.70	943.01	840.84	102.17	9.230	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - TATER SALAD FEDERAL COM 702H - OWB - PWP2														Offset Site Error: 0.00 usft
Survey Program: 0-r.5 MWD+IFR1+SAG+FDIR, 2000-r.5 MWD+IFR1, 9323-r.5 MWD+IFR1+SAG+FDIR														Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Offset Wellbore Centre		Distance		No-Go		Separation		Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Distance (usft)	Factor		
0.00	0.00	0.90	0.00	0.00	0.01	72.95	61.20	199.50	208.68					
100.00	100.00	100.90	100.00	0.77	0.77	72.95	61.20	199.50	208.68	206.68	2.00	104.485		
200.00	200.00	200.90	200.00	1.44	1.44	72.95	61.20	199.50	208.68	205.36	3.32	62.939		
300.00	300.00	300.90	300.00	1.88	1.89	72.95	61.20	199.50	208.68	204.48	4.20	49.701		
400.00	400.00	400.90	400.00	2.25	2.25	72.95	61.20	199.50	208.68	203.76	4.91	42.459		
500.00	500.00	500.90	500.00	2.56	2.56	72.95	61.20	199.50	208.68	203.14	5.54	37.698		
600.00	600.00	600.90	600.00	2.84	2.85	72.95	61.20	199.50	208.68	202.58	6.09	34.251		
700.00	700.00	700.90	700.00	3.10	3.11	72.95	61.20	199.50	208.68	202.07	6.60	31.602		
800.00	800.00	800.90	800.00	3.34	3.35	72.95	61.20	199.50	208.68	201.60	7.08	29.480		
900.00	900.00	900.90	900.00	3.57	3.57	72.95	61.20	199.50	208.68	201.15	7.53	27.729		
1,000.00	1,000.00	1,000.90	1,000.00	3.79	3.79	72.95	61.20	199.50	208.68	200.73	7.95	26.251		
1,100.00	1,100.00	1,100.90	1,100.00	3.99	3.99	72.95	61.20	199.50	208.68	200.32	8.35	24.981		
1,200.00	1,200.00	1,200.90	1,200.00	4.19	4.19	72.95	61.20	199.50	208.68	199.93	8.74	23.873		
1,300.00	1,300.00	1,300.90	1,300.00	4.38	4.38	72.95	61.20	199.50	208.68	199.56	9.11	22.896		
1,400.00	1,400.00	1,400.90	1,400.00	4.56	4.56	72.95	61.20	199.50	208.68	199.20	9.47	22.024		
1,500.00	1,500.00	1,500.90	1,500.00	4.74	4.74	72.95	61.20	199.50	208.68	198.85	9.82	21.241		
1,600.00	1,600.00	1,600.90	1,600.00	4.91	4.91	72.95	61.20	199.50	208.68	198.51	10.16	20.531		
1,700.00	1,700.00	1,700.90	1,700.00	5.08	5.08	72.95	61.20	199.50	208.68	198.18	10.49	19.884		
1,800.00	1,800.00	1,800.90	1,800.00	5.24	5.24	72.95	61.20	199.50	208.68	197.86	10.82	19.291		
1,900.00	1,900.00	1,900.90	1,900.00	5.40	5.40	72.95	61.20	199.50	208.68	197.54	11.13	18.745		
2,000.00	2,000.00	2,000.90	2,000.00	5.56	5.56	72.95	61.20	199.50	208.68	197.24	11.44	18.240		
2,100.00	2,100.00	2,100.90	2,100.00	5.70	5.70	72.95	61.20	199.50	208.68	196.96	11.72	17.804		
2,200.00	2,200.00	2,200.91	2,200.01	5.83	5.83	72.95	61.20	199.50	208.68	196.70	11.97	17.428		
2,300.00	2,300.00	2,301.50	2,300.58	5.95	6.04	72.45	62.87	198.83	208.53	196.30	12.22	17.058		
2,400.00	2,400.00	2,401.84	2,400.77	6.08	6.26	71.00	67.79	196.84	208.18	195.71	12.47	16.693		
2,500.00	2,500.00	2,501.69	2,500.23	6.20	6.50	68.58	75.91	193.55	207.91	195.19	12.71	16.353		
2,600.00	2,599.98	2,600.91	2,598.76	6.40	6.62	-17.64	86.75	189.17	206.45	193.49	12.96	15.931		
2,700.00	2,699.84	2,699.86	2,696.97	6.61	6.82	-21.52	97.94	184.64	202.52	189.25	13.28	15.255		
2,800.00	2,799.45	2,798.45	2,794.83	6.83	7.04	-25.98	109.08	180.14	196.42	182.81	13.60	14.439		
2,900.00	2,898.70	2,896.58	2,892.23	7.07	7.27	-31.22	120.17	175.65	188.58	174.64	13.94	13.525		
3,000.00	2,997.47	2,995.11	2,990.09	7.34	7.53	-37.38	130.76	171.37	179.44	165.13	14.31	12.540		
3,099.97	3,095.59	3,093.58	3,088.07	7.62	7.79	-44.45	139.80	167.71	169.22	154.54	14.69	11.523		
3,200.00	3,193.44	3,192.20	3,186.36	7.86	8.04	-52.15	147.29	164.69	159.72	144.67	15.05	10.610		
3,300.00	3,291.25	3,291.24	3,285.19	8.12	8.30	-60.20	153.24	162.28	152.26	136.80	15.46	9.851		
3,400.00	3,389.07	3,390.65	3,384.49	8.39	8.56	-68.52	157.61	160.51	146.75	130.86	15.89	9.236		
3,500.00	3,486.88	3,490.39	3,484.18	8.69	8.80	-76.99	160.39	159.39	143.04	126.70	16.34	8.756		
3,600.00	3,584.70	3,590.39	3,584.18	9.00	9.01	-85.49	161.56	158.92	140.98	124.21	16.77	8.406		
3,653.88	3,637.40	3,643.62	3,637.40	9.17	9.07	-89.99	161.60	158.90	140.57	123.61	16.96	8.287 CC, ES		
3,700.00	3,682.51	3,688.73	3,682.51	9.32	9.12	-93.81	161.60	158.90	140.90	123.77	17.13	8.227 SF		
3,800.00	3,780.33	3,786.55	3,780.33	9.66	9.21	-101.93	161.60	158.90	143.82	126.34	17.48	8.229		
3,900.00	3,878.14	3,884.36	3,878.14	10.01	9.30	-109.59	161.60	158.90	149.59	131.74	17.85	8.381		
4,000.00	3,975.96	3,982.18	3,975.96	10.37	9.38	-116.59	161.60	158.90	157.91	139.66	18.25	8.651		
4,100.00	4,073.77	4,079.99	4,073.77	10.73	9.47	-122.83	161.60	158.90	168.40	149.71	18.69	9.009		
4,200.00	4,171.59	4,177.81	4,171.59	11.11	9.56	-128.31	161.60	158.90	180.69	161.53	19.16	9.429		
4,300.00	4,269.40	4,275.62	4,269.40	11.49	9.65	-133.06	161.60	158.90	194.42	174.77	19.66	9.890		
4,400.00	4,367.22	4,373.44	4,367.22	11.88	9.74	-137.18	161.60	158.90	209.33	189.15	20.18	10.375		
4,500.00	4,465.03	4,471.25	4,465.03	12.28	9.83	-140.75	161.60	158.90	225.16	204.45	20.71	10.872		
4,600.00	4,562.85	4,569.07	4,562.85	12.68	9.92	-143.84	161.60	158.90	241.75	220.50	21.26	11.372		
4,700.00	4,660.66	4,666.88	4,660.66	13.08	10.00	-146.54	161.60	158.90	258.95	237.13	21.82	11.869		
4,800.00	4,758.48	4,764.69	4,758.48	13.49	10.09	-148.90	161.60	158.90	276.64	254.26	22.39	12.358		
4,900.00	4,856.29	4,862.51	4,856.29	13.91	10.18	-150.98	161.60	158.90	294.74	271.78	22.96	12.836		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - TATER SALAD FEDERAL COM 702H - OWB - PWP2												Offset Site Error:	0.00 usft
Survey Program: 0-r.5 MWD+IFR1+SAG+FDIR, 2000-r.5 MWD+IFR1, 9323-r.5 MWD+IFR1+SAG+FDIR												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Offset Wellbore Centre		Distance		Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor	
5,000.00	4,954.11	4,960.32	4,954.11	14.33	10.27	-152.82	161.60	158.90	313.17	289.62	23.54	13.302	
5,100.00	5,051.92	5,058.14	5,051.92	14.75	10.35	-154.45	161.60	158.90	331.88	307.75	24.13	13.754	
5,200.00	5,149.74	5,155.95	5,149.74	15.17	10.44	-155.91	161.60	158.90	350.82	326.10	24.72	14.190	
5,300.00	5,247.55	5,253.77	5,247.55	15.60	10.53	-157.22	161.60	158.90	369.96	344.64	25.32	14.612	
5,400.00	5,345.37	5,351.58	5,345.37	16.03	10.62	-158.40	161.60	158.90	389.27	363.35	25.92	15.019	
5,500.00	5,443.18	5,449.40	5,443.18	16.47	10.70	-159.47	161.60	158.90	408.73	382.21	26.52	15.410	
5,600.00	5,541.00	5,547.21	5,541.00	16.90	10.79	-160.44	161.60	158.90	428.31	401.18	27.13	15.787	
5,700.00	5,638.81	5,645.03	5,638.81	17.34	10.88	-161.33	161.60	158.90	448.00	420.26	27.74	16.149	
5,800.00	5,736.63	5,742.84	5,736.63	17.78	10.96	-162.15	161.60	158.90	467.79	439.43	28.35	16.498	
5,900.00	5,834.44	5,840.66	5,834.44	18.22	11.05	-162.89	161.60	158.90	487.66	458.69	28.97	16.833	
6,000.00	5,932.26	5,938.47	5,932.26	18.67	11.14	-163.58	161.60	158.90	507.60	478.01	29.59	17.155	
6,100.00	6,030.07	6,036.29	6,030.07	19.11	11.22	-164.22	161.60	158.90	527.61	497.40	30.21	17.465	
6,200.00	6,127.89	6,134.10	6,127.89	19.56	11.31	-164.81	161.60	158.90	547.67	516.84	30.83	17.763	
6,300.00	6,225.70	6,231.92	6,225.70	20.01	11.40	-165.36	161.60	158.90	567.79	536.34	31.46	18.050	
6,367.65	6,291.87	6,298.09	6,291.87	20.30	11.45	-165.71	161.60	158.90	581.43	549.56	31.87	18.244	
6,400.00	6,323.55	6,329.76	6,323.55	20.44	11.48	-165.89	161.60	158.90	587.83	555.77	32.06	18.335	
6,500.00	6,421.78	6,428.00	6,421.78	20.89	11.57	-166.39	161.60	158.90	605.98	573.29	32.69	18.539	
6,600.00	6,520.48	6,526.69	6,520.48	21.32	11.65	-166.79	161.60	158.90	621.65	588.36	33.29	18.672	
6,700.00	6,619.56	6,625.77	6,619.56	21.74	11.74	-167.11	161.60	158.90	634.82	600.94	33.88	18.738	
6,800.00	6,718.96	6,725.17	6,718.96	22.15	11.83	-167.36	161.60	158.90	645.46	611.02	34.44	18.742	
6,900.00	6,818.61	6,824.83	6,818.61	22.53	11.92	-167.55	161.60	158.90	653.57	618.60	34.97	18.689	
7,000.00	6,918.44	6,924.66	6,918.44	22.88	12.00	-167.67	161.60	158.90	659.13	623.67	35.46	18.587	
7,100.00	7,018.39	7,024.61	7,018.39	23.18	12.09	-167.74	161.60	158.90	662.14	626.24	35.89	18.448	
7,167.61	7,086.00	7,092.22	7,086.00	23.27	12.15	-84.90	161.60	158.90	662.72	626.68	36.05	18.385	
7,200.00	7,118.39	7,124.61	7,118.39	23.28	12.18	-84.90	161.60	158.90	662.72	626.65	36.07	18.374	
7,300.00	7,218.39	7,224.61	7,218.39	23.31	12.27	-84.90	161.60	158.90	662.72	626.55	36.17	18.322	
7,400.00	7,318.39	7,324.61	7,318.39	23.35	12.35	-84.90	161.60	158.90	662.72	626.45	36.27	18.270	
7,500.00	7,418.39	7,424.61	7,418.39	23.38	12.44	-84.90	161.60	158.90	662.72	626.35	36.38	18.219	
7,600.00	7,518.39	7,524.61	7,518.39	23.42	12.53	-84.90	161.60	158.90	662.72	626.24	36.48	18.167	
7,700.00	7,618.39	7,624.61	7,618.39	23.45	12.61	-84.90	161.60	158.90	662.72	626.14	36.58	18.116	
7,800.00	7,718.39	7,724.61	7,718.39	23.49	12.70	-84.90	161.60	158.90	662.72	626.04	36.69	18.064	
7,900.00	7,818.39	7,824.61	7,818.39	23.52	12.79	-84.90	161.60	158.90	662.72	625.93	36.79	18.013	
8,000.00	7,918.39	7,924.61	7,918.39	23.56	12.87	-84.90	161.60	158.90	662.72	625.83	36.90	17.962	
8,100.00	8,018.39	8,024.61	8,018.39	23.60	12.96	-84.90	161.60	158.90	662.72	625.72	37.00	17.911	
8,200.00	8,118.39	8,124.61	8,118.39	23.63	13.05	-84.90	161.60	158.90	662.72	625.62	37.11	17.860	
8,300.00	8,218.39	8,224.61	8,218.39	23.67	13.13	-84.90	161.60	158.90	662.72	625.51	37.21	17.809	
8,400.00	8,318.39	8,324.61	8,318.39	23.71	13.22	-84.90	161.60	158.90	662.72	625.40	37.32	17.758	
8,500.00	8,418.39	8,424.61	8,418.39	23.75	13.31	-84.90	161.60	158.90	662.72	625.30	37.43	17.708	
8,600.00	8,518.39	8,524.61	8,518.39	23.78	13.39	-84.90	161.60	158.90	662.72	625.19	37.53	17.657	
8,700.00	8,618.39	8,624.61	8,618.39	23.82	13.48	-84.90	161.60	158.90	662.72	625.08	37.64	17.607	
8,800.00	8,718.39	8,724.61	8,718.39	23.86	13.57	-84.90	161.60	158.90	662.72	624.97	37.75	17.556	
8,900.00	8,818.39	8,824.61	8,818.39	23.90	13.65	-84.90	161.60	158.90	662.72	624.87	37.86	17.506	
9,000.00	8,918.39	8,924.61	8,918.39	23.94	13.74	-84.90	161.60	158.90	662.72	624.76	37.97	17.456	
9,100.00	9,018.39	9,024.61	9,018.39	23.98	13.82	-84.90	161.60	158.90	662.72	624.65	38.07	17.406	
9,200.00	9,118.39	9,124.61	9,118.39	24.02	13.91	-84.90	161.60	158.90	662.72	624.54	38.18	17.356	
9,300.00	9,218.39	9,224.61	9,218.39	24.05	14.00	-84.90	161.60	158.90	662.72	624.43	38.29	17.306	
9,366.07	9,284.46	9,290.68	9,284.46	24.08	14.05	-84.90	161.60	158.90	662.72	624.36	38.37	17.273	
9,400.00	9,318.39	9,324.41	9,318.19	24.09	14.07	-84.90	161.60	158.90	662.72	624.33	38.39	17.262	
9,500.00	9,418.39	9,412.24	9,405.51	24.13	14.12	-84.18	169.94	158.89	663.65	625.30	38.35	17.305	
9,600.00	9,518.39	9,494.41	9,484.53	24.17	14.16	-82.29	192.09	158.86	667.02	628.85	38.17	17.473	
9,700.00	9,618.39	9,567.24	9,550.49	24.21	14.21	-79.69	222.79	158.83	674.43	636.57	37.86	17.813	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - TATER SALAD FEDERAL COM 702H - OWB - PWP2													Offset Site Error: 0.00 usft
Survey Program: 0-r.5 MWD+IFR1+SAG+FDIR, 2000-r.5 MWD+IFR1, 9323-r.5 MWD+IFR1+SAG+FDIR													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Offset Wellbore Centre		Distance		Rule Assigned:		Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor	
9,800.00	9,718.39	9,629.48	9,602.62	24.25	14.25	-76.87	256.72	158.79	687.75	650.31	37.45	18.366	
9,900.00	9,818.39	9,681.60	9,642.57	24.29	14.29	-74.15	290.15	158.75	708.51	671.51	37.00	19.151	
10,000.00	9,918.39	9,725.00	9,672.90	24.34	14.32	-71.69	321.17	158.71	737.55	700.96	36.59	20.158	
10,100.00	10,018.39	9,760.93	9,695.79	24.38	14.35	-69.56	348.86	158.68	775.04	738.75	36.29	21.358	
10,146.26	10,064.65	9,775.00	9,704.17	24.39	14.36	-68.70	360.16	158.67	795.15	758.96	36.19	21.972	
10,150.00	10,068.39	9,775.00	9,704.17	24.39	14.36	-68.42	360.16	158.67	796.85	760.86	35.99	22.141	
10,175.00	10,093.37	9,784.34	9,709.55	24.39	14.36	-66.45	367.79	158.66	808.19	772.25	35.94	22.486	
10,200.00	10,118.28	9,792.23	9,713.99	24.39	14.37	-64.62	374.32	158.65	819.54	783.63	35.91	22.821	
10,225.00	10,143.03	9,800.00	9,718.24	24.40	14.37	-62.85	380.82	158.64	830.84	794.95	35.90	23.145	
10,250.00	10,167.57	9,808.54	9,722.79	24.40	14.38	-61.10	388.05	158.64	842.04	806.15	35.89	23.459	
10,275.00	10,191.83	9,816.93	9,727.14	24.40	14.39	-59.43	395.22	158.63	853.10	817.19	35.91	23.760	
10,300.00	10,215.75	9,825.00	9,731.20	24.40	14.39	-57.85	402.19	158.62	863.97	828.04	35.93	24.046	
10,325.00	10,239.24	9,834.11	9,735.65	24.40	14.40	-56.30	410.14	158.61	874.62	838.65	35.96	24.320	
10,350.00	10,262.26	9,842.87	9,739.78	24.41	14.40	-54.84	417.87	158.60	885.00	848.99	36.01	24.578	
10,375.00	10,284.74	9,850.00	9,743.03	24.41	14.41	-53.52	424.21	158.59	895.10	859.03	36.07	24.817	
10,400.00	10,306.61	9,860.71	9,747.75	24.41	14.42	-52.17	433.83	158.58	904.85	868.73	36.12	25.050	
10,425.00	10,327.82	9,875.00	9,753.69	24.42	14.43	-50.80	446.82	158.57	914.29	878.12	36.17	25.279	
10,450.00	10,348.31	9,875.00	9,753.69	24.42	14.43	-49.91	446.82	158.57	923.29	887.01	36.28	25.450	
10,475.00	10,368.02	9,888.13	9,758.81	24.43	14.43	-48.75	458.91	158.55	931.87	895.53	36.34	25.642	
10,500.00	10,386.90	9,900.00	9,763.15	24.43	14.44	-47.72	469.96	158.54	940.05	903.64	36.41	25.816	
10,525.00	10,404.90	9,900.00	9,763.15	24.44	14.44	-47.00	469.96	158.54	947.81	911.27	36.54	25.942	
10,550.00	10,421.97	9,916.16	9,768.62	24.44	14.45	-46.04	485.16	158.52	954.98	918.38	36.60	26.094	
10,575.00	10,438.05	9,925.00	9,771.39	24.45	14.46	-45.29	493.56	158.51	961.72	925.03	36.69	26.211	
10,600.00	10,453.11	9,935.11	9,774.37	24.46	14.46	-44.60	503.22	158.50	967.94	931.16	36.78	26.317	
10,625.00	10,467.11	9,950.00	9,778.39	24.47	14.47	-43.92	517.56	158.48	973.67	936.81	36.85	26.419	
10,650.00	10,480.00	9,950.00	9,778.39	24.49	14.47	-43.48	517.56	158.48	978.81	941.83	36.98	26.471	
10,675.00	10,491.76	9,963.83	9,781.71	24.50	14.48	-42.95	530.98	158.47	983.38	946.32	37.06	26.538	
10,700.00	10,502.34	9,975.00	9,784.11	24.51	14.48	-42.53	541.89	158.46	987.41	950.27	37.14	26.584	
10,725.00	10,511.73	9,983.12	9,785.70	24.53	14.49	-42.18	549.86	158.45	990.87	953.63	37.24	26.610	
10,750.00	10,519.89	10,000.00	9,788.56	24.55	14.50	-41.85	566.49	158.43	993.81	956.51	37.31	26.639	
10,775.00	10,526.80	10,000.00	9,788.56	24.57	14.50	-41.67	566.49	158.43	996.04	958.63	37.42	26.620	
10,800.00	10,532.44	10,012.20	9,790.26	24.59	14.50	-41.50	578.58	158.41	997.73	960.23	37.50	26.609	
10,825.00	10,536.80	10,025.00	9,791.71	24.62	14.51	-41.38	591.29	158.40	998.84	961.27	37.57	26.584	
10,850.00	10,539.87	10,025.00	9,791.71	24.65	14.51	-41.34	591.29	158.40	999.38	961.71	37.67	26.530	
10,875.00	10,541.64	10,041.36	9,793.07	24.67	14.52	-41.35	607.59	158.38	999.22	961.49	37.74	26.479	
10,892.84	10,542.10	10,050.00	9,793.56	24.70	14.52	-41.39	616.22	158.37	998.79	961.00	37.79	26.432	
10,900.00	10,542.15	10,050.00	9,793.56	24.70	14.52	-41.39	616.22	158.37	998.56	960.75	37.81	26.409	
10,948.70	10,542.50	10,070.99	9,794.10	24.78	14.53	-41.41	637.20	158.35	997.88	959.93	37.95	26.292	
11,000.00	10,542.87	10,119.85	9,794.29	24.86	14.56	-41.40	686.06	158.29	998.01	959.93	38.08	26.209	
11,100.00	10,543.58	10,219.85	9,794.68	25.04	14.66	-41.39	786.06	158.17	998.25	959.89	38.36	26.023	
11,200.00	10,544.30	10,319.85	9,795.07	25.25	14.86	-41.38	886.06	158.05	998.49	959.81	38.68	25.812	
11,300.00	10,545.02	10,419.85	9,795.46	25.49	15.17	-41.37	986.05	157.94	998.74	959.69	39.05	25.577	
11,400.00	10,545.73	10,519.85	9,795.85	25.76	15.56	-41.35	1,086.05	157.82	998.98	959.53	39.45	25.321	
11,500.00	10,546.45	10,619.85	9,796.25	26.05	16.01	-41.34	1,186.05	157.70	999.23	959.33	39.90	25.045	
11,600.00	10,547.17	10,719.85	9,796.64	26.37	16.50	-41.33	1,286.05	157.59	999.47	959.09	40.38	24.753	
11,700.00	10,547.88	10,819.85	9,797.03	26.71	17.01	-41.32	1,386.05	157.47	999.72	958.82	40.89	24.446	
11,800.00	10,548.60	10,919.85	9,797.42	27.08	17.56	-41.30	1,486.05	157.35	999.96	958.51	41.45	24.127	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - TATER SALAD FEDERAL COM 703H - OWB - PWP2													Offset Site Error:	0.00 usft
Survey Program:		0-r.5 MWD+IFR1+SAG+FDIR, 2000-r.5 MWD+IFR1, 9180-r.5 MWD+IFR1+SAG+FDIR								Rule Assigned:		Offset Well Error:	0.00 usft	
Reference		Offset		Semi Major Axis		Offset Wellbore Centre			Distance		Separation Factor	Warning		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)				
0.00	0.00	0.90	0.00	0.00	0.01	78.34	41.20	199.60	203.81					
100.00	100.00	100.90	100.00	0.77	0.77	78.34	41.20	199.60	203.81	201.81	2.00	102.048		
200.00	200.00	200.90	200.00	1.44	1.44	78.34	41.20	199.60	203.81	200.49	3.32	61.471		
300.00	300.00	300.90	300.00	1.88	1.89	78.34	41.20	199.60	203.81	199.61	4.20	48.542		
400.00	400.00	400.90	400.00	2.25	2.25	78.34	41.20	199.60	203.81	198.89	4.91	41.468		
500.00	500.00	500.90	500.00	2.56	2.56	78.34	41.20	199.60	203.81	198.27	5.54	36.818		
600.00	600.00	600.90	600.00	2.84	2.85	78.34	41.20	199.60	203.81	197.72	6.09	33.452		
700.00	700.00	700.90	700.00	3.10	3.11	78.34	41.20	199.60	203.81	197.20	6.60	30.864		
800.00	800.00	800.90	800.00	3.34	3.35	78.34	41.20	199.60	203.81	196.73	7.08	28.792		
900.00	900.00	900.90	900.00	3.57	3.57	78.34	41.20	199.60	203.81	196.28	7.53	27.082		
1,000.00	1,000.00	1,000.90	1,000.00	3.79	3.79	78.34	41.20	199.60	203.81	195.86	7.95	25.639		
1,100.00	1,100.00	1,100.90	1,100.00	3.99	3.99	78.34	41.20	199.60	203.81	195.45	8.35	24.398		
1,200.00	1,200.00	1,200.90	1,200.00	4.19	4.19	78.34	41.20	199.60	203.81	195.07	8.74	23.316		
1,300.00	1,300.00	1,300.90	1,300.00	4.38	4.38	78.34	41.20	199.60	203.81	194.69	9.11	22.361		
1,400.00	1,400.00	1,400.90	1,400.00	4.56	4.56	78.34	41.20	199.60	203.81	194.33	9.47	21.510		
1,500.00	1,500.00	1,500.90	1,500.00	4.74	4.74	78.34	41.20	199.60	203.81	193.98	9.82	20.745		
1,600.00	1,600.00	1,600.90	1,600.00	4.91	4.91	78.34	41.20	199.60	203.81	193.64	10.16	20.052		
1,700.00	1,700.00	1,700.90	1,700.00	5.08	5.08	78.34	41.20	199.60	203.81	193.31	10.49	19.420		
1,800.00	1,800.00	1,800.90	1,800.00	5.24	5.24	78.34	41.20	199.60	203.81	192.99	10.82	18.841		
1,900.00	1,900.00	1,900.90	1,900.00	5.40	5.40	78.34	41.20	199.60	203.81	192.68	11.13	18.308		
2,000.00	2,000.00	2,000.96	2,000.06	5.56	5.56	78.34	41.20	199.60	203.81	192.37	11.44	17.813		
2,100.00	2,100.00	2,107.87	2,106.95	5.70	5.80	78.10	41.63	197.61	202.07	190.27	11.80	17.119		
2,200.00	2,200.00	2,214.48	2,213.38	5.83	6.05	77.39	42.89	191.76	196.95	184.81	12.14	16.224		
2,300.00	2,300.00	2,320.50	2,318.93	5.95	6.31	76.13	44.98	182.09	188.52	176.04	12.48	15.110		
2,400.00	2,400.00	2,425.64	2,423.18	6.08	6.59	74.17	47.86	168.75	176.93	164.11	12.81	13.808		
2,500.00	2,500.00	2,529.65	2,525.73	6.20	6.87	71.27	51.50	151.88	162.42	149.29	13.13	12.374		
2,600.00	2,599.98	2,629.51	2,623.66	6.40	7.10	-15.87	55.62	132.76	144.22	130.77	13.45	10.721		
2,700.00	2,699.84	2,726.38	2,718.58	6.61	7.35	-21.94	59.69	113.88	123.50	109.71	13.79	8.954		
2,800.00	2,799.45	2,822.35	2,812.63	6.83	7.62	-31.21	63.73	95.18	101.62	87.58	14.05	7.235		
2,900.00	2,898.70	2,917.32	2,905.69	7.07	7.91	-46.30	67.72	76.67	81.11	67.00	14.11	5.747		
3,000.00	2,997.47	3,011.15	2,997.65	7.34	8.20	-70.24	71.67	58.39	67.97	53.93	14.05	4.839		
3,032.89	3,029.82	3,041.75	3,027.63	7.43	8.30	-79.78	72.95	52.42	66.93	52.80	14.13	4.737 CC, ES, SF		
3,099.97	3,095.59	3,103.72	3,088.36	7.62	8.50	-99.23	75.56	40.35	71.55	56.89	14.66	4.881		
3,200.00	3,193.44	3,195.69	3,178.48	7.86	8.81	-121.74	79.43	22.42	92.90	77.08	15.82	5.872		
3,300.00	3,291.25	3,287.63	3,268.57	8.12	9.14	-135.21	83.29	4.51	123.43	106.65	16.78	7.355		
3,400.00	3,389.07	3,379.57	3,358.67	8.39	9.47	-143.32	87.16	-13.41	157.91	140.33	17.57	8.986		
3,500.00	3,486.88	3,471.51	3,448.76	8.69	9.81	-148.54	91.02	-31.33	194.23	175.94	18.29	10.620		
3,600.00	3,584.70	3,563.45	3,538.86	9.00	10.15	-152.13	94.89	-49.24	231.55	212.56	18.98	12.198		
3,700.00	3,682.51	3,655.39	3,628.95	9.32	10.50	-154.73	98.75	-67.16	269.43	249.76	19.67	13.698		
3,800.00	3,780.33	3,747.33	3,719.05	9.66	10.86	-156.69	102.62	-85.08	307.68	287.32	20.36	15.112		
3,900.00	3,878.14	3,839.27	3,809.14	10.01	11.22	-158.22	106.49	-103.00	346.18	325.12	21.06	16.440		
4,000.00	3,975.96	3,931.21	3,899.24	10.37	11.59	-159.45	110.35	-120.91	384.84	363.08	21.76	17.683		
4,100.00	4,073.77	4,023.15	3,989.33	10.73	11.96	-160.45	114.22	-138.83	423.62	401.15	22.48	18.846		
4,200.00	4,171.59	4,115.09	4,079.43	11.11	12.34	-161.29	118.08	-156.75	462.50	439.30	23.20	19.933		
4,300.00	4,269.40	4,207.03	4,169.52	11.49	12.72	-162.00	121.95	-174.66	501.45	477.52	23.93	20.951		
4,400.00	4,367.22	4,298.97	4,259.61	11.88	13.10	-162.60	125.81	-192.58	540.46	515.78	24.68	21.902		
4,500.00	4,465.03	4,390.91	4,349.71	12.28	13.49	-163.12	129.68	-210.50	579.50	554.08	25.42	22.794		
4,600.00	4,562.85	4,482.85	4,439.80	12.68	13.88	-163.58	133.55	-228.41	618.59	592.41	26.18	23.629		
4,700.00	4,660.66	4,574.79	4,529.90	13.08	14.27	-163.98	137.41	-246.33	657.70	630.76	26.94	24.412		
4,800.00	4,758.48	4,666.73	4,619.99	13.49	14.66	-164.34	141.28	-264.25	696.84	669.13	27.71	25.147		
4,900.00	4,856.29	4,758.68	4,710.09	13.91	15.06	-164.66	145.14	-282.17	736.00	707.52	28.48	25.839		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips
Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design:	TATER SALAD & MOMBA FEDERAL - TATER SALAD FEDERAL COM 703H - OWB - PWP2											Offset Site Error:	0.00 usft
Survey Program:	0-r.5 MWD+IFR1+SAG+FDIR, 2000-r.5 MWD+IFR1, 9180-r.5 MWD+IFR1+SAG+FDIR											Offset Well Error:	0.00 usft
Reference	Rule Assigned:												
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor	Warning
5,000.00	4,954.11	4,850.62	4,800.18	14.33	15.46	-164.95	149.01	-300.08	775.18	745.91	29.26	26.490	
5,100.00	5,051.92	4,942.56	4,890.28	14.75	15.86	-165.21	152.87	-318.00	814.37	784.32	30.05	27.103	
5,200.00	5,149.74	5,034.50	4,980.37	15.17	16.26	-165.45	156.74	-335.92	853.57	822.74	30.84	27.681	
5,300.00	5,247.55	5,126.44	5,070.47	15.60	16.66	-165.66	160.61	-353.83	892.79	861.16	31.63	28.227	
5,400.00	5,345.37	5,218.38	5,160.56	16.03	17.07	-165.86	164.47	-371.75	932.02	899.59	32.43	28.742	
5,500.00	5,443.18	5,310.32	5,250.65	16.47	17.48	-166.04	168.34	-389.67	971.25	938.02	33.23	29.231	

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - TATER SALAD FEDERAL COM 704H - OWB - PWP2													Offset Site Error: 0.00 usft
Survey Program: 0-r.5 MWD+IFR1+SAG+FDIR, 1500-r.5 MWD+IFR1, 9495-r.5 MWD+IFR1+SAG+FDIR													Offset Well Error: 0.00 usft
Reference	Offset	Semi Major Axis	Distance	Rule Assigned:									
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor	Warning
0.00	0.00	0.90	0.00	0.00	0.01	83.91	21.30	199.80	200.93				
100.00	100.00	100.90	100.00	0.77	0.77	83.91	21.30	199.80	200.93	198.93	2.00	100.608	
200.00	200.00	200.90	200.00	1.44	1.44	83.91	21.30	199.80	200.93	197.62	3.32	60.604	
300.00	300.00	300.90	300.00	1.88	1.89	83.91	21.30	199.80	200.93	196.73	4.20	47.857	
400.00	400.00	400.90	400.00	2.25	2.25	83.91	21.30	199.80	200.93	196.02	4.91	40.883	
500.00	500.00	500.90	500.00	2.56	2.56	83.91	21.30	199.80	200.93	195.40	5.54	36.299	
600.00	600.00	600.90	600.00	2.84	2.85	83.91	21.30	199.80	200.93	194.84	6.09	32.980	
700.00	700.00	700.90	700.00	3.10	3.11	83.91	21.30	199.80	200.93	194.33	6.60	30.429	
800.00	800.00	800.90	800.00	3.34	3.35	83.91	21.30	199.80	200.93	193.85	7.08	28.386	
900.00	900.00	900.90	900.00	3.57	3.57	83.91	21.30	199.80	200.93	193.41	7.53	26.700	
1,000.00	1,000.00	1,000.90	1,000.00	3.79	3.79	83.91	21.30	199.80	200.93	192.98	7.95	25.277	
1,100.00	1,100.00	1,100.90	1,100.00	3.99	3.99	83.91	21.30	199.80	200.93	192.58	8.35	24.054	
1,200.00	1,200.00	1,200.90	1,200.00	4.19	4.19	83.91	21.30	199.80	200.93	192.19	8.74	22.987	
1,300.00	1,300.00	1,300.90	1,300.00	4.38	4.38	83.91	21.30	199.80	200.93	191.82	9.11	22.046	
1,400.00	1,400.00	1,400.90	1,400.00	4.56	4.56	83.91	21.30	199.80	200.93	191.46	9.47	21.207	
1,500.00	1,500.00	1,500.97	1,500.07	4.74	4.74	83.91	21.30	199.80	200.93	191.11	9.83	20.450	
1,600.00	1,600.00	1,608.36	1,607.43	4.91	5.02	84.01	20.77	197.82	199.05	188.78	10.27	19.384	
1,700.00	1,700.00	1,715.45	1,714.35	5.08	5.31	84.29	19.20	191.98	193.47	182.77	10.70	18.088	
1,800.00	1,800.00	1,821.94	1,820.36	5.24	5.60	84.79	16.62	182.35	184.23	173.10	11.13	16.557	
1,900.00	1,900.00	1,927.54	1,925.06	5.40	5.92	85.58	13.06	169.04	171.39	159.82	11.56	14.821	
2,000.00	2,000.00	2,031.99	2,028.04	5.56	6.26	86.78	8.55	152.22	155.02	143.01	12.01	12.909	
2,100.00	2,100.00	2,135.03	2,128.94	5.70	6.61	88.63	3.16	132.09	135.26	122.82	12.45	10.866	
2,200.00	2,200.00	2,236.42	2,227.44	5.83	6.97	91.61	-3.06	108.88	112.32	99.45	12.87	8.724	
2,300.00	2,300.00	2,335.96	2,323.25	5.95	7.33	96.92	-10.04	82.82	86.61	73.36	13.25	6.537	
2,400.00	2,400.00	2,432.44	2,415.34	6.08	7.62	107.62	-17.49	55.04	59.76	46.28	13.48	4.433	
2,500.00	2,500.00	2,528.34	2,506.81	6.20	7.93	132.06	-24.46	27.11	37.14	23.82	13.32	2.788	Normal Operations
2,580.60	2,580.59	2,605.66	2,580.60	6.36	8.22	90.79	-28.03	4.26	28.34	15.13	13.21	2.145	Caution - Monitor Closely, CC, ES, SF
2,600.00	2,599.98	2,624.17	2,598.25	6.40	8.28	102.93	-28.57	-1.25	29.00	15.53	13.47	2.153	Caution - Monitor Closely
2,700.00	2,699.84	2,718.24	2,687.98	6.61	8.60	146.22	-30.01	-29.47	49.18	34.08	15.11	3.256	
2,800.00	2,799.45	2,810.63	2,776.09	6.83	8.95	162.08	-31.14	-57.23	83.32	67.36	15.95	5.222	
2,900.00	2,898.70	2,901.63	2,862.88	7.07	9.32	168.93	-32.25	-84.58	123.11	106.49	16.62	7.405	
3,000.00	2,997.47	2,991.14	2,948.25	7.34	9.68	172.57	-33.34	-111.47	166.86	149.59	17.27	9.660	
3,099.97	3,095.59	3,079.01	3,032.05	7.62	10.05	174.78	-34.41	-137.87	214.04	196.11	17.93	11.940	
3,200.00	3,193.44	3,166.09	3,115.10	7.86	10.42	176.30	-35.47	-164.04	262.95	244.40	18.55	14.177	
3,300.00	3,291.25	3,253.15	3,198.13	8.12	10.79	177.35	-36.53	-190.20	311.94	292.75	19.19	16.259	
3,400.00	3,389.07	3,340.21	3,281.16	8.39	11.17	178.11	-37.59	-216.36	360.99	341.15	19.84	18.192	
3,500.00	3,486.88	3,427.27	3,364.19	8.69	11.56	178.69	-38.65	-242.52	410.08	389.56	20.52	19.987	
3,600.00	3,584.70	3,514.32	3,447.21	9.00	11.95	179.14	-39.71	-268.67	459.19	437.98	21.21	21.652	
3,700.00	3,682.51	3,601.38	3,530.24	9.32	12.34	179.51	-40.77	-294.83	508.32	486.40	21.91	23.198	
3,800.00	3,780.33	3,688.44	3,613.27	9.66	12.73	179.81	-41.83	-320.99	557.46	534.83	22.63	24.633	
3,900.00	3,878.14	3,775.50	3,696.30	10.01	13.13	-179.93	-42.89	-347.15	606.61	583.25	23.36	25.967	
4,000.00	3,975.96	3,862.55	3,779.33	10.37	13.54	-179.72	-43.95	-373.31	655.77	631.67	24.10	27.209	
4,100.00	4,073.77	3,949.61	3,862.35	10.73	13.94	-179.53	-45.01	-399.47	704.94	680.09	24.85	28.367	
4,200.00	4,171.59	4,036.67	3,945.38	11.11	14.35	-179.37	-46.08	-425.62	754.11	728.50	25.61	29.446	
4,300.00	4,269.40	4,123.73	4,028.41	11.49	14.76	-179.23	-47.14	-451.78	803.28	776.91	26.38	30.454	
4,400.00	4,367.22	4,210.78	4,111.44	11.88	15.17	-179.10	-48.20	-477.94	852.46	825.31	27.15	31.397	
4,500.00	4,465.03	4,297.84	4,194.46	12.28	15.59	-178.99	-49.26	-504.10	901.64	873.71	27.93	32.280	
4,600.00	4,562.85	4,384.90	4,277.49	12.68	16.00	-178.89	-50.32	-530.26	950.82	922.11	28.72	33.108	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - TATER SALAD FEDERAL COM 902H - OWB - PWP2													Offset Site Error: 0.00 usft
Survey Program: 0-r.5 MWD+IFR1+SAG+FDIR, 2000-r.5 MWD+IFR1, 10318-r.5 MWD+IFR1+SAG+FDIR													Offset Well Error: 0.00 usft
Reference	Offset	Semi Major Axis	Offset Wellbore Centre	Distance	Rule Assigned:				Warning				
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor	
0.00	0.00	0.00	0.10	0.00	0.00	-0.57	20.00	-0.20	20.00				
100.00	100.00	99.90	100.00	0.77	0.77	-0.57	20.00	-0.20	20.00	18.01	1.99	10.048	
200.00	200.00	199.90	200.00	1.44	1.44	-0.57	20.00	-0.20	20.00	16.69	3.31	6.041	
300.00	300.00	299.90	300.00	1.88	1.88	-0.57	20.00	-0.20	20.00	15.81	4.19	4.768	
400.00	400.00	399.90	400.00	2.25	2.25	-0.57	20.00	-0.20	20.00	15.09	4.91	4.072	
500.00	500.00	499.90	500.00	2.56	2.56	-0.57	20.00	-0.20	20.00	14.47	5.53	3.615	
600.00	600.00	599.90	600.00	2.84	2.84	-0.57	20.00	-0.20	20.00	13.91	6.09	3.284	
700.00	700.00	699.90	700.00	3.10	3.10	-0.57	20.00	-0.20	20.00	13.40	6.60	3.030	
800.00	800.00	799.90	800.00	3.34	3.34	-0.57	20.00	-0.20	20.00	12.92	7.08	2.826 Normal Operations	
900.00	900.00	899.90	900.00	3.57	3.57	-0.57	20.00	-0.20	20.00	12.48	7.52	2.658 Normal Operations	
1,000.00	1,000.00	999.90	1,000.00	3.79	3.79	-0.57	20.00	-0.20	20.00	12.05	7.95	2.517 Normal Operations	
1,100.00	1,100.00	1,099.90	1,100.00	3.99	3.99	-0.57	20.00	-0.20	20.00	11.65	8.35	2.395 Caution - Monitor Closely	
1,200.00	1,200.00	1,199.90	1,200.00	4.19	4.19	-0.57	20.00	-0.20	20.00	11.26	8.74	2.289 Caution - Monitor Closely	
1,300.00	1,300.00	1,299.90	1,300.00	4.38	4.38	-0.57	20.00	-0.20	20.00	10.89	9.11	2.195 Caution - Monitor Closely	
1,400.00	1,400.00	1,399.90	1,400.00	4.56	4.56	-0.57	20.00	-0.20	20.00	10.53	9.47	2.111 Caution - Monitor Closely	
1,500.00	1,500.00	1,499.90	1,500.00	4.74	4.74	-0.57	20.00	-0.20	20.00	10.18	9.82	2.036 Caution - Monitor Closely	
1,600.00	1,600.00	1,599.90	1,600.00	4.91	4.91	-0.57	20.00	-0.20	20.00	9.84	10.16	1.968 Caution - Monitor Closely	
1,700.00	1,700.00	1,699.90	1,700.00	5.08	5.08	-0.57	20.00	-0.20	20.00	9.51	10.49	1.906 Caution - Monitor Closely	
1,800.00	1,800.00	1,799.90	1,800.00	5.24	5.24	-0.57	20.00	-0.20	20.00	9.19	10.82	1.849 Caution - Monitor Closely	
1,900.00	1,900.00	1,899.90	1,900.00	5.40	5.40	-0.57	20.00	-0.20	20.00	8.87	11.13	1.797 Caution - Monitor Closely	
2,000.00	2,000.00	1,999.90	2,000.00	5.56	5.56	-0.57	20.00	-0.20	20.00	8.56	11.44	1.748 Caution - Monitor Closely, CC, ES, SF	
2,100.00	2,100.00	2,099.69	2,099.79	5.70	5.70	1.43	20.50	0.51	20.50	8.79	11.72	1.750 Caution - Monitor Closely	
2,200.00	2,200.00	2,199.43	2,199.49	5.83	5.84	6.85	21.99	2.64	22.15	10.18	11.97	1.850 Caution - Monitor Closely	
2,300.00	2,300.00	2,299.04	2,299.00	5.95	5.99	14.20	24.47	6.19	25.27	13.03	12.24	2.065 Caution - Monitor Closely	
2,400.00	2,400.00	2,398.47	2,398.25	6.08	6.17	21.74	27.94	11.15	30.14	17.62	12.52	2.408 Caution - Monitor Closely	
2,500.00	2,500.00	2,497.66	2,497.13	6.20	6.36	28.37	32.39	17.49	36.92	24.11	12.81	2.882 Normal Operations	
2,600.00	2,599.98	2,597.23	2,596.24	6.40	6.58	-48.97	36.60	26.06	43.93	30.74	13.19	3.330	
2,700.00	2,699.84	2,696.75	2,695.04	6.61	6.84	-43.92	39.22	37.68	49.39	35.80	13.59	3.634	
2,800.00	2,799.45	2,796.53	2,793.86	6.83	7.07	-39.85	40.73	51.42	53.11	39.12	13.99	3.797	
2,900.00	2,898.70	2,896.51	2,892.87	7.07	7.33	-38.45	42.22	65.26	54.31	39.88	14.42	3.765	
3,000.00	2,997.47	2,996.49	2,991.87	7.34	7.61	-39.44	43.70	79.09	52.79	37.93	14.86	3.553	
3,099.97	3,095.59	3,096.32	3,090.73	7.62	7.90	-43.19	45.19	92.91	48.69	33.45	15.24	3.195	
3,200.00	3,193.44	3,196.10	3,189.54	7.86	8.20	-49.22	46.67	106.72	43.67	28.17	15.50	2.818 Normal Operations	
3,300.00	3,291.25	3,295.86	3,288.33	8.12	8.52	-56.70	48.15	120.52	39.25	23.61	15.64	2.509 Normal Operations	
3,400.00	3,389.07	3,395.62	3,387.11	8.39	8.84	-65.87	49.63	134.33	35.67	20.00	15.66	2.277 Caution - Monitor Closely	
3,500.00	3,486.88	3,495.37	3,485.90	8.69	9.17	-76.73	51.12	148.13	33.18	17.59	15.59	2.128 Caution - Monitor Closely	
3,600.00	3,584.70	3,595.13	3,584.68	9.00	9.51	-88.83	52.60	161.93	32.05	16.46	15.59	2.056 Caution - Monitor Closely	
3,625.72	3,609.86	3,620.79	3,610.09	9.08	9.60	-92.03	52.98	165.48	32.00	16.37	15.63	2.047 Caution - Monitor Closely	
3,700.00	3,682.51	3,694.89	3,683.47	9.32	9.86	-101.21	54.08	175.74	32.42	16.54	15.88	2.042 Caution - Monitor Closely	
3,800.00	3,780.33	3,794.64	3,782.25	9.66	10.22	-112.80	55.56	189.54	34.23	17.68	16.56	2.068 Caution - Monitor Closely	
3,900.00	3,878.14	3,894.40	3,881.04	10.01	10.58	-122.86	57.05	203.35	37.29	19.76	17.53	2.127 Caution - Monitor Closely	
4,000.00	3,975.96	3,994.15	3,979.83	10.37	10.94	-131.20	58.53	217.15	41.31	22.67	18.64	2.217 Caution - Monitor Closely	
4,100.00	4,073.77	4,093.91	4,078.61	10.73	11.31	-137.94	60.01	230.96	46.04	26.28	19.77	2.329 Caution - Monitor Closely	
4,200.00	4,171.59	4,193.67	4,177.40	11.11	11.69	-143.37	61.49	244.76	51.29	30.43	20.87	2.458 Caution - Monitor Closely	
4,300.00	4,269.40	4,293.42	4,276.18	11.49	12.07	-147.76	62.97	258.56	56.92	34.99	21.93	2.596 Normal Operations	
4,400.00	4,367.22	4,392.91	4,374.71	11.88	12.42	-151.36	64.45	272.27	62.87	39.95	22.92	2.743 Normal Operations	
4,500.00	4,465.03	4,491.54	4,472.55	12.28	12.79	-154.74	65.77	284.62	70.19	46.25	23.93	2.933 Normal Operations	
4,600.00	4,562.85	4,589.85	4,570.28	12.68	13.16	-157.92	66.91	295.26	79.30	54.37	24.93	3.181	
4,700.00	4,660.66	4,687.79	4,667.81	13.08	13.51	-160.78	67.87	304.20	90.22	64.34	25.88	3.486	
4,800.00	4,758.48	4,785.32	4,765.06	13.49	13.85	-163.27	68.65	311.45	102.96	76.17	26.79	3.844	
4,900.00	4,856.29	4,882.37	4,861.94	13.91	14.17	-165.40	69.25	317.04	117.48	89.84	27.63	4.251	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - TATER SALAD FEDERAL COM 902H - OWB - PWP2													Offset Site Error: 0.00 usft
Survey Program: 0-r.5 MWD+IFR1+SAG+FDIR, 2000-r.5 MWD+IFR1, 10318-r.5 MWD+IFR1+SAG+FDIR													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Offset Wellbore Centre		Distance		Rule Assigned:		Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor	
5,000.00	4,954.11	4,978.89	4,958.38	14.33	14.47	-167.20	69.68	320.97	133.76	105.34	28.42	4.706	
5,100.00	5,051.92	5,074.83	5,054.29	14.75	14.73	-168.72	69.92	323.28	151.78	122.63	29.15	5.206	
5,200.00	5,149.74	5,170.28	5,149.74	15.17	14.88	-170.00	70.00	324.00	171.50	141.75	29.75	5.764	
5,300.00	5,247.55	5,268.09	5,247.55	15.60	14.92	-171.08	70.00	324.00	192.02	161.74	30.28	6.342	
5,400.00	5,345.37	5,365.91	5,345.37	16.03	14.97	-171.95	70.00	324.00	212.59	181.79	30.81	6.901	
5,500.00	5,443.18	5,463.72	5,443.18	16.47	15.02	-172.66	70.00	324.00	233.20	201.87	31.33	7.443	
5,600.00	5,541.00	5,561.54	5,541.00	16.90	15.07	-173.26	70.00	324.00	253.84	221.99	31.86	7.968	
5,700.00	5,638.81	5,659.35	5,638.81	17.34	15.12	-173.77	70.00	324.00	274.51	242.12	32.38	8.476	
5,800.00	5,736.63	5,757.17	5,736.63	17.78	15.18	-174.21	70.00	324.00	295.19	262.27	32.91	8.968	
5,900.00	5,834.44	5,854.98	5,834.44	18.22	15.23	-174.59	70.00	324.00	315.88	282.44	33.45	9.444	
6,000.00	5,932.26	5,952.80	5,932.26	18.67	15.28	-174.92	70.00	324.00	336.59	302.61	33.98	9.905	
6,100.00	6,030.07	6,050.61	6,030.07	19.11	15.33	-175.22	70.00	324.00	357.31	322.78	34.52	10.350	
6,200.00	6,127.89	6,148.43	6,127.89	19.56	15.39	-175.48	70.00	324.00	378.03	342.97	35.06	10.781	
6,300.00	6,225.70	6,246.24	6,225.70	20.01	15.44	-175.72	70.00	324.00	398.76	363.15	35.61	11.198	
6,367.65	6,291.87	6,312.42	6,291.87	20.30	15.48	-175.86	70.00	324.00	412.79	376.82	35.97	11.476	
6,400.00	6,323.55	6,344.09	6,323.55	20.44	15.49	-175.93	70.00	324.00	419.37	383.23	36.14	11.604	
6,500.00	6,421.78	6,442.32	6,421.78	20.89	15.55	-176.13	70.00	324.00	438.00	401.31	36.69	11.937	
6,600.00	6,520.48	6,541.02	6,520.48	21.32	15.60	-176.28	70.00	324.00	454.06	416.83	37.23	12.196	
6,700.00	6,619.56	6,640.10	6,619.56	21.74	15.66	-176.40	70.00	324.00	467.54	429.79	37.76	12.383	
6,800.00	6,718.96	6,739.50	6,718.96	22.15	15.71	-176.49	70.00	324.00	478.43	440.17	38.26	12.505	
6,900.00	6,818.61	6,839.15	6,818.61	22.53	15.77	-176.56	70.00	324.00	486.72	447.99	38.74	12.564	
7,000.00	6,918.44	6,938.98	6,918.44	22.88	15.82	-176.60	70.00	324.00	492.41	453.22	39.19	12.566	
7,100.00	7,018.39	7,038.93	7,018.39	23.18	15.88	-176.63	70.00	324.00	495.48	455.90	39.58	12.519	
7,167.61	7,086.00	7,106.54	7,086.00	23.27	15.92	-93.78	70.00	324.00	496.08	456.36	39.72	12.491	
7,200.00	7,118.39	7,138.93	7,118.39	23.28	15.94	-93.78	70.00	324.00	496.08	456.35	39.73	12.485	
7,300.00	7,218.39	7,238.93	7,218.39	23.31	15.99	-93.78	70.00	324.00	496.08	456.26	39.82	12.459	
7,400.00	7,318.39	7,338.93	7,318.39	23.35	16.05	-93.78	70.00	324.00	496.08	456.18	39.90	12.432	
7,500.00	7,418.39	7,438.93	7,418.39	23.38	16.11	-93.78	70.00	324.00	496.08	456.09	39.99	12.405	
7,600.00	7,518.39	7,538.93	7,518.39	23.42	16.16	-93.78	70.00	324.00	496.08	456.00	40.08	12.379	
7,700.00	7,618.39	7,638.93	7,618.39	23.45	16.22	-93.78	70.00	324.00	496.08	455.92	40.16	12.352	
7,800.00	7,718.39	7,738.93	7,718.39	23.49	16.28	-93.78	70.00	324.00	496.08	455.83	40.25	12.325	
7,900.00	7,818.39	7,838.93	7,818.39	23.52	16.34	-93.78	70.00	324.00	496.08	455.74	40.34	12.298	
8,000.00	7,918.39	7,938.93	7,918.39	23.56	16.40	-93.78	70.00	324.00	496.08	455.65	40.42	12.272	
8,100.00	8,018.39	8,038.93	8,018.39	23.60	16.45	-93.78	70.00	324.00	496.08	455.57	40.51	12.245	
8,200.00	8,118.39	8,138.93	8,118.39	23.63	16.51	-93.78	70.00	324.00	496.08	455.48	40.60	12.218	
8,300.00	8,218.39	8,238.93	8,218.39	23.67	16.57	-93.78	70.00	324.00	496.08	455.39	40.69	12.191	
8,400.00	8,318.39	8,338.93	8,318.39	23.71	16.63	-93.78	70.00	324.00	496.08	455.30	40.78	12.164	
8,500.00	8,418.39	8,438.93	8,418.39	23.75	16.69	-93.78	70.00	324.00	496.08	455.21	40.87	12.137	
8,600.00	8,518.39	8,538.93	8,518.39	23.78	16.75	-93.78	70.00	324.00	496.08	455.12	40.96	12.111	
8,700.00	8,618.39	8,638.93	8,618.39	23.82	16.81	-93.78	70.00	324.00	496.08	455.03	41.05	12.084	
8,800.00	8,718.39	8,738.93	8,718.39	23.86	16.87	-93.78	70.00	324.00	496.08	454.93	41.15	12.057	
8,900.00	8,818.39	8,838.93	8,818.39	23.90	16.93	-93.78	70.00	324.00	496.08	454.84	41.24	12.030	
9,000.00	8,918.39	8,938.93	8,918.39	23.94	16.99	-93.78	70.00	324.00	496.08	454.75	41.33	12.003	
9,100.00	9,018.39	9,038.93	9,018.39	23.98	17.05	-93.78	70.00	324.00	496.08	454.66	41.42	11.976	
9,200.00	9,118.39	9,138.93	9,118.39	24.02	17.11	-93.78	70.00	324.00	496.08	454.56	41.52	11.949	
9,300.00	9,218.39	9,238.93	9,218.39	24.05	17.17	-93.78	70.00	324.00	496.08	454.47	41.61	11.922	
9,400.00	9,318.39	9,338.93	9,318.39	24.09	17.23	-93.78	70.00	324.00	496.08	454.38	41.70	11.895	
9,500.00	9,418.39	9,438.93	9,418.39	24.13	17.29	-93.78	70.00	324.00	496.08	454.28	41.80	11.868	
9,600.00	9,518.39	9,538.93	9,518.39	24.17	17.35	-93.78	70.00	324.00	496.08	454.19	41.89	11.842	
9,700.00	9,618.39	9,638.93	9,618.39	24.21	17.41	-93.78	70.00	324.00	496.08	454.09	41.99	11.815	
9,800.00	9,718.39	9,738.93	9,718.39	24.25	17.47	-93.78	70.00	324.00	496.08	454.00	42.08	11.788	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - TATER SALAD FEDERAL COM 902H - OWB - PWP2													Offset Site Error:	0.00 usft	
Survey Program:		0-r.5 MWD+IFR1+SAG+FDIR, 2000-r.5 MWD+IFR1, 10318-r.5 MWD+IFR1+SAG+FDIR										Rule Assigned:		Offset Well Error:	0.00 usft
Reference	Offset	Semi Major Axis		Offset Wellbore Centre		Distance				Warning					
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor	Warning		
9,900.00	9,818.39	9,838.93	9,818.39	24.29	17.54	-93.78	70.00	324.00	496.08	453.90	42.18	11.761			
10,000.00	9,918.39	9,938.93	9,918.39	24.34	17.60	-93.78	70.00	324.00	496.08	453.80	42.28	11.734			
10,100.00	10,018.39	10,038.93	10,018.39	24.38	17.66	-93.78	70.00	324.00	496.08	453.71	42.37	11.707			
10,146.26	10,064.65	10,085.19	10,064.65	24.39	17.69	-93.78	70.00	324.00	496.08	453.67	42.41	11.698			
10,150.00	10,068.39	10,088.93	10,068.39	24.39	17.69	-93.71	70.00	324.00	496.08	453.67	42.41	11.697			
10,175.00	10,093.37	10,113.91	10,093.37	24.39	17.71	-93.81	70.00	324.00	496.14	453.70	42.43	11.692			
10,200.00	10,118.28	10,138.82	10,118.28	24.39	17.72	-94.04	70.00	324.00	496.28	453.83	42.46	11.689			
10,225.00	10,143.03	10,163.57	10,143.03	24.40	17.74	-94.40	70.00	324.00	496.54	454.06	42.48	11.688			
10,250.00	10,167.57	10,188.12	10,167.57	24.40	17.75	-94.89	70.00	324.00	496.93	454.42	42.51	11.689			
10,275.00	10,191.83	10,212.38	10,191.83	24.40	17.77	-95.49	70.00	324.00	497.49	454.95	42.54	11.694			
10,300.00	10,215.75	10,236.29	10,215.75	24.40	17.78	-96.20	70.00	324.00	498.27	455.70	42.57	11.704			
10,325.00	10,239.24	10,259.78	10,239.24	24.40	17.80	-96.99	70.00	324.00	499.31	456.71	42.60	11.721			
10,350.00	10,262.26	10,282.80	10,262.26	24.41	17.81	-97.85	70.00	324.00	500.68	458.06	42.62	11.747			
10,375.00	10,284.74	10,305.28	10,284.74	24.41	17.82	-98.75	70.00	324.00	502.43	459.80	42.63	11.786			
10,400.00	10,306.61	10,329.47	10,308.93	24.41	17.83	-99.80	70.13	324.00	504.62	461.98	42.64	11.834			
10,425.00	10,327.82	10,357.44	10,336.86	24.42	17.83	-101.02	71.61	324.00	507.10	464.43	42.67	11.883			
10,450.00	10,348.31	10,386.46	10,365.68	24.42	17.84	-102.24	74.87	323.99	509.82	467.12	42.71	11.937			
10,475.00	10,368.02	10,416.61	10,395.38	24.43	17.84	-103.45	80.11	323.99	512.75	470.00	42.75	11.995			
10,500.00	10,386.90	10,448.00	10,425.86	24.43	17.84	-104.65	87.54	323.98	515.85	473.06	42.79	12.054			
10,525.00	10,404.90	10,480.71	10,457.05	24.44	17.85	-105.84	97.40	323.97	519.09	476.24	42.85	12.114			
10,550.00	10,421.97	10,514.85	10,488.79	24.44	17.85	-107.01	109.93	323.95	522.42	479.50	42.92	12.171			
10,575.00	10,438.05	10,550.50	10,520.90	24.45	17.86	-108.16	125.41	323.94	525.79	482.78	43.01	12.224			
10,600.00	10,453.11	10,587.74	10,553.10	24.46	17.86	-109.28	144.09	323.91	529.14	486.02	43.12	12.271			
10,625.00	10,467.11	10,626.63	10,585.08	24.47	17.87	-110.35	166.22	323.89	532.41	489.16	43.25	12.311			
10,650.00	10,480.00	10,667.21	10,616.41	24.49	17.88	-111.37	191.99	323.86	535.54	492.15	43.39	12.342			
10,675.00	10,491.76	10,709.48	10,646.58	24.50	17.90	-112.31	221.56	323.82	538.46	494.91	43.56	12.362			
10,700.00	10,502.34	10,753.37	10,675.02	24.51	17.92	-113.16	254.97	323.78	541.10	497.37	43.73	12.374			
10,725.00	10,511.73	10,798.78	10,701.10	24.53	17.94	-113.90	292.14	323.74	543.40	499.49	43.91	12.376			
10,750.00	10,519.89	10,845.54	10,724.13	24.55	17.97	-114.51	332.81	323.69	545.29	501.21	44.08	12.370			
10,775.00	10,526.80	10,893.41	10,743.47	24.57	18.01	-114.98	376.58	323.64	546.72	502.48	44.24	12.358			
10,800.00	10,532.44	10,942.10	10,758.55	24.59	18.06	-115.28	422.85	323.59	547.65	503.28	44.37	12.343			
10,825.00	10,536.80	10,991.25	10,768.92	24.62	18.12	-115.41	470.87	323.53	548.05	503.59	44.47	12.325			
10,850.00	10,539.87	11,040.49	10,774.30	24.65	18.19	-115.36	519.79	323.48	547.91	503.39	44.52	12.307			
10,875.00	10,541.64	11,078.47	10,775.13	24.67	18.25	-115.23	557.76	323.43	547.34	502.78	44.56	12.283			
10,892.84	10,542.10	11,096.30	10,775.17	24.70	18.29	-115.21	575.59	323.41	547.16	502.56	44.60	12.267			
10,900.00	10,542.15	11,103.46	10,775.19	24.70	18.30	-115.21	582.75	323.40	547.15	502.52	44.62	12.262			
11,000.00	10,542.87	11,203.46	10,775.44	24.86	18.51	-115.16	682.75	323.29	546.95	502.01	44.94	12.172			
11,100.00	10,543.58	11,303.46	10,775.69	25.04	18.76	-115.12	782.75	323.17	546.75	501.44	45.30	12.069			
11,200.00	10,544.30	11,403.46	10,775.94	25.25	19.05	-115.08	882.75	323.05	546.55	500.83	45.72	11.954			
11,300.00	10,545.02	11,503.46	10,776.18	25.49	19.37	-115.03	982.75	322.94	546.35	500.16	46.19	11.827			
11,400.00	10,545.73	11,603.46	10,776.43	25.76	19.73	-114.99	1,082.74	322.82	546.15	499.44	46.71	11.691			
11,500.00	10,546.45	11,703.46	10,776.68	26.05	20.12	-114.94	1,182.74	322.70	545.95	498.67	47.28	11.547			
11,600.00	10,547.17	11,803.46	10,776.93	26.37	20.53	-114.90	1,282.74	322.59	545.76	497.86	47.90	11.394			
11,700.00	10,547.88	11,903.46	10,777.18	26.71	20.98	-114.85	1,382.74	322.47	545.56	497.00	48.56	11.235			
11,800.00	10,548.60	12,003.45	10,777.42	27.08	21.45	-114.81	1,482.74	322.35	545.36	496.10	49.26	11.071			
11,900.00	10,549.32	12,103.45	10,777.67	27.47	21.94	-114.76	1,582.74	322.24	545.17	495.16	50.00	10.902			
12,000.00	10,550.03	12,203.45	10,777.92	27.88	22.46	-114.72	1,682.73	322.12	544.97	494.18	50.79	10.730			
12,100.00	10,550.75	12,303.45	10,778.17	28.31	22.99	-114.67	1,782.73	322.00	544.77	493.16	51.61	10.556			
12,200.00	10,551.47	12,403.45	10,778.42	28.76	23.55	-114.63	1,882.73	321.89	544.58	492.11	52.47	10.379			
12,300.00	10,552.18	12,503.45	10,778.67	29.23	24.12	-114.58	1,982.73	321.77	544.38	491.02	53.36	10.202			
12,400.00	10,552.90	12,603.45	10,778.91	29.72	24.71	-114.54	2,082.73	321.65	544.19	489.90	54.28	10.025			

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - TATER SALAD FEDERAL COM 902H - OWB - PWP2													Offset Site Error:	0.00 usft
Survey Program:		0-r.5 MWD+IFR1+SAG+FDIR, 2000-r.5 MWD+IFR1, 10318-r.5 MWD+IFR1+SAG+FDIR							Rule Assigned:				Offset Well Error:	0.00 usft
Reference	Offset	Offset		Semi Major Axis		Offset Wellbore Centre			Distance		No-Go	Separation	Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Ellipses (usft)	Distance (usft)	Factor		
12,500.00	10,553.61	12,703.45	10,779.16	30.22	25.32	-114.49	2,182.73	321.54	543.99	488.75	55.24	9.848		
12,600.00	10,554.33	12,803.45	10,779.41	30.74	25.94	-114.45	2,282.73	321.42	543.80	487.57	56.22	9.672		
12,700.00	10,555.05	12,903.44	10,779.66	31.28	26.58	-114.41	2,382.72	321.30	543.60	486.37	57.24	9.497		
12,800.00	10,555.76	13,003.44	10,779.91	31.83	27.22	-114.36	2,482.72	321.19	543.41	485.13	58.28	9.325		
12,900.00	10,556.48	13,103.44	10,780.15	32.39	27.88	-114.32	2,582.72	321.07	543.22	483.88	59.34	9.154		
13,000.00	10,557.20	13,203.44	10,780.40	32.96	28.55	-114.27	2,682.72	320.95	543.02	482.59	60.43	8.986		
13,100.00	10,557.91	13,303.44	10,780.65	33.55	29.23	-114.23	2,782.72	320.84	542.83	481.29	61.54	8.820		
13,200.00	10,558.63	13,403.44	10,780.90	34.15	29.91	-114.18	2,882.72	320.72	542.64	479.96	62.68	8.658		
13,300.00	10,559.35	13,503.44	10,781.15	34.76	30.61	-114.13	2,982.72	320.60	542.45	478.62	63.83	8.498		
13,400.00	10,560.06	13,603.44	10,781.40	35.38	31.32	-114.09	3,082.71	320.49	542.26	477.25	65.01	8.342		
13,500.00	10,560.78	13,703.44	10,781.64	36.01	32.03	-114.04	3,182.71	320.37	542.07	475.87	66.20	8.189		
13,600.00	10,561.50	13,803.43	10,781.89	36.65	32.75	-114.00	3,282.71	320.25	541.87	474.47	67.41	8.039		
13,700.00	10,562.21	13,903.43	10,782.14	37.30	33.47	-113.95	3,382.71	320.14	541.68	473.05	68.63	7.892		
13,800.00	10,562.93	14,003.43	10,782.39	37.96	34.20	-113.91	3,482.71	320.02	541.49	471.62	69.88	7.749		
13,900.00	10,563.65	14,103.43	10,782.64	38.62	34.94	-113.86	3,582.71	319.90	541.30	470.17	71.13	7.610		
14,000.00	10,564.36	14,203.43	10,782.88	39.29	35.68	-113.82	3,682.71	319.79	541.11	468.71	72.41	7.473		
14,100.00	10,565.08	14,303.43	10,783.13	39.97	36.43	-113.77	3,782.70	319.67	540.92	467.23	73.69	7.340		
14,200.00	10,565.79	14,403.43	10,783.38	40.66	37.18	-113.73	3,882.70	319.55	540.74	465.75	74.99	7.211		
14,300.00	10,566.51	14,503.43	10,783.63	41.35	37.94	-113.68	3,982.70	319.44	540.55	464.25	76.30	7.084		
14,400.00	10,567.23	14,603.43	10,783.88	42.05	38.70	-113.64	4,082.70	319.32	540.36	462.74	77.62	6.961		
14,500.00	10,567.94	14,703.43	10,784.12	42.75	39.47	-113.59	4,182.70	319.21	540.17	461.21	78.96	6.841		
14,600.00	10,568.66	14,803.42	10,784.37	43.46	40.24	-113.55	4,282.70	319.09	539.98	459.68	80.30	6.724		
14,700.00	10,569.38	14,903.42	10,784.62	44.17	41.01	-113.50	4,382.70	318.97	539.80	458.14	81.66	6.611		
14,800.00	10,570.09	15,003.42	10,784.87	44.89	41.78	-113.45	4,482.69	318.86	539.61	456.59	83.02	6.500		
14,900.00	10,570.81	15,103.42	10,785.12	45.62	42.56	-113.41	4,582.69	318.74	539.42	455.03	84.39	6.392		
15,000.00	10,571.53	15,203.42	10,785.37	46.35	43.34	-113.36	4,682.69	318.62	539.24	453.46	85.78	6.287		
15,100.00	10,572.24	15,303.42	10,785.61	47.08	44.13	-113.32	4,782.69	318.51	539.05	451.88	87.17	6.184		
15,200.00	10,572.96	15,403.42	10,785.86	47.82	44.92	-113.27	4,882.69	318.39	538.87	450.30	88.57	6.084		
15,300.00	10,573.68	15,503.42	10,786.11	48.56	45.71	-113.23	4,982.69	318.27	538.68	448.71	89.97	5.987		
15,400.00	10,574.39	15,603.42	10,786.36	49.30	46.50	-113.18	5,082.68	318.16	538.50	447.11	91.39	5.892		
15,500.00	10,575.11	15,703.41	10,786.61	50.05	47.29	-113.13	5,182.68	318.04	538.31	445.50	92.81	5.800		
15,600.00	10,575.82	15,803.41	10,786.85	50.80	48.09	-113.09	5,282.68	317.92	538.13	443.89	94.24	5.710		
15,700.00	10,576.54	15,903.41	10,787.10	51.56	48.89	-113.04	5,382.68	317.81	537.94	442.27	95.67	5.623		
15,800.00	10,577.26	16,003.41	10,787.35	52.32	49.69	-113.00	5,482.68	317.69	537.76	440.65	97.11	5.537		
15,900.00	10,577.97	16,103.41	10,787.60	53.08	50.49	-112.95	5,582.68	317.57	537.58	439.01	98.56	5.454		
16,000.00	10,578.69	16,203.41	10,787.85	53.84	51.29	-112.90	5,682.68	317.46	537.39	437.38	100.02	5.373		
16,100.00	10,579.41	16,303.41	10,788.10	54.61	52.10	-112.86	5,782.67	317.34	537.21	435.74	101.47	5.294		
16,200.00	10,580.12	16,403.41	10,788.34	55.38	52.91	-112.81	5,882.67	317.22	537.03	434.09	102.94	5.217		
16,300.00	10,580.84	16,503.41	10,788.59	56.15	53.72	-112.77	5,982.67	317.11	536.85	432.44	104.41	5.142		
16,400.00	10,581.56	16,603.40	10,788.84	56.92	54.53	-112.72	6,082.67	316.99	536.67	430.78	105.88	5.068		
16,500.00	10,582.27	16,703.40	10,789.09	57.70	55.34	-112.67	6,182.67	316.87	536.49	429.12	107.36	4.997		
16,600.00	10,582.99	16,803.40	10,789.34	58.48	56.15	-112.63	6,282.67	316.76	536.31	427.46	108.85	4.927		
16,700.00	10,583.71	16,903.40	10,789.58	59.26	56.97	-112.58	6,382.67	316.64	536.13	425.79	110.34	4.859		
16,800.00	10,584.42	17,003.40	10,789.83	60.04	57.78	-112.54	6,482.66	316.52	535.95	424.11	111.83	4.792		
16,900.00	10,585.14	17,103.40	10,790.08	60.83	58.60	-112.49	6,582.66	316.41	535.77	422.44	113.33	4.728		
17,000.00	10,585.86	17,203.40	10,790.33	61.62	59.42	-112.44	6,682.66	316.29	535.59	420.76	114.83	4.664		
17,100.00	10,586.57	17,303.40	10,790.58	62.40	60.24	-112.40	6,782.66	316.17	535.41	419.07	116.34	4.602		
17,200.00	10,587.29	17,403.40	10,790.83	63.20	61.06	-112.35	6,882.66	316.06	535.23	417.38	117.84	4.542		
17,300.00	10,588.00	17,503.39	10,791.07	63.99	61.88	-112.30	6,982.66	315.94	535.05	415.69	119.36	4.483		
17,400.00	10,588.72	17,603.39	10,791.32	64.78	62.70	-112.26	7,082.66	315.82	534.87	414.00	120.87	4.425		
17,500.00	10,589.44	17,703.39	10,791.57	65.58	63.53	-112.21	7,182.65	315.71	534.70	412.30	122.40	4.369		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - TATER SALAD FEDERAL COM 902H - OWB - PWP2													Offset Site Error:	0.00 usft
Survey Program:				0-r.5 MWD+IFR1+SAG+FDIR, 2000-r.5 MWD+IFR1, 10318-r.5 MWD+IFR1+SAG+FDIR					Rule Assigned:				Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Offset Wellbore Centre			Distance					
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor	Warning	
17,600.00	10,590.15	17,803.39	10,791.82	66.37	64.35	-112.17	7,282.65	315.59	534.52	410.60	123.92	4.313		
17,700.00	10,590.87	17,903.39	10,792.07	67.17	65.18	-112.12	7,382.65	315.47	534.34	408.90	125.45	4.260		
17,800.00	10,591.59	18,003.39	10,792.31	67.97	66.00	-112.07	7,482.65	315.36	534.17	407.19	126.98	4.207		
17,900.00	10,592.30	18,103.39	10,792.56	68.77	66.83	-112.03	7,582.65	315.24	533.99	405.48	128.51	4.155		
18,000.00	10,593.02	18,203.39	10,792.81	69.58	67.66	-111.98	7,682.65	315.12	533.81	403.77	130.05	4.105		
18,100.00	10,593.74	18,303.39	10,793.06	70.38	68.49	-111.93	7,782.65	315.01	533.64	402.05	131.59	4.055		
18,200.00	10,594.45	18,403.38	10,793.31	71.19	69.31	-111.89	7,882.64	314.89	533.46	400.33	133.13	4.007		
18,300.00	10,595.17	18,503.38	10,793.56	71.99	70.14	-111.84	7,982.64	314.77	533.29	398.61	134.67	3.960		
18,400.00	10,595.89	18,603.38	10,793.80	72.80	70.97	-111.79	8,082.64	314.66	533.11	396.89	136.22	3.914		
18,500.00	10,596.60	18,703.38	10,794.05	73.61	71.81	-111.75	8,182.64	314.54	532.94	395.17	137.77	3.868		
18,600.00	10,597.32	18,803.38	10,794.30	74.42	72.64	-111.70	8,282.64	314.43	532.77	393.44	139.32	3.824		
18,700.00	10,598.04	18,903.38	10,794.55	75.23	73.47	-111.65	8,382.64	314.31	532.59	391.71	140.88	3.780		
18,800.00	10,598.75	19,003.38	10,794.80	76.04	74.30	-111.61	8,482.63	314.19	532.42	389.98	142.44	3.738		
18,900.00	10,599.47	19,103.38	10,795.04	76.85	75.13	-111.56	8,582.63	314.08	532.25	388.25	144.00	3.696		
19,000.00	10,600.18	19,203.38	10,795.29	77.67	75.97	-111.51	8,682.63	313.96	532.08	386.51	145.56	3.655		
19,100.00	10,600.90	19,303.37	10,795.54	78.48	76.80	-111.46	8,782.63	313.84	531.90	384.78	147.13	3.615		
19,200.00	10,601.62	19,403.37	10,795.79	79.30	77.64	-111.42	8,882.63	313.73	531.73	383.04	148.69	3.576		
19,300.00	10,602.33	19,503.37	10,796.04	80.11	78.47	-111.37	8,982.63	313.61	531.56	381.30	150.26	3.538		
19,400.00	10,603.05	19,603.37	10,796.28	80.93	79.31	-111.32	9,082.63	313.49	531.39	379.55	151.84	3.500		
19,500.00	10,603.77	19,703.37	10,796.53	81.75	80.15	-111.28	9,182.62	313.38	531.22	377.81	153.41	3.463		
19,600.00	10,604.48	19,803.37	10,796.78	82.57	80.98	-111.23	9,282.62	313.26	531.05	376.06	154.99	3.426		
19,700.00	10,605.20	19,903.37	10,797.03	83.39	81.82	-111.18	9,382.62	313.14	530.88	374.32	156.56	3.391		
19,800.00	10,605.92	20,003.37	10,797.28	84.21	82.66	-111.14	9,482.62	313.03	530.71	372.57	158.14	3.356		
19,900.00	10,606.63	20,103.37	10,797.53	85.03	83.50	-111.09	9,582.62	312.91	530.54	370.82	159.73	3.322		
20,000.00	10,607.35	20,203.36	10,797.77	85.85	84.33	-111.04	9,682.62	312.79	530.37	369.06	161.31	3.288		
20,100.00	10,608.07	20,303.36	10,798.02	86.67	85.17	-110.99	9,782.62	312.68	530.21	367.31	162.89	3.255		
20,200.00	10,608.78	20,403.36	10,798.27	87.50	86.01	-110.95	9,882.61	312.56	530.04	365.56	164.48	3.222		
20,300.00	10,609.50	20,503.36	10,798.52	88.32	86.85	-110.90	9,982.61	312.44	529.87	363.80	166.07	3.191		
20,400.00	10,610.22	20,603.36	10,798.77	89.14	87.69	-110.85	10,082.61	312.33	529.70	362.04	167.66	3.159		
20,500.00	10,610.93	20,703.36	10,799.01	89.97	88.53	-110.80	10,182.61	312.21	529.54	360.28	169.25	3.129		
20,600.00	10,611.65	20,803.36	10,799.26	90.79	89.37	-110.76	10,282.61	312.09	529.37	358.52	170.85	3.098		
20,700.00	10,612.36	20,903.36	10,799.51	91.62	90.21	-110.71	10,382.61	311.98	529.20	356.76	172.45	3.069		
20,800.00	10,613.08	21,003.36	10,799.76	92.45	91.05	-110.66	10,482.61	311.86	529.04	354.99	174.04	3.040		
20,900.00	10,613.80	21,103.35	10,800.01	93.27	91.90	-110.61	10,582.60	311.74	528.87	353.23	175.64	3.011		
20,938.67	10,614.07	21,140.85	10,800.10	93.59	92.21	-110.60	10,620.10	311.70	528.81	352.57	176.24	3.001		
20,942.26	10,614.10	21,140.85	10,800.10	93.62	92.21	-110.60	10,620.10	311.70	528.82	352.60	176.22	3.001		
20,943.16	10,614.11	21,140.85	10,800.10	93.63	92.21	-110.60	10,620.10	311.70	528.83	352.61	176.22	3.001		

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - TATER SALAD FEDERAL COM 903H - OWB - PWP2													Offset Site Error: 0.00 usft
Survey Program: 0-r.5 MWD+IFR1+SAG+FDIR, 2000-r.5 MWD+IFR1, 9992-r.5 MWD+IFR1+SAG+FDIR													Offset Well Error: 0.00 usft
Reference	Offset	Semi Major Axis	Highside	Offset Wellbore Centre	Distance	No-Go	Separation	Rule Assigned:					
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Distance (usft)	Factor	Warning
0.00	0.00	0.00	0.00	0.00	0.00	-0.43	80.00	-0.60	80.00				
100.00	100.00	100.00	100.00	0.77	0.77	-0.43	80.00	-0.60	80.00	78.01	1.99	40.177	
200.00	200.00	200.00	200.00	1.44	1.44	-0.43	80.00	-0.60	80.00	76.69	3.31	24.159	
300.00	300.00	300.00	300.00	1.88	1.88	-0.43	80.00	-0.60	80.00	75.81	4.20	19.069	
400.00	400.00	400.00	400.00	2.25	2.25	-0.43	80.00	-0.60	80.00	75.09	4.91	16.287	
500.00	500.00	500.00	500.00	2.56	2.56	-0.43	80.00	-0.60	80.00	74.47	5.53	14.459	
600.00	600.00	600.00	600.00	2.84	2.84	-0.43	80.00	-0.60	80.00	73.91	6.09	13.136	
700.00	700.00	700.00	700.00	3.10	3.10	-0.43	80.00	-0.60	80.00	73.40	6.60	12.119	
800.00	800.00	800.00	800.00	3.34	3.34	-0.43	80.00	-0.60	80.00	72.93	7.08	11.305	
900.00	900.00	900.00	900.00	3.57	3.57	-0.43	80.00	-0.60	80.00	72.48	7.52	10.633	
1,000.00	1,000.00	1,000.00	1,000.00	3.79	3.79	-0.43	80.00	-0.60	80.00	72.05	7.95	10.066	
1,100.00	1,100.00	1,100.00	1,100.00	3.99	3.99	-0.43	80.00	-0.60	80.00	71.65	8.35	9.579	
1,200.00	1,200.00	1,200.00	1,200.00	4.19	4.19	-0.43	80.00	-0.60	80.00	71.26	8.74	9.154	
1,300.00	1,300.00	1,300.00	1,300.00	4.38	4.38	-0.43	80.00	-0.60	80.00	70.89	9.11	8.779	
1,400.00	1,400.00	1,400.00	1,400.00	4.56	4.56	-0.43	80.00	-0.60	80.00	70.53	9.47	8.445	
1,500.00	1,500.00	1,500.00	1,500.00	4.74	4.74	-0.43	80.00	-0.60	80.00	70.18	9.82	8.145	
1,600.00	1,600.00	1,600.00	1,600.00	4.91	4.91	-0.43	80.00	-0.60	80.00	69.84	10.16	7.872	
1,700.00	1,700.00	1,700.00	1,700.00	5.08	5.08	-0.43	80.00	-0.60	80.00	69.51	10.49	7.624	
1,800.00	1,800.00	1,800.00	1,800.00	5.24	5.24	-0.43	80.00	-0.60	80.00	69.19	10.82	7.397	
1,900.00	1,900.00	1,900.00	1,900.00	5.40	5.40	-0.43	80.00	-0.60	80.00	68.87	11.13	7.187	
2,000.00	2,000.00	2,000.00	2,000.00	5.56	5.56	-0.43	80.00	-0.60	80.00	68.56	11.44	6.994 CC, ES	
2,100.00	2,100.00	2,098.35	2,098.33	5.70	5.78	-1.40	80.98	-1.98	81.02	69.27	11.75	6.898	
2,200.00	2,200.00	2,196.47	2,196.32	5.83	6.01	-4.15	83.90	-6.09	84.20	72.17	12.03	6.997	
2,300.00	2,300.00	2,294.14	2,293.62	5.95	6.24	-8.27	88.74	-12.90	89.90	77.56	12.34	7.287	
2,400.00	2,400.00	2,391.12	2,389.90	6.08	6.50	-13.17	95.44	-22.33	98.54	85.88	12.66	7.782	
2,500.00	2,500.00	2,489.91	2,487.74	6.20	6.71	-17.96	103.40	-33.53	109.39	96.40	12.99	8.419	
2,600.00	2,599.98	2,588.74	2,585.60	6.40	6.93	-105.30	111.37	-44.74	121.33	107.98	13.35	9.088	
2,700.00	2,699.84	2,687.09	2,682.99	6.61	7.17	-110.28	119.30	-55.90	135.12	121.37	13.75	9.829	
2,800.00	2,799.45	2,784.84	2,779.79	6.83	7.42	-115.41	127.19	-66.99	151.28	137.10	14.18	10.666	
2,900.00	2,898.70	2,881.87	2,875.88	7.07	7.69	-120.44	135.01	-78.00	170.26	155.60	14.66	11.614	
3,000.00	2,997.47	2,978.07	2,971.14	7.34	7.97	-125.19	142.77	-88.92	192.38	177.20	15.17	12.680	
3,099.97	3,095.59	3,073.29	3,065.43	7.62	8.26	-129.53	150.45	-99.72	217.83	202.12	15.71	13.862	
3,200.00	3,193.44	3,168.05	3,159.27	7.86	8.55	-133.60	158.09	-110.47	245.60	229.35	16.25	15.115	
3,300.00	3,291.25	3,265.30	3,255.61	8.12	8.86	-136.92	165.79	-121.31	274.06	257.25	16.81	16.300	
3,400.00	3,389.07	3,365.56	3,355.13	8.39	9.19	-139.70	172.84	-131.23	301.73	284.31	17.41	17.330	
3,500.00	3,486.88	3,466.80	3,455.82	8.69	9.52	-142.06	178.94	-139.81	328.22	310.21	18.01	18.226	
3,600.00	3,584.70	3,568.96	3,557.60	9.00	9.84	-144.10	184.05	-146.99	353.43	334.82	18.61	18.991	
3,700.00	3,682.51	3,672.00	3,660.39	9.32	10.16	-145.92	188.13	-152.74	377.26	358.05	19.21	19.635	
3,800.00	3,780.33	3,775.85	3,764.10	9.66	10.46	-147.57	191.16	-157.01	399.66	379.84	19.81	20.173	
3,900.00	3,878.14	3,880.45	3,868.65	10.01	10.75	-149.11	193.11	-159.75	420.58	400.18	20.40	20.621	
4,000.00	3,975.96	3,985.75	3,973.94	10.37	10.98	-150.56	193.96	-160.95	439.99	419.05	20.94	21.011	
4,100.00	4,073.77	4,085.58	4,073.77	10.73	11.09	-151.85	194.00	-161.00	458.36	437.00	21.36	21.456	
4,200.00	4,171.59	4,183.40	4,171.59	11.11	11.16	-153.03	194.00	-161.00	476.88	455.11	21.77	21.905	
4,300.00	4,269.40	4,281.21	4,269.40	11.49	11.23	-154.11	194.00	-161.00	495.58	473.39	22.19	22.332	
4,400.00	4,367.22	4,379.03	4,367.22	11.88	11.30	-155.12	194.00	-161.00	514.44	491.81	22.62	22.738	
4,500.00	4,465.03	4,476.84	4,465.03	12.28	11.38	-156.06	194.00	-161.00	533.44	510.37	23.07	23.121	
4,600.00	4,562.85	4,574.66	4,562.85	12.68	11.45	-156.93	194.00	-161.00	552.57	529.04	23.53	23.482	
4,700.00	4,660.66	4,672.47	4,660.66	13.08	11.52	-157.74	194.00	-161.00	571.82	547.81	24.00	23.823	
4,800.00	4,758.48	4,770.29	4,758.48	13.49	11.59	-158.50	194.00	-161.00	591.17	566.68	24.48	24.144	
4,900.00	4,856.29	4,868.10	4,856.29	13.91	11.66	-159.22	194.00	-161.00	610.61	585.64	24.98	24.447	
5,000.00	4,954.11	4,965.92	4,954.11	14.33	11.74	-159.88	194.00	-161.00	630.15	604.67	25.48	24.732	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - TATER SALAD FEDERAL COM 903H - OWB - PWP2												Offset Site Error:	0.00 usft
Survey Program: 0-r.5 MWD+IFR1+SAG+FDIR, 2000-r.5 MWD+IFR1, 9992-r.5 MWD+IFR1+SAG+FDIR												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Offset Wellbore Centre		Distance		No-Go		Separation	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Distance (usft)	Factor	Warning
5,100.00	5,051.92	5,063.73	5,051.92	14.75	11.81	-160.51	194.00	-161.00	649.76	623.77	25.99	25.000	
5,200.00	5,149.74	5,161.55	5,149.74	15.17	11.88	-161.11	194.00	-161.00	669.44	642.93	26.51	25.252	
5,300.00	5,247.55	5,259.36	5,247.55	15.60	11.95	-161.66	194.00	-161.00	689.18	662.15	27.04	25.490	
5,400.00	5,345.37	5,357.18	5,345.37	16.03	12.03	-162.19	194.00	-161.00	708.99	681.42	27.57	25.714	
5,500.00	5,443.18	5,454.99	5,443.18	16.47	12.10	-162.69	194.00	-161.00	728.85	700.74	28.11	25.925	
5,600.00	5,541.00	5,552.81	5,541.00	16.90	12.17	-163.16	194.00	-161.00	748.76	720.10	28.66	26.123	
5,700.00	5,638.81	5,650.62	5,638.81	17.34	12.24	-163.61	194.00	-161.00	768.72	739.50	29.22	26.311	
5,800.00	5,736.63	5,748.44	5,736.63	17.78	12.32	-164.04	194.00	-161.00	788.72	758.94	29.78	26.487	
5,900.00	5,834.44	5,846.25	5,834.44	18.22	12.39	-164.44	194.00	-161.00	808.76	778.42	30.34	26.654	
6,000.00	5,932.26	5,944.07	5,932.26	18.67	12.46	-164.83	194.00	-161.00	828.84	797.93	30.91	26.812	
6,100.00	6,030.07	6,041.88	6,030.07	19.11	12.54	-165.19	194.00	-161.00	848.95	817.46	31.49	26.961	
6,200.00	6,127.89	6,139.70	6,127.89	19.56	12.61	-165.54	194.00	-161.00	869.09	837.03	32.07	27.102	
6,300.00	6,225.70	6,237.51	6,225.70	20.01	12.68	-165.88	194.00	-161.00	889.27	856.62	32.65	27.235	
6,367.65	6,291.87	6,303.68	6,291.87	20.30	12.73	-166.09	194.00	-161.00	902.93	869.89	33.04	27.330	
6,400.00	6,323.55	6,335.35	6,323.55	20.44	12.76	-166.22	194.00	-161.00	909.34	876.12	33.22	27.375	
6,500.00	6,421.78	6,433.59	6,421.78	20.89	12.83	-166.56	194.00	-161.00	927.51	893.70	33.81	27.436	
6,600.00	6,520.48	6,532.28	6,520.48	21.32	12.91	-166.84	194.00	-161.00	943.18	908.80	34.38	27.433	
6,700.00	6,619.56	6,631.37	6,619.56	21.74	12.98	-167.07	194.00	-161.00	956.35	921.41	34.94	27.373	
6,800.00	6,718.96	6,730.77	6,718.96	22.15	13.06	-167.25	194.00	-161.00	966.99	931.52	35.47	27.259	
6,900.00	6,818.61	6,830.42	6,818.61	22.53	13.13	-167.38	194.00	-161.00	975.10	939.11	35.98	27.100	
7,000.00	6,918.44	6,930.25	6,918.44	22.88	13.21	-167.47	194.00	-161.00	980.65	944.20	36.45	26.902	
7,100.00	7,018.39	7,030.20	7,018.39	23.18	13.28	-167.52	194.00	-161.00	983.66	946.79	36.87	26.681	
7,167.61	7,086.00	7,097.81	7,086.00	23.27	13.33	-84.68	194.00	-161.00	984.24	947.23	37.01	26.591	
7,200.00	7,118.39	7,130.20	7,118.39	23.28	13.36	-84.68	194.00	-161.00	984.24	947.21	37.04	26.575	
7,300.00	7,218.39	7,230.20	7,218.39	23.31	13.43	-84.68	194.00	-161.00	984.24	947.11	37.13	26.506	
7,400.00	7,318.39	7,330.20	7,318.39	23.35	13.51	-84.68	194.00	-161.00	984.24	947.01	37.23	26.437	
7,500.00	7,418.39	7,430.20	7,418.39	23.38	13.58	-84.68	194.00	-161.00	984.24	946.92	37.33	26.368	
7,600.00	7,518.39	7,530.20	7,518.39	23.42	13.66	-84.68	194.00	-161.00	984.24	946.82	37.43	26.299	
7,700.00	7,618.39	7,630.20	7,618.39	23.45	13.74	-84.68	194.00	-161.00	984.24	946.72	37.52	26.230	
7,800.00	7,718.39	7,730.20	7,718.39	23.49	13.81	-84.68	194.00	-161.00	984.24	946.62	37.62	26.161	
7,900.00	7,818.39	7,830.20	7,818.39	23.52	13.89	-84.68	194.00	-161.00	984.24	946.52	37.72	26.092	
8,000.00	7,918.39	7,930.20	7,918.39	23.56	13.97	-84.68	194.00	-161.00	984.24	946.42	37.82	26.023	
8,100.00	8,018.39	8,030.20	8,018.39	23.60	14.04	-84.68	194.00	-161.00	984.24	946.32	37.92	25.955	
8,200.00	8,118.39	8,130.20	8,118.39	23.63	14.12	-84.68	194.00	-161.00	984.24	946.22	38.02	25.886	
8,300.00	8,218.39	8,230.20	8,218.39	23.67	14.19	-84.68	194.00	-161.00	984.24	946.12	38.12	25.817	
8,400.00	8,318.39	8,330.20	8,318.39	23.71	14.27	-84.68	194.00	-161.00	984.24	946.02	38.22	25.749	
8,500.00	8,418.39	8,430.20	8,418.39	23.75	14.35	-84.68	194.00	-161.00	984.24	945.92	38.33	25.681	
8,600.00	8,518.39	8,530.20	8,518.39	23.78	14.42	-84.68	194.00	-161.00	984.24	945.82	38.43	25.612	
8,700.00	8,618.39	8,630.20	8,618.39	23.82	14.50	-84.68	194.00	-161.00	984.24	945.71	38.53	25.544	
8,800.00	8,718.39	8,730.20	8,718.39	23.86	14.58	-84.68	194.00	-161.00	984.24	945.61	38.63	25.476	
8,900.00	8,818.39	8,830.20	8,818.39	23.90	14.65	-84.68	194.00	-161.00	984.24	945.51	38.74	25.408	
9,000.00	8,918.39	8,930.20	8,918.39	23.94	14.73	-84.68	194.00	-161.00	984.24	945.40	38.84	25.340	
9,100.00	9,018.39	9,030.20	9,018.39	23.98	14.81	-84.68	194.00	-161.00	984.24	945.30	38.95	25.272	
9,200.00	9,118.39	9,130.20	9,118.39	24.02	14.88	-84.68	194.00	-161.00	984.24	945.19	39.05	25.205	
9,300.00	9,218.39	9,230.20	9,218.39	24.05	14.96	-84.68	194.00	-161.00	984.24	945.09	39.16	25.137	
9,400.00	9,318.39	9,330.20	9,318.39	24.09	15.04	-84.68	194.00	-161.00	984.24	944.98	39.26	25.070	
9,500.00	9,418.39	9,430.20	9,418.39	24.13	15.12	-84.68	194.00	-161.00	984.24	944.88	39.37	25.002	
9,600.00	9,518.39	9,530.20	9,518.39	24.17	15.19	-84.68	194.00	-161.00	984.24	944.77	39.47	24.935	
9,700.00	9,618.39	9,630.20	9,618.39	24.21	15.27	-84.68	194.00	-161.00	984.24	944.66	39.58	24.868	
9,800.00	9,718.39	9,730.20	9,718.39	24.25	15.35	-84.68	194.00	-161.00	984.24	944.56	39.69	24.801	
9,900.00	9,818.39	9,830.20	9,818.39	24.29	15.42	-84.68	194.00	-161.00	984.24	944.45	39.79	24.734	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - TATER SALAD FEDERAL COM 903H - OWB - PWP2												Offset Site Error:	0.00 usft
Survey Program: 0-r.5 MWD+IFR1+SAG+FDIR, 2000-r.5 MWD+IFR1, 9992-r.5 MWD+IFR1+SAG+FDIR												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Offset Wellbore Centre		Distance		Rule Assigned:		Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor	
10,000.00	9,918.39	9,930.20	9,918.39	24.34	15.50	-84.68	194.00	-161.00	984.24	944.34	39.90	24.668	
10,010.00	9,928.39	9,940.20	9,928.39	24.34	15.51	-84.68	194.00	-161.00	984.24	944.33	39.91	24.662	
10,100.00	10,018.39	10,025.00	10,013.17	24.38	15.55	-84.61	195.11	-161.00	984.36	944.39	39.97	24.628	
10,146.26	10,064.65	10,062.33	10,050.27	24.39	15.56	-84.38	199.10	-161.01	984.84	944.89	39.95	24.653	
10,150.00	10,068.39	10,065.40	10,053.30	24.39	15.56	-84.28	199.56	-161.01	984.90	944.96	39.94	24.660	
10,175.00	10,093.37	10,085.83	10,073.43	24.39	15.57	-84.07	203.10	-161.01	985.25	945.33	39.92	24.678	
10,200.00	10,118.28	10,106.18	10,093.29	24.39	15.57	-83.88	207.48	-161.02	985.60	945.69	39.91	24.698	
10,225.00	10,143.03	10,125.00	10,111.50	24.40	15.58	-83.71	212.28	-161.02	985.93	946.04	39.89	24.719	
10,250.00	10,167.57	10,146.62	10,132.15	24.40	15.58	-83.54	218.67	-161.03	986.23	946.36	39.87	24.734	
10,275.00	10,191.83	10,166.74	10,151.08	24.40	15.59	-83.38	225.45	-161.04	986.52	946.66	39.86	24.749	
10,300.00	10,215.75	10,186.79	10,169.66	24.40	15.60	-83.25	233.00	-161.05	986.78	946.93	39.85	24.762	
10,325.00	10,239.24	10,206.79	10,187.86	24.40	15.60	-83.13	241.30	-161.06	987.02	947.18	39.84	24.773	
10,350.00	10,262.26	10,225.00	10,204.11	24.41	15.61	-83.03	249.52	-161.07	987.23	947.40	39.83	24.784	
10,375.00	10,284.74	10,246.66	10,223.01	24.41	15.62	-82.94	260.08	-161.08	987.41	947.58	39.83	24.788	
10,400.00	10,306.61	10,266.54	10,239.93	24.41	15.63	-82.86	270.53	-161.09	987.56	947.72	39.83	24.792	
10,425.00	10,327.82	10,286.40	10,256.37	24.42	15.63	-82.81	281.65	-161.10	987.67	947.84	39.84	24.792	
10,450.00	10,348.31	10,306.23	10,272.32	24.42	15.64	-82.77	293.44	-161.12	987.76	947.91	39.84	24.790	
10,475.00	10,368.02	10,325.00	10,286.95	24.43	15.65	-82.74	305.20	-161.13	987.81	947.95	39.85	24.786	
10,500.00	10,386.90	10,345.87	10,302.67	24.43	15.66	-82.74	318.93	-161.15	987.82	947.95	39.87	24.777	
10,525.00	10,404.90	10,365.69	10,317.02	24.44	15.67	-82.75	332.60	-161.16	987.80	947.92	39.89	24.765	
10,550.00	10,421.97	10,385.51	10,330.79	24.44	15.68	-82.77	346.85	-161.18	987.75	947.84	39.91	24.751	
10,575.00	10,438.05	10,405.35	10,343.97	24.45	15.69	-82.81	361.67	-161.20	987.66	947.73	39.93	24.733	
10,600.00	10,453.11	10,425.00	10,356.41	24.46	15.70	-82.87	376.88	-161.21	987.54	947.58	39.96	24.712	
10,625.00	10,467.11	10,445.10	10,368.47	24.47	15.72	-82.95	392.95	-161.23	987.39	947.39	40.00	24.688	
10,650.00	10,480.00	10,465.01	10,379.75	24.49	15.73	-83.04	409.37	-161.25	987.21	947.17	40.03	24.660	
10,675.00	10,491.76	10,484.97	10,390.35	24.50	15.74	-83.14	426.28	-161.27	986.99	946.92	40.07	24.629	
10,700.00	10,502.34	10,504.98	10,400.27	24.51	15.76	-83.27	443.66	-161.29	986.75	946.63	40.12	24.595	
10,725.00	10,511.73	10,525.00	10,409.45	24.53	15.77	-83.40	461.44	-161.31	986.49	946.32	40.17	24.558	
10,750.00	10,519.89	10,545.17	10,417.93	24.55	15.79	-83.56	479.74	-161.33	986.20	945.97	40.23	24.517	
10,775.00	10,526.80	10,565.36	10,425.65	24.57	15.81	-83.72	498.40	-161.36	985.89	945.60	40.28	24.473	
10,800.00	10,532.44	10,585.63	10,432.59	24.59	15.82	-83.90	517.44	-161.38	985.56	945.21	40.35	24.426	
10,825.00	10,536.80	10,605.99	10,438.75	24.62	15.84	-84.10	536.84	-161.40	985.21	944.79	40.42	24.376	
10,850.00	10,539.87	10,625.00	10,443.74	24.65	15.86	-84.30	555.18	-161.42	984.85	944.36	40.49	24.324	
10,875.00	10,541.64	10,646.98	10,448.60	24.67	15.89	-84.53	576.62	-161.45	984.48	943.91	40.57	24.267	
10,892.84	10,542.10	10,661.71	10,451.31	24.70	15.90	-84.70	591.10	-161.46	984.21	943.59	40.63	24.226	
10,900.00	10,542.15	10,667.65	10,452.27	24.70	15.91	-84.75	596.96	-161.47	984.11	943.46	40.65	24.209	
11,000.00	10,542.87	10,754.46	10,458.23	24.86	16.02	-85.06	683.46	-161.57	983.54	942.53	41.01	23.984	
11,100.00	10,543.58	10,854.46	10,459.07	25.04	16.20	-85.07	783.46	-161.69	983.53	942.10	41.44	23.737	
11,200.00	10,544.30	10,954.46	10,459.90	25.25	16.43	-85.08	883.46	-161.81	983.52	941.59	41.93	23.458	
11,300.00	10,545.02	11,054.46	10,460.74	25.49	16.71	-85.08	983.45	-161.92	983.51	941.03	42.48	23.152	
11,400.00	10,545.73	11,154.46	10,461.57	25.76	17.04	-85.09	1,083.45	-162.04	983.50	940.41	43.09	22.822	
11,500.00	10,546.45	11,254.46	10,462.41	26.05	17.42	-85.10	1,183.44	-162.16	983.49	939.73	43.77	22.472	
11,600.00	10,547.17	11,354.46	10,463.24	26.37	17.83	-85.10	1,283.44	-162.28	983.48	938.99	44.49	22.106	
11,700.00	10,547.88	11,454.46	10,464.07	26.71	18.28	-85.11	1,383.44	-162.39	983.47	938.21	45.27	21.726	
11,800.00	10,548.60	11,554.46	10,464.91	27.08	18.77	-85.12	1,483.43	-162.51	983.46	937.37	46.09	21.337	
11,900.00	10,549.32	11,654.46	10,465.74	27.47	19.28	-85.13	1,583.43	-162.63	983.45	936.49	46.97	20.940	
12,000.00	10,550.03	11,754.46	10,466.58	27.88	19.82	-85.13	1,683.43	-162.74	983.44	935.56	47.88	20.539	
12,100.00	10,550.75	11,854.46	10,467.41	28.31	20.39	-85.14	1,783.42	-162.86	983.43	934.59	48.84	20.136	
12,200.00	10,551.47	11,954.46	10,468.25	28.76	20.97	-85.15	1,883.42	-162.98	983.42	933.59	49.84	19.733	
12,300.00	10,552.18	12,054.46	10,469.08	29.23	21.58	-85.15	1,983.42	-163.10	983.41	932.54	50.87	19.332	
12,400.00	10,552.90	12,154.46	10,469.92	29.72	22.20	-85.16	2,083.41	-163.21	983.40	931.47	51.94	18.934	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - TATER SALAD FEDERAL COM 903H - OWB - PWP2												Offset Site Error:	0.00 usft
Survey Program: 0-r.5 MWD+IFR1+SAG+FDIR, 2000-r.5 MWD+IFR1, 9992-r.5 MWD+IFR1+SAG+FDIR												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Offset Wellbore Centre		Distance		Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor	
12,500.00	10,553.61	12,254.46	10,470.75	30.22	22.84	-85.17	2,183.41	-163.33	983.39	930.36	53.04	18.541	
12,600.00	10,554.33	12,354.46	10,471.58	30.74	23.49	-85.17	2,283.40	-163.45	983.38	929.21	54.17	18.154	
12,700.00	10,555.05	12,454.46	10,472.42	31.28	24.16	-85.18	2,383.40	-163.56	983.37	928.05	55.33	17.773	
12,800.00	10,555.76	12,554.46	10,473.25	31.83	24.84	-85.19	2,483.40	-163.68	983.37	926.85	56.52	17.400	
12,900.00	10,556.48	12,654.46	10,474.09	32.39	25.53	-85.19	2,583.39	-163.80	983.36	925.63	57.73	17.035	
13,000.00	10,557.20	12,754.46	10,474.92	32.96	26.22	-85.20	2,683.39	-163.91	983.35	924.38	58.96	16.678	
13,100.00	10,557.91	12,854.46	10,475.76	33.55	26.93	-85.21	2,783.39	-164.03	983.34	923.12	60.22	16.329	
13,200.00	10,558.63	12,954.46	10,476.59	34.15	27.65	-85.21	2,883.38	-164.15	983.33	921.83	61.50	15.990	
13,300.00	10,559.35	13,054.46	10,477.43	34.76	28.38	-85.22	2,983.38	-164.27	983.32	920.52	62.79	15.659	
13,400.00	10,560.06	13,154.46	10,478.26	35.38	29.11	-85.23	3,083.38	-164.38	983.31	919.20	64.11	15.338	
13,500.00	10,560.78	13,254.46	10,479.09	36.01	29.85	-85.23	3,183.37	-164.50	983.30	917.85	65.44	15.025	
13,600.00	10,561.50	13,354.46	10,479.93	36.65	30.59	-85.24	3,283.37	-164.62	983.29	916.50	66.79	14.722	
13,700.00	10,562.21	13,454.46	10,480.76	37.30	31.34	-85.25	3,383.37	-164.73	983.28	915.12	68.16	14.427	
13,800.00	10,562.93	13,554.46	10,481.60	37.96	32.10	-85.26	3,483.36	-164.85	983.27	913.73	69.53	14.141	
13,900.00	10,563.65	13,654.46	10,482.43	38.62	32.86	-85.26	3,583.36	-164.97	983.26	912.33	70.93	13.863	
14,000.00	10,564.36	13,754.46	10,483.27	39.29	33.63	-85.27	3,683.35	-165.09	983.25	910.92	72.33	13.594	
14,100.00	10,565.08	13,854.46	10,484.10	39.97	34.40	-85.28	3,783.35	-165.20	983.24	909.49	73.75	13.333	
14,200.00	10,565.79	13,954.46	10,484.93	40.66	35.17	-85.28	3,883.35	-165.32	983.23	908.06	75.17	13.079	
14,300.00	10,566.51	14,054.46	10,485.77	41.35	35.95	-85.29	3,983.34	-165.44	983.22	906.61	76.61	12.834	
14,400.00	10,567.23	14,154.46	10,486.60	42.05	36.73	-85.30	4,083.34	-165.55	983.21	905.15	78.06	12.595	
14,500.00	10,567.94	14,254.46	10,487.44	42.75	37.52	-85.30	4,183.34	-165.67	983.20	903.68	79.52	12.364	
14,600.00	10,568.66	14,354.46	10,488.27	43.46	38.30	-85.31	4,283.33	-165.79	983.19	902.21	80.99	12.140	
14,700.00	10,569.38	14,454.46	10,489.11	44.17	39.10	-85.32	4,383.33	-165.90	983.18	900.72	82.46	11.923	
14,800.00	10,570.09	14,554.46	10,489.94	44.89	39.89	-85.32	4,483.33	-166.02	983.17	899.23	83.94	11.712	
14,900.00	10,570.81	14,654.46	10,490.78	45.62	40.69	-85.33	4,583.32	-166.14	983.16	897.73	85.44	11.508	
15,000.00	10,571.53	14,754.46	10,491.61	46.35	41.48	-85.34	4,683.32	-166.26	983.15	896.22	86.93	11.309	
15,100.00	10,572.24	14,854.46	10,492.44	47.08	42.29	-85.34	4,783.31	-166.37	983.15	894.71	88.44	11.117	
15,200.00	10,572.96	14,954.46	10,493.28	47.82	43.09	-85.35	4,883.31	-166.49	983.14	893.19	89.95	10.930	
15,300.00	10,573.68	15,054.46	10,494.11	48.56	43.89	-85.36	4,983.31	-166.61	983.13	891.66	91.47	10.748	
15,400.00	10,574.39	15,154.46	10,494.95	49.30	44.70	-85.36	5,083.30	-166.72	983.12	890.13	92.99	10.572	
15,500.00	10,575.11	15,254.46	10,495.78	50.05	45.51	-85.37	5,183.30	-166.84	983.11	888.59	94.52	10.401	
15,600.00	10,575.82	15,354.46	10,496.62	50.80	46.32	-85.38	5,283.30	-166.96	983.10	887.04	96.05	10.235	
15,700.00	10,576.54	15,454.46	10,497.45	51.56	47.13	-85.39	5,383.29	-167.08	983.09	885.50	97.59	10.073	
15,800.00	10,577.26	15,554.46	10,498.29	52.32	47.95	-85.39	5,483.29	-167.19	983.08	883.94	99.14	9.916	
15,900.00	10,577.97	15,654.46	10,499.12	53.08	48.76	-85.40	5,583.29	-167.31	983.07	882.38	100.69	9.764	
16,000.00	10,578.69	15,754.46	10,499.95	53.84	49.58	-85.41	5,683.28	-167.43	983.06	880.82	102.24	9.615	
16,100.00	10,579.41	15,854.46	10,500.79	54.61	50.40	-85.41	5,783.28	-167.54	983.05	879.25	103.80	9.471	
16,200.00	10,580.12	15,954.46	10,501.62	55.38	51.22	-85.42	5,883.27	-167.66	983.04	877.68	105.36	9.330	
16,300.00	10,580.84	16,054.46	10,502.46	56.15	52.04	-85.43	5,983.27	-167.78	983.03	876.11	106.93	9.194	
16,400.00	10,581.56	16,154.46	10,503.29	56.92	52.86	-85.43	6,083.27	-167.90	983.02	874.53	108.50	9.061	
16,500.00	10,582.27	16,254.46	10,504.13	57.70	53.68	-85.44	6,183.26	-168.01	983.02	872.95	110.07	8.931	
16,600.00	10,582.99	16,354.46	10,504.96	58.48	54.51	-85.45	6,283.26	-168.13	983.01	871.36	111.64	8.805	
16,700.00	10,583.71	16,454.46	10,505.79	59.26	55.33	-85.45	6,383.26	-168.25	983.00	869.77	113.22	8.682	
16,800.00	10,584.42	16,554.46	10,506.63	60.04	56.16	-85.46	6,483.25	-168.36	982.99	868.18	114.81	8.562	
16,900.00	10,585.14	16,654.46	10,507.46	60.83	56.98	-85.47	6,583.25	-168.48	982.98	866.59	116.39	8.445	
17,000.00	10,585.86	16,754.46	10,508.30	61.62	57.81	-85.47	6,683.25	-168.60	982.97	864.99	117.98	8.332	
17,100.00	10,586.57	16,854.46	10,509.13	62.40	58.64	-85.48	6,783.24	-168.71	982.96	863.39	119.57	8.221	
17,200.00	10,587.29	16,954.46	10,509.97	63.20	59.47	-85.49	6,883.24	-168.83	982.95	861.79	121.16	8.113	
17,300.00	10,588.00	17,054.46	10,510.80	63.99	60.30	-85.50	6,983.23	-168.95	982.94	860.18	122.76	8.007	
17,400.00	10,588.72	17,154.46	10,511.64	64.78	61.13	-85.50	7,083.23	-169.07	982.93	858.57	124.36	7.904	
17,500.00	10,589.44	17,254.46	10,512.47	65.58	61.96	-85.51	7,183.23	-169.18	982.92	856.96	125.96	7.803	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - TATER SALAD FEDERAL COM 903H - OWB - PWP2													Offset Site Error:	0.00 usft
Survey Program:		0-r.5 MWD+IFR1+SAG+FDIR, 2000-r.5 MWD+IFR1, 9992-r.5 MWD+IFR1+SAG+FDIR							Rule Assigned:				Offset Well Error:	0.00 usft
Reference	Offset	Semi Major Axis		Offset Wellbore Centre		Distance				Warning				
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor	Warning	
17,600.00	10,590.15	17,354.46	10,513.30	66.37	62.79	-85.52	7,283.22	-169.30	982.92	855.35	127.56	7.705		
17,700.00	10,590.87	17,454.46	10,514.14	67.17	63.63	-85.52	7,383.22	-169.42	982.91	853.74	129.17	7.609		
17,800.00	10,591.59	17,554.46	10,514.97	67.97	64.46	-85.53	7,483.22	-169.53	982.90	852.12	130.78	7.516		
17,900.00	10,592.30	17,654.46	10,515.81	68.77	65.29	-85.54	7,583.21	-169.65	982.89	850.50	132.39	7.424		
18,000.00	10,593.02	17,754.46	10,516.64	69.58	66.13	-85.54	7,683.21	-169.77	982.88	848.88	134.00	7.335		
18,100.00	10,593.74	17,854.46	10,517.48	70.38	66.96	-85.55	7,783.21	-169.89	982.87	847.26	135.61	7.248		
18,200.00	10,594.45	17,954.46	10,518.31	71.19	67.80	-85.56	7,883.20	-170.00	982.86	845.63	137.23	7.162		
18,300.00	10,595.17	18,054.46	10,519.15	71.99	68.64	-85.56	7,983.20	-170.12	982.85	844.01	138.84	7.079		
18,400.00	10,595.89	18,154.45	10,519.98	72.80	69.47	-85.57	8,083.20	-170.24	982.84	842.38	140.46	6.997		
18,500.00	10,596.60	18,254.45	10,520.81	73.61	70.31	-85.58	8,183.19	-170.35	982.83	840.75	142.08	6.917		
18,600.00	10,597.32	18,354.45	10,521.65	74.42	71.15	-85.58	8,283.19	-170.47	982.83	839.12	143.70	6.839		
18,700.00	10,598.04	18,454.45	10,522.48	75.23	71.99	-85.59	8,383.18	-170.59	982.82	837.49	145.33	6.763		
18,800.00	10,598.75	18,554.45	10,523.32	76.04	72.82	-85.60	8,483.18	-170.70	982.81	835.86	146.95	6.688		
18,900.00	10,599.47	18,654.45	10,524.15	76.85	73.66	-85.60	8,583.18	-170.82	982.80	834.22	148.58	6.615		
19,000.00	10,600.18	18,754.45	10,524.99	77.67	74.50	-85.61	8,683.17	-170.94	982.79	832.58	150.21	6.543		
19,100.00	10,600.90	18,854.45	10,525.82	78.48	75.34	-85.62	8,783.17	-171.06	982.78	830.95	151.84	6.473		
19,200.00	10,601.62	18,954.45	10,526.66	79.30	76.18	-85.63	8,883.17	-171.17	982.77	829.31	153.47	6.404		
19,300.00	10,602.33	19,054.45	10,527.49	80.11	77.02	-85.63	8,983.16	-171.29	982.76	827.67	155.10	6.336		
19,400.00	10,603.05	19,154.45	10,528.32	80.93	77.86	-85.64	9,083.16	-171.41	982.76	826.02	156.73	6.270		
19,500.00	10,603.77	19,254.45	10,529.16	81.75	78.71	-85.65	9,183.16	-171.52	982.75	824.38	158.36	6.206		
19,600.00	10,604.48	19,354.45	10,529.99	82.57	79.55	-85.65	9,283.15	-171.64	982.74	822.74	160.00	6.142		
19,700.00	10,605.20	19,454.45	10,530.83	83.39	80.39	-85.66	9,383.15	-171.76	982.73	821.09	161.64	6.080		
19,800.00	10,605.92	19,554.45	10,531.66	84.21	81.23	-85.67	9,483.14	-171.88	982.72	819.45	163.27	6.019		
19,900.00	10,606.63	19,654.45	10,532.50	85.03	82.07	-85.67	9,583.14	-171.99	982.71	817.80	164.91	5.959		
20,000.00	10,607.35	19,754.45	10,533.33	85.85	82.92	-85.68	9,683.14	-172.11	982.70	816.15	166.55	5.900		
20,100.00	10,608.07	19,854.45	10,534.16	86.67	83.76	-85.69	9,783.13	-172.23	982.69	814.50	168.19	5.843		
20,200.00	10,608.78	19,954.45	10,535.00	87.50	84.60	-85.69	9,883.13	-172.34	982.69	812.85	169.83	5.786		
20,300.00	10,609.50	20,054.45	10,535.83	88.32	85.45	-85.70	9,983.13	-172.46	982.68	811.20	171.47	5.731		
20,400.00	10,610.22	20,154.45	10,536.67	89.14	86.29	-85.71	10,083.12	-172.58	982.67	809.55	173.12	5.676		
20,500.00	10,610.93	20,254.45	10,537.50	89.97	87.14	-85.71	10,183.12	-172.70	982.66	807.90	174.76	5.623		
20,600.00	10,611.65	20,354.45	10,538.34	90.79	87.98	-85.72	10,283.12	-172.81	982.65	806.24	176.41	5.570		
20,700.00	10,612.36	20,454.45	10,539.17	91.62	88.82	-85.73	10,383.11	-172.93	982.64	804.59	178.05	5.519		
20,800.00	10,613.08	20,554.45	10,540.01	92.45	89.67	-85.74	10,483.11	-173.05	982.63	802.93	179.70	5.468		
20,900.00	10,613.80	20,654.45	10,540.84	93.27	90.51	-85.74	10,583.10	-173.16	982.63	801.28	181.35	5.419		
20,932.18	10,614.03	20,686.55	10,541.11	93.54	90.78	-85.74	10,615.20	-173.20	982.62	800.75	181.87	5.403		
20,942.26	10,614.10	20,686.55	10,541.11	93.62	90.78	-85.74	10,615.20	-173.20	982.67	800.74	181.93	5.401 SF		
20,943.16	10,614.11	20,686.55	10,541.11	93.63	90.78	-85.74	10,615.20	-173.20	982.68	800.75	181.93	5.401		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - TATER SALAD FEDERAL COM 904H - OWB - PWP2													Offset Site Error: 0.00 usft
Survey Program: 0-r.5 MWD+IFR1+SAG+FDIR, 2000-r.5 MWD+IFR1, 10330-r.5 MWD+IFR1+SAG+FDIR													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Offset Wellbore Centre		Distance		Rule Assigned:		Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor	
0.00	0.00	0.00	0.10	0.00	0.00	-0.48	60.00	-0.50	60.00				
100.00	100.00	99.90	100.00	0.77	0.77	-0.48	60.00	-0.50	60.00	58.01	1.99	30.145	
200.00	200.00	199.90	200.00	1.44	1.44	-0.48	60.00	-0.50	60.00	56.69	3.31	18.123	
300.00	300.00	299.90	300.00	1.88	1.88	-0.48	60.00	-0.50	60.00	55.81	4.19	14.304	
400.00	400.00	399.90	400.00	2.25	2.25	-0.48	60.00	-0.50	60.00	55.09	4.91	12.216	
500.00	500.00	499.90	500.00	2.56	2.56	-0.48	60.00	-0.50	60.00	54.47	5.53	10.845	
600.00	600.00	599.90	600.00	2.84	2.84	-0.48	60.00	-0.50	60.00	53.91	6.09	9.853	
700.00	700.00	699.90	700.00	3.10	3.10	-0.48	60.00	-0.50	60.00	53.40	6.60	9.090	
800.00	800.00	799.90	800.00	3.34	3.34	-0.48	60.00	-0.50	60.00	52.93	7.08	8.479	
900.00	900.00	899.90	900.00	3.57	3.57	-0.48	60.00	-0.50	60.00	52.48	7.52	7.975	
1,000.00	1,000.00	999.90	1,000.00	3.79	3.79	-0.48	60.00	-0.50	60.00	52.05	7.95	7.550	
1,100.00	1,100.00	1,099.90	1,100.00	3.99	3.99	-0.48	60.00	-0.50	60.00	51.65	8.35	7.185	
1,200.00	1,200.00	1,199.90	1,200.00	4.19	4.19	-0.48	60.00	-0.50	60.00	51.26	8.74	6.866	
1,300.00	1,300.00	1,299.90	1,300.00	4.38	4.38	-0.48	60.00	-0.50	60.00	50.89	9.11	6.585	
1,400.00	1,400.00	1,399.90	1,400.00	4.56	4.56	-0.48	60.00	-0.50	60.00	50.53	9.47	6.334	
1,500.00	1,500.00	1,499.90	1,500.00	4.74	4.74	-0.48	60.00	-0.50	60.00	50.18	9.82	6.109	
1,600.00	1,600.00	1,599.90	1,600.00	4.91	4.91	-0.48	60.00	-0.50	60.00	49.84	10.16	5.904	
1,700.00	1,700.00	1,699.90	1,700.00	5.08	5.08	-0.48	60.00	-0.50	60.00	49.51	10.49	5.718	
1,800.00	1,800.00	1,799.90	1,800.00	5.24	5.24	-0.48	60.00	-0.50	60.00	49.19	10.82	5.548	
1,900.00	1,900.00	1,899.90	1,900.00	5.40	5.40	-0.48	60.00	-0.50	60.00	48.87	11.13	5.391	
2,000.00	2,000.00	1,999.90	2,000.00	5.56	5.56	-0.48	60.00	-0.50	60.00	48.56	11.44	5.245 CC, ES	
2,100.00	2,100.00	2,099.53	2,099.61	5.70	5.79	-2.10	60.26	-2.21	60.30	48.58	11.72	5.145	
2,200.00	2,200.00	2,198.92	2,198.86	5.83	6.01	-6.84	61.03	-7.33	61.48	49.50	11.98	5.131 SF	
2,300.00	2,300.00	2,297.83	2,297.40	5.95	6.25	-14.22	62.32	-15.79	64.34	52.08	12.26	5.248	
2,400.00	2,400.00	2,396.04	2,394.88	6.08	6.51	-23.24	64.09	-27.52	69.94	57.37	12.57	5.565	
2,500.00	2,500.00	2,493.32	2,490.98	6.20	6.78	-32.58	66.35	-42.39	79.25	66.32	12.92	6.132	
2,600.00	2,599.98	2,591.36	2,587.54	6.40	7.02	-124.20	68.89	-59.22	92.66	79.33	13.33	6.949	
2,700.00	2,699.84	2,688.83	2,683.53	6.61	7.26	-131.92	71.43	-75.95	110.06	96.26	13.80	7.978	
2,800.00	2,799.45	2,785.48	2,778.71	6.83	7.52	-138.40	73.94	-92.54	131.53	117.23	14.30	9.198	
2,900.00	2,898.70	2,881.18	2,872.96	7.07	7.79	-143.70	76.43	-108.97	157.02	142.18	14.84	10.583	
3,000.00	2,997.47	2,975.83	2,966.17	7.34	8.07	-147.98	78.89	-125.22	186.38	170.98	15.40	12.102	
3,099.97	3,095.59	3,069.28	3,058.20	7.62	8.37	-151.46	81.32	-141.26	219.47	203.48	15.99	13.729	
3,200.00	3,193.44	3,162.17	3,149.67	7.86	8.67	-154.46	83.74	-157.21	254.70	238.16	16.54	15.395	
3,300.00	3,291.25	3,255.02	3,241.12	8.12	8.98	-156.74	86.15	-173.15	290.40	273.28	17.12	16.964	
3,400.00	3,389.07	3,347.88	3,332.56	8.39	9.30	-158.53	88.57	-189.09	326.42	308.71	17.71	18.430	
3,500.00	3,486.88	3,440.73	3,424.01	8.69	9.63	-159.96	90.98	-205.03	362.66	344.33	18.32	19.793	
3,600.00	3,584.70	3,533.59	3,515.45	9.00	9.96	-161.13	93.40	-220.97	399.06	380.10	18.95	21.055	
3,700.00	3,682.51	3,626.44	3,606.90	9.32	10.31	-162.11	95.81	-236.91	435.58	415.98	19.60	22.224	
3,800.00	3,780.33	3,719.30	3,698.34	9.66	10.65	-162.94	98.23	-252.85	472.20	451.93	20.26	23.304	
3,900.00	3,878.14	3,812.15	3,789.79	10.01	11.01	-163.64	100.64	-268.79	508.88	487.95	20.94	24.303	
4,000.00	3,975.96	3,905.01	3,881.23	10.37	11.37	-164.26	103.06	-284.73	545.63	524.00	21.63	25.227	
4,100.00	4,073.77	3,997.86	3,972.68	10.73	11.73	-164.79	105.47	-300.67	582.43	560.09	22.33	26.081	
4,200.00	4,171.59	4,090.72	4,064.12	11.11	12.10	-165.26	107.89	-316.61	619.26	596.21	23.04	26.872	
4,300.00	4,269.40	4,183.57	4,155.57	11.49	12.47	-165.68	110.30	-332.55	656.12	632.36	23.77	27.606	
4,400.00	4,367.22	4,276.43	4,247.01	11.88	12.84	-166.06	112.72	-348.49	693.02	668.52	24.50	28.286	
4,500.00	4,465.03	4,369.28	4,338.46	12.28	13.22	-166.39	115.13	-364.43	729.93	704.69	25.24	28.918	
4,600.00	4,562.85	4,462.14	4,429.90	12.68	13.59	-166.70	117.55	-380.37	766.87	740.88	25.99	29.506	
4,700.00	4,660.66	4,554.99	4,521.35	13.08	13.98	-166.97	119.96	-396.31	803.82	777.08	26.75	30.054	
4,800.00	4,758.48	4,647.85	4,612.79	13.49	14.36	-167.23	122.38	-412.25	840.79	813.28	27.51	30.565	
4,900.00	4,856.29	4,740.70	4,704.24	13.91	14.75	-167.46	124.79	-428.19	877.77	849.49	28.28	31.043	
5,000.00	4,954.11	4,833.56	4,795.68	14.33	15.14	-167.67	127.20	-444.13	914.76	885.71	29.05	31.489	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips
Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design:	TATER SALAD & MOMBA FEDERAL - TATER SALAD FEDERAL COM 904H - OWB - PWP2												Offset Site Error:	0.00 usft
Survey Program:	0-r.5 MWD+IFR1+SAG+FDIR, 2000-r.5 MWD+IFR1, 10330-r.5 MWD+IFR1+SAG+FDIR												Offset Well Error:	0.00 usft
Reference	Offset	Semi Major Axis		Offset Wellbore Centre		Rule Assigned:								
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor	Warning	
5,100.00	5,051.92	4,926.42	4,887.13	14.75	15.53	-167.87	129.62	-460.07	951.76	921.93	29.83	31.907		
5,200.00	5,149.74	5,019.27	4,978.57	15.17	15.92	-168.05	132.03	-476.01	988.77	958.16	30.61	32.299		

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Offset Design: TATER SALAD & MOMBA FEDERAL - TATER SALAD FEDERAL COM 905H - OWB - PWP2													Offset Site Error: 0.00 usft
Survey Program: 0-r.5 MWD+IFR1+SAG+FDIR, 2000-r.5 MWD+IFR1+SAG+FDIR, 10148-r.5 MWD+IFR1+SAG+FDIR													Offset Well Error: 0.00 usft
Reference	Offset	Semi Major Axis	Distance	Rule Assigned:									
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	No-Go Distance (usft)	Separation Factor	Warning
0.00	0.00	0.00	0.10	0.00	0.00	-0.43	40.00	-0.30	40.00				
100.00	100.00	99.90	100.00	0.77	0.77	-0.43	40.00	-0.30	40.00	38.01	1.99	20.096	
200.00	200.00	199.90	200.00	1.44	1.44	-0.43	40.00	-0.30	40.00	36.69	3.31	12.082	
300.00	300.00	299.90	300.00	1.88	1.88	-0.43	40.00	-0.30	40.00	35.81	4.19	9.536	
400.00	400.00	399.90	400.00	2.25	2.25	-0.43	40.00	-0.30	40.00	35.09	4.91	8.144	
500.00	500.00	499.90	500.00	2.56	2.56	-0.43	40.00	-0.30	40.00	34.47	5.53	7.230	
600.00	600.00	599.90	600.00	2.84	2.84	-0.43	40.00	-0.30	40.00	33.91	6.09	6.568	
700.00	700.00	699.90	700.00	3.10	3.10	-0.43	40.00	-0.30	40.00	33.40	6.60	6.060	
800.00	800.00	799.90	800.00	3.34	3.34	-0.43	40.00	-0.30	40.00	32.92	7.08	5.653	
900.00	900.00	899.90	900.00	3.57	3.57	-0.43	40.00	-0.30	40.00	32.48	7.52	5.317	
1,000.00	1,000.00	999.90	1,000.00	3.79	3.79	-0.43	40.00	-0.30	40.00	32.05	7.95	5.033	
1,100.00	1,100.00	1,099.90	1,100.00	3.99	3.99	-0.43	40.00	-0.30	40.00	31.65	8.35	4.790	
1,200.00	1,200.00	1,199.90	1,200.00	4.19	4.19	-0.43	40.00	-0.30	40.00	31.26	8.74	4.577	
1,300.00	1,300.00	1,299.90	1,300.00	4.38	4.38	-0.43	40.00	-0.30	40.00	30.89	9.11	4.390	
1,400.00	1,400.00	1,399.90	1,400.00	4.56	4.56	-0.43	40.00	-0.30	40.00	30.53	9.47	4.223	
1,500.00	1,500.00	1,499.90	1,500.00	4.74	4.74	-0.43	40.00	-0.30	40.00	30.18	9.82	4.072	
1,600.00	1,600.00	1,599.90	1,600.00	4.91	4.91	-0.43	40.00	-0.30	40.00	29.84	10.16	3.936	
1,700.00	1,700.00	1,699.90	1,700.00	5.08	5.08	-0.43	40.00	-0.30	40.00	29.51	10.49	3.812	
1,800.00	1,800.00	1,799.90	1,800.00	5.24	5.24	-0.43	40.00	-0.30	40.00	29.19	10.82	3.698	
1,900.00	1,900.00	1,899.90	1,900.00	5.40	5.40	-0.43	40.00	-0.30	40.00	28.87	11.13	3.594	
2,000.00	2,000.00	1,999.90	2,000.00	5.56	5.56	-0.43	40.00	-0.30	40.00	28.56	11.44	3.497 CC	
2,004.45	2,004.45	2,004.35	2,004.45	5.56	5.57	-0.43	40.00	-0.30	40.00	28.55	11.45	3.493	
2,100.00	2,100.00	2,099.85	2,099.93	5.70	5.78	-2.92	40.00	-2.04	40.05	28.33	11.72	3.418 ES	
2,200.00	2,200.00	2,199.56	2,199.49	5.83	6.00	-10.27	40.00	-7.25	40.65	28.68	11.98	3.395 SF	
2,300.00	2,300.00	2,298.78	2,298.34	5.95	6.21	-21.64	40.00	-15.87	43.06	30.81	12.25	3.516	
2,400.00	2,400.00	2,397.29	2,396.12	6.08	6.41	-34.80	40.00	-27.80	48.87	36.32	12.55	3.893	
2,500.00	2,500.00	2,494.87	2,492.51	6.20	6.61	-47.03	40.00	-42.94	59.16	46.28	12.87	4.596	
2,600.00	2,599.98	2,590.93	2,586.85	6.40	6.81	-140.24	40.00	-61.03	75.46	62.23	13.23	5.703	
2,700.00	2,699.84	2,684.64	2,678.24	6.61	7.00	-148.51	40.00	-81.72	99.28	85.68	13.60	7.302	
2,800.00	2,799.45	2,776.54	2,767.20	6.83	7.10	-154.53	40.00	-104.79	130.28	116.40	13.88	9.386	
2,900.00	2,898.70	2,869.28	2,856.78	7.07	7.22	-158.77	40.00	-128.79	166.04	151.80	14.24	11.661	
3,000.00	2,997.47	2,960.66	2,945.05	7.34	7.35	-161.74	40.00	-152.44	205.46	190.83	14.62	14.050	
3,099.97	3,095.59	3,050.55	3,031.87	7.62	7.48	-163.93	40.00	-175.70	248.30	233.28	15.02	16.528	
3,200.00	3,193.44	3,139.72	3,118.00	7.86	7.62	-165.77	40.00	-198.78	292.96	277.57	15.39	19.041	
3,300.00	3,291.25	3,228.86	3,204.11	8.12	7.75	-167.12	40.00	-221.85	337.78	322.02	15.76	21.429	
3,400.00	3,389.07	3,318.01	3,290.21	8.39	7.89	-168.15	40.00	-244.93	382.72	366.56	16.16	23.684	
3,500.00	3,486.88	3,407.15	3,376.32	8.69	8.04	-168.97	40.00	-268.00	427.74	411.17	16.57	25.809	
3,600.00	3,584.70	3,496.29	3,462.43	9.00	8.18	-169.64	40.00	-291.07	472.82	455.82	17.00	27.806	
3,700.00	3,682.51	3,585.44	3,548.53	9.32	8.33	-170.19	40.00	-314.14	517.94	500.49	17.45	29.680	
3,800.00	3,780.33	3,674.58	3,634.64	9.66	8.48	-170.65	40.00	-337.21	563.09	545.18	17.91	31.436	
3,900.00	3,878.14	3,763.72	3,720.74	10.01	8.64	-171.04	40.00	-360.29	608.26	589.87	18.39	33.081	
4,000.00	3,975.96	3,852.86	3,806.85	10.37	8.79	-171.38	40.00	-383.36	653.46	634.58	18.87	34.621	
4,100.00	4,073.77	3,942.01	3,892.95	10.73	8.95	-171.67	40.00	-406.43	698.67	679.29	19.37	36.062	
4,200.00	4,171.59	4,031.15	3,979.06	11.11	9.11	-171.93	40.00	-429.50	743.89	724.00	19.88	37.412	
4,300.00	4,269.40	4,120.29	4,065.16	11.49	9.27	-172.16	40.00	-452.57	789.12	768.72	20.40	38.675	
4,400.00	4,367.22	4,209.44	4,151.27	11.88	9.44	-172.36	40.00	-475.65	834.36	813.43	20.93	39.859	
4,500.00	4,465.03	4,298.58	4,237.37	12.28	9.60	-172.55	40.00	-498.72	879.61	858.14	21.47	40.968	
4,600.00	4,562.85	4,387.72	4,323.48	12.68	9.77	-172.71	40.00	-521.79	924.87	902.85	22.02	42.008	
4,700.00	4,660.66	4,476.86	4,409.59	13.08	9.94	-172.86	40.00	-544.86	970.13	947.56	22.57	42.983	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Reference Depths are relative to RKB=32ft @ 2945.10usft

Offset Depths are relative to Offset Datum


Central Meridian is 104° 20' 0.000 W

Coordinates are relative to: TATER SALAD FEDERAL COM 901H

Coordinate System is US State Plane 1927 (Exact solution), New Mexico East 30

Grid Convergence at Surface is: 0.16°

Ladder Plot

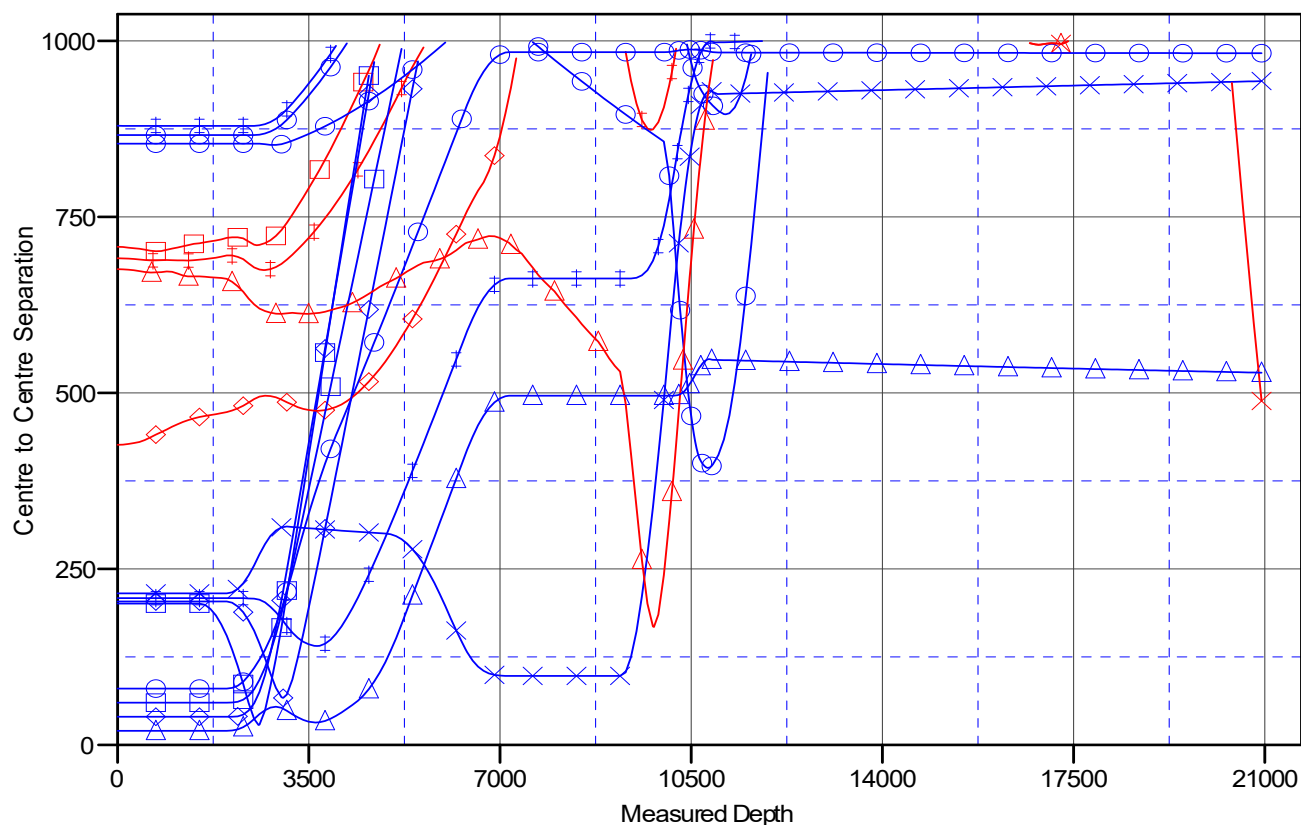

LEGEND

RICK VAUGHN 7 WA FED COM 014H, OWB, AWP V0	TATER SALAD FEDERAL COM 701H, OWB, PWP2 V0	GOLDEN GRAHAM 1 STATE COM 764H, OWB, AWP V0
MOMBA FEDERAL COM 702H, OWB, AWP V0	TATER SALAD FEDERAL COM 704H, OWB, PWP2 V0	MOMBA FEDERAL COM 701H, OWB, AWP V0
MOMBA FEDERAL COM 703H, OWB, AWP V0	TATER SALAD FEDERAL COM 903H, OWB, PWP2 V0	MOMBA FEDERAL COM 903H, OWB, PWP2 V0
MOMBA FEDERAL COM 901H, OWB, PWP1 V0	MOMBA 24 FEDERAL COM 1H(P&A), OWB, AWP V0	TATER SALAD FEDERAL COM 902H, OWB, PWP2 V0
MOMBA FEDERAL COM 902H, OWB, PWP2 V0	TATER SALAD FEDERAL COM 904H, OWB, PWP2 V0	TATER SALAD FEDERAL COM 702H, OWB, PWP2 V0
TATER SALAD FEDERAL COM 905H, OWB, PWP2 V0	TATER SALAD FEDERAL COM 703H, OWB, PWP2 V0	RICK VAUGHN 7 WA FED COM 014H, OWB, AWP V0

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

ConocoPhillips

Anticollision Report

Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Project:	ATLAS PROSPECT_NME	TVD Reference:	RKB=32ft @ 2945.10usft
Reference Site:	TATER SALAD & MOMBA FEDERAL	MD Reference:	RKB=32ft @ 2945.10usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	EDT 17 Permian Prod
Reference Design:	PWP2	Offset TVD Reference:	Reference Datum

Reference Depths are relative to RKB=32ft @ 2945.10usft

Offset Depths are relative to Offset Datum


Central Meridian is 104° 20' 0.000 W

Coordinates are relative to: TATER SALAD FEDERAL COM 901H

Coordinate System is US State Plane 1927 (Exact solution), New Mexico East 30

Grid Convergence at Surface is: 0.16°

Separation Factor Plot

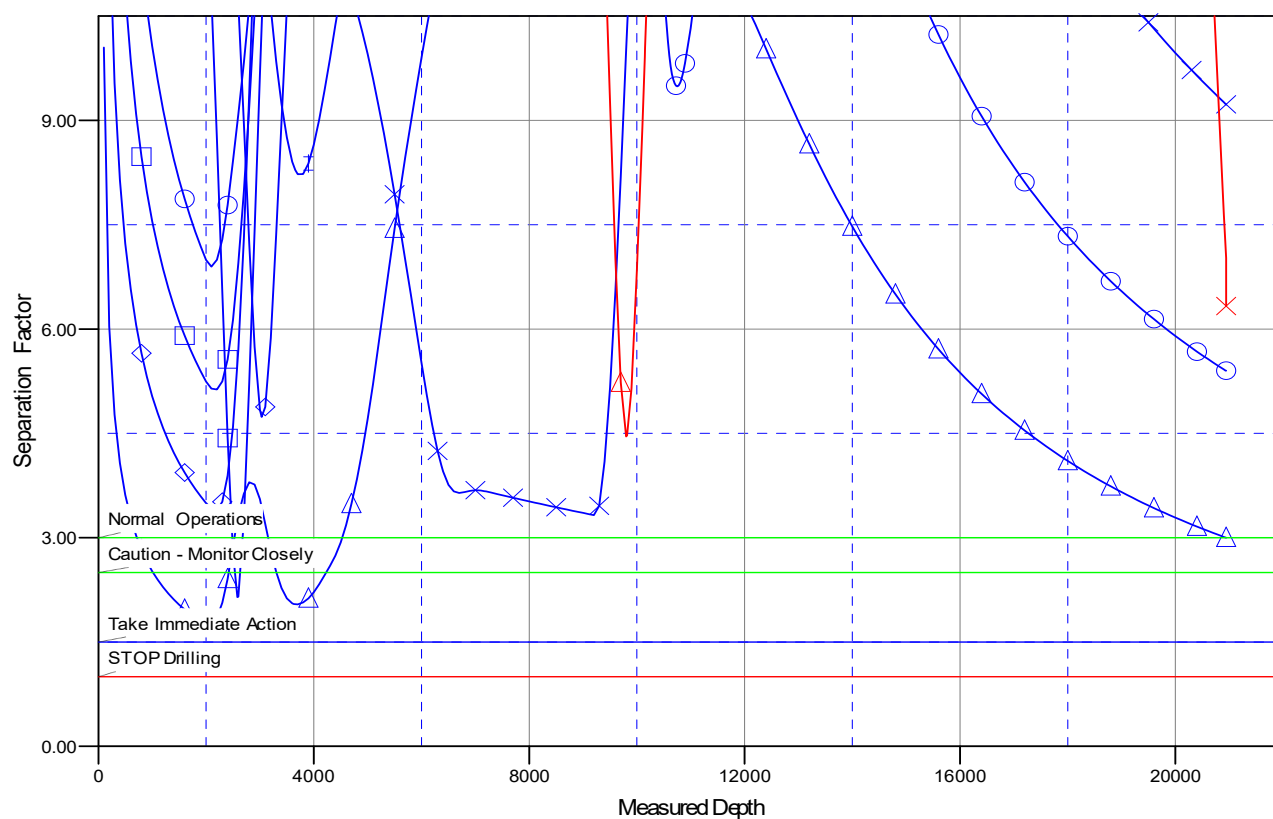

LEGEND

RICK VAUGHN 7 WA FED COM 014H, OWB, AWP V0	TATER SALAD FEDERAL COM 701H, OWB, PWP2 V0	GOLDEN GRAHAM 1 STATE COM 764H, OWB, AWP V0
MOMBA FEDERAL COM 702H, OWB, AWP V0	TATER SALAD FEDERAL COM 704H, OWB, PWP2 V0	MOMBA FEDERAL COM 701H, OWB, AWP V0
MOMBA FEDERAL COM 703H, OWB, AWP V0	TATER SALAD FEDERAL COM 903H, OWB, PWP2 V0	MOMBA FEDERAL COM 903H, OWB, PWP2 V0
MOMBA FEDERAL COM 901H, OWB, PWP1 V0	MOMBA 34 FEDERAL COM 1H(P&A), OWB, AWP V0	TATER SALAD FEDERAL COM 902H, OWB, PWP2 V0
MOMBA FEDERAL COM 902H, OWB, PWP2 V0	TATER SALAD FEDERAL COM 904H, OWB, PWP2 V0	TATER SALAD FEDERAL COM 702H, OWB, PWP2 V0
TATER SALAD FEDERAL COM 905H, OWB, PWP2 V0	TATER SALAD FEDERAL COM 703H, OWB, PWP2 V0	RICK VAUGHN 7 WA FED COM 014H, OWB, AWP V0

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

DELAWARE BASIN WEST

**ATLAS PROSPECT_NME
TATER SALAD & MOMBA FEDERAL
TATER SALAD FEDERAL COM 901H
300154774800
OWB**

Plan: PWP2

Standard Planning Report

03 February, 2026

ConocoPhillips
Planning Report

Database:	EDT 17 Permian Prod	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Company:	DELAWARE BASIN WEST	TVD Reference:	RKB=32ft @ 2945.10usft
Project:	ATLAS PROSPECT_NME	MD Reference:	RKB=32ft @ 2945.10usft
Site:	TATER SALAD & MOMBA FEDERAL	North Reference:	Grid
Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP2		

Project	ATLAS PROSPECT_NME		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site	TATER SALAD & MOMBA FEDERAL		
Site Position:		Northing:	376,681.58 usft
From:	Map	Easting:	593,463.23 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "
		Latitude:	32° 2' 6.913 N
		Longitude:	104° 1' 54.189 W

Well	TATER SALAD FEDERAL COM 901H		
Well Position	+N/-S	0.00 usft	Northing:
	+E/-W	0.00 usft	Easting:
Position Uncertainty	0.00 usft	Wellhead Elevation:	
Grid Convergence:	0.16 °		
		Latitude:	32° 2' 4.250 N
		Longitude:	104° 2' 7.530 W
		Ground Level:	2,913.10 usft

Wellbore	OWB				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	BGGM2025	5/1/2026	6.38	59.49	46,995.10474568

Design	PWP2			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	4.34

Plan Survey Tool Program		Date	2/3/2026		
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.00	2,000.00	PWP2 (OWB)	r.5 MWD+IFR1+SAG+FDIR OWSG MWD + IFR1 + SAG +	
2	2,000.00	10,146.26	PWP2 (OWB)	r.5 MWD+IFR1 OWSG MWD + IFR1 rev.5	
3	10,146.26	20,942.26	PWP2 (OWB)	r.5 MWD+IFR1+SAG+FDIR OWSG MWD + IFR1 + SAG +	

ConocoPhillips
Planning Report

Database:	EDT 17 Permian Prod	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Company:	DELAWARE BASIN WEST	TVD Reference:	RKB=32ft @ 2945.10usft
Project:	ATLAS PROSPECT_NME	MD Reference:	RKB=32ft @ 2945.10usft
Site:	TATER SALAD & MOMBA FEDERAL	North Reference:	Grid
Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP2		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00	
3,099.97	12.00	82.85	3,095.59	7.79	62.11	2.00	2.00	0.00	82.85	
6,367.65	12.00	82.85	6,291.87	92.32	736.19	0.00	0.00	0.00	0.00	
7,167.61	0.00	0.00	7,086.00	102.70	819.00	1.50	-1.50	0.00	180.00	
10,146.26	0.00	0.00	10,064.65	102.70	819.00	0.00	0.00	0.00	0.00	
10,892.84	89.59	359.93	10,542.10	576.74	818.45	12.00	12.00	-0.01	359.93	
20,942.26	89.59	359.93	10,614.10	10,625.90	806.70	0.00	0.00	0.00	0.00	

ConocoPhillips

Planning Report

Database:	EDT 17 Permian Prod	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Company:	DELAWARE BASIN WEST	TVD Reference:	RKB=32ft @ 2945.10usft
Project:	ATLAS PROSPECT_NME	MD Reference:	RKB=32ft @ 2945.10usft
Site:	TATER SALAD & MOMBA FEDERAL	North Reference:	Grid
Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	2.00	82.85	2,599.98	0.22	1.73	0.35	2.00	2.00	0.00
2,700.00	4.00	82.85	2,699.84	0.87	6.92	1.39	2.00	2.00	0.00
2,800.00	6.00	82.85	2,799.45	1.95	15.57	3.13	2.00	2.00	0.00
2,900.00	8.00	82.85	2,898.70	3.47	27.66	5.55	2.00	2.00	0.00
3,000.00	10.00	82.85	2,997.47	5.42	43.18	8.67	2.00	2.00	0.00
3,099.97	12.00	82.85	3,095.59	7.79	62.11	12.47	2.00	2.00	0.00
3,200.00	12.00	82.85	3,193.44	10.38	82.74	16.61	0.00	0.00	0.00
3,300.00	12.00	82.85	3,291.25	12.96	103.37	20.75	0.00	0.00	0.00
3,400.00	12.00	82.85	3,389.07	15.55	124.00	24.89	0.00	0.00	0.00
3,500.00	12.00	82.85	3,486.88	18.14	144.63	29.03	0.00	0.00	0.00
3,600.00	12.00	82.85	3,584.70	20.72	165.26	33.17	0.00	0.00	0.00
3,700.00	12.00	82.85	3,682.51	23.31	185.89	37.31	0.00	0.00	0.00
3,800.00	12.00	82.85	3,780.33	25.90	206.52	41.46	0.00	0.00	0.00
3,900.00	12.00	82.85	3,878.14	28.48	227.14	45.60	0.00	0.00	0.00
4,000.00	12.00	82.85	3,975.96	31.07	247.77	49.74	0.00	0.00	0.00
4,100.00	12.00	82.85	4,073.77	33.66	268.40	53.88	0.00	0.00	0.00
4,200.00	12.00	82.85	4,171.59	36.24	289.03	58.02	0.00	0.00	0.00
4,300.00	12.00	82.85	4,269.40	38.83	309.66	62.16	0.00	0.00	0.00
4,400.00	12.00	82.85	4,367.22	41.42	330.29	66.30	0.00	0.00	0.00
4,500.00	12.00	82.85	4,465.03	44.00	350.92	70.44	0.00	0.00	0.00
4,600.00	12.00	82.85	4,562.85	46.59	371.55	74.58	0.00	0.00	0.00
4,700.00	12.00	82.85	4,660.66	49.18	392.17	78.72	0.00	0.00	0.00
4,800.00	12.00	82.85	4,758.48	51.76	412.80	82.86	0.00	0.00	0.00
4,900.00	12.00	82.85	4,856.29	54.35	433.43	87.01	0.00	0.00	0.00
5,000.00	12.00	82.85	4,954.11	56.94	454.06	91.15	0.00	0.00	0.00
5,100.00	12.00	82.85	5,051.92	59.52	474.69	95.29	0.00	0.00	0.00
5,200.00	12.00	82.85	5,149.74	62.11	495.32	99.43	0.00	0.00	0.00
5,300.00	12.00	82.85	5,247.55	64.70	515.95	103.57	0.00	0.00	0.00

ConocoPhillips

Planning Report

Database:	EDT 17 Permian Prod	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Company:	DELAWARE BASIN WEST	TVD Reference:	RKB=32ft @ 2945.10usft
Project:	ATLAS PROSPECT_NME	MD Reference:	RKB=32ft @ 2945.10usft
Site:	TATER SALAD & MOMBA FEDERAL	North Reference:	Grid
Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP2		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
5,400.00	12.00	82.85	5,345.37	67.28	536.57	107.71	0.00	0.00	0.00	
5,500.00	12.00	82.85	5,443.18	69.87	557.20	111.85	0.00	0.00	0.00	
5,600.00	12.00	82.85	5,541.00	72.46	577.83	115.99	0.00	0.00	0.00	
5,700.00	12.00	82.85	5,638.81	75.04	598.46	120.13	0.00	0.00	0.00	
5,800.00	12.00	82.85	5,736.63	77.63	619.09	124.27	0.00	0.00	0.00	
5,900.00	12.00	82.85	5,834.44	80.22	639.72	128.42	0.00	0.00	0.00	
6,000.00	12.00	82.85	5,932.26	82.81	660.35	132.56	0.00	0.00	0.00	
6,100.00	12.00	82.85	6,030.07	85.39	680.97	136.70	0.00	0.00	0.00	
6,200.00	12.00	82.85	6,127.89	87.98	701.60	140.84	0.00	0.00	0.00	
6,300.00	12.00	82.85	6,225.70	90.57	722.23	144.98	0.00	0.00	0.00	
6,367.65	12.00	82.85	6,291.87	92.32	736.19	147.78	0.00	0.00	0.00	
6,400.00	11.51	82.85	6,323.55	93.14	742.73	149.09	1.50	-1.50	0.00	
6,500.00	10.01	82.85	6,421.78	95.46	761.26	152.81	1.50	-1.50	0.00	
6,600.00	8.51	82.85	6,520.48	97.46	777.23	156.02	1.50	-1.50	0.00	
6,700.00	7.01	82.85	6,619.56	99.14	790.64	158.71	1.50	-1.50	0.00	
6,800.00	5.51	82.85	6,718.96	100.50	801.46	160.88	1.50	-1.50	0.00	
6,900.00	4.01	82.85	6,818.61	101.53	809.70	162.54	1.50	-1.50	0.00	
7,000.00	2.51	82.85	6,918.44	102.24	815.35	163.67	1.50	-1.50	0.00	
7,100.00	1.01	82.85	7,018.39	102.63	818.41	164.28	1.50	-1.50	0.00	
7,167.61	0.00	0.00	7,086.00	102.70	819.00	164.40	1.50	-1.50	0.00	
7,200.00	0.00	0.00	7,118.39	102.70	819.00	164.40	0.00	0.00	0.00	
7,300.00	0.00	0.00	7,218.39	102.70	819.00	164.40	0.00	0.00	0.00	
7,400.00	0.00	0.00	7,318.39	102.70	819.00	164.40	0.00	0.00	0.00	
7,500.00	0.00	0.00	7,418.39	102.70	819.00	164.40	0.00	0.00	0.00	
7,600.00	0.00	0.00	7,518.39	102.70	819.00	164.40	0.00	0.00	0.00	
7,700.00	0.00	0.00	7,618.39	102.70	819.00	164.40	0.00	0.00	0.00	
7,800.00	0.00	0.00	7,718.39	102.70	819.00	164.40	0.00	0.00	0.00	
7,900.00	0.00	0.00	7,818.39	102.70	819.00	164.40	0.00	0.00	0.00	
8,000.00	0.00	0.00	7,918.39	102.70	819.00	164.40	0.00	0.00	0.00	
8,100.00	0.00	0.00	8,018.39	102.70	819.00	164.40	0.00	0.00	0.00	
8,200.00	0.00	0.00	8,118.39	102.70	819.00	164.40	0.00	0.00	0.00	
8,300.00	0.00	0.00	8,218.39	102.70	819.00	164.40	0.00	0.00	0.00	
8,400.00	0.00	0.00	8,318.39	102.70	819.00	164.40	0.00	0.00	0.00	
8,500.00	0.00	0.00	8,418.39	102.70	819.00	164.40	0.00	0.00	0.00	
8,600.00	0.00	0.00	8,518.39	102.70	819.00	164.40	0.00	0.00	0.00	
8,700.00	0.00	0.00	8,618.39	102.70	819.00	164.40	0.00	0.00	0.00	
8,800.00	0.00	0.00	8,718.39	102.70	819.00	164.40	0.00	0.00	0.00	
8,900.00	0.00	0.00	8,818.39	102.70	819.00	164.40	0.00	0.00	0.00	
9,000.00	0.00	0.00	8,918.39	102.70	819.00	164.40	0.00	0.00	0.00	
9,100.00	0.00	0.00	9,018.39	102.70	819.00	164.40	0.00	0.00	0.00	
9,200.00	0.00	0.00	9,118.39	102.70	819.00	164.40	0.00	0.00	0.00	
9,300.00	0.00	0.00	9,218.39	102.70	819.00	164.40	0.00	0.00	0.00	
9,400.00	0.00	0.00	9,318.39	102.70	819.00	164.40	0.00	0.00	0.00	
9,500.00	0.00	0.00	9,418.39	102.70	819.00	164.40	0.00	0.00	0.00	
9,600.00	0.00	0.00	9,518.39	102.70	819.00	164.40	0.00	0.00	0.00	
9,700.00	0.00	0.00	9,618.39	102.70	819.00	164.40	0.00	0.00	0.00	
9,800.00	0.00	0.00	9,718.39	102.70	819.00	164.40	0.00	0.00	0.00	
9,900.00	0.00	0.00	9,818.39	102.70	819.00	164.40	0.00	0.00	0.00	
10,000.00	0.00	0.00	9,918.39	102.70	819.00	164.40	0.00	0.00	0.00	
10,100.00	0.00	0.00	10,018.39	102.70	819.00	164.40	0.00	0.00	0.00	
10,146.26	0.00	0.00	10,064.65	102.70	819.00	164.40	0.00	0.00	0.00	
10,150.00	0.45	359.93	10,068.39	102.71	819.00	164.42	12.00	12.00	0.00	
10,175.00	3.45	359.93	10,093.37	103.56	819.00	165.27	12.00	12.00	0.00	
10,200.00	6.45	359.93	10,118.28	105.72	819.00	167.42	12.00	12.00	0.00	

ConocoPhillips

Planning Report

Database:	EDT 17 Permian Prod	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Company:	DELAWARE BASIN WEST	TVD Reference:	RKB=32ft @ 2945.10usft
Project:	ATLAS PROSPECT_NME	MD Reference:	RKB=32ft @ 2945.10usft
Site:	TATER SALAD & MOMBA FEDERAL	North Reference:	Grid
Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
10,225.00	9.45	359.93	10,143.03	109.18	818.99	170.86	12.00	12.00	0.00
10,250.00	12.45	359.93	10,167.57	113.93	818.99	175.60	12.00	12.00	0.00
10,275.00	15.45	359.93	10,191.83	119.95	818.98	181.60	12.00	12.00	0.00
10,300.00	18.45	359.93	10,215.75	127.24	818.97	188.87	12.00	12.00	0.00
10,325.00	21.45	359.93	10,239.24	135.77	818.96	197.37	12.00	12.00	0.00
10,350.00	24.45	359.93	10,262.26	145.51	818.95	207.09	12.00	12.00	0.00
10,375.00	27.45	359.93	10,284.74	156.45	818.94	218.00	12.00	12.00	0.00
10,400.00	30.45	359.93	10,306.61	168.55	818.92	230.06	12.00	12.00	0.00
10,425.00	33.45	359.93	10,327.82	181.78	818.91	243.25	12.00	12.00	0.00
10,450.00	36.45	359.93	10,348.31	196.10	818.89	257.53	12.00	12.00	0.00
10,475.00	39.45	359.93	10,368.02	211.47	818.87	272.85	12.00	12.00	0.00
10,500.00	42.45	359.93	10,386.90	227.85	818.85	289.19	12.00	12.00	0.00
10,525.00	45.45	359.93	10,404.90	245.20	818.83	306.48	12.00	12.00	0.00
10,550.00	48.45	359.93	10,421.97	263.47	818.81	324.70	12.00	12.00	0.00
10,575.00	51.45	359.93	10,438.05	282.60	818.79	343.78	12.00	12.00	0.00
10,600.00	54.45	359.93	10,453.11	302.55	818.77	363.67	12.00	12.00	0.00
10,625.00	57.45	359.93	10,467.11	323.27	818.74	384.32	12.00	12.00	0.00
10,650.00	60.45	359.93	10,480.00	344.68	818.72	405.67	12.00	12.00	0.00
10,675.00	63.45	359.93	10,491.76	366.74	818.69	427.66	12.00	12.00	0.00
10,700.00	66.45	359.93	10,502.34	389.39	818.66	450.24	12.00	12.00	0.00
10,725.00	69.45	359.93	10,511.73	412.56	818.64	473.34	12.00	12.00	0.00
10,750.00	72.45	359.93	10,519.89	436.18	818.61	496.90	12.00	12.00	0.00
10,775.00	75.45	359.93	10,526.80	460.21	818.58	520.85	12.00	12.00	0.00
10,800.00	78.45	359.93	10,532.44	484.56	818.55	545.13	12.00	12.00	0.00
10,825.00	81.45	359.93	10,536.80	509.17	818.52	569.67	12.00	12.00	0.00
10,850.00	84.45	359.93	10,539.87	533.98	818.50	594.41	12.00	12.00	0.00
10,875.00	87.45	359.93	10,541.64	558.91	818.47	619.27	12.00	12.00	0.00
10,892.84	89.59	359.93	10,542.10	576.74	818.45	637.05	12.00	12.00	0.00
10,900.00	89.59	359.93	10,542.15	583.91	818.44	644.19	0.00	0.00	0.00
11,000.00	89.59	359.93	10,542.87	683.90	818.32	743.89	0.00	0.00	0.00
11,100.00	89.59	359.93	10,543.58	783.90	818.20	843.59	0.00	0.00	0.00
11,200.00	89.59	359.93	10,544.30	883.90	818.09	943.29	0.00	0.00	0.00
11,300.00	89.59	359.93	10,545.02	983.90	817.97	1,042.99	0.00	0.00	0.00
11,400.00	89.59	359.93	10,545.73	1,083.89	817.85	1,142.70	0.00	0.00	0.00
11,500.00	89.59	359.93	10,546.45	1,183.89	817.74	1,242.40	0.00	0.00	0.00
11,600.00	89.59	359.93	10,547.17	1,283.89	817.62	1,342.10	0.00	0.00	0.00
11,700.00	89.59	359.93	10,547.88	1,383.89	817.50	1,441.80	0.00	0.00	0.00
11,800.00	89.59	359.93	10,548.60	1,483.88	817.39	1,541.50	0.00	0.00	0.00
11,900.00	89.59	359.93	10,549.32	1,583.88	817.27	1,641.20	0.00	0.00	0.00
12,000.00	89.59	359.93	10,550.03	1,683.88	817.15	1,740.90	0.00	0.00	0.00
12,100.00	89.59	359.93	10,550.75	1,783.87	817.03	1,840.61	0.00	0.00	0.00
12,200.00	89.59	359.93	10,551.47	1,883.87	816.92	1,940.31	0.00	0.00	0.00
12,300.00	89.59	359.93	10,552.18	1,983.87	816.80	2,040.01	0.00	0.00	0.00
12,400.00	89.59	359.93	10,552.90	2,083.87	816.68	2,139.71	0.00	0.00	0.00
12,500.00	89.59	359.93	10,553.61	2,183.86	816.57	2,239.41	0.00	0.00	0.00
12,600.00	89.59	359.93	10,554.33	2,283.86	816.45	2,339.11	0.00	0.00	0.00
12,700.00	89.59	359.93	10,555.05	2,383.86	816.33	2,438.82	0.00	0.00	0.00
12,800.00	89.59	359.93	10,555.76	2,483.86	816.22	2,538.52	0.00	0.00	0.00
12,900.00	89.59	359.93	10,556.48	2,583.85	816.10	2,638.22	0.00	0.00	0.00
13,000.00	89.59	359.93	10,557.20	2,683.85	815.98	2,737.92	0.00	0.00	0.00
13,100.00	89.59	359.93	10,557.91	2,783.85	815.87	2,837.62	0.00	0.00	0.00
13,200.00	89.59	359.93	10,558.63	2,883.85	815.75	2,937.32	0.00	0.00	0.00
13,300.00	89.59	359.93	10,559.35	2,983.84	815.63	3,037.03	0.00	0.00	0.00
13,400.00	89.59	359.93	10,560.06	3,083.84	815.52	3,136.73	0.00	0.00	0.00

ConocoPhillips

Planning Report

Database:	EDT 17 Permian Prod	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Company:	DELAWARE BASIN WEST	TVD Reference:	RKB=32ft @ 2945.10usft
Project:	ATLAS PROSPECT_NME	MD Reference:	RKB=32ft @ 2945.10usft
Site:	TATER SALAD & MOMBA FEDERAL	North Reference:	Grid
Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP2		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
13,500.00	89.59	359.93	10,560.78	3,183.84	815.40	3,236.43	0.00	0.00	0.00	
13,600.00	89.59	359.93	10,561.50	3,283.84	815.28	3,336.13	0.00	0.00	0.00	
13,700.00	89.59	359.93	10,562.21	3,383.83	815.16	3,435.83	0.00	0.00	0.00	
13,800.00	89.59	359.93	10,562.93	3,483.83	815.05	3,535.53	0.00	0.00	0.00	
13,900.00	89.59	359.93	10,563.65	3,583.83	814.93	3,635.23	0.00	0.00	0.00	
14,000.00	89.59	359.93	10,564.36	3,683.82	814.81	3,734.94	0.00	0.00	0.00	
14,100.00	89.59	359.93	10,565.08	3,783.82	814.70	3,834.64	0.00	0.00	0.00	
14,200.00	89.59	359.93	10,565.79	3,883.82	814.58	3,934.34	0.00	0.00	0.00	
14,300.00	89.59	359.93	10,566.51	3,983.82	814.46	4,034.04	0.00	0.00	0.00	
14,400.00	89.59	359.93	10,567.23	4,083.81	814.35	4,133.74	0.00	0.00	0.00	
14,500.00	89.59	359.93	10,567.94	4,183.81	814.23	4,233.44	0.00	0.00	0.00	
14,600.00	89.59	359.93	10,568.66	4,283.81	814.11	4,333.15	0.00	0.00	0.00	
14,700.00	89.59	359.93	10,569.38	4,383.81	814.00	4,432.85	0.00	0.00	0.00	
14,800.00	89.59	359.93	10,570.09	4,483.80	813.88	4,532.55	0.00	0.00	0.00	
14,900.00	89.59	359.93	10,570.81	4,583.80	813.76	4,632.25	0.00	0.00	0.00	
15,000.00	89.59	359.93	10,571.53	4,683.80	813.65	4,731.95	0.00	0.00	0.00	
15,100.00	89.59	359.93	10,572.24	4,783.80	813.53	4,831.65	0.00	0.00	0.00	
15,200.00	89.59	359.93	10,572.96	4,883.79	813.41	4,931.36	0.00	0.00	0.00	
15,300.00	89.59	359.93	10,573.68	4,983.79	813.29	5,031.06	0.00	0.00	0.00	
15,400.00	89.59	359.93	10,574.39	5,083.79	813.18	5,130.76	0.00	0.00	0.00	
15,500.00	89.59	359.93	10,575.11	5,183.79	813.06	5,230.46	0.00	0.00	0.00	
15,600.00	89.59	359.93	10,575.82	5,283.78	812.94	5,330.16	0.00	0.00	0.00	
15,700.00	89.59	359.93	10,576.54	5,383.78	812.83	5,429.86	0.00	0.00	0.00	
15,800.00	89.59	359.93	10,577.26	5,483.78	812.71	5,529.56	0.00	0.00	0.00	
15,900.00	89.59	359.93	10,577.97	5,583.77	812.59	5,629.27	0.00	0.00	0.00	
16,000.00	89.59	359.93	10,578.69	5,683.77	812.48	5,728.97	0.00	0.00	0.00	
16,100.00	89.59	359.93	10,579.41	5,783.77	812.36	5,828.67	0.00	0.00	0.00	
16,200.00	89.59	359.93	10,580.12	5,883.77	812.24	5,928.37	0.00	0.00	0.00	
16,300.00	89.59	359.93	10,580.84	5,983.76	812.13	6,028.07	0.00	0.00	0.00	
16,400.00	89.59	359.93	10,581.56	6,083.76	812.01	6,127.77	0.00	0.00	0.00	
16,500.00	89.59	359.93	10,582.27	6,183.76	811.89	6,227.48	0.00	0.00	0.00	
16,600.00	89.59	359.93	10,582.99	6,283.76	811.78	6,327.18	0.00	0.00	0.00	
16,700.00	89.59	359.93	10,583.71	6,383.75	811.66	6,426.88	0.00	0.00	0.00	
16,800.00	89.59	359.93	10,584.42	6,483.75	811.54	6,526.58	0.00	0.00	0.00	
16,900.00	89.59	359.93	10,585.14	6,583.75	811.42	6,626.28	0.00	0.00	0.00	
17,000.00	89.59	359.93	10,585.86	6,683.75	811.31	6,725.98	0.00	0.00	0.00	
17,100.00	89.59	359.93	10,586.57	6,783.74	811.19	6,825.69	0.00	0.00	0.00	
17,200.00	89.59	359.93	10,587.29	6,883.74	811.07	6,925.39	0.00	0.00	0.00	
17,300.00	89.59	359.93	10,588.00	6,983.74	810.96	7,025.09	0.00	0.00	0.00	
17,400.00	89.59	359.93	10,588.72	7,083.74	810.84	7,124.79	0.00	0.00	0.00	
17,500.00	89.59	359.93	10,589.44	7,183.73	810.72	7,224.49	0.00	0.00	0.00	
17,600.00	89.59	359.93	10,590.15	7,283.73	810.61	7,324.19	0.00	0.00	0.00	
17,700.00	89.59	359.93	10,590.87	7,383.73	810.49	7,423.90	0.00	0.00	0.00	
17,800.00	89.59	359.93	10,591.59	7,483.72	810.37	7,523.60	0.00	0.00	0.00	
17,900.00	89.59	359.93	10,592.30	7,583.72	810.26	7,623.30	0.00	0.00	0.00	
18,000.00	89.59	359.93	10,593.02	7,683.72	810.14	7,723.00	0.00	0.00	0.00	
18,100.00	89.59	359.93	10,593.74	7,783.72	810.02	7,822.70	0.00	0.00	0.00	
18,200.00	89.59	359.93	10,594.45	7,883.71	809.91	7,922.40	0.00	0.00	0.00	
18,300.00	89.59	359.93	10,595.17	7,983.71	809.79	8,022.10	0.00	0.00	0.00	
18,400.00	89.59	359.93	10,595.89	8,083.71	809.67	8,121.81	0.00	0.00	0.00	
18,500.00	89.59	359.93	10,596.60	8,183.71	809.55	8,221.51	0.00	0.00	0.00	
18,600.00	89.59	359.93	10,597.32	8,283.70	809.44	8,321.21	0.00	0.00	0.00	
18,700.00	89.59	359.93	10,598.04	8,383.70	809.32	8,420.91	0.00	0.00	0.00	
18,800.00	89.59	359.93	10,598.75	8,483.70	809.20	8,520.61	0.00	0.00	0.00	


ConocoPhillips
Planning Report

Database:	EDT 17 Permian Prod	Local Co-ordinate Reference:	Well TATER SALAD FEDERAL COM 901H
Company:	DELAWARE BASIN WEST	TVD Reference:	RKB=32ft @ 2945.10usft
Project:	ATLAS PROSPECT_NME	MD Reference:	RKB=32ft @ 2945.10usft
Site:	TATER SALAD & MOMBA FEDERAL	North Reference:	Grid
Well:	TATER SALAD FEDERAL COM 901H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
18,900.00	89.59	359.93	10,599.47	8,583.70	809.09	8,620.31	0.00	0.00	0.00
19,000.00	89.59	359.93	10,600.18	8,683.69	808.97	8,720.02	0.00	0.00	0.00
19,100.00	89.59	359.93	10,600.90	8,783.69	808.85	8,819.72	0.00	0.00	0.00
19,200.00	89.59	359.93	10,601.62	8,883.69	808.74	8,919.42	0.00	0.00	0.00
19,300.00	89.59	359.93	10,602.33	8,983.69	808.62	9,019.12	0.00	0.00	0.00
19,400.00	89.59	359.93	10,603.05	9,083.68	808.50	9,118.82	0.00	0.00	0.00
19,500.00	89.59	359.93	10,603.77	9,183.68	808.39	9,218.52	0.00	0.00	0.00
19,600.00	89.59	359.93	10,604.48	9,283.68	808.27	9,318.23	0.00	0.00	0.00
19,700.00	89.59	359.93	10,605.20	9,383.67	808.15	9,417.93	0.00	0.00	0.00
19,800.00	89.59	359.93	10,605.92	9,483.67	808.04	9,517.63	0.00	0.00	0.00
19,900.00	89.59	359.93	10,606.63	9,583.67	807.92	9,617.33	0.00	0.00	0.00
20,000.00	89.59	359.93	10,607.35	9,683.67	807.80	9,717.03	0.00	0.00	0.00
20,100.00	89.59	359.93	10,608.07	9,783.66	807.68	9,816.73	0.00	0.00	0.00
20,200.00	89.59	359.93	10,608.78	9,883.66	807.57	9,916.43	0.00	0.00	0.00
20,300.00	89.59	359.93	10,609.50	9,983.66	807.45	10,016.14	0.00	0.00	0.00
20,400.00	89.59	359.93	10,610.22	10,083.66	807.33	10,115.84	0.00	0.00	0.00
20,500.00	89.59	359.93	10,610.93	10,183.65	807.22	10,215.54	0.00	0.00	0.00
20,600.00	89.59	359.93	10,611.65	10,283.65	807.10	10,315.24	0.00	0.00	0.00
20,700.00	89.59	359.93	10,612.36	10,383.65	806.98	10,414.94	0.00	0.00	0.00
20,800.00	89.59	359.93	10,613.08	10,483.65	806.87	10,514.64	0.00	0.00	0.00
20,900.00	89.59	359.93	10,613.80	10,583.64	806.75	10,614.35	0.00	0.00	0.00
20,942.26	89.59	359.93	10,614.10	10,625.90	806.70	10,656.48	0.00	0.00	0.00

Design Targets									
Target Name									
- hit/miss target	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
FTP (TATER SALAD FE	0.00	0.00	10,542.10	600.10	818.10	377,009.50	593,133.70	32° 2' 10.167 N	104° 1' 58.006 W
- plan misses target center by 0.36usft at 10916.19usft MD (10542.27 TVD, 600.10 N, 818.42 E)									
- Circle (radius 50.00)									
LTP (TATER SALAD FEI	0.00	0.00	10,613.17	10,495.90	806.90	386,905.30	593,122.50	32° 3' 48.101 N	104° 1' 57.816 W
- plan misses target center by 0.05usft at 20812.25usft MD (10613.17 TVD, 10495.90 N, 806.85 E)									
- Point									
PBHL (TATER SALAD F	-0.41	179.93	10,614.10	10,625.90	806.70	387,035.30	593,122.30	32° 3' 49.388 N	104° 1' 57.814 W
- plan hits target center									
- Rectangle (sides W100.00 H10,023.10 D20.00)									

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Comment
2,500.00	2,500.00	0.00	0.00	NUDGE @ DLS 2.00
3,099.97	3,095.59	7.79	62.11	HOLD TNGT
6,367.65	6,291.87	92.32	736.19	END NUDGE
7,167.61	7,086.00	102.70	819.00	HOLD TO CVE KOP
10,146.26	10,064.65	102.70	819.00	CVE KOP-START DLS 12.00 TFO 359.93
10,892.84	10,542.10	576.74	818.45	EOC-HOLD
20,942.26	10,614.10	10,625.90	806.70	TD @ 20942.26 MD / 10656.48 VS

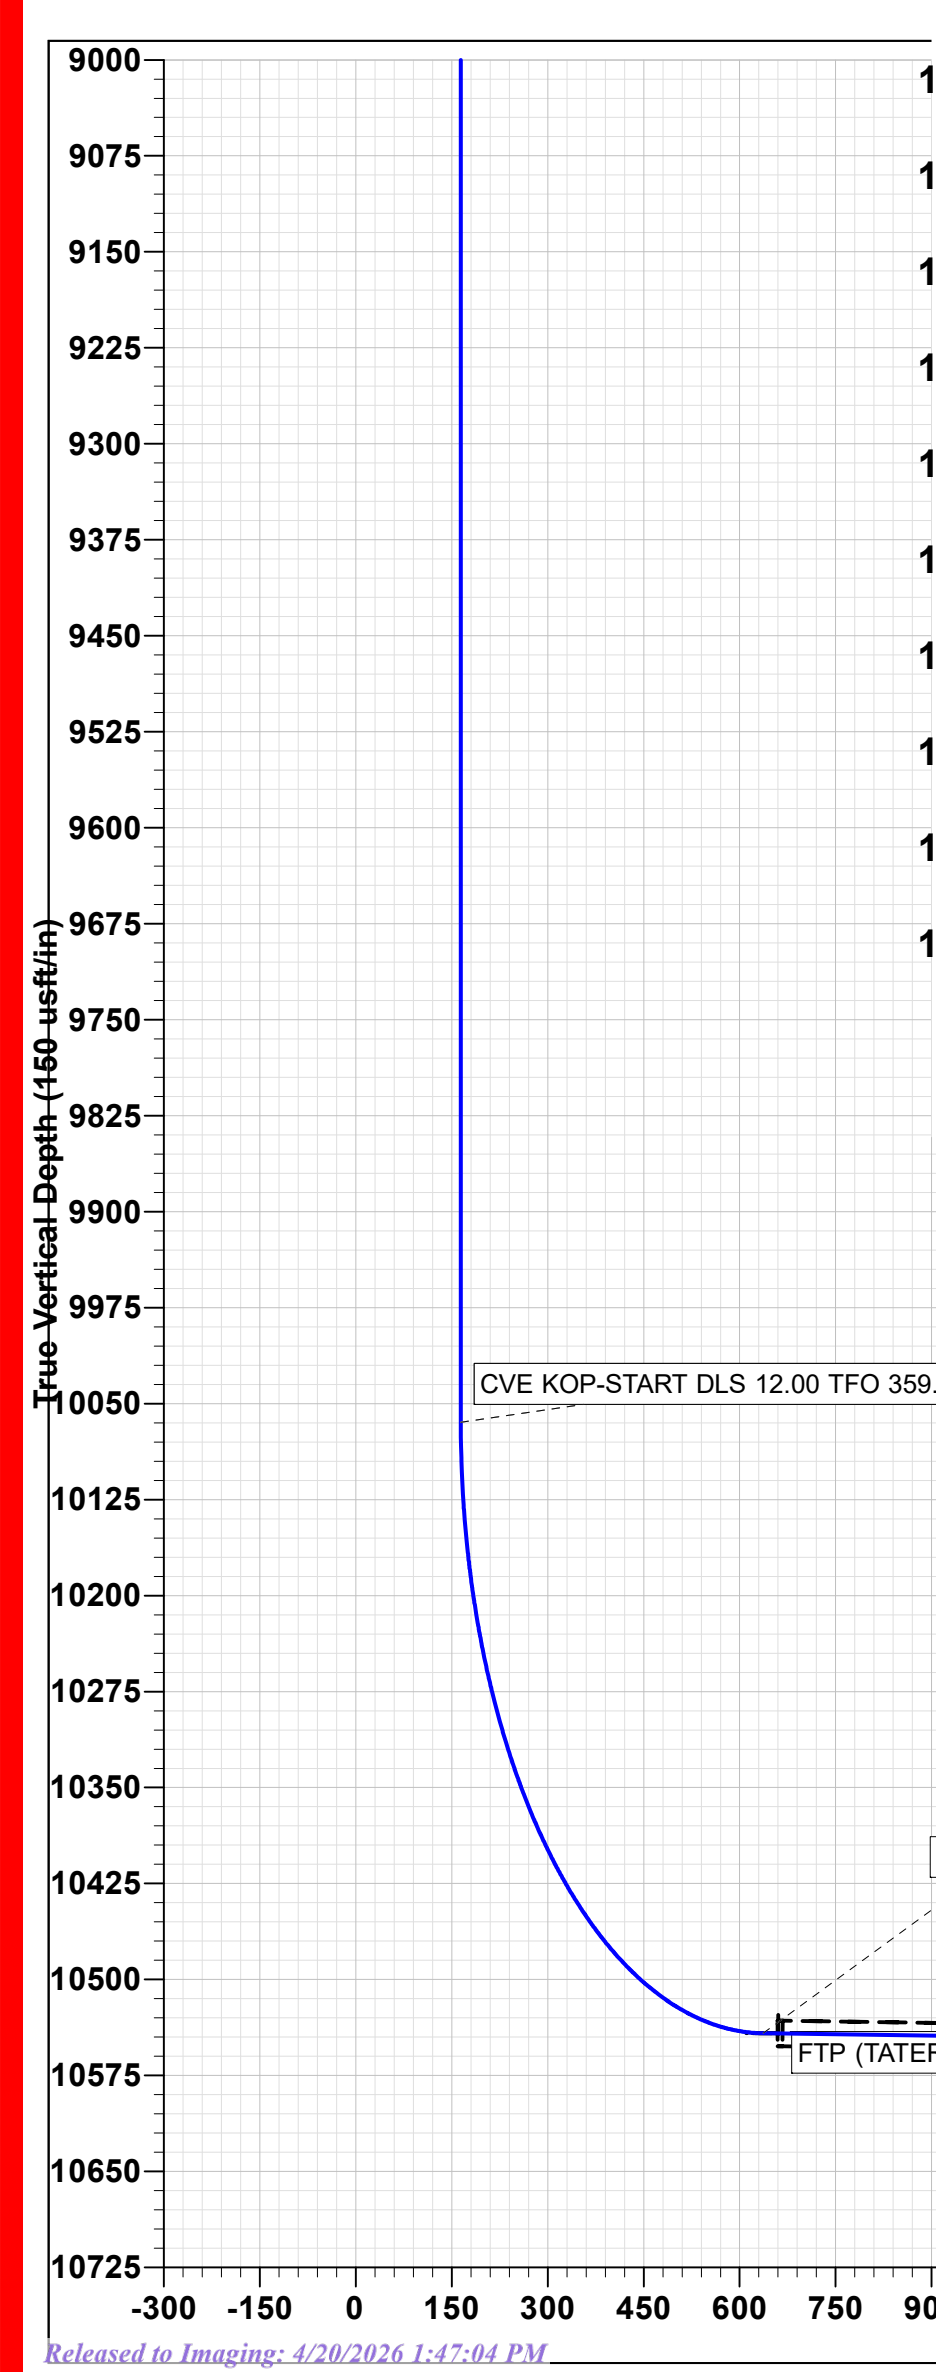

TFO 359.93


5° 10° 15° 20° 25° 30° 35° 40° 45° 50° 55° 60° 65° 70° 75° 80° 85°

FTP (TATER SALAD FED COM 901H)

EOC-HOLD

Vertical Section at 4.34° (35 usft/in)

Vertical Section at 4.34° (300.usft/in)

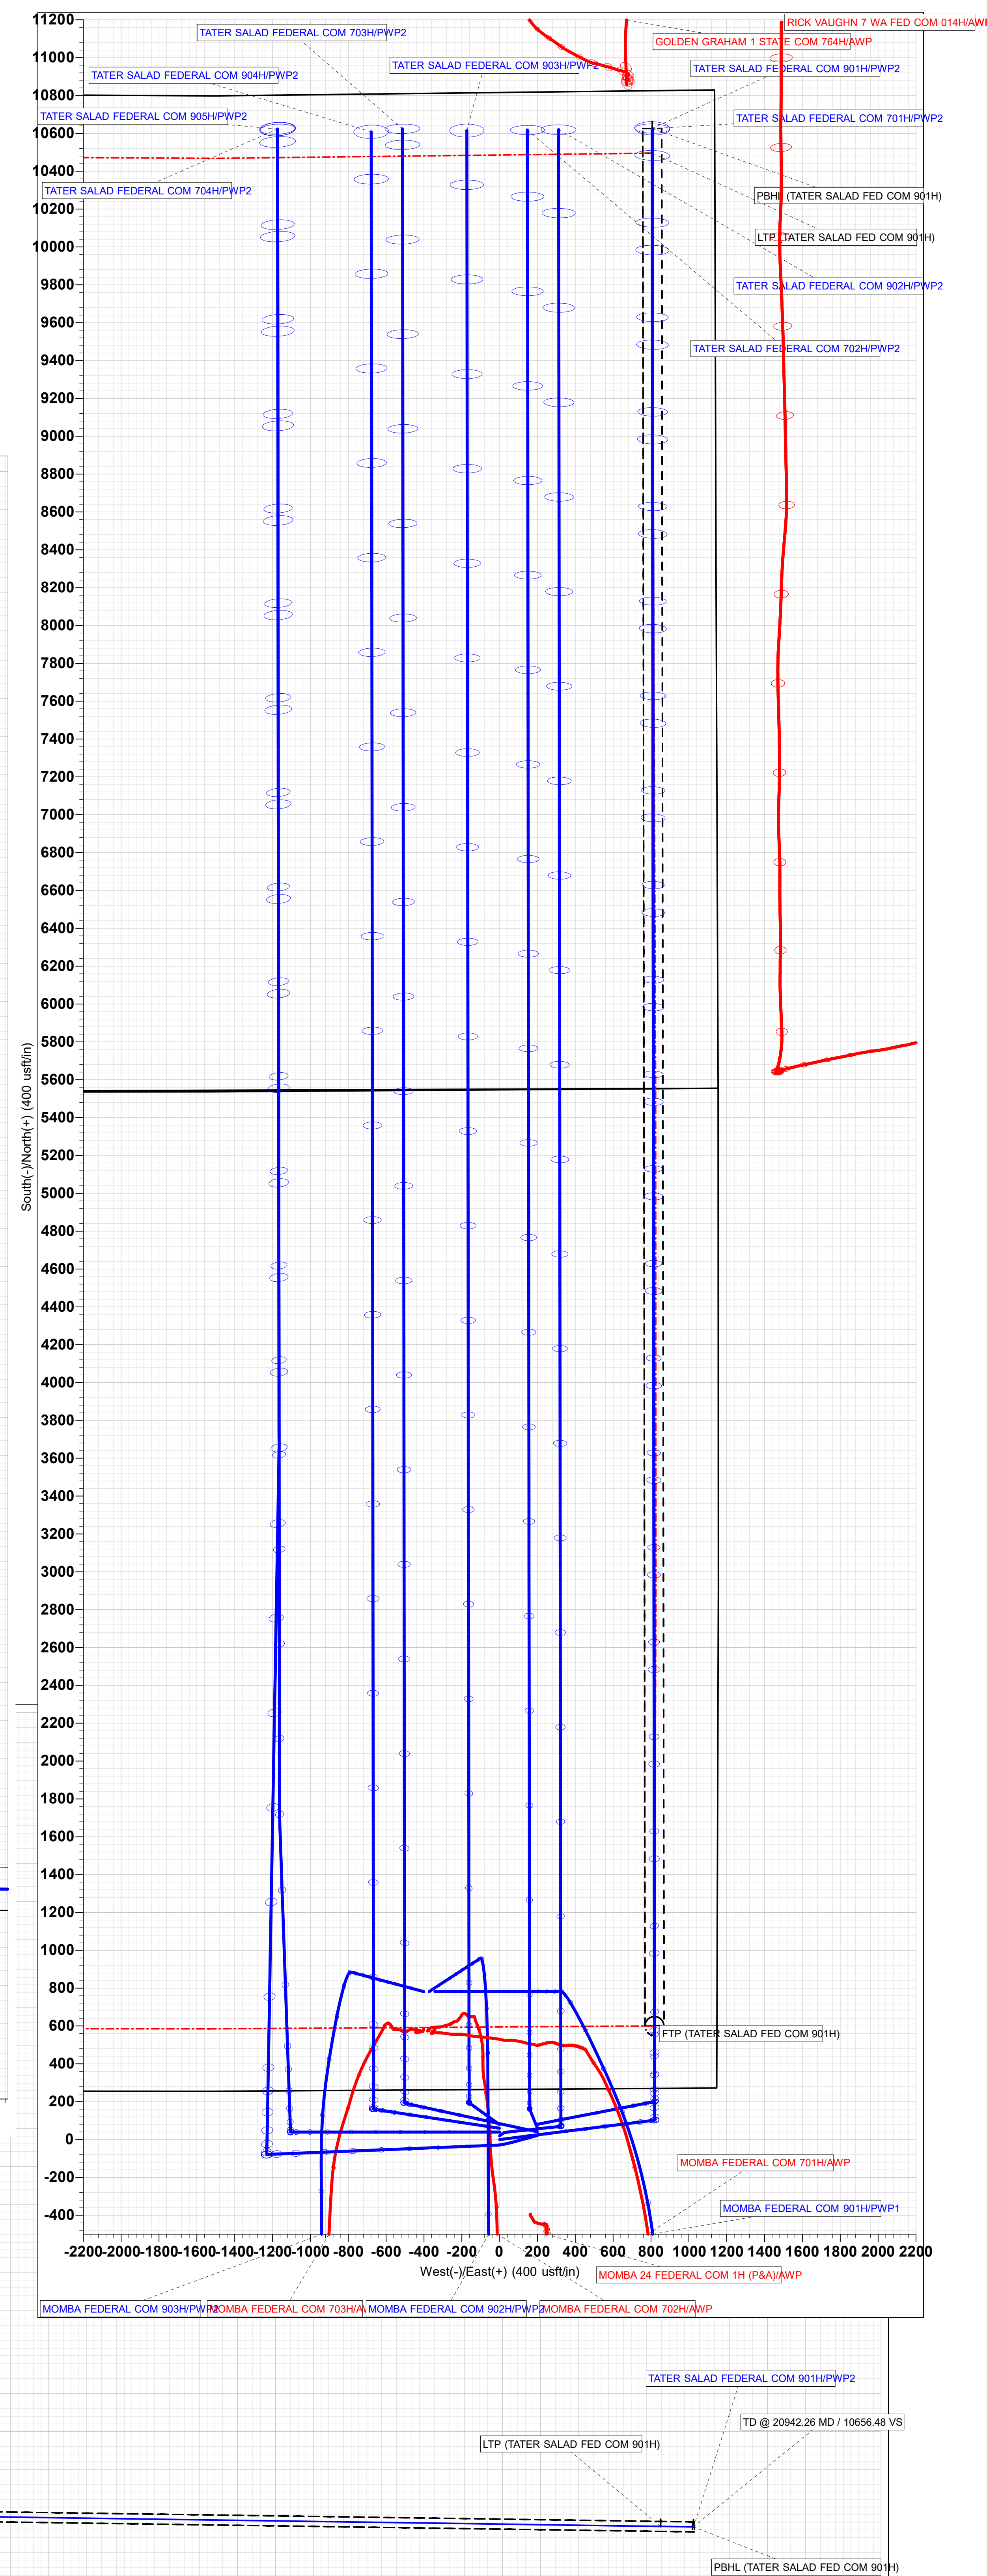

Form 3160-5 (October 2024)	UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT	FORM APPROVED OMB No. 1004-0220 Expires: October 31, 2027
SUNDRY NOTICES AND REPORTS ON WELLS <i>Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.</i>		5. Lease Serial No. NMNM12559
		6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 2		7. If Unit of CA/Agreement, Name and/or No.
1. Type of Well ☒ Oil Well ☐ Gas Well ☐ Other		8. Well Name and No. TATER SALAD FEDERAL COM/901H
2. Name of Operator COG OPERATING LLC		9. API Well No. 3001557152
3a. Address 600 West Illinois Ave, Midland, TX 79701	3b. Phone No. (include area code) (432) 683-7443	10. Field and Pool or Exploratory Area PURPLE SAGE/Wolfcamp, Gas
4. Location of Well (Footage, Sec., T.,R.,M., or Survey Description) SEC 24/T26S/R28E/NMP		11. Country or Parish, State EDDY/NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA				
TYPE OF SUBMISSION	TYPE OF ACTION			
☒ Notice of Intent	☐ Acidize	☐ Deepen	☐ Production (Start/Resume)	☐ Water Shut-Off
☐ Subsequent Report	☐ Alter Casing	☐ Hydraulic Fracturing	☐ Reclamation	☐ Well Integrity
☐ Final Abandonment Notice	☐ Casing Repair	☐ New Construction	☐ Recomplete	☐ Other
	☒ Change Plans	☐ Plug and Abandon	☐ Temporarily Abandon	
	☐ Convert to Injection	☐ Plug Back	☐ Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be perfonned or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has detennined that the site is ready for final inspection.)

COG Operating LLC, respectfully requests approval for the following changes to the original approved APD.

Summary of changes:
No changes in targets
MD at TD changed to 20,942'
TVD of target changed to 10,542'
7-5/8" casing shoe @ 10,150' MD (min)
Contingency cement program to include bradenhead cement job if severe losses are encountered
Request surface and intermediate cement jobs to be performed offline
Request variance to perform BOPE break testing on intermediate skids

Drilling program, directional plan, AC report, bradenhead and break testing attached.

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed) MAYTE REYES / Ph: (281) 293-1000	Title Regulatory Analyst
Signature (Electronic Submission)	Date 02/04/2026

THE SPACE FOR FEDERAL OR STATE OFFICE USE		
Approved by CHRISTOPHER WALLS / Ph: (575) 234-2234 / Approved	Title Petroleum Engineer	Date 02/18/2026
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office CARLSBAD	

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

Additional Information

Location of Well

0. SHL: NENE / 265 FNL / 1150 FEL / TWSP: 26S / RANGE: 28E / SECTION: 24 / LAT: 32.034638 / LONG: -104.03591 (TVD: 0 feet, MD: 0 feet)

PPP: SESE / 330 FSL / 330 FEL / TWSP: 26S / RANGE: 28E / SECTION: 13 / LAT: 32.036282 / LONG: -104.033264 (TVD: 10549 feet, MD: 10923 feet)

PPP: SWNE / 1321 FNL / 330 FEL / TWSP: 26S / RANGE: 28E / SECTION: 13 / LAT: 32.042638 / LONG: -104.033252 (TVD: 10568 feet, MD: 12863 feet)

BHL: NENE / 200 FNL / 330 FEL / TWSP: 26S / RANGE: 28E / SECTION: 12 / LAT: 32.063843 / LONG: -104.033212 (TVD: 10570 feet, MD: 20970 feet)

CONFIDENTIAL

Well Name: TATER SALAD FEDERAL COM	Well Location: T26S / R28E / SEC 24 / NENE / 32.034638 / -104.03591	County or Parish/State: EDDY / NM
Well Number: 901H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM12559	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001557152	Operator: COG OPERATING LLC	

Notice of Intent

Sundry ID: 2894382

Type of Submission: Notice of Intent	Type of Action: APD Change
Date Sundry Submitted: 02/04/2026	Time Sundry Submitted: 01:01
Date proposed operation will begin: 02/04/2026	

Procedure Description: COG Operating LLC, respectfully requests approval for the following changes to the original approved APD. Summary of changes: • No changes in targets • MD at TD changed to 20,942' • TVD of target changed to 10,542' • 7-5/8" casing shoe @ 10,150' MD (min) • Contingency cement program to include bradenhead cement job if severe losses are encountered • Request surface and intermediate cement jobs to be performed offline • Request variance to perform BOPE break testing on intermediate skids Drilling program, directional plan, AC report, bradenhead and break testing attached.

NOI Attachments

Procedure Description

- COP_Offline_Bradenhead_Intermediate_Documentation_20260204130048.pdf
- Tater_Salad_Federal_Com_901H_Drilling_Program_20260204130046.pdf
- TATER_SALAD_FEDERAL_COM_901H_PWP2_PPLOT_20260204130046.pdf
- TATER_SALAD_FEDERAL_COM_901H_PWP2_AC_RPT_20260204130046.pdf
- TATER_SALAD_FEDERAL_COM_901H_PWP2_DIR_RPT_20260204130046.pdf
- COP_BOP_Break_Testing_Documentation_20260204130045.pdf

Received by OCD: 2/24/2026 8:05:44 AM

Page 79 of 96

Well Name: TATER SALAD FEDERAL COM	Well Location: T26S / R28E / SEC 24 / NENE / 32.034638 / -104.03591	County or Parish/State: EDDY / NM
Well Number: 901H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM12559	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001557152	Operator: COG OPERATING LLC	

Conditions of Approval

Additional

TATER_SALAD_FED_COM_901H_COAs_20260211150247.pdf

SEC24_T26S_R28E_TATER_SALAD_FED_COM_Eddy_CONOCOPHILLIPS_COMPANY_46064_JS_20260211150247.pdf

SEC24_T26S_R28E_TATER_SALAD_FED_COM_Eddy_CONOCOPHILLIPS_COMPANY_46064_JS_B_20260211150247.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: MAYTE REYES

Signed on: FEB 04, 2026 01:00 PM

Name: COG OPERATING LLC

Title: Regulatory Analyst

Street Address: 925 N ELDRIDGE PARKWAY

City: HOUSTONState: TX

Phone: (281) 293-1000

Email address: MAYTE.X.REYES@CONOCOPHILLIPS.COM

Field

Representative Name: Robyn Russell

Street Address: 600 W. Illinois Ave.

City: MidlandState: TXZip: 79701

Phone: (432)685-4385

Email address: robyn.m.russell@cop.com

BLM Point of Contact

BLM POC Name: CHRISTOPHER WALLS

BLM POC Title: Petroleum Engineer

BLM POC Phone: 5752342234

BLM POC Email Address: CWALLS@BLM.GOV

Disposition: Approved

Disposition Date: 02/18/2026

Signature: Chris Walls

ConocoPhillips Company - TATER SALAD FED COM 901H

1. Geologic Formations

TVD of target	10,542' EOL	Pilot hole depth	NA
MD at TD:	20,942'	Deepest expected fresh water:	0'

Formation	Depth (TVD) from KB	Water/Mineral Bearing/ Target Zone?	Hazards*
Quaternary Fill	Surface	Water	
Rustler	465	Water	
Top of Salt	595	Salt	
Base of Salt	2463	Salt	
Lamar	2662	Salt Water	
Bell Canyon	2710	Salt Water	
Cherry Canyon	3540	Oil/Gas	
Brushy Canyon	4817	Oil/Gas	
Bone Spring	6377	Oil/Gas	
1st Bone Spring Sand	7282	Oil/Gas	
2nd Bone Spring Sand	8007	Oil/Gas	
3rd Bone Spring Sand	9144	Oil/Gas	
Wolfcamp	9495	Oil/Gas	
Wolfcamp A	9606	Oil/Gas	
Wolfcamp B	9946	Oil/Gas	
Wolfcamp C	10479	Target	

2. Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Body	SF Joint
	From	To								
14.75"	0	450	10.75"	45.5	J55	BTC	10.15	1.14	34.92	38.88
9.875"	0	7500	7.625"	29.7	L80-ICY	BTC	1.51	1.15	3.26	3.29
8.750"	7500	10150	7.625"	29.7	P110-ICY	W513	1.39	1.74	3.54	2.13
6.75"	0	9950	5.5"	23	P110-CY	BTC	2.08	2.43	3.19	3.19
6.75"	9950	20,942	5.5"	23	P110-CY	W441	1.96	2.29	3.01	2.73
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet

2b. Contingency Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Body	SF Joint
	From	To								
17.50"	0	450	13.375"	54.5	J55	BTC	5.49	2.53	34.78	37.06
12.25"	0	2570	9.625"	40	L80-IC	BTC	2.90	1.45	8.91	9.21
8.75"	2370	10150	7.625"	29.7	P110-ICY	W513	1.39	1.74	3.54	2.13
6.75"	0	9950	5.5"	23	P110-CY	BTC	2.08	2.43	3.19	3.19
6.75"	9950	20,942	5.5"	23	P110-CY	W441	1.96	2.29	3.01	2.73
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet

Intermediate casing will be kept at least 1/3 full while running casing to mitigate collapse. Surface burst based on 0.7 frac gradient at the shoe with Gas Gradient 0.1 psi/ft to surface and

All casing strings will be tested in accordance with 43 CFR Part 3170 Subpart 3172

Contingency program will be run if large water flows are encountered.

The 5 1/2" W441 casing will be run back 200' into the intermediate casing to ensure the coupling OD clearance is greater than .422" for the cement bond tie in.

February 24, 2026

1

ConocoPhillips Company - TATER SALAD FED COM 901H

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	Y
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary?	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

ConocoPhillips Company - TATER SALAD FED COM 901H

3. Cementing Program

Casing	# Sks	Wt. lb/ gal	Yld ft3/ sack	H ₂ O gal/sk	500# Comp. Strength (hours)	Slurry Description
Surf.	220	12.8	1.75	9	12	Lead: Class C + 4% Gel + 1% CaCl ₂
	250	14.8	1.34	6.34	8	Tail: Class C + 2% CaCl ₂
Inter. Stage 1	740	10.3	3.3	22	24	Halliburton tuned light
	250	14.8	1.35	6.6	8	Tail: Class H
Prod	630	12.5	1.48	10.7	72	Lead: 50:50:10 H Blend
	830	13.2	1.34	5.7	19	Tail: 50:50:2 Class H Blend

If losses are encountered in the intermediate section a DV/ECP tool will be run ~50' above the Lamar Lime top, cement will be adjusted accordingly if this contingency is necessary.

Volumes Subject to Observed Hole Conditions and/or Fluid Caliper Results

Lab reports with the 500 psi compressive strength time for the cement will be onsite for review.

Casing String	TOC	% Excess
Surface	0'	50%
1 st Intermediate	0'	50%
Production	9,650'	20% OH in Lateral (KOP to EOL)

3b. Contingency Cementing Program

Casing	# Sks	Wt. lb/ gal	Yld ft3/ sack	H ₂ O gal/sk	500# Comp. Strength (hours)	Slurry Description
Surf.	270	13.5	1.75	9	12	Lead: Class C + 4% Gel + 1% CaCl ₂
	250	14.8	1.34	6.34	8	Tail: Class C + 2% CaCl ₂
Int. #1	300	12.8	1.75	9.21	12	Lead: Class C + 4% Gel + 1% CaCl ₂
	390	14.8	1.35	6.6	8	Tail: Class C + 2% CaCl ₂
Inter. #2 (Liner)	300	10.5	3.3	22	24	Tuned light
	90	14.8	1.35	6.6	8	Tail: Class H
Prod	510	12.5	1.48	10.7	72	Lead: 50:50:10 H Blend
	830	13.2	1.34	5.7	19	Tail: 50:50:2 Class H Blend

Contingency program will be run if large water flows are encountered.

Casing String	TOC	% Excess
Surface	0'	50%
1 st Intermediate	0'	50%
2 nd Intermediate	2,370'	20%
Production	9,900'	20% OH in Lateral (KOP to EOL)

If conditions dictate, an offline bradenhead cement job will be performed to ensure cement to surface. A CBL will be ran Offline to verify TOC after 2nd Stage Bradenhead.

ConocoPhillips Company - TATER SALAD FED COM 901H

4. Pressure Control Equipment

N	A variance is requested for the use of a diverter on the surface casing. See attached for schematic.
Y	A variance is requested for the use of BOPE break testing on intermediate skids (in accordance with the 30 day full BOPE test requirements).

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Type	x	Tested to:
12-1/4" or 9-7/8"	13-5/8"	5M	Annular	x	2500psi
			Blind Ram	x	5000psi
			Pipe Ram	x	
			Double Ram	x	
			Other*		
6-3/4"	13-5/8"	10M	5M Annular	x	5000psi
			Blind Ram	x	10000psi
			Pipe Ram	x	
			Double Ram	x	
			Other*		

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per 43 CFR Part 3170 Subpart 3172 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics.

Y	Formation integrity test will be performed per Onshore Order #2. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with 43 CFR Part 3170 Subpart 3172.
Y	A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.
N	Are anchors required by manufacturer?
Y	A multibowl wellhead is being used. The BOP will be tested per 43 CFR Part 3170 Subpart 3172 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested.

ConocoPhillips Company - TATER SALAD FED COM 901H

5. Mud Program

Depth		Type	Weight (ppg)	Viscosity	Water Loss
From	To				
0	Surf. Shoe	FW Gel	8.6 - 8.8	28-34	N/C
Surf csg	7-5/8" Int shoe	Brine Diesel Emulsion	8.4 - 10	28-34	N/C
7-5/8" Int shoe	Lateral TD	OBM	9.6 - 13.5	35-45	<20

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	PVT/Pason/Visual Monitoring
---	-----------------------------

5b. Contingency Mud Program

Depth		Type	Weight (ppg)	Viscosity	Water Loss
From	To				
0	Surf. Shoe	FW Gel	8.6 - 8.8	28-34	N/C
Surf csg	9-5/8" Int shoe	Brine	8.4 - 10	28-34	N/C
9-5/8" Int shoe	7-5/8" Int shoe	Brine	8.4 - 10	28-34	N/C
7-5/8" Int shoe	Lateral TD	OBM	9.6 - 13.5	35-45	<20

6. Logging and Testing Procedures

Logging, Coring and Testing.	
Y	Will run GR/CNL from TD to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
Y	No Logs are planned based on well control or offset log information.
N	Drill stem test? If yes, explain.
N	Coring? If yes, explain.

Additional logs planned		Interval
N	Resistivity	Pilot Hole TD to ICP
N	Density	Pilot Hole TD to ICP
Y	CBL	Production casing (If cement not circulated to surface)
Y	Mud log	Intermediate shoe to TD
N	PEX	

ConocoPhillips Company - TATER SALAD FED COM 901H**7. Drilling Conditions**

Condition	Specify what type and where?
BH Pressure at deepest TVD	7405 psi at 10542' TVD
Abnormal Temperature	NO 160 Deg. F.

No abnormal pressure or temperature conditions are anticipated. Sufficient mud materials to maintain mud properties and weight increase requirements will be kept on location at all times.

Sufficient supplies of Paper/LCM for periodic sweeps to control seepage and losses will be maintained on location.

Hydrogen Sulfide (H₂S) monitors will be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of 43 CFR Part 3170 Subpart 3176. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.

N H₂S is present

Y H₂S Plan attached

8. Other Facets of Operation

Y	Is it a walking operation?
Y	Is casing pre-set?
Y	Is it a batch drilling operation?

x	H ₂ S Plan.
x	BOP & Choke Schematics.
x	Directional Plan

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	CONOCOPHILLIPS COMPANY
WELL NAME & NO.:	TATER SALAD FED COM 901H
LOCATION:	Section 24, T.26 S., R.28 E., NMP
COUNTY:	Eddy County, New Mexico

COA

H2S	☒ Yes	☐ No	
Potash	☒ None	☐ Secretary	☐ R-111-P
Cave/Karst Potential	☐ Low	☒ Medium	☐ High
Cave/Karst Potential	☐ Critical		
Variance	☐ None	☒ Flex Hose	☐ Other
Wellhead	☐ Conventional	☒ Multibowl	☐ Both
Wellhead Variance	☐ Diverter		
Other	☐ 4 String	☐ Capitan Reef	☐ WIPP
Other	☒ Fluid Filled	☐ Pilot Hole	☐ Open Annulus
Cementing	☒ Contingency Cement Squeeze	☒ EchoMeter	☐ Primary Cement Squeeze
Special Requirements	☐ Water Disposal	☒ COM	☐ Unit
Special Requirements	☐ Batch Sundry		
Special Requirements Variance	☒ Break Testing	☒ Offline Cementing	☒ Casing Clearance

A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H2S) Drilling Plan shall be activated AT SPUD. As a result, the Hydrogen Sulfide area must meet 43 CFR part 3170 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING

Primary Casing Design:

1. The **10-3/4** inch surface casing shall be set at approximately **450 feet** (a minimum of 70 feet (Eddy County) into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature

survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.

- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. **Keep casing full during run for collapse safety factor.** The minimum required fill of cement behind the 7-5/8 inch intermediate casing is:
- Cement to surface. If cement does not circulate see B.1.a, c-d above.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.
 - ❖ In Medium Cave/Karst Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.

Contingency Squeeze:

Operator has proposed to pump down 10-3/4" X 7-5/8" annulus. Operator must top out cement after the bradenhead squeeze and verify cement to surface. Operator can also check TOC with Echo-meter. CBL must be run from TD of the 7-5/8" casing to surface if confidence is lacking on the quality of the bradenhead squeeze cement job. Submit results to BLM.

Submit results to the BLM. No displacement fluid/wash out shall be utilized at the top of the cement slurry between second stage BH and top out. Operator must run one CBL per Well Pad.

If cement does not reach surface, the next casing string must come to surface.

Operator must use a limited flush fluid volume of 1 bbl following backside cementing procedures.

3. The minimum required fill of cement behind the 5-1/2 inch production casing is:
 - Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.
 - **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.**

Contingency Casing Design:

4. The **13-3/8** inch surface casing shall be set at approximately **450 feet** (a minimum of 70 feet (Eddy County) into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.
 - e. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - f. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - g. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - h. If cement falls back, remedial cementing will be done prior to drilling out that string.
5. **Keep casing full during run for collapse safety factor.** The minimum required fill of cement behind the **9-5/8** inch intermediate casing is:
 - Cement to surface. If cement does not circulate see B.1.a, c-d above.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.
 - ❖ In Medium Cave/Karst Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.
6. **Keep casing full during run for collapse safety factor.** The minimum required fill of cement behind the **7-5/8** inch intermediate liner is:
 - Cement should tie-back **100 feet** into the previous casing. Operator shall provide method of verification.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.

Contingency Squeeze:

Operator has proposed to pump down 9-5/8" X 7-5/8" annulus. Operator must top out cement after the bradenhead squeeze and verify cement to surface. Operator

can also check TOC with Echo-meter. CBL must be run from TD of the 7-5/8" casing to surface if confidence is lacking on the quality of the bradenhead squeeze cement job. Submit results to BLM.

Submit results to the BLM. No displacement fluid/wash out shall be utilized at the top of the cement slurry between second stage BH and top out. Operator must run one CBL per Well Pad.

If cement does not reach surface, the next casing string must come to surface.

Operator must use a limited flush fluid volume of 1 bbl following backside cementing procedures.

7. The minimum required fill of cement behind the 5-1/2 inch production casing is:

- Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.
- **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.**

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the 10-3/4 inch surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **10,000 (10M) psi. Variance is approved to use a 5000 (5M) Annular which shall be tested to 3500 (70% Working Pressure) psi.**
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- The operator will submit an as-drilled survey well plat of the well completion, but are not limited to, those specified in Onshore Order 1 and 2.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

(Note: For a minimum 5M BOPE or less (Utilizing a 10M BOPE system)

BOPE Break Testing Variance

- BOPE Break Testing is ONLY permitted for 5M BOPE or less. **(Annular preventer must be tested to a minimum of 70% of BOPE working pressure and shall be higher than the MASP)**
- BOPE Break Testing is NOT permitted to drilling the production hole section.
- Variance only pertains to the intermediate hole-sections and no deeper than the Bone Springs formation.
- While in transfer between wells, the BOPE shall be secured by the hydraulic carrier or cradle.
- Any well control event while drilling require notification to the BLM Petroleum Engineer (575-706-2779) prior to the commencement of any BOPE Break Testing operations.
- A full BOPE test is required prior to drilling the first deep intermediate hole section. If any subsequent hole interval is deeper than the first, a full BOPE test will be required. (200' TVD tolerance between intermediate shoes is allowable).
- The BLM is to be contacted (575-361-2822 Eddy County) 4 hours prior to BOPE tests.
- As a minimum, a full BOPE test shall be performed at 21-day intervals.
- In the event any repairs or replacement of the BOPE is required, the BOPE shall test as per Onshore Oil and Gas Order No. 2.
- If in the event break testing is not utilized, then a full BOPE test would be conducted.

Casing Clearance:

- The W441 connection should tie back 500'+ into the W513 intermediate casing for clearance overlap.

Operator shall clean up cycles until wellbore is clear of cuttings and any large debris, ensure cutting sizes are adequate “coffee ground or less” before cementing.

Offline Cementing:

Contact the BLM prior to the commencement of any offline cementing procedure.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

EMAIL or call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,

BLM_NM_CFO_DrillingNotifications@BLM.GOV
(575) 361-2822

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240,
(575) 689-5981

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - i. Notify the BLM when moving in and removing the Spudder Rig.
 - ii. Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - iii. BOP/BOPE test to be conducted per **43 CFR 3172** as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational

at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.

3. For intervals in which cement to surface is required, cement to surface should be verified with a visual check and density or pH check to differentiate cement from spacer and drilling mud. The results should be documented in the driller's log and daily reports.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends of both lead and tail cement, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.

6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-Q potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in **43 CFR 3172**.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - i. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - ii. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - iii. Manufacturer representative shall install the test plug for the initial BOP test.

- iv. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.
 - v. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
- i. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - ii. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (only applies to single stage cement jobs, prior to the cement setting up.)
 - iii. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for 8 hours or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
 - iv. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock.

If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.

- v. The results of the test shall be reported to the appropriate BLM office.
- vi. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- vii. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- viii. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per **43 CFR 3172**.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area. Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

JS 2/11/2026

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/oed/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 556975

CONDITIONS

Operator: COG OPERATING LLC 600 W Illinois Ave Midland, TX 79701	OGRID: 229137
	Action Number: 556975
	Action Type: [C-103A] NOI Change of Plans (C-103A)

CONDITIONS

Created By	Condition	Condition Date
ward.rikala	Cement is required to circulate on both surface and intermediate1 strings of casing.	4/20/2026
ward.rikala	Post Bradenhead cement squeeze, a CBL will be required. If zonal isolation was not achieved per OCD requirements, then remedial work is required before operations can continue.	4/20/2026
ward.rikala	Any previous COA's not addressed within the updated COA's still apply.	4/20/2026