

APR 18 2019 AM 11:21

4/18/2019 DATE IN	SUSPENSE	ENGINEER	LOGGED IN	TYPE SUD	APP NO. DMA 1911554413
----------------------	----------	----------	-----------	-------------	---------------------------

ABOVE THIS LINE FOR DIVISION USE ONLY

NEW MEXICO OIL CONSERVATION DIVISION
 - Engineering Bureau -
 1220 South St. Francis Drive, Santa Fe, NM 87505



ADMINISTRATIVE APPLICATION CHECKLIST

THIS CHECKLIST IS MANDATORY FOR ALL ADMINISTRATIVE APPLICATIONS FOR EXCEPTIONS TO DIVISION RULES AND REGULATIONS
 WHICH REQUIRE PROCESSING AT THE DIVISION LEVEL IN SANTA FE

Application Acronyms:

[NSL-Non-Standard Location] [NSP-Non-Standard Proration Unit] [SD-Simultaneous Dedication]
 [DHC-Downhole Commingling] [CTB-Lease Commingling] [PLC-Pool/Lease Commingling]
 [PC-Pool Commingling] [OLS - Off-Lease Storage] [OLM-Off-Lease Measurement]
 [WFX-Waterflood Expansion] [PMX-Pressure Maintenance Expansion]
 [SWD-Salt Water Disposal] [IPI-Injection Pressure Increase]
 [EOR-Qualified Enhanced Oil Recovery Certification] [PPR-Positive Production Response]

[1] **TYPE OF APPLICATION** - Check Those Which Apply for [A]

[A] Location - Spacing Unit - Simultaneous Dedication
☐ NSL ☐ NSP ☐ SD

Check One Only for [B] or [C]

[B] Commingling - Storage - Measurement
☐ DHC ☐ CTB ☐ PLC ☐ PC ☐ OLS ☐ OLM

[C] Injection - Disposal - Pressure Increase - Enhanced Oil Recovery
☐ WFX ☐ PMX ☒ SWD ☐ IPI ☐ EOR ☐ PPR

[D] Other: Specify _____

- SUD
 - Goodnight
 372311

Well 35
 Willis SA(SUD#)

Pool

[2] **NOTIFICATION REQUIRED TO:** - Check Those Which Apply, or Does Not Apply

[A] ☐ Working, Royalty or Overriding Royalty Interest Owners

[B] ☒ Offset Operators, Leaseholders or Surface Owner

[C] ☒ Application is One Which Requires Published Legal Notice

[D] ☒ Notification and/or Concurrent Approval by BLM or SLO
 U.S. Bureau of Land Management - Commissioner of Public Lands, State Land Office

[E] ☒ For all of the above, Proof of Notification or Publication is Attached, and/or,

[F] ☐ Waivers are Attached

SUD, SUD Andrey
 9/6/21

[3] **SUBMIT ACCURATE AND COMPLETE INFORMATION REQUIRED TO PROCESS THE TYPE OF APPLICATION INDICATED ABOVE.**

[4] **CERTIFICATION:** I hereby certify that the information submitted with this application for administrative approval is **accurate** and **complete** to the best of my knowledge. I also understand that **no action** will be taken on this application until the required information and notifications are submitted to the Division.

Note: Statement must be completed by an individual with managerial and/or supervisory capacity.

Nate Alleman
 Print or Type Name

Nate Alleman
 Signature

Regulatory Specialist - ALL Consulting 04/05/2019
 Title Date

nalleman@all-llc.com
 Date e-mail Address

APR 18 2019 AM 11:21

ALLCONSULTING

GOVERNMENT RELATIONS • ENERGY • PLANNING • TECHNOLOGY
ENGINEERING • ENVIRONMENTAL

April 5, 2019

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, New Mexico 87505


Subject: Goodnight Midstream Permian, LLC – Willis 35 SA 1
Application for Authorization to Inject

To Whom It May Concern,

On behalf of Goodnight Midstream Permian, LLC (Goodnight), ALL Consulting, LLC (ALL) is submitting the enclosed Application for Authorization to Inject for the Willis 35 SA 1, a proposed salt water disposal well, in Lea County, NM.

Should you have any questions regarding the enclosed application, please contact Nate Alleman at (918) 382-7581 or nalleman@all-llc.com.

Sincerely,
ALL Consulting



Nate Alleman
Sr. Regulatory Specialist

APPLICATION FOR AUTHORIZATION TO INJECT

- I. PURPOSE: _____ Secondary Recovery _____ Pressure Maintenance X Disposal
_____ Storage Application qualifies for administrative approval? X Yes _____ No
- II. OPERATOR: Goodnight Midstream Permian, LLC
ADDRESS: 5910 N Central Expressway, Suite 850, Dallas, TX 75206
CONTACT PARTY: Grant Adams PHONE: 214-444-7388(0)
- III. WELL DATA: Complete the data required on the reverse side of this form for each well proposed for injection.
Additional sheets may be attached if necessary.
- IV. Is this an expansion of an existing project? _____ Yes X No
If yes, give the Division order number authorizing the project: _____
- V. Attach a map that identifies all wells and leases within two miles of any proposed injection well with a one-half mile radius circle drawn around each proposed injection well. This circle identifies the well's area of review.
- VI. Attach a tabulation of data on all wells of public record within the area of review which penetrate the proposed injection zone. Such data shall include a description of each well's type, construction, date drilled, location, depth, record of completion, and a schematic of any plugged well illustrating all plugging detail.
- VII. Attach data on the proposed operation, including:
1. Proposed average and maximum daily rate and volume of fluids to be injected;
 2. Whether the system is open or closed;
 3. Proposed average and maximum injection pressure;
 4. Sources and an appropriate analysis of injection fluid and compatibility with the receiving formation if other than reinjected produced water; and,
 5. If injection is for disposal purposes into a zone not productive of oil or gas at or within one mile of the proposed well, attach a chemical analysis of the disposal zone formation water (may be measured or inferred from existing literature, studies, nearby wells, etc.).
- *VIII. Attach appropriate geologic data on the injection zone including appropriate lithologic detail, geologic name, thickness, and depth. Give the geologic name, and depth to bottom of all underground sources of drinking water (aquifers containing waters with total dissolved solids concentrations of 10,000 mg/l or less) overlying the proposed injection zone as well as any such sources known to be immediately underlying the injection interval.
- IX. Describe the proposed stimulation program, if any.
- *X. Attach appropriate logging and test data on the well. (If well logs have been filed with the Division, they need not be resubmitted).
- *XI. Attach a chemical analysis of fresh water from two or more fresh water wells (if available and producing) within one mile of any injection or disposal well showing location of wells and dates samples were taken.
- XII. Applicants for disposal wells must make an affirmative statement that they have examined available geologic and engineering data and find no evidence of open faults or any other hydrologic connection between the disposal zone and any underground sources of drinking water.
- XIII. Applicants must complete the "Proof of Notice" section on the reverse side of this form.
- XIV. Certification: I hereby certify that the information submitted with this application is true and correct to the best of my knowledge and belief.
- NAME: Nate Alleman TITLE: Regulatory Specialist - ALL Consulting
SIGNATURE:  DATE: 4/15/2019
E-MAIL ADDRESS: nalleman@all-llc.com
- * If the information required under Sections VI, VIII, X, and XI above has been previously submitted, it need not be resubmitted. Please show the date and circumstances of the earlier submittal:

III. WELL DATA

- A. The following well data must be submitted for each injection well covered by this application. The data must be both in tabular and schematic form and shall include:

- (1) Lease name; Well No.; Location by Section, Township and Range; and footage location within the section.
- (2) Each casing string used with its size, setting depth, sacks of cement used, hole size, top of cement, and how such top was determined.
- (3) A description of the tubing to be used including its size, lining material, and setting depth.
- (4) The name, model, and setting depth of the packer used or a description of any other seal system or assembly used.

Division District Offices have supplies of Well Data Sheets which may be used or which may be used as models for this purpose. Applicants for several identical wells may submit a "typical data sheet" rather than submitting the data for each well.

- B. The following must be submitted for each injection well covered by this application. All items must be addressed for the initial well. Responses for additional wells need be shown only when different. Information shown on schematics need not be repeated.

- (1) The name of the injection formation and, if applicable, the field or pool name.
- (2) The injection interval and whether it is perforated or open-hole.
- (3) State if the well was drilled for injection or, if not, the original purpose of the well.
- (4) Give the depths of any other perforated intervals and detail on the sacks of cement or bridge plugs used to seal off such perforations.
- (5) Give the depth to and the name of the next higher and next lower oil or gas zone in the area of the well, if any.

XIV. PROOF OF NOTICE

All applicants must furnish proof that a copy of the application has been furnished, by certified or registered mail, to the owner of the surface of the land on which the well is to be located and to each leasehold operator within one-half mile of the well location.

Where an application is subject to administrative approval, a proof of publication must be submitted. Such proof shall consist of a copy of the legal advertisement which was published in the county in which the well is located. The contents of such advertisement must include:

- (1) The name, address, phone number, and contact party for the applicant;
- (2) The intended purpose of the injection well; with the exact location of single wells or the Section, Township, and Range location of multiple wells;
- (3) The formation name and depth with expected maximum injection rates and pressures; and,
- (4) A notation that interested parties must file objections or requests for hearing with the Oil Conservation Division, 1220 South St. Francis Dr., Santa Fe, New Mexico 87505, within 15 days.

NO ACTION WILL BE TAKEN ON THE APPLICATION UNTIL PROPER PROOF OF NOTICE HAS BEEN SUBMITTED.

NOTICE: Surface owners or offset operators must file any objections or requests for hearing of administrative applications within 15 days from the date this application was mailed to them.

Application for Authorization to Inject
Well Name: Willis 35 SA 1

III – Well Data *(The Wellbore Diagram is included as Attachment 1)*

A.

(1) General Well Information:

Operator: Goodnight Midstream Permian, LLC (OGRID No. 372311)
Lease Name & Well Number: Willis 35 SA 1
Location Footage Calls: 1462' FSL & 1987' FEL
Legal Location: Unit Letter J, S35 T25S R37E
Ground Elevation: 3,009'
Proposed Injection Interval: 3,725' – 4,375'
County: Lea

(2) Casing Information:

Type	Hole Size	Casing Size	Casing Weight	Setting Depth	Sacks of Cement	Estimated TOC	Method Determined
Surface	12-1/4"	9-5/8"	40.0 lb/ft	1,015'	318	Surface	Circulation
Intermediate 1	8-3/4"	7"	26.0 lb/ft	3,725'	486	Surface	Circulation/ CBL
Tubing	6-3/11"	4-1/2"	20.0 lb/ft	3,705'	N/A	N/A	N/A

(3) Tubing Information:

4-1/2" (composite weight string) of fiberglass-coated tubing with setting depth of 3,705'

(4) Packer Information: Lok-set or equivalent packer set at 3,705'

B.

(1) Injection Formation Name: San Andres

Pool Name: SWD; SAN ANDRES

Pool Code: 96121

(2) Injection Interval: Open-hole injection between 3,725' – 4,375'

(3) Drilling Purpose: New Drill for Salt Water Disposal

(4) Other Perforated Intervals: No other perforated intervals exist.

(5) Overlying Oil and Gas Zones: Below are the approximate formation tops for known oil and gas producing zones in the area.

- Grayburg (3,350')

Underlying Oil and Gas Zones: Below are the approximate formation tops for known oil and gas producing zones in the area.

- Tubb (5,932')

V – Well and Lease Maps

The following maps are included in **Attachment 2**:

- 2-mile Oil & Gas Well Map
- 2-mile Lease Map
- 1/2-mile Well Detail List w/ Casing Information for Penetrating Wells
- Potash Lease Map
- Penetrating wells – Wellbore Diagram

VI – AOR Well List

A list of the wells within the 1/2-mile AOR is included in **Attachment 2**.

There is one well that penetrates the injection zone, it has been properly plugged and abandoned. A wellbore diagram and casing information for this well is also included in **Attachment 2**.

VII – Proposed Operation

- (1) **Proposed Maximum Injection Rate:** 35,000 bpd
Proposed Average Injection Rate: 17,500 bpd
- (2) A closed system will be used.
- (3) **Proposed Maximum Injection Pressure:** 745 psi (surface)
Proposed Average Injection Pressure: approximately 373 psi (surface)
- (4) **Source Water Analysis:** It is expected that the injectate will consist of produced water from production wells completed in the Wolfcamp and Bone Springs formations. Analysis of water from these formations is included in **Attachment 3**.
- (5) **Injection Formation Water Analysis:** The proposed SWD will be injecting water into the San Andres formation which is a non-productive zone known to be compatible with formation water from the Wolfcamp and Bone Springs formations. Water analyses from the Bone Springs, Delaware, Devonian, and Wolfcamp formations in the area are included in **Attachment 4**.

VIII – Geologic Description

The proposed injection interval includes the San Andres formations from 3,725' – 4,375'. This formation consists of interbedded carbonates rocks including dolomites and limestones. Several thick sections of porous and permeable intervals are present within this formation in the area.

The freshwater formation is the Rustler at a depth of approximately 990 feet. Water well depths in the area range from approximately 40 - 901 feet below ground surface.

IX – Proposed Stimulation Program

A small cleanup acid job may be used to remove mud and drill cuttings from the formation. However, no other formation stimulation is currently planned.

X – Logging and Test Data

Logs will be submitted to the Division upon completion of the well.

XI – Fresh Groundwater Samples

Based on a review of data from the New Mexico Office of the State Engineer, 1 groundwater well (CP-00909) is located within 1 mile of the proposed SWD location; A water sample was collected on 03/08/2019.

A water well map, details of water wells within 1-mile, and any associated water analyses are included in **Attachment 5**.

XII – No Hydrologic Connection Statement

No faulting is present in the area that would provide a hydrologic connection between the injection interval and overlying USDWs. Additionally, the casing program has been designed to ensure there will be no hydrologic connection between the injection interval and overlying USDWs.

XIII – Proof of Notice

A Public Notice was filed with the Hobbs News-Sun newspaper and an affidavit is included in **Attachment 6**.

A copy of the application was mailed to the OCD District Office, landowner, and leasehold operators within 1/2-mile of the proposed SWD location. A list of the recipients, as well as delivery confirmations, are included in **Attachment 6**.

Attachments

Attachment 1: Wellbore Diagram

Attachment 2: Area of Review Information:

- 2-mile Oil & Gas Well Map
- 2-mile Lease Map
- 1/2-mile Well Detail List w/ Casing Information for Penetrating Wells
- Potash Lease Map
- Penetrating wells – Wellbore Diagram

Attachment 3: Source Water Analyses


Attachment 4: Injection Formation Water Analyses

Attachment 5: Water Well Map and Well Data

Attachment 6: Public Notice Affidavit and Notice of Application Confirmations

Attachment 1

Wellbore Diagram

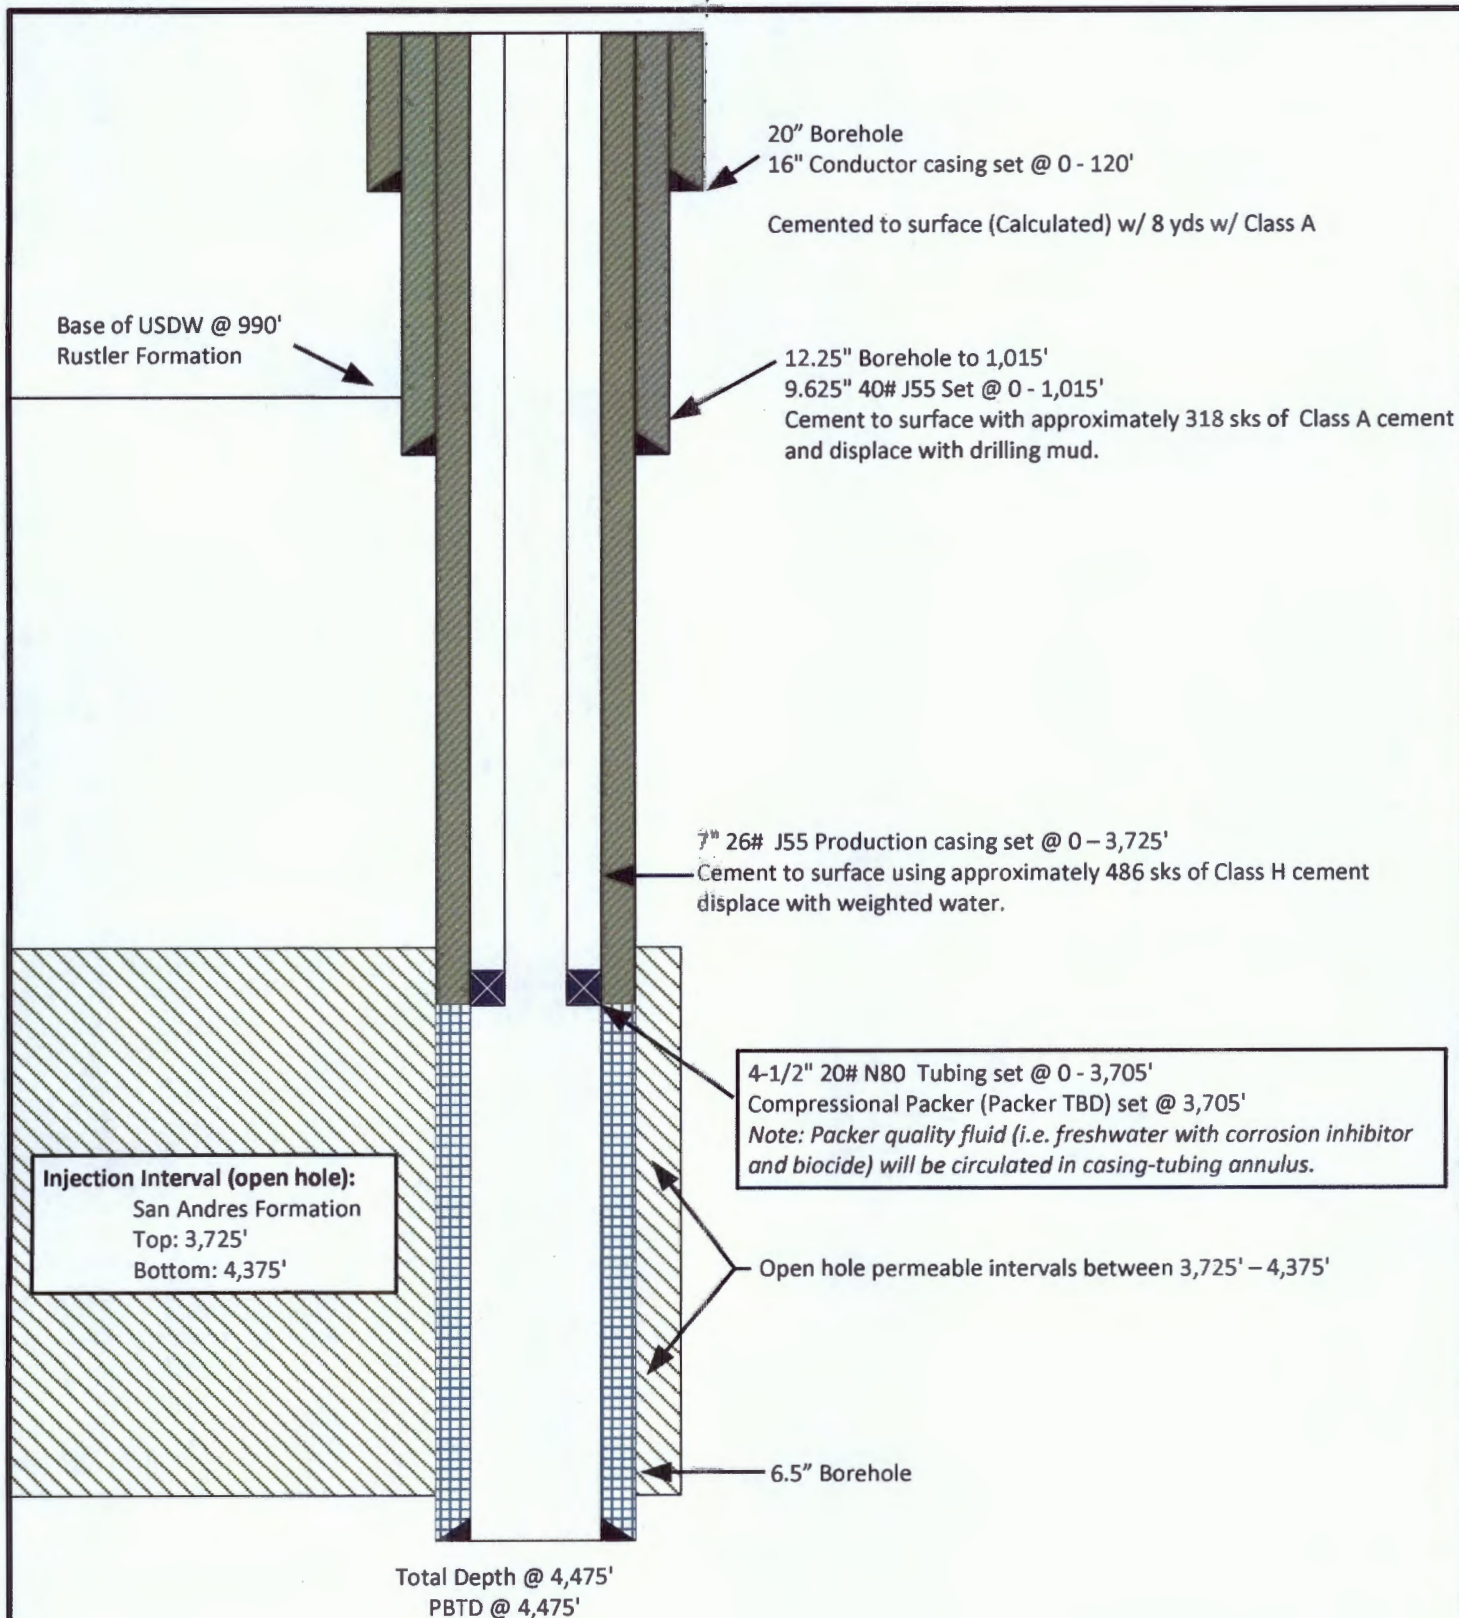

Note: Listed depths and cement volumes are approximates based on available information.

NOT TO SCALE

Prepared by:

ALLCONSULTING

Drawn by: Joshua Ticknor

Project Manager:
Nathan Alleman

Date: 03/27/2019

Goodnight Midstream Permian, LLC
Willis 35 SA 1
Section 35, Twp 25S, Rng 37E
1,462' FSL & 1,987' FEL
Lea County, NM

A-3 and AL-2 LOK-SET Retrievable Casing Packers

Product Family No. H64630 and H64628

APPLICATION

The A-3™ LOK-SET™ packer combines advantages of a retrievable packer with the features of a permanent packer. An ability to lock down tubing forces makes the A-3 suitable for a broad range of applications, including production, injection, zone isolation, and remedial operations. The AL-2™ LOK-SET packer is similar to the A-3, and has a larger bore.


Advantages

- Holds pressure from above and below, without relying on set-down weight, tubing tension, or hydraulic hold down
- Provides tubing anchoring with tension applied, suitable for pumping wells or injection, controlling tubing forces related to change fluid temperatures
- Opposed, non-transferring, dovetail slips prevent packer movement associated with changing differential pressures, while allowing the landing of the tubing in tension, neutral or compression
- Right-hand tubing rotation controls setting and releasing
- Packing element compression locks in by ratcheting action of lock segments, which restricts rotation to one direction

Accessories

To provide a simple and reliable injection system for retrieving an injection string without having to unseat the packer:

L-10 or L-316 on-off sealing connectors, Product Family Nos. H68420 and H68422. Baker Hughes blanking plug can be used in the seating nipple profile of the on-off sealing connector to provide a means of plugging the lower zone while the tubing is being pulled.

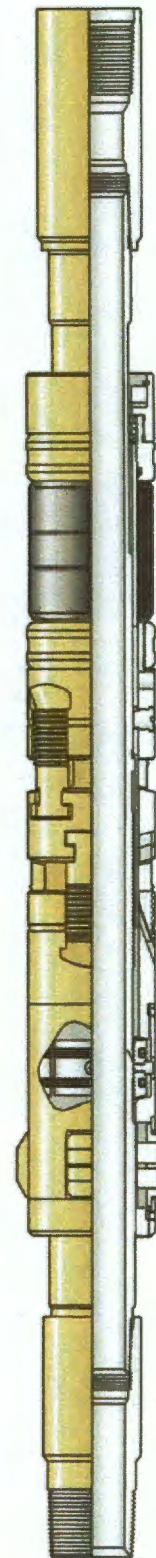

A-3 LOK-SET
Retrievable Casing Packer
Product Family No. H64630

Retrievable Packer Systems

SPECIFICATION GUIDES

A-3™ LOK-SET Retrievable Casing Packer, Product Family No. H64630

Casing			Packer				
OD		Weight *	Size	Nom ID		Max Gage Ring OD	
in.	mm	lb/ft		in.	mm	in.	mm
4	101.6	9.5-12.9	41A2	1.500	38.1	3.244	82.4
4-1/2	144.3	21.6-23.6	41A2	1.500	38.1	3.244	82.4
4	101.6	9.5	41A4	1.500	38.1	3.423	112.4
4-1/2	114.3	18.8	41A4	1.500	38.1	3.423	112.4
		13.5-17.7	41B			3.578	90.9
		11.6-13.5	43A2	1.978	50.2	3.786	96.2
		9.5-10.5	43A4			3.786	96.2
5	127.0	15-18	43B	1.978	50.2	4.140	105.2
		11.5-15	43C			4.265	108.3
5-1/2	139.7	26	43C	1.978	50.2	4.265	108.3
		20-23	45A2			4.515	114.7
		15.5-20	45A4			4.656	118.3
		13-15.5	45B			4.796	121.8
6	152.4	26	45B	1.978	50.2	4.796	121.8
		20-23	45C			5.078	129.0
		15-18	45D			5.171	131.3
6-5/8	168.3	34	45E	1.978	50.2	5.421	137.7
		24-32	45F			5.499	139.7
		24	47A2	2.441	62.0	5.671	144.0
		17-24	45G	1.978	50.2	5.796	147.2
7	177.8	17-20	47A4	2.441	62.0	5.827	148.0
		38	47A2	2.441	62.0	5.671	144.0
		32-35	47A4			5.827	148.0
		26-29	47B2			5.983	152.0
7-5/8	193.7	23-26	47B4			6.093	154.8
		17-20	47C2			6.281	159.5
		33.7-39	47C4	2.441	62.0	6.468	164.3
		24-29.7	47D2			6.687	169.9
8-5/8	219.1	20-24	47D4			6.827	173.4
		44-49	49A2	3.500	88.9	7.327	186.1
		32-40	49A4			7.546	191.7
		20-28	49B			7.796	198.0
9-5/8	244.5	47-53.5	51A2	3.500	88.9	8.234	209.1
		40-47	51A4			8.452	214.7
		29.3-36	51B			8.608	218.6

AL-2™ Large Bore LOK-SET Retrievable Casing Packer Product Family No. H64628

Casing			Packer					
OD		Weight *	Size	Nom ID		Max Gage Ring OD		Max Diameter of Compressed Drag Block
in.	mm	lb/ft		in.	mm	in.	mm	in.
5-1/2	139.7	20	45A2 x 2-3/8	2.375	60.3	4.562	115.9	4.592
		15.5-17	45A4 x 2-3/8			4.656	118.3	4.750
		13	45B x 2-3/8			4.796	121.8	4.902
6	152.4	26	45B x 2-3/8	2.375	60.3	4.796	121.8	4.902


* When selecting a packer for a casing weight common to two weight ranges (same OD), choose the packer size shown for the lighter of the two weight ranges. Example: for 7-in. (177.8 mm) OD 26 lb/ft casing use packer size 47B4. Under certain circumstances the other packer size may be run, such as when running in mixed casing strings.

Repair kits, including such items as packing elements, seal rings, etc., are available for redressing Baker Retrievable Packers. Contact your Baker Hughes representative. Use only Baker Hughes repair parts.

Attachment 2

Area of Review Information:

- 2-mile Oil & Gas Well Map
- 2-mile Lease Map
- 1/2-mile Well Detail List w/ Casing Information for Penetrating Wells
- Potash Lease Map
- Penetrating wells - Wellbore Diagrams

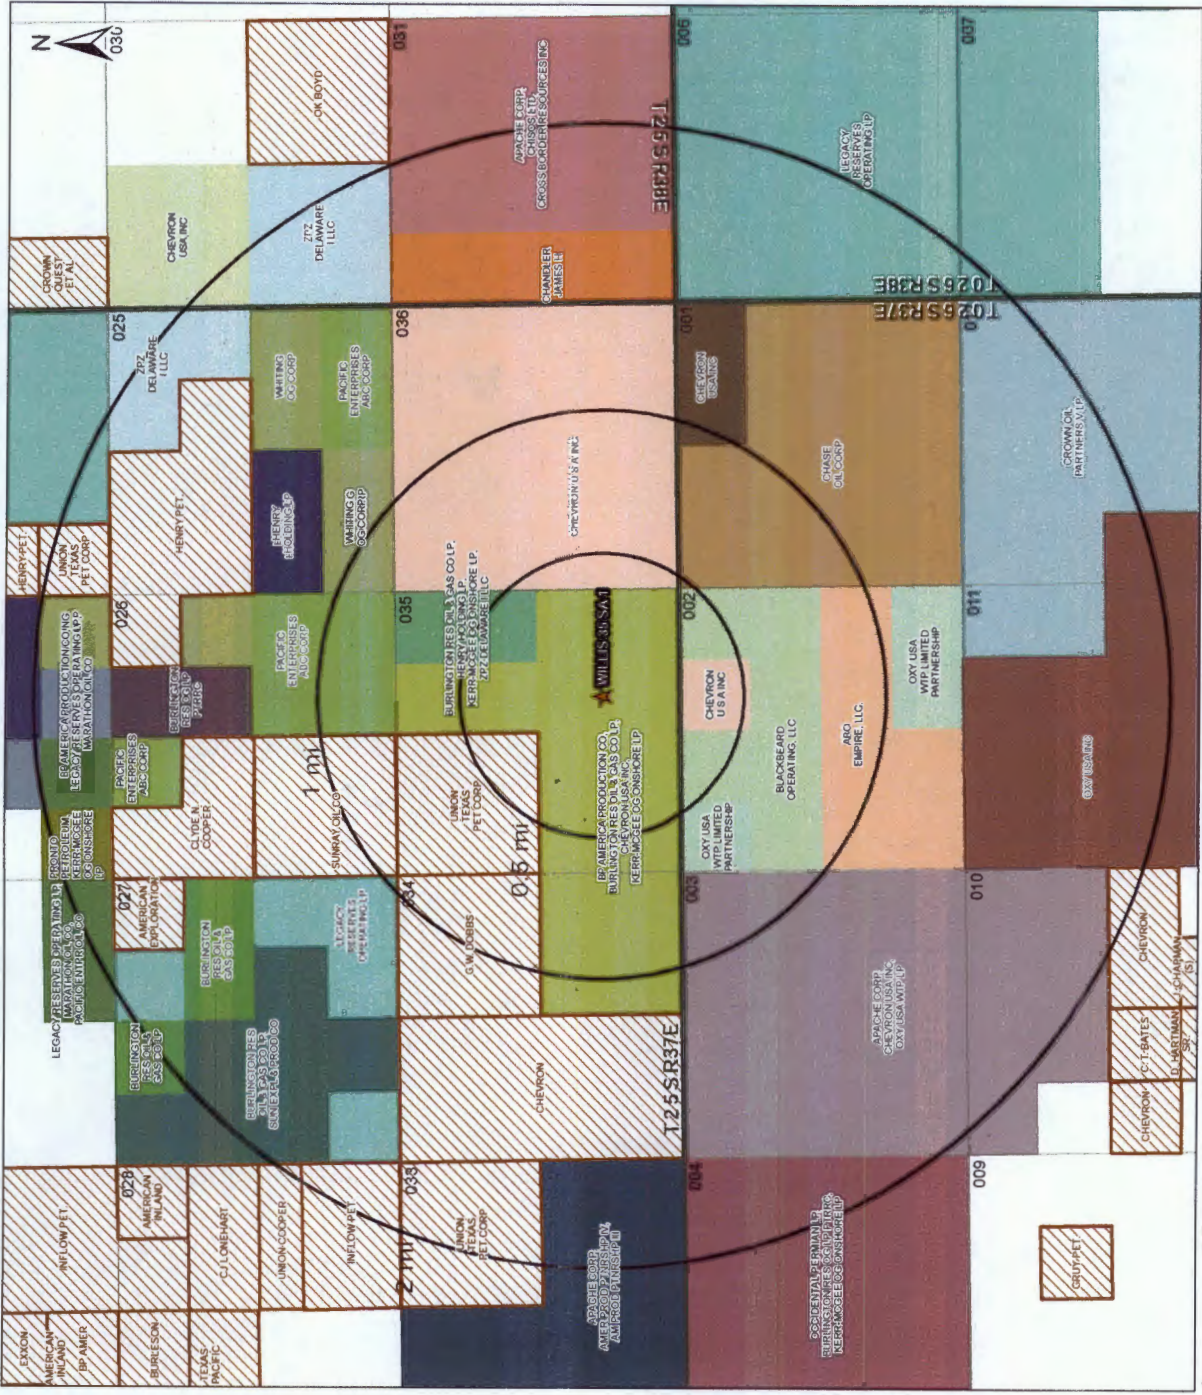


Mineral Lease Area of Review		WILLIS 35 SA 1 Lea County, New Mexico	
Proj Mgr: Dan Arthur	April 03, 2019	Mapped by: Ben Bockelmann	
Prepared by: ALL CONSULTING			

AORT Tabulation for Willis 35 SA 1 (Top of Injection Interval: 3,725')						
Well Name	API#	Well Type	Operator	Spud Date	Location (Surf. Tr., Inq.)	Penetrated Depth (feet)
GREGORY C #003	30-025-11896	Plugged	BURLINGTON RESOURCES OIL & GAS CO	6/29/1961	J-35-25S-37E	3324 No
L L GREGORY #001	30-025-11897	Plugged	BURLINGTON RESOURCES OIL & GAS CO	12/23/1952	P-35-25S-37E	3284 No
PRE-ONGARD WELL #003 (Carr Well Service I)	30-025-22351	Plugged	PRE-ONGARD WELL OPERATOR	12/31/1967	F-35-25S-37E	3344 No
PRE-ONGARD WELL #001 (Atlantic Richfield)	30-025-20131	Plugged	PRE-ONGARD WELL OPERATOR	12/29/1963	I-35-25S-37E	5784 Yes
PRE-ONGARD WELL #001 (Marathon Oil Co.)	30-025-11931	Plugged	PRE-ONGARD WELL OPERATOR	4/27/1938	A-02-26S-37E	3331 No
PRE-ONGARD WELL #002 (Meridian Oil Inc.)	30-025-11895	Plugged	PRE-ONGARD WELL OPERATOR	3/19/1961	H-35-25S-37E	3192 No
PRE-ONGARD WELL #001 (Bright & Schiffr)	30-025-11932	Plugged	PRE-ONGARD WELL OPERATOR	7/6/1953	A-02-26S-37E	3450 No

Casing Information for Wells Penetrating the Willis 35 SA 1 Injection Zone														
Well Name	Surface Casing			Intermediate Casing			Production Casing			Tubing			Packer	
	Set Depth	Casing Size	TOC Method Determined	Casing Size	TOC Method Determined	Sls of Cement	Set Depth	Casing Size	TOC Method Determined	Sls of Cement	Hole Size	Set Depth	Lining Material	Packer Type
PRE-ONGARD WELL #001 (Atlantic Richfield) Gregory Federal #001	887	8 5/8	G.S.	N/A	N/A	N/A	N/A	4 1/2	3000	Temperature Survey	7 7/8	Unknown	2 7/8	N/A

Note: *Information can not be found on the OCD website. See wellbore diagram.

Note: *Information can not be found on the OCD website. See wellbore diagram.

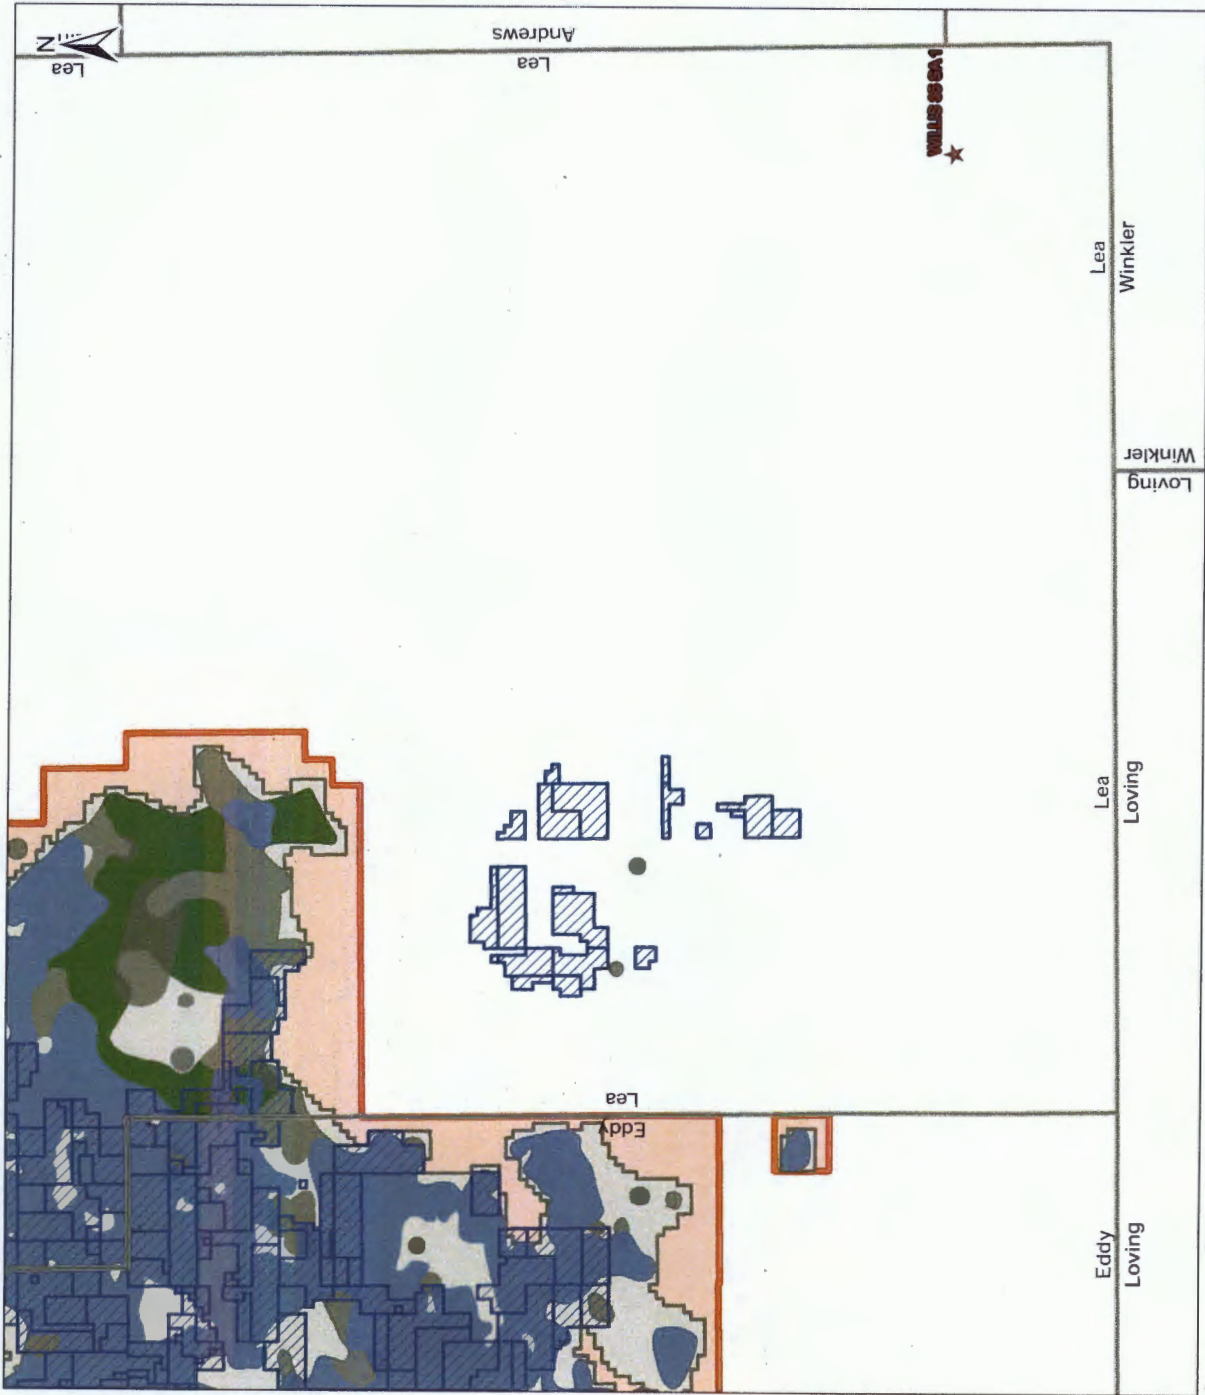

Legend

- ★ Proposed SWD
- Potash Leases
- Ore Type - Measured
- Ore Type - Indicated
- Ore Type - Inferred
- KPLA
- SOPA

Potash Leases
Area of Review

WILLIS 35 SA 1
Lea County, New Mexico

Proj Mgr:
Dan Arthur

April 01, 2019

Mapped by:
Ben Bockelmann


Prepared by:
ALLI CONSULTING



ATLANTIC RICHFIELD, GREGORY FEDERAL 001
API# 30-025-20131

Operator: ATLANTIC RICHFIELD
 FIELD: JUSTIS BLINEBRY
 LEASE: GREGORY FEDERAL
 COUNTY: LEA
 Location: 2310 FSL 330 FEL

DATE: 3/27/2019
 BY: F De Leon
 WELL: 1
 STATE: New Mexico
 Survey: I-35-25S-37E

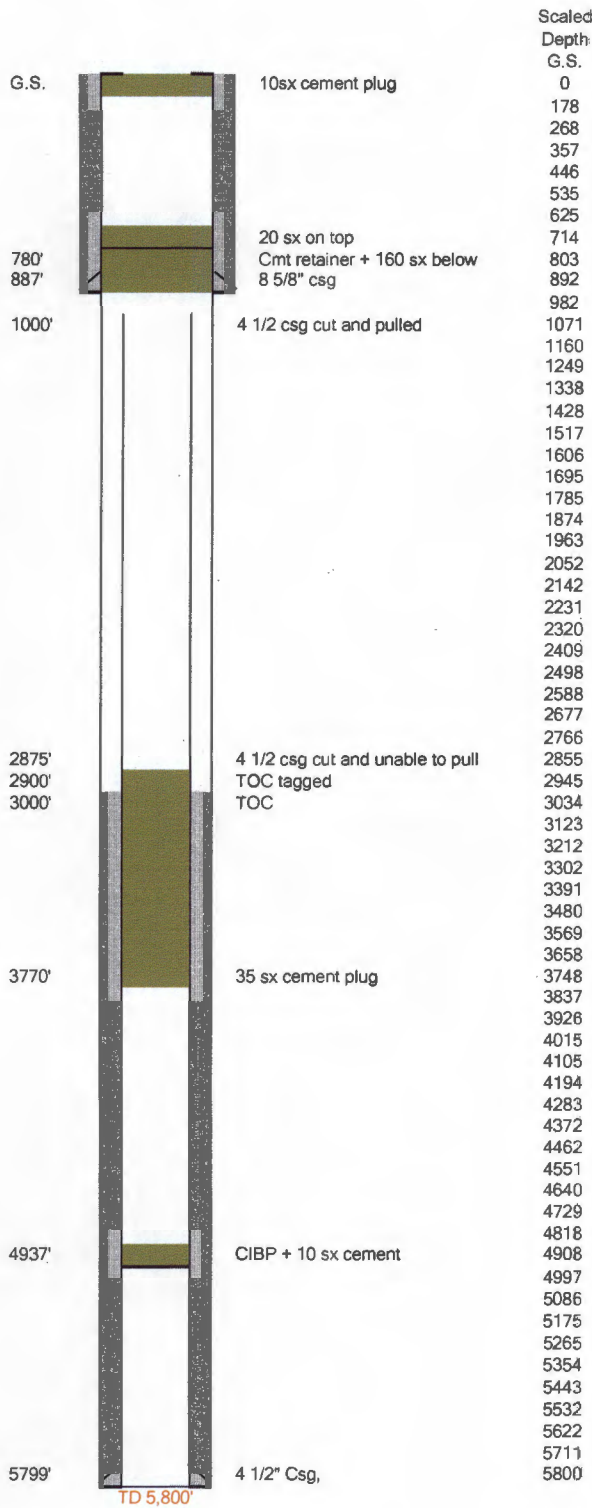

Casing	O.D.	top	bottom	weight	Drld hole	Factor
Conductor						
Surface	8 5/8		887	24	12 1/4	0.4127
Intermediate						
Production	4 1/2		5799	10.5	7 7/8	0.2278
Perforations						

Cement	Slurry	Class	Sacks	Volume	Yield	Fillup	bottom	top
Surface		?	?					G.S.
Intermediate		?						
Intermed. DVT		?						
Production		?	?					3000
Prod. Sqz @13400		?						

Groundwater	i. Csg set at 88
TD =	5800
PBTD =	5764
SPUD DATE:	12/29/1963
COMP. DATE:	
CURRENT STATUS:	
DERRICK FLOOR =	
Elevation =	3015

Attachment 3
Source Water Analyses

PRODUCED WATER FROM BONE SPRING, DELAWARE, DEVONIAN, WOLFCAMP

API	SECTION	TOWNSHIP	RANGE	FORMATION	tds mg/L	chloride mg/L	bicarbonate mg/L	sulfate mg/L
3002502424	11	20S	34E	BONE SPRING	29436	16720	634	1142
3002502427	12	20S	34E	BONE SPRING	15429			
3002502427	12	20S	34E	BONE SPRING	180701	108300	1016	670
3002502429	12	20S	34E	BONE SPRING	202606	118100	5196	992
3002502429	12	20S	34E	BONE SPRING	121800			
3002502431	12	20S	34E	BONE SPRING	147229	89640	108	1038
3002531696	2	20S	34E	DELAWARE	152064	102148	404	691
3002532105	2	20S	34E	DELAWARE	296822	215237	143	294
3002532466	2	20S	34E	DELAWARE	340838	245270	229	147
3002502427	12	20S	34E	DELAWARE	214787	132700	208	1816
3002502431	12	20S	34E	DEVONIAN	33414	18570	227	1961
3002502432	13	20S	34E	DEVONIAN	45778	26440	1145	729
3002501912	16	16S	34E	WOLFCAMP	164004	102500	4204	1249
3002501922	20	16S	34E	WOLFCAMP	104541	64290	280	541
3002501922	20	16S	34E	WOLFCAMP	104033	64080	268	515
3002501922	20	16S	34E	WOLFCAMP	105175	65570	207	192
3002501925	21	16S	34E	WOLFCAMP	86355	51800	610	665
3002501928	21	16S	34E	WOLFCAMP	119102	73300	227	454
3002501928	21	16S	34E	WOLFCAMP	35422	19170	979	1949
3002501930	22	16S	34E	WOLFCAMP	30015	14800	750	3300
3002501931	22	16S	34E	WOLFCAMP	87680	53000	301	681
3002501933	28	16S	34E	WOLFCAMP	59960	35100	515	1500
3002501933	28	16S	34E	WOLFCAMP	60309	35350	586	1297
3002501940	30	16S	34E	WOLFCAMP	82422	49890	361	787
3002501944	30	16S	34E	WOLFCAMP	83960	51410	418	641
3002502022	27	16S	34E	WOLFCAMP	85457	51020	544	1201
3001542895	2	23S	31E	WOLFCAMP	119472	73173		1036

EXHIBIT F

Attachment 4

Injection Formation Water Analyses

San Andres Water Sampling Results (mg/L)

	Chloride	TDS	Benzene	Toluene	Ethylbenzene	Total Xylenes	Total BTEX
San Andres #1 SWAB	48500	80100	0.38	0.045	<0.010	<0.030	0.425
San Andres #2 SWAB	49500	81500	0.014	0.014	<0.001	0.004	0.103
San Andres #3 SWAB	21200	40400	4.33	0.551	<0.050	0.289	5.17
San Andres #4 SWAB	9800	16400	6.2	0.664	<0.100	<0.300	6.86

Source: Cardinal laboratory sampling results as shown in attached pages.

Goetze, Phillip, EMNRD

From: Goetze, Phillip, EMNRD
Sent: Tuesday, September 25, 2018 10:07 AM
To: 'Andy Rickard'
Cc: Bower, George, EMNRD; Brown, Maxey G, EMNRD; McMillan, Michael, EMNRD
Subject: RE: Sampling Results, Ted Williams SWD #1 Administrative Order SWD 1739

Mr. Rickard:

Thank you for providing the results of the sampling requested in Administrative Order SWD-1739. The results confirm that this location of the San Andres and Glorieta formations is not protectable as defined under 19.15.2(F)(3) NMAC. Though the initial sample from the lower zone showed a TDS of less than 10,000 mg/L, the overall assessment of the four samples support a general water quality in excess of 10,000 mg/L. Results of the SWD-846 Method 8021B also indicate a low HC potential. The order remains unchanged and this COA is complete. Copies of the results will be placed in the well record and Imaging file for the SWD order. Additionally, thank Mr. Boyer for providing a description of the sampling procedure as well as the good protocol of obtaining multiple samples. PRG

Phillip Goetze, PG

Engineering Bureau, Oil Conservation Division, NM EMNRD
1220 South St. Francis Drive, Santa Fe, NM 87505
Direct: 505.476.3466
E-mail: phillip.goetze@state.nm.us

From: Andy Rickard <arickard@Cambrianmgmt.com>
Sent: Monday, September 24, 2018 3:40 PM
To: Goetze, Phillip, EMNRD <Phillip.Goetze@state.nm.us>
Subject: FW: Sampling Results, Ted Williams SWD #1 Administrative Order SWD 1739

M Goetze

Per the COA for Ted Williams SWD owned by Goodnight Midstream. The Term "upper zone" refers to a perf set from 5720-5740 (between 5200-5800)

"Lower zone" refers to a perf set 5945-5965 which is between 5900-6500 as dictated by Administrative Order SWD 1739

Andrew E Rickard
Project Manager



415 West Wall St., Suite 900
Midland, TX 79701
Off: 432-620-9181
Cell: 432-553-2828

From: Art Linthicum <art.wellsite@yahoo.com>
Sent: Saturday, September 22, 2018 11:14 AM
To: Andy Rickard <arickard@Cambrianmgmt.com>
Subject: Fwd: Sampling Results, Ted Williams SWD #1



PHONE (575) 393-2326 • 101 E. MARLAND • HOBBS, NM 88240

Analytical Results For:

Safety & Environmental Solutions
703 East Clinton
Hobbs NM, 88240

Project: TED WILLIAMS SWD #1
Project Number: CAM - 18-001
Project Manager: Bob Allen
Fax To: (575) 393-4388

Reported:
21-Sep-18 08:43

**UPPER ZONE #1 SWAB
H802574-05 (Water)**

Analyte	Result	MDL	Reporting Limit	Units	Dilution	Batch	Analyst	Analyzed	Method	Notes
---------	--------	-----	-----------------	-------	----------	-------	---------	----------	--------	-------

Cardinal Laboratories

Inorganic Compounds

Chloride*	48500	4.00	mg/L	1	8090703	AC	14-Sep-18	4500-Cl-B
TDS*	80100	5.00	mg/L	1	8090710	AC	13-Sep-18	160.1

Volatile Organic Compounds by EPA Method 8021

Benzene*	0.380	0.010	mg/L	10	8091213	MS	13-Sep-18	8021B
Toluene*	0.045	0.010	mg/L	10	8091213	MS	13-Sep-18	8021B
Ethylbenzene*	<0.010	0.010	mg/L	10	8091213	MS	13-Sep-18	8021B
Total Xylenes*	<0.030	0.030	mg/L	10	8091213	MS	13-Sep-18	8021B
Total BTEX	0.425	0.060	mg/L	10	8091213	MS	13-Sep-18	8021B
Surrogate: 4-Bromofluorobenzene (PID)		98.7 %	81.3-128		8091213	MS	13-Sep-18	8021B

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analysis. All claims, including those for negligence in any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damage including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene

Celey D. Keene, Lab Director/Quality Manager



PHONE (575) 393-2326 • 101 E. MARLAND • HOBBS, NM 88240

Analytical Results For:Safety & Environmental Solutions
703 East Clinton
Hobbs NM, 88240Project: TED WILLIAMS SWD #1
Project Number: CAM - 18-001
Project Manager: Bob Allen
Fax To: (575) 393-4388Reported:
21-Sep-18 08:43**UPPER ZONE # 2 SWAB
H802574-06 (Water)**

Analyte	Result	MDL	Reporting Limit	Units	Dilution	Batch	Analyst	Analyzed	Method	Notes
---------	--------	-----	-----------------	-------	----------	-------	---------	----------	--------	-------

Cardinal Laboratories**Inorganic Compounds**

Chloride*	49500		4.00	mg/L	1	8090703	AC	14-Sep-18	4500-Cl-B	
TDS*	81500		5.00	mg/L	1	8090710	AC	13-Sep-18	160.1	

Volatile Organic Compounds by EPA Method 8021

Benzene*	0.085		0.001	mg/L	1	8091213	MS	13-Sep-18	8021B	
Toluene*	0.014		0.001	mg/L	1	8091213	MS	13-Sep-18	8021B	
Ethylbenzene*	<0.001		0.001	mg/L	1	8091213	MS	13-Sep-18	8021B	
Total Xylenes*	0.004		0.003	mg/L	1	8091213	MS	13-Sep-18	8021B	
Total BTEX	0.103		0.006	mg/L	1	8091213	MS	13-Sep-18	8021B	

Surrogate: 4-Bromofluorobenzene (PID) 86.3 % 81.3-128 8091213 MS 13-Sep-18 8021B

Cardinal Laboratories

* = Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence in any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damage including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager



PHONE (575) 393-2326 • 101 E. MARLAND • HOBBS, NM 88240

Analytical Results For:

Safety & Environmental Solutions
703 East Clinton
Hobbs NM, 88240

Project: TED WILLIAMS SWD #1
Project Number: CAM - 18-001
Project Manager: Bob Allen
Fax To: (575) 393-4388

Reported:
21-Sep-18 08:43

**UPPER ZONE #3 SWAB
H802574-07 (Water)**

Analyte	Result	MDL	Reporting Limit	Units	Dilution	Batch	Analyst	Analyzed	Method	Notes
---------	--------	-----	-----------------	-------	----------	-------	---------	----------	--------	-------

Cardinal Laboratories

Inorganic Compounds

Chloride*	21200	4.00	mg/L	1	8090703	AC	14-Sep-18	4500-Cl-B	
TDS*	40400	5.00	mg/L	1	8090710	AC	13-Sep-18	160.1	

Volatile Organic Compounds by EPA Method 8021

Benzene*	4.33	0.050	mg/L	50	8091213	MS	13-Sep-18	8021B	
Toluene*	0.551	0.050	mg/L	50	8091213	MS	13-Sep-18	8021B	
Ethylbenzene*	<0.050	0.050	mg/L	50	8091213	MS	13-Sep-18	8021B	
Total Xylenes*	0.289	0.150	mg/L	50	8091213	MS	13-Sep-18	8021B	
Total BTEX	5.17	0.300	mg/L	50	8091213	MS	13-Sep-18	8021B	

Surrogate: 4-Bromofluorobenzene (PID) 95.1 % 81.3-128 8091213 MS 13-Sep-18 8021B

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence in any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damage including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Coley D. Keene

Coley D. Keene, Lab Director/Quality Manager



PHONE (575) 393-2326 • 101 E. MARLAND • HOBBS, NM 88240

Analytical Results For:Safety & Environmental Solutions
703 East Clinton
Hobbs NM, 88240Project: TED WILLIAMS SWD #1
Project Number: CAM - 18-001
Project Manager: Bob Allen
Fax To: (575) 393-4388Reported:
21-Sep-18 08:43**UPPER ZONE # 4 SWAB**
H802574-08 (Water)

Analyte	Result	MDL	Reporting Limit	Units	Dilution	Batch	Analyst	Analyzed	Method	Notes
---------	--------	-----	-----------------	-------	----------	-------	---------	----------	--------	-------

Cardinal Laboratories**Inorganic Compounds**

Chloride*	9800	4.00	mg/L	1	8090703	AC	14-Sep-18	4500-Cl-B
TDS*	16400	5.00	mg/L	1	8091202	AC	13-Sep-18	160.1

Volatile Organic Compounds by EPA Method 8021

Benzene*	6.20	0.100	mg/L	100	8091213	MS	13-Sep-18	8021B
Toluene*	0.664	0.100	mg/L	100	8091213	MS	13-Sep-18	8021B
Ethylbenzene*	<0.100	0.100	mg/L	100	8091213	MS	13-Sep-18	8021B
Total Xylenes*	<0.300	0.300	mg/L	100	8091213	MS	13-Sep-18	8021B
Total BTEX	6.86	0.600	mg/L	100	8091213	MS	13-Sep-18	8021B

Surrogate: 4-Bromofluorobenzene (PID) 94.7 % 81.3-128 8091213 MS 13-Sep-18 8021B


Cardinal Laboratories

* = Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence in any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damage including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Caley D. Keene, Lab Director/Quality Manager

Attachment 5
Water Well Map and Well Data

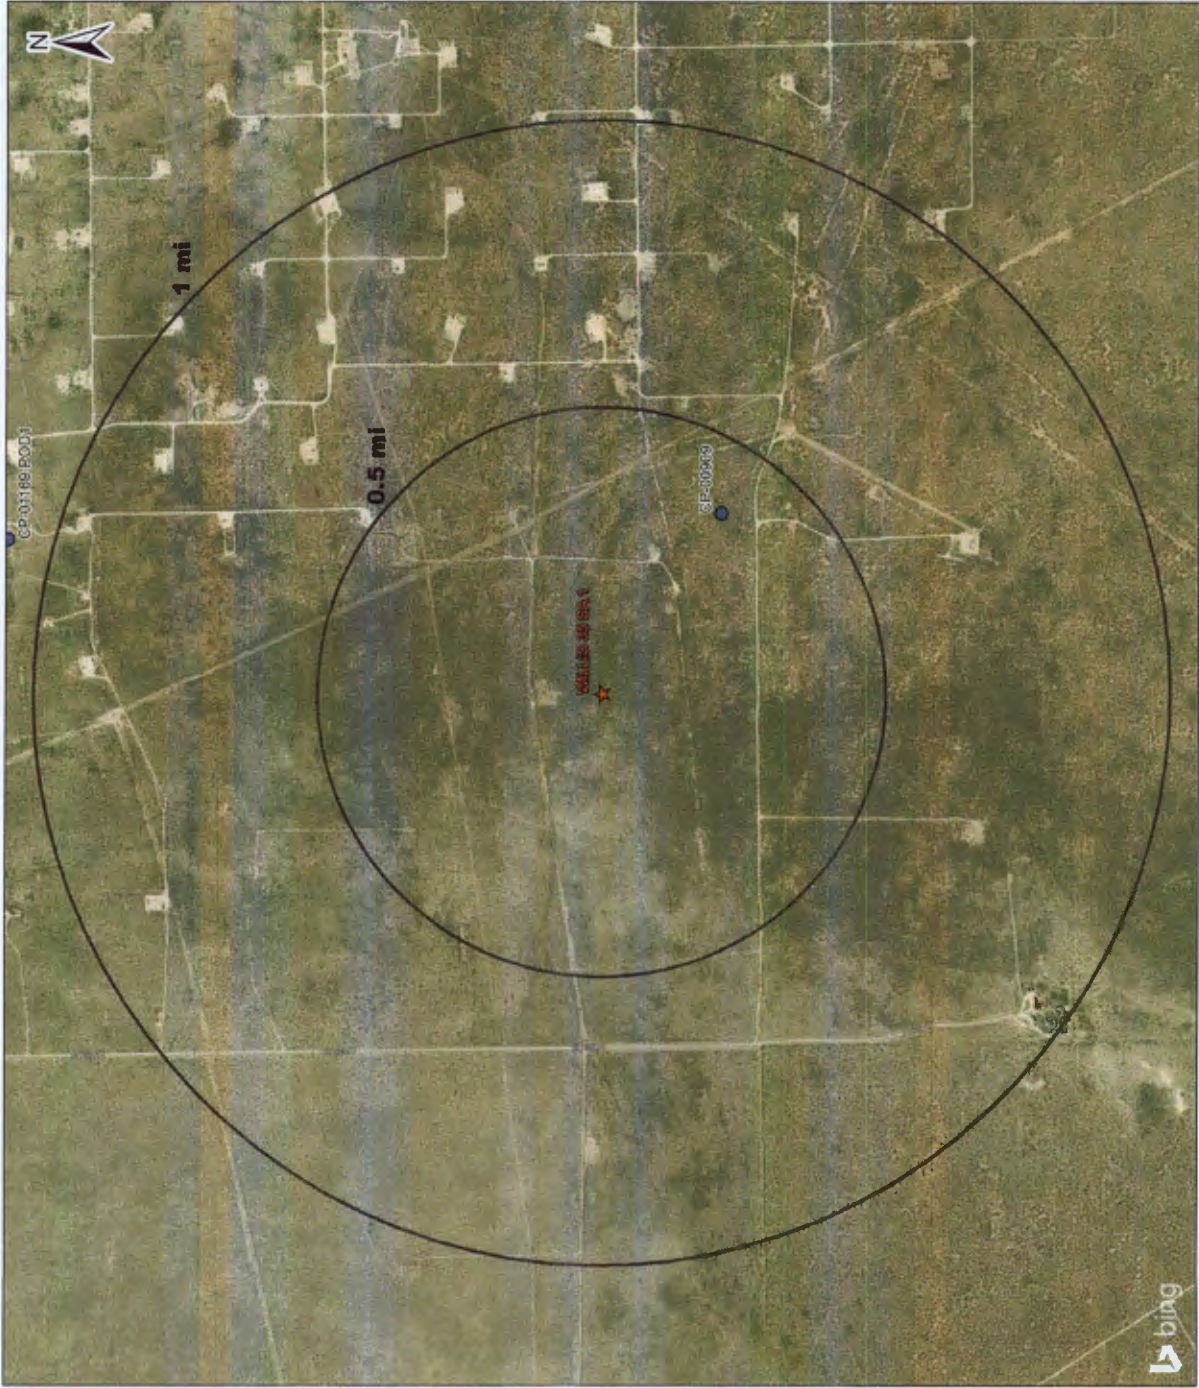

Legend

- ★ Proposed SWD
- NMOSE PODS
- Status
- Active (2)

Water Wells Area of Review

WILLIS 35 SA 1
Lea County, New Mexico

Proj Mgr:
Dan Arthur

March 14, 2019

Mapped by:
Ben Bockelmann

Prepared by:
ALJ CONSULTING

Water Well Sampling Rationale						
Goodnight Midstream Permian, LLC - Willis 35 SA 1						
SWD	Water Wells	Owner	Available Contact Information	Use	Sampling Required	Notes
Willis 35 SA 1	CP-00909	George Willis	575-631-8752	Livestock Watering	Yes	Sampling has been completed



PHONE (575) 393-2326 • 101 E. MARLAND • HOBBS, NM 88240

Pod number: CP: 00909

Legal Location: S35 T25S R37E

March 08, 2019

KRIS ANDERSEN

ALL CONSULTING, LLC

1718 S. CHEYENNE AVE.

TULSA, OK 74119

RE: WILLIS RANCH

Enclosed are the results of analyses for samples received by the laboratory on 03/01/19 15:45.

Cardinal Laboratories is accredited through Texas NELAP under certificate number T104704398-18-11. Accreditation applies to drinking water, non-potable water and solid and chemical materials. All accredited analytes are denoted by an asterisk (*). For a complete list of accredited analytes and matrices visit the TCEQ website at www.tceq.texas.gov/field/qa/lab_accred_certif.html.

Cardinal Laboratories is accredited through the State of Colorado Department of Public Health and Environment for:

Method EPA 552.2	Total Haloacetic Acids (HAA-5)
Method EPA 524.2	Total Trihalomethanes (TTHM)
Method EPA 524.4	Regulated VOCs (V1, V2, V3)

Cardinal Laboratories is accredited through the State of New Mexico Environment Department for:

Method SM 9223-B	Total Coliform and E. coli (Colilert MMO-MUG)
Method EPA 524.2	Regulated VOCs and Total Trihalomethanes (TTHM)
Method EPA 552.2	Total Haloacetic Acids (HAA-5)

Accreditation applies to public drinking water matrices for State of Colorado and New Mexico.

This report meets NELAP requirements and is made up of a cover page, analytical results, and a copy of the original chain-of-custody. If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Celey D. Keene

Lab Director/Quality Manager

Analytical Results For:ALL CONSULTING, LLC
1718 S. CHEYENNE AVE.
TULSA OK, 74119Project: WILLIS RANCH
Project Number: 32.073016-103.141134
Project Manager: KRIS ANDERSEN
Fax To: NAReported:
08-Mar-19 16:45

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
WILLIS RANCH	H900828-01	Water	01-Mar-19 14:45	01-Mar-19 15:45

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence or any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damage including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

ALL CONSULTING, LLC
1718 S. CHEYENNE AVE.
TULSA OK, 74119

Project: WILLIS RANCH
Project Number: 32.073016-103.141134
Project Manager: KRIS ANDERSEN
Fax To: NA

Reported:
08-Mar-19 16:45

WILLIS RANCH H900828-01 (Water)

Analyte	Result	MDL	Reporting Limit	Units	Dilution	Batch	Analyst	Analyzed	Method	Notes
---------	--------	-----	-----------------	-------	----------	-------	---------	----------	--------	-------

Cardinal Laboratories

Inorganic Compounds

Alkalinity, Bicarbonate	234		5.00	mg/L	1	9030407	AC	05-Mar-19	310.1	
Alkalinity, Carbonate	<1.00		1.00	mg/L	1	9030407	AC	05-Mar-19	310.1	
Conductivity*	1240		1.00	uS/cm	1	9030501	AC	05-Mar-19	120.1	
pH*	7.64		0.100	pH Units	1	9030501	AC	05-Mar-19	150.1	
Resistivity	8.07			Ohms/m	1	9030501	AC	05-Mar-19	120.1	
TDS*	745		5.00	mg/L	1	9030416	AC	07-Mar-19	160.1	
Alkalinity, Total*	192		4.00	mg/L	1	9030407	AC	05-Mar-19	310.1	
TSS*	5.00		2.00	mg/L	1	9030410	AC	07-Mar-19	160.2	
Turbidity	0.210		0.0100	NTU	1	9030502	AC	05-Mar-19	180.1	

Volatile Organic Compounds by EPA Method 8021

Benzene*	<0.001		0.001	mg/L	1	9030406	ms	05-Mar-19	8021B	
Toluene*	<0.001		0.001	mg/L	1	9030406	ms	05-Mar-19	8021B	
Ethylbenzene*	<0.001		0.001	mg/L	1	9030406	ms	05-Mar-19	8021B	
Total Xylenes*	<0.003		0.003	mg/L	1	9030406	ms	05-Mar-19	8021B	
Total BTEX	<0.006		0.006	mg/L	1	9030406	ms	05-Mar-19	8021B	

Surrogate: 4-Bromofluorobenzene (PID) 97.9 % 81.3-128 9030406 ms 05-Mar-19 8021B

Petroleum Hydrocarbons by GC FID

GRO C6-C12	<2.50		2.50	mg/L	0.1	9030413	MS	05-Mar-19	TX1005	
DRO >C12-C28	<2.50		2.50	mg/L	0.1	9030413	MS	05-Mar-19	TX1005	
DRO >C28-C35	<2.50		2.50	mg/L	0.1	9030413	MS	05-Mar-19	TX1005	
Total TPH C6-C35*	<2.50		2.50	mg/L	0.1	9030413	MS	05-Mar-19	TX1005	

Surrogate: 1-Chlorooctane 93.1 % 70-130 9030413 MS 05-Mar-19 TX1005

Surrogate: 1-Chlorooctadecane 95.8 % 70-130 9030413 MS 05-Mar-19 TX1005

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence or any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damage including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

 ALL CONSULTING, LLC
 1718 S. CHEYENNE AVE.
 TULSA OK, 74119

 Project: WILLIS RANCH
 Project Number: 32.073016-103.141134
 Project Manager: KRIS ANDERSEN
 Fax To: NA

 Reported:
 08-Mar-19 16:45

WILLIS RANCH
H900828-01 (Water)

Analyte	Result	MDL	Reporting Limit	Units	Dilution	Batch	Analyst	Analyzed	Method	Notes
---------	--------	-----	-----------------	-------	----------	-------	---------	----------	--------	-------

Green Analytical Laboratories
General Chemistry

Bromide	1.87		0.100	mg/L	1	B903055	AES	06-Mar-19	EPA300.0	M5
Chloride*	107		10.0	mg/L	10	B903039	AES	05-Mar-19	EPA300.0	
Nitrate/Nitrite as N*	10.6		0.200	mg/L	10	B903044	LLG	07-Mar-19	EPA353.2	
Sulfate*	192		10.0	mg/L	10	B903039	AES	05-Mar-19	EPA300.0	

Total Recoverable Metals by ICP (E200.7)

Calcium*	82.8		0.100	mg/L	1	B903037	AES	06-Mar-19	EPA200.7	
Hardness as CaCO ₃	371		0.662	mg/L	1	[CALC]	AES	06-Mar-19	2340 B	
Iron*	<0.050		0.050	mg/L	1	B903037	AES	06-Mar-19	EPA200.7	
Magnesium*	40.0		0.100	mg/L	1	B903037	AES	06-Mar-19	EPA200.7	
Potassium*	7.70		1.00	mg/L	1	B903037	AES	06-Mar-19	EPA200.7	
Sodium*	102		1.00	mg/L	1	B903037	AES	06-Mar-19	EPA200.7	
Strontium*	2.11		0.100	mg/L	1	B903037	AES	06-Mar-19	EPA200.7	

Total Recoverable Metals by ICPMS (E200.8)

Arsenic*	0.0225		0.0010	mg/L	1	B903038	AES	08-Mar-19	EPA200.8	
Barium*	0.0294		0.0005	mg/L	1	B903038	AES	08-Mar-19	EPA200.8	
Chromium*	<0.0050		0.0050	mg/L	5	B903038	AES	08-Mar-19	EPA200.8	
Lead*	0.0017		0.0005	mg/L	1	B903038	AES	08-Mar-19	EPA200.8	
Manganese*	<0.0100		0.0100	mg/L	5	B903038	AES	08-Mar-19	EPA200.8	
Selenium*	0.0167		0.0010	mg/L	1	B903038	AES	08-Mar-19	EPA200.8	

SunStar Laboratories, Inc.
RSK-175

Methane	<0.0719	0.0719	1.00	ug/l	1	9030518	NV	06-Mar-19	RSK-175	
Ethene	<0.139	0.139	1.00	ug/l	1	9030518	NV	06-Mar-19	RSK-175	
Ethane	<0.164	0.164	1.00	ug/l	1	9030518	NV	06-Mar-19	RSK-175	

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence or any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damage including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager



PHONE (575) 393-2326 • 101 E. MARLAND • HOBBS, NM 88240

Analytical Results For:

ALL CONSULTING, LLC
1718 S. CHEYENNE AVE.
TULSA OK, 74119

Project: WILLIS RANCH
Project Number: 32.073016-103.141134
Project Manager: KRIS ANDERSEN
Fax To: NA

Reported:
08-Mar-19 16:45

WILLIS RANCH
H900828-01 (Water)

Analyte	Result	MDL	Reporting Limit	Units	Dilution	Batch	Analyst	Analyzed	Method	Notes
---------	--------	-----	--------------------	-------	----------	-------	---------	----------	--------	-------

SunStar Laboratories, Inc.

RSK-175

Propane	0.440	0.314	5.00	ug/l	1	9030518	NV	06-Mar-19	RSK-175	J
---------	-------	-------	------	------	---	---------	----	-----------	---------	---

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence or any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damage including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Coley D. Keene

Coley D. Keene, Lab Director/Quality Manager



PHONE (575) 393-2326 • 101 E. MARLAND • HOBBS, NM 88240

Analytical Results For:ALL CONSULTING, LLC
1718 S. CHEYENNE AVE.
TULSA OK, 74119Project: WILLIS RANCH
Project Number: 32.073016-103.141134
Project Manager: KRIS ANDERSEN
Fax To: NAReported:
08-Mar-19 16:45**Inorganic Compounds - Quality Control****Cardinal Laboratories**

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
---------	--------	--------------------	-------	----------------	------------------	------	----------------	-----	--------------	-------

Batch 9030407 - General Prep - Wet Chem**Blank (9030407-BLK1)**

Prepared: 04-Mar-19 Analyzed: 05-Mar-19

Alkalinity, Carbonate	ND	1.00	mg/L							
Alkalinity, Bicarbonate	5.00	5.00	mg/L							
Alkalinity, Total	4.00	4.00	mg/L							

LCS (9030407-BS1)

Prepared: 04-Mar-19 Analyzed: 05-Mar-19

Alkalinity, Carbonate	ND	2.50	mg/L				80-120			
Alkalinity, Bicarbonate	318	12.5	mg/L				80-120			
Alkalinity, Total	260	10.0	mg/L	250		104	80-120			

LCS Dup (9030407-BSD1)

Prepared: 04-Mar-19 Analyzed: 05-Mar-19

Alkalinity, Carbonate	ND	2.50	mg/L				80-120		20	
Alkalinity, Bicarbonate	318	12.5	mg/L				80-120	0.00	20	
Alkalinity, Total	260	10.0	mg/L	250		104	80-120	0.00	20	

Batch 9030410 - Filtration**Blank (9030410-BLK1)**

Prepared: 05-Mar-19 Analyzed: 07-Mar-19

TSS	ND	2.00	mg/L							
-----	----	------	------	--	--	--	--	--	--	--

Duplicate (9030410-DUP1)

Source: H900787-01

Prepared: 05-Mar-19 Analyzed: 07-Mar-19

TSS	660	2.00	mg/L		520			23.7	52.7	
-----	-----	------	------	--	-----	--	--	------	------	--

Batch 9030416 - Filtration**Blank (9030416-BLK1)**

Prepared: 05-Mar-19 Analyzed: 07-Mar-19

TDS	ND	5.00	mg/L							
-----	----	------	------	--	--	--	--	--	--	--

Cardinal Laboratories

* = Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence or any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damage including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

ALL CONSULTING, LLC 1718 S. CHEYENNE AVE. TULSA OK, 74119	Project: WILLIS RANCH Project Number: 32.073016-103.141134 Project Manager: KRIS ANDERSEN Fax To: NA	Reported: 08-Mar-19 16:45
---	---	------------------------------

Inorganic Compounds - Quality Control

Cardinal Laboratories

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
---------	--------	-----------------	-------	-------------	---------------	------	-------------	-----	-----------	-------

Batch 9030416 - Filtration

LCS (9030416-BS1)

Prepared: 05-Mar-19 Analyzed: 07-Mar-19

TDS	509		mg/L	527		96.6	80-120			
-----	-----	--	------	-----	--	------	--------	--	--	--

Duplicate (9030416-DUP1)

Source: H900795-01

Prepared: 05-Mar-19 Analyzed: 07-Mar-19

TDS	94400	5.00	mg/L		95100			0.770	20	
-----	-------	------	------	--	-------	--	--	-------	----	--

Batch 9030501 - General Prep - Wet Chem

LCS (9030501-BS1)

Prepared & Analyzed: 05-Mar-19

Conductivity	50200		uS/cm	50000		100	80-120			
pH	7.04		pH Units	7.00		101	90-110			

Duplicate (9030501-DUP1)

Source: H900828-01

Prepared & Analyzed: 05-Mar-19

Conductivity	1230	1.00	uS/cm		1240			0.648	20	
pH	7.66	0.100	pH Units		7.64			0.261	20	
Resistivity	8.12		Ohms/m		8.07			0.648	20	

Batch 9030502 - General Prep - Wet Chem

Blank (9030502-BLK1)

Prepared & Analyzed: 05-Mar-19

Turbidity	ND	0.0100	NTU							
-----------	----	--------	-----	--	--	--	--	--	--	--

LCS (9030502-BS1)

Prepared & Analyzed: 05-Mar-19

Turbidity	38.8	0.0100	NTU	40.0		97.0	80-120			
-----------	------	--------	-----	------	--	------	--------	--	--	--

Duplicate (9030502-DUP1)

Source: H900828-01

Prepared & Analyzed: 05-Mar-19

Turbidity	0.220	0.0100	NTU		0.210			4.65	20	
-----------	-------	--------	-----	--	-------	--	--	------	----	--

Cardinal Laboratories

* = Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence or any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damage including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

ALL CONSULTING, LLC
1718 S. CHEYENNE AVE.
TULSA OK, 74119

Project: WILLIS RANCH
Project Number: 32.073016-103.141134
Project Manager: KRIS ANDERSEN
Fax To: NA

Reported:
08-Mar-19 16:45

Volatile Organic Compounds by EPA Method 8021 - Quality Control

Cardinal Laboratories

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
---------	--------	-----------------	-------	-------------	---------------	------	-------------	-----	-----------	-------

Batch 9030406 - Volatiles

Blank (9030406-BLK1)

Prepared: 04-Mar-19 Analyzed: 05-Mar-19

Benzene	ND	0.001	mg/L							
Toluene	ND	0.001	mg/L							
Ethylbenzene	ND	0.001	mg/L							
Total Xylenes	ND	0.003	mg/L							
Total BTEX	ND	0.006	mg/L							
Surrogate: 4-Bromofluorobenzene (PID)	0.0964		mg/L	0.100		96.4	81.3-128			

LCS (9030406-BS1)

Prepared: 04-Mar-19 Analyzed: 05-Mar-19

Benzene	0.021	0.001	mg/L	0.0200		106	86.6-118			
Toluene	0.019	0.001	mg/L	0.0200		97.0	84.5-122			
Ethylbenzene	0.020	0.001	mg/L	0.0200		102	83.9-122			
Total Xylenes	0.064	0.003	mg/L	0.0600		106	81.8-124			
Surrogate: 4-Bromofluorobenzene (PID)	0.0942		mg/L	0.100		94.2	81.3-128			

LCS Dup (9030406-BSD1)

Prepared: 04-Mar-19 Analyzed: 05-Mar-19

Benzene	0.021	0.001	mg/L	0.0200		106	86.6-118	0.538	7.71	
Toluene	0.020	0.001	mg/L	0.0200		97.8	84.5-122	0.862	8.86	
Ethylbenzene	0.021	0.001	mg/L	0.0200		103	83.9-122	1.06	11.8	
Total Xylenes	0.064	0.003	mg/L	0.0600		107	81.8-124	1.06	11.9	
Surrogate: 4-Bromofluorobenzene (PID)	0.0944		mg/L	0.100		94.4	81.3-128			

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence or any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damage including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene

Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

ALL CONSULTING, LLC
1718 S. CHEYENNE AVE.
TULSA OK, 74119

Project: WILLIS RANCH
Project Number: 32.073016-103.141134
Project Manager: KRIS ANDERSEN
Fax To: NA

Reported:
08-Mar-19 16:45

Petroleum Hydrocarbons by GC FID - Quality Control
Cardinal Laboratories

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
---------	--------	-----------------	-------	-------------	---------------	------	-------------	-----	-----------	-------

Batch 9030413 - General Prep - Organics
Blank (9030413-BLK1)

Prepared: 04-Mar-19 Analyzed: 05-Mar-19

GRO C6-C12	ND	2.50	mg/L							
DRO >C12-C28	ND	2.50	mg/L							
DRO >C28-C35	ND	2.50	mg/L							
Total TPH C6-C35	ND	2.50	mg/L							
Surrogate: 1-Chlorooctane	4.54		mg/L	5.00		90.8	70-130			
Surrogate: 1-Chlorooctadecane	4.78		mg/L	5.00		95.6	70-130			

LCS (9030413-BS1)

Prepared & Analyzed: 04-Mar-19

GRO C6-C12	46.9	2.50	mg/L	50.0		93.8	76-107			
DRO >C12-C28	51.1	2.50	mg/L	50.0		102	78.9-117			
Total TPH C6-C35	98.4	2.50	mg/L	100		98.4	78.6-112			
Surrogate: 1-Chlorooctane	5.62		mg/L	5.00		112	70-130			
Surrogate: 1-Chlorooctadecane	5.34		mg/L	5.00		107	70-130			

LCS Dup (9030413-BSD1)

Prepared & Analyzed: 04-Mar-19

GRO C6-C12	47.8	2.50	mg/L	50.0		95.6	76-107	1.81	11.7	
DRO >C12-C28	50.6	2.50	mg/L	50.0		101	78.9-117	0.947	11.5	
Total TPH C6-C35	98.7	2.50	mg/L	100		98.7	78.6-112	0.311	11.6	
Surrogate: 1-Chlorooctane	5.68		mg/L	5.00		114	70-130			
Surrogate: 1-Chlorooctadecane	5.47		mg/L	5.00		109	70-130			

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence or any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damage including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

ALL CONSULTING, LLC
1718 S. CHEYENNE AVE.
TULSA OK, 74119

Project: WILLIS RANCH
Project Number: 32.073016-103.141134
Project Manager: KRIS ANDERSEN
Fax To: NA

Reported:
08-Mar-19 16:45

RSK-175 - Quality Control

SunStar Laboratories, Inc.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
---------	--------	--------------------	-------	----------------	------------------	------	----------------	-----	--------------	-------

Batch 9030518 - EPA 3810m Headspace

Blank (9030518-BLK1)

Prepared & Analyzed: 06-Mar-19

Methane	ND	1.00	ug/l							
Ethene	ND	1.00	ug/l							
Ethane	ND	1.00	ug/l							
Propane	ND	5.00	ug/l							

LCS (9030518-BS1)

Prepared & Analyzed: 06-Mar-19

Methane	589	1.00	ug/l	656		89.8	75-125			
Ethene	1060	1.00	ug/l	1150		92.3	75-125			
Ethane	1180	1.00	ug/l	1230		96.0	75-125			

Duplicate (9030518-DUP1)

Source: H900828-01

Prepared & Analyzed: 06-Mar-19

Methane	ND	1.00	ug/l		ND				20	
Ethene	ND	1.00	ug/l		ND				20	
Ethane	ND	1.00	ug/l		ND				20	
Propane	0.380	5.00	ug/l		0.440			14.6	20	J

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence as any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damage including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene

Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

ALL CONSULTING, LLC
1718 S. CHEYENNE AVE.
TULSA OK, 74119

Project: WILLIS RANCH
Project Number: 32.073016-103.141134
Project Manager: KRIS ANDERSEN
Fax To: NA

Reported:
08-Mar-19 16:45

General Chemistry - Quality Control Green Analytical Laboratories

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch B903039 - General Prep - Wet Chem										
Blank (B903039-BLK1)				Prepared & Analyzed: 05-Mar-19						
Chloride	ND	1.00	mg/L							
Sulfate	ND	1.00	mg/L							
LCS (B903039-BS1)				Prepared & Analyzed: 05-Mar-19						
Chloride	23.5	1.00	mg/L	25.0		94.1	90-110			
Sulfate	23.5	1.00	mg/L	25.0		93.8	90-110			
LCS Dup (B903039-BSD1)				Prepared & Analyzed: 05-Mar-19						
Sulfate	24.4	1.00	mg/L	25.0		97.7	90-110	4.02	20	
Chloride	24.7	1.00	mg/L	25.0		98.9	90-110	5.04	20	
Batch B903044 - General Prep - Wet Chem										
Blank (B903044-BLK1)				Prepared: 06-Mar-19 Analyzed: 07-Mar-19						
Nitrate/Nitrite as N	ND	0.020	mg/L							
LCS (B903044-BS1)				Prepared: 06-Mar-19 Analyzed: 07-Mar-19						
Nitrate/Nitrite as N	1.06	0.020	mg/L	1.00		106	90-110			
LCS Dup (B903044-BSD1)				Prepared: 06-Mar-19 Analyzed: 07-Mar-19						
Nitrate/Nitrite as N	1.06	0.020	mg/L	1.00		106	90-110	0.783	20	
Batch B903055 - General Prep - Wet Chem										
Blank (B903055-BLK1)				Prepared: 06-Mar-19 Analyzed: 07-Mar-19						
Bromide	ND	0.100	mg/L							

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence or any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damage including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

 ALL CONSULTING, LLC
 1718 S. CHEYENNE AVE.
 TULSA OK, 74119

 Project: WILLIS RANCH
 Project Number: 32.073016-103.141134
 Project Manager: KRIS ANDERSEN
 Fax To: NA

 Reported:
 08-Mar-19 16:45

General Chemistry - Quality Control
Green Analytical Laboratories

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch B903055 - General Prep - Wet Chem										
LCS (B903055-BS1)				Prepared: 06-Mar-19 Analyzed: 07-Mar-19						
Bromide	2.63	0.100	mg/L	2.50		105	90-110			
LCS Dup (B903055-BSD1)				Prepared: 06-Mar-19 Analyzed: 07-Mar-19						
Bromide	2.60	0.100	mg/L	2.50		104	90-110	1.15	20	

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence or any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damage including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

ALL CONSULTING, LLC
1718 S. CHEYENNE AVE.
TULSA OK, 74119

Project: WILLIS RANCH
Project Number: 32.073016-103.141134
Project Manager: KRIS ANDERSEN
Fax To: NA

Reported:
08-Mar-19 16:45

Total Recoverable Metals by ICP (E200.7) - Quality Control

Green Analytical Laboratories

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
---------	--------	-----------------	-------	-------------	---------------	------	-------------	-----	-----------	-------

Batch B903037 - Total Rec. 200.7/200.8/200.2

Blank (B903037-BLK1)

Prepared: 05-Mar-19 Analyzed: 07-Mar-19

Potassium	ND	1.00	mg/L							
Iron	ND	0.050	mg/L							
Calcium	ND	0.100	mg/L							
Sodium	ND	1.00	mg/L							
Strontium	ND	0.100	mg/L							
Magnesium	ND	0.100	mg/L							

LCS (B903037-BS1)

Prepared: 05-Mar-19 Analyzed: 07-Mar-19

Magnesium	20.9	0.100	mg/L	20.0		105	85-115			
Strontium	4.18	0.100	mg/L	4.00		105	85-115			
Sodium	3.29	1.00	mg/L	3.24		102	85-115			
Potassium	8.53	1.00	mg/L	8.00		107	85-115			
Calcium	4.21	0.100	mg/L	4.00		105	85-115			
Iron	4.15	0.050	mg/L	4.00		104	85-115			

LCS Dup (B903037-BSD1)

Prepared: 05-Mar-19 Analyzed: 07-Mar-19

Magnesium	20.6	0.100	mg/L	20.0		103	85-115	1.84	20	
Calcium	4.13	0.100	mg/L	4.00		103	85-115	1.88	20	
Sodium	3.22	1.00	mg/L	3.24		99.3	85-115	2.22	20	
Iron	4.10	0.050	mg/L	4.00		102	85-115	1.34	20	
Strontium	4.19	0.100	mg/L	4.00		105	85-115	0.103	20	
Potassium	8.47	1.00	mg/L	8.00		106	85-115	0.723	20	

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence or any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damage including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene

Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

 ALL CONSULTING, LLC
 1718 S. CHEYENNE AVE.
 TULSA OK, 74119

 Project: WILLIS RANCH
 Project Number: 32.073016-103.141134
 Project Manager: KRIS ANDERSEN
 Fax To: NA

 Reported:
 08-Mar-19 16:45

Total Recoverable Metals by ICPMS (E200.8) - Quality Control
Green Analytical Laboratories

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
---------	--------	-----------------	-------	-------------	---------------	------	-------------	-----	-----------	-------

Batch B903038 - Total Rec. 200.7/200.8/200.2
Blank (B903038-BLK1)

Prepared: 05-Mar-19 Analyzed: 08-Mar-19

Selenium	ND	0.0010	mg/L							
Barium	ND	0.0005	mg/L							
Lead	ND	0.0005	mg/L							
Chromium	0.0012	0.0010	mg/L							B3
Arsenic	ND	0.0010	mg/L							
Manganese	ND	0.0020	mg/L							

LCS (B903038-BS1)

Prepared: 05-Mar-19 Analyzed: 08-Mar-19

Selenium	0.246	0.0010	mg/L	0.250		98.3	85-115			
Manganese	0.0501	0.0020	mg/L	0.0500		100	85-115			
Lead	0.0493	0.0005	mg/L	0.0500		98.5	85-115			
Chromium	0.0518	0.0010	mg/L	0.0500		104	85-115			
Barium	0.0482	0.0005	mg/L	0.0500		96.5	85-115			
Arsenic	0.0492	0.0010	mg/L	0.0500		98.3	85-115			

LCS Dup (B903038-BS1)

Prepared: 05-Mar-19 Analyzed: 08-Mar-19

Selenium	0.254	0.0010	mg/L	0.250		102	85-115	3.36	20	
Manganese	0.0486	0.0020	mg/L	0.0500		97.2	85-115	3.16	20	
Lead	0.0497	0.0005	mg/L	0.0500		99.4	85-115	0.935	20	
Barium	0.0472	0.0005	mg/L	0.0500		94.3	85-115	2.25	20	
Arsenic	0.0508	0.0010	mg/L	0.0500		102	85-115	3.34	20	
Chromium	0.0500	0.0010	mg/L	0.0500		99.9	85-115	3.73	20	

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence or any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damage including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Notes and Definitions

M5	Sample was chosen for matrix spike. Spike recovery did not meet laboratory acceptance criteria, possible matrix interference in sample.
J	Detected but below the Standard Reporting Limit; therefore, result is an estimated concentration (CLP J-Flag).
B3	Target analyte detected in method blank or continuing calibration blank. Reporting limit elevated to account for blank result.
ND	Analyte NOT DETECTED at or above the reporting limit
RPD	Relative Percent Difference
**	Samples not received at proper temperature of 6°C or below.
***	Insufficient time to reach temperature.
-	Chloride by SM4500Cl-B does not require samples be received at or below 6°C Samples reported on an as received basis (wet) unless otherwise noted on report


Cardinal Laboratories

* = Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence or any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damage including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager



CHAIN-OF-CUSTODY AND ANALYSIS REQUEST

101 East Marland, Hobbs, NM 88240
(575) 393-2326 FAX (575) 393-2476

Company Name: ALL CONSULTING		P.O. #:		BILL TO		ANALYSIS REQUEST	
Project Manager:		Company:					
Address:		Attn:					
City:		Address:					
State:		City:					
Zip:		State:					
Phone #:		Fax #:					
Project #:		Project Owner:					
Project Name: Willis Ranch		State:					
Project Location: 37-073010-103-141134		Zip:					
Sample Name: Kidman Fluvial		Phone #:					
Fax #:							
FOR LAB USE ONLY		PRESERV		SAMPLING			
Lab I.D.	Sample I.D.	MATRIX					
4900828	Willis Ranch	GROUNDWATER					
		WASTEWATER					
		SOIL					
		OIL					
		SLUDGE					
		OTHER:					
		ACID/BASE:					
		ICE / COOL					
		OTHER:					
		DATE					
		TIME					
		BTEX					
		TPH					
		(RSK-L75) Methane, Ethane, Propane					
		Hardness					
		T. Metals - Ag, Ba, Ca					
		Cr, Fe, Pb, Mg, Mn, K, Se					
		Na, Sr					
		Turbidity					
		Anions 300 - Br, Cl, NO ₃ , PO ₄					
		TDS, TSS					
		T. ALK. HCO ₃ / CO ₃					
		Conductivity					
		PH					

PLEASE NOTE: Liability and Damages, Cardinal's facility and client's facilities remain for any claim arising whether stated in contract or not, shall be limited to the amount paid by the client for the analysis. All claims, including those for negligence and any other cause whatsoever, shall be deemed waived unless made in writing and received by Cardinal within 30 days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of services rendered by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise.

Relinquished By: **Ch. Starnes** Date: **3-1-19** Received By: **Shirley A. Williams** Date: **3-1-19** Time: **2:45**

Relinquished By: **Ch. Starnes** Date: **3-1-19** Received By: **Shirley A. Williams** Date: **3-1-19** Time: **2:45**

Delivered By: (Circle One) **UPS** - Bus - Other: **-0.1c #47** Sample Condition: ☒ Cool ☒ Intact ☐ Yes ☐ No ☐ Yes ☐ No **40.** CHECKED BY: **RP**

REMARKS: **Rush!**

Attachment 6


Public Notice Affidavit and Notice of Application Confirmations

Affidavit of Publication

STATE OF NEW MEXICO
COUNTY OF LEA


I, Daniel Russell, Publisher of the Hobbs News-Sun, a newspaper published at Hobbs, New Mexico, solemnly swear that the clipping attached hereto was published in the regular and entire issue of said newspaper, and not a supplement thereof for a period of 1 issue(s).

Beginning with the issue dated
April 05, 2019
and ending with the issue dated
April 05, 2019.



Publisher


Sworn and subscribed to before me this
5th day of April 2019.



Business Manager

My commission expires
January 29, 2023

(Seal)

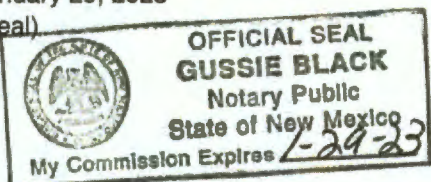

This newspaper is duly qualified to publish legal notices or advertisements within the meaning of Section 3, Chapter 167, Laws of 1937 and payment of fees for said

LEGAL NOTICE APRIL 5, 2019

APPLICATION FOR AUTHORIZATION TO INJECT

NOTICE IS HEREBY GIVEN: That Goodnight Midstream Permian, LLC, 5910 N Central Expressway, Suite 850, Dallas, TX 75208, is requesting that the New Mexico Oil Conservation Division administratively approve the APPLICATION FOR AUTHORIZATION TO INJECT as follows:

PURPOSE: The intended purpose of the injection well is to dispose of salt water produced from permitted oil and gas wells.

WELL NAME AND LOCATION: Willis 35 SA 1
NW 1/4 SE 1/4, Section 35, Township 25S, Range 37E
1.482' FSL & 1.987' FEL
Lea County, NM

NAME AND DEPTH OF DISPOSAL ZONE: San Andres
(3,725' - 4,375')

EXPECTED MAXIMUM INJECTION RATE: 35,000
Bbls/day

EXPECTED MAXIMUM INJECTION PRESSURE: 745 psi
(surface)

Objections or requests for hearing must be filed with the New Mexico Oil Conservation Division within fifteen (15) days. Any objection or request for hearing should be mailed to the Oil Conservation Division, 1220 South St. Francis Dr., Santa Fe, New Mexico 87505.

Additional information may be obtained by contacting Nate Aleman at 918-382-7581.
#33983

67115320

00226726

DANIEL ARTHUR
ALL CONSULTING
1718 S. CHEYENNE AVE.
TULSA, OK 74119

Willis 35 SA 1 - Notice of Application Recipients				
Entity	Address	City	State	Zip Code
Landowner				
George Willis	P.O. Box 307	Jal	NM	88252
OCD District				
NMOCD District 1	1625 N. French Drive	Hobbs	NM	88240
Mineral Owner				
Bureau of Land Management Carlsbad Field Office Attention: Chris Walls	620 E. Greene Street	Carlsbad	NM	88220-6292
Leasehold Operators				
BP America Production Co	501 Westlake Park Blvd.	Houston	TX	77079
Blackbeard Operating, LLC	201 W. Wall St., Suite 900	Midland	TX	79701
Burlington Res Oil & Gas Co LP	21 Desta Drive	Midland	TX	79705
Chase Oil Corp	P.O. Box 1767	Artesia	NM	88211
Chevron U S A Inc.	6301 Deauville	Midland	TX	79706
Henry Holding,LP	3525 Andrews Highway, Suite 200	Midland	TX	79703
Kerr-McGee OG Onshore LP	P.O. Box 867	Andrews	TX	79714
OXY USA WTP Limited Partnership	P.O. Box 27570	Houston	TX	77225-7570
Union Texas Pet Corp	P.O. Box 200128	Houston	TX	77216
ZPZ Delaware I LLC	2000 Post Oak Blvd., Suite 100	Houston	TX	77056
Note:				

Certified Mail™ Labels⬆ **Top of the page**

Print postage using Stamps.com Template SDC-3610

ALL Consulting
1718 S. Cheyenne Ave.
Tulsa, OK 74119

\$5.600
US POSTAGE
FIRST-CLASS
FROM 74119
APR 03 2019

stamps.com



Place label at top of the center of the envelope and fold at dotted line.

CERTIFIED MAIL™
CERTIFIED MAIL™



9414 8118 9956 0659 4190 09

George Willis
P.O. Box 307
Jal NM 88252-0307

ALL Consulting
1718 S. Cheyenne Ave.
Tulsa, OK 74119

\$5.600
US POSTAGE
FIRST-CLASS
FROM 74119
APR 03 2019

stamps.com



Place label at top of the center of the envelope and fold at dotted line.

CERTIFIED MAIL™
CERTIFIED MAIL™




9414 8118 9956 0659 4194 12

Blackbeard Operating, LLC
201 W. Wall St., Suite 900
Midland TX 79701-4532

ALL Consulting
1718 S. Cheyenne Ave.
Tulsa, OK 74119

\$5.600
US POSTAGE
FIRST-CLASS
FROM 74119
APR 03 2019

stamps.com



Place label at top of the center of the envelope and fold at dotted line.

CERTIFIED MAIL™
CERTIFIED MAIL™



9414 8118 9956 0659 4194 67

BP America Production Co.
501 Westlake Park Blvd.
Houston TX 77079-2604

ALL Consulting
1718 S. Cheyenne Ave.
Tulsa, OK 74119

\$5.600
US POSTAGE
FIRST-CLASS
FROM 74119
APR 03 2019

stamps.com



Place label at top of the center of the envelope and fold at dotted line.

CERTIFIED MAIL™
CERTIFIED MAIL™



9414 8118 9956 0659 4194 98

Burlington Res Oil & Gas Co LP
21 Desta Drive
Midland TX 79705

Certified Mail™ Labels⬆ **Top of the page**

Print postage using Stamps.com Template SDC-3610

ALL Consulting
1718 S. Cheyenne Ave.
Tulsa, OK 74119

\$5.600
US POSTAGE
FIRST-CLASS
FROM 74119
APR 03 2019

stamps.com



Place label at top of the center of the envelope and fold at dotted line.

CERTIFIED MAIL™
CERTIFIED MAIL™



9414 8118 9956 0659 4195 11

Chase Oil Corporation
P.O. Box 1767
Artesia NM 88211-1767

ALL Consulting
1718 S. Cheyenne Ave.
Tulsa, OK 74119

\$5.600
US POSTAGE
FIRST-CLASS
FROM 74119
APR 03 2019

stamps.com



Place label at top of the center of the envelope and fold at dotted line.

CERTIFIED MAIL™
CERTIFIED MAIL™



9414 8118 9956 0659 4195 42

Chevron USA Inc.
6301 Deauville
Midland TX 79706-2964

ALL Consulting
1718 S. Cheyenne Ave.
Tulsa, OK 74119

\$5.600
US POSTAGE
FIRST-CLASS
FROM 74119
APR 03 2019

stamps.com



Place label at top of the center of the envelope and fold at dotted line.

CERTIFIED MAIL™
CERTIFIED MAIL™



9414 8118 9956 0659 4132 50

Henry Holding LP
3525 Andrews Highway, Suite 200
Midland TX 79703-5054

ALL Consulting
1718 S. Cheyenne Ave.
Tulsa, OK 74119

\$5.600
US POSTAGE
FIRST-CLASS
FROM 74119
APR 03 2019

stamps.com



Place label at top of the center of the envelope and fold at dotted line.

CERTIFIED MAIL™
CERTIFIED MAIL™



9414 8118 9956 0659 4132 81

Kerr-McGee OG Onshore LP
P.O. Box 867
Andrews TX 79714-0867

Certified Mail™ Labels↑ **Top of the page**Print postage using Stamps.com Template **SDC-3610**

ALL Consulting
1718 S. Cheyenne Ave.
Tulsa, OK 74119

\$5.600
US POSTAGE
FIRST-CLASS
FROM 74119
APR 03 2019



Place label at top of the center of the
envelope and fold at dotted line.

CERTIFIED MAIL™



9414 8118 9956 0659 4138 16

NMOCD District 1
1625 N. French Drive
Hobbs NM 88240-9273

ALL Consulting
1718 S. Cheyenne Ave.
Tulsa, OK 74119

\$5.600
US POSTAGE
FIRST-CLASS
FROM 74119
APR 03 2019



Place label at top of the center of the
envelope and fold at dotted line.

CERTIFIED MAIL™



9414 8118 9956 0659 4138 47

OXY USA WTP Limited Partnership
P.O. Box 27570
Houston TX 77227-7570

ALL Consulting
1718 S. Cheyenne Ave.
Tulsa, OK 74119

\$5.600
US POSTAGE
FIRST-CLASS
FROM 74119
APR 03 2019



Place label at top of the center of the
envelope and fold at dotted line.

CERTIFIED MAIL™




9414 8118 9956 0659 4137 62

Union Texas Pet Corp
P.O. Box 200128
Houston TX 77216-0001

ALL Consulting
1718 S. Cheyenne Ave.
Tulsa, OK 74119

\$5.600
US POSTAGE
FIRST-CLASS
FROM 74119
APR 03 2019



Place label at top of the center of the
envelope and fold at dotted line.

CERTIFIED MAIL™



9414 8118 9956 0659 4137 79

ZPZ Delaware I LLC
2000 Post Oak Blvd., Suite 100
Houston TX 77056-4497

Certified Mail™ Labels

Top of the page

Print postage using Stamps.com Template SDC-3610

ALL Consulting
1718 S. Cheyenne Ave.
Tulsa, OK 74119

\$7.450
US POSTAGE
FIRST-CLASS
FROM 74119
APR 11 2019
stamps.com

Place label at top of the center of the envelope and fold at dotted line.

Place label at top of the center of the envelope and fold at dotted line.

CERTIFIED MAIL™
CERTIFIED MAIL™

CERTIFIED MAIL™
CERTIFIED MAIL™



9414 8118 9956 0643 1720 33

Chris Walls
Carlsbad Field Office
Bureau of Land Management
620 E. Greene St.
Carlsbad NM 88220-6292

Place label at top of the center of the envelope and fold at dotted line.

Place label at top of the center of the envelope and fold at dotted line.

CERTIFIED MAIL™
CERTIFIED MAIL™

CERTIFIED MAIL™
CERTIFIED MAIL™

HOBBS OCD

April 5, 2019

APR 11 2019

New Mexico Oil Conservation Division - District 1
1625 N. French Drive
Hobbs, NM 88240

RECEIVED


Subject: Goodnight Midstream Permian, LLC – Willis 35 SA 1 – Application for Permit to Drill

To Whom It May Concern,

On behalf of Goodnight Midstream Permian, LLC (Goodnight), ALL Consulting, LLC (ALL) is submitting the enclosed Application for Permit to Drill for the Willis 35 SA 1, a proposed salt water disposal well, in Lea County, NM.

Should you have any questions regarding the enclosed application, please contact Nate Alleman at (918) 382-7581 or nalleman@all-llc.com.

Sincerely,
ALL Consulting



Nate Alleman
Project Manager

*This GPS pt was diff
than what I had in
the Ex table - I
changed it to this
7-18*

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy Minerals and Natural Resources

HOBBS OCD

Form C-101
Revised July 18, 2013

Oil Conservation Division

APR 11 2019

☐ AMENDED REPORT

1220 South St. Francis Dr.

Santa Fe, NM 87505

RECEIVED

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

¹ Operator Name and Address Goodnight Midstream Permian, LLC 5910 N Central Expressway, Suite 850, Dallas, TX 75206		² OGRID Number 372311
		³ API Number
⁴ Property Code	⁵ Property Name WILLIS 35 SA	⁶ Well No. 1

⁷ Surface Location

UL - Lot	Section	Township	Range	Lot Idn	Feet from	N/S Line	Feet From	E/W Line	County
J	35	25S	37E		1462	SOUTH	1987	EAST	LEA

⁸ Proposed Bottom Hole Location

UL - Lot	Section	Township	Range	Lot Idn	Feet from	N/S Line	Feet From	E/W Line	County
-	-	-	-		-	-	-	-	-

⁹ Pool Information

Pool Name SWD; SAN ANDRES	Pool Code 96121
------------------------------	--------------------

Additional Well Information

¹¹ Work Type N	¹² Well Type S	¹³ Cable/Rotary R	¹⁴ Lease Type Private Surface/ Federal Minerals	¹⁵ Ground Level Elevation 3,009'
¹⁶ Multiple No	¹⁷ Proposed Depth 4,475	¹⁸ Formation San Andres	¹⁹ Contractor TBD	²⁰ Spud Date Upon Approval
Depth to Ground water 185' (CP-00909)	Distance from nearest fresh water well 2,006' (CP-00909)		Distance to nearest surface water 14,168' (East)	

☒ We will be using a closed-loop system in lieu of lined pits

²¹ Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surface	12-1/4"	9-5/8"	40 lb/ft	1,015'	318	Surface
Production	8-3/4"	7"	26 lb/ft	3,725'	486	Surface
Tubing	6-3/11"	4-1/2"	20 lb/ft	3,705'	N/A	N/A

Casing/Cement Program: Additional Comments

--

²² Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Annular, Pipe & Blind/Shear Rams	3,000 psi	3,000 psi	Hydril, Cameron or Equivalent

²³ I hereby certify that the information given above is true and complete to the best of my knowledge and belief.

I further certify that I have complied with 19.15.14.9 (A) NMAC ☐ and/or 19.15.14.9 (B) NMAC ☐, if applicable.

Signature: *Nathan Alleman*

Printed name: Nate Alleman

Title: Regulatory Specialist - ALL Consulting

E-mail Address: nalleman@all-llc.com

Date: 4/8/2019

Phone: 918-237-0559

OIL CONSERVATION DIVISION

Approved By:

Title:

Approved Date:

Expiration Date:

Conditions of Approval Attached

DISTRICT I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
DISTRICT II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
DISTRICT III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
DISTRICT IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

HOBBS OCD

APR 11 2019

RECEIVED

Form C-102

Revised August 1, 2011

Submit one copy to appropriate District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number	² Pool Code 96121	³ Pool Name SWD; SAN ANDRES
⁴ Property Code	⁵ Property Name WILLIS 35 SA	⁶ Well Number 1
⁷ OGRID No. 372311	⁸ Operator Name GOODNIGHT MIDSTREAM PERMIAN, LLC	⁹ Elevation 3009'

¹⁰Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
J	35	25-S	37-E		1462'	South	1987'	East	Lea

¹¹Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County


¹² Dedicated Acres	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

	¹⁶ T-25-S, R-37-E N.M.P.M. Sec. 35	¹⁷OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. <i>Nate Alleman</i> 4/8/2019 Signature Date Nate Alleman Printed Name nalleman@all-llc.com E-mail Address
	¹⁸SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. 3-19-2019 Date of Survey Signature and Seal of Professional Surveyor <i>Michael L. Stanford</i> 10324 Certificate Number	

4.1 Miles SE of Jal, New Mexico.

File No. A-12846

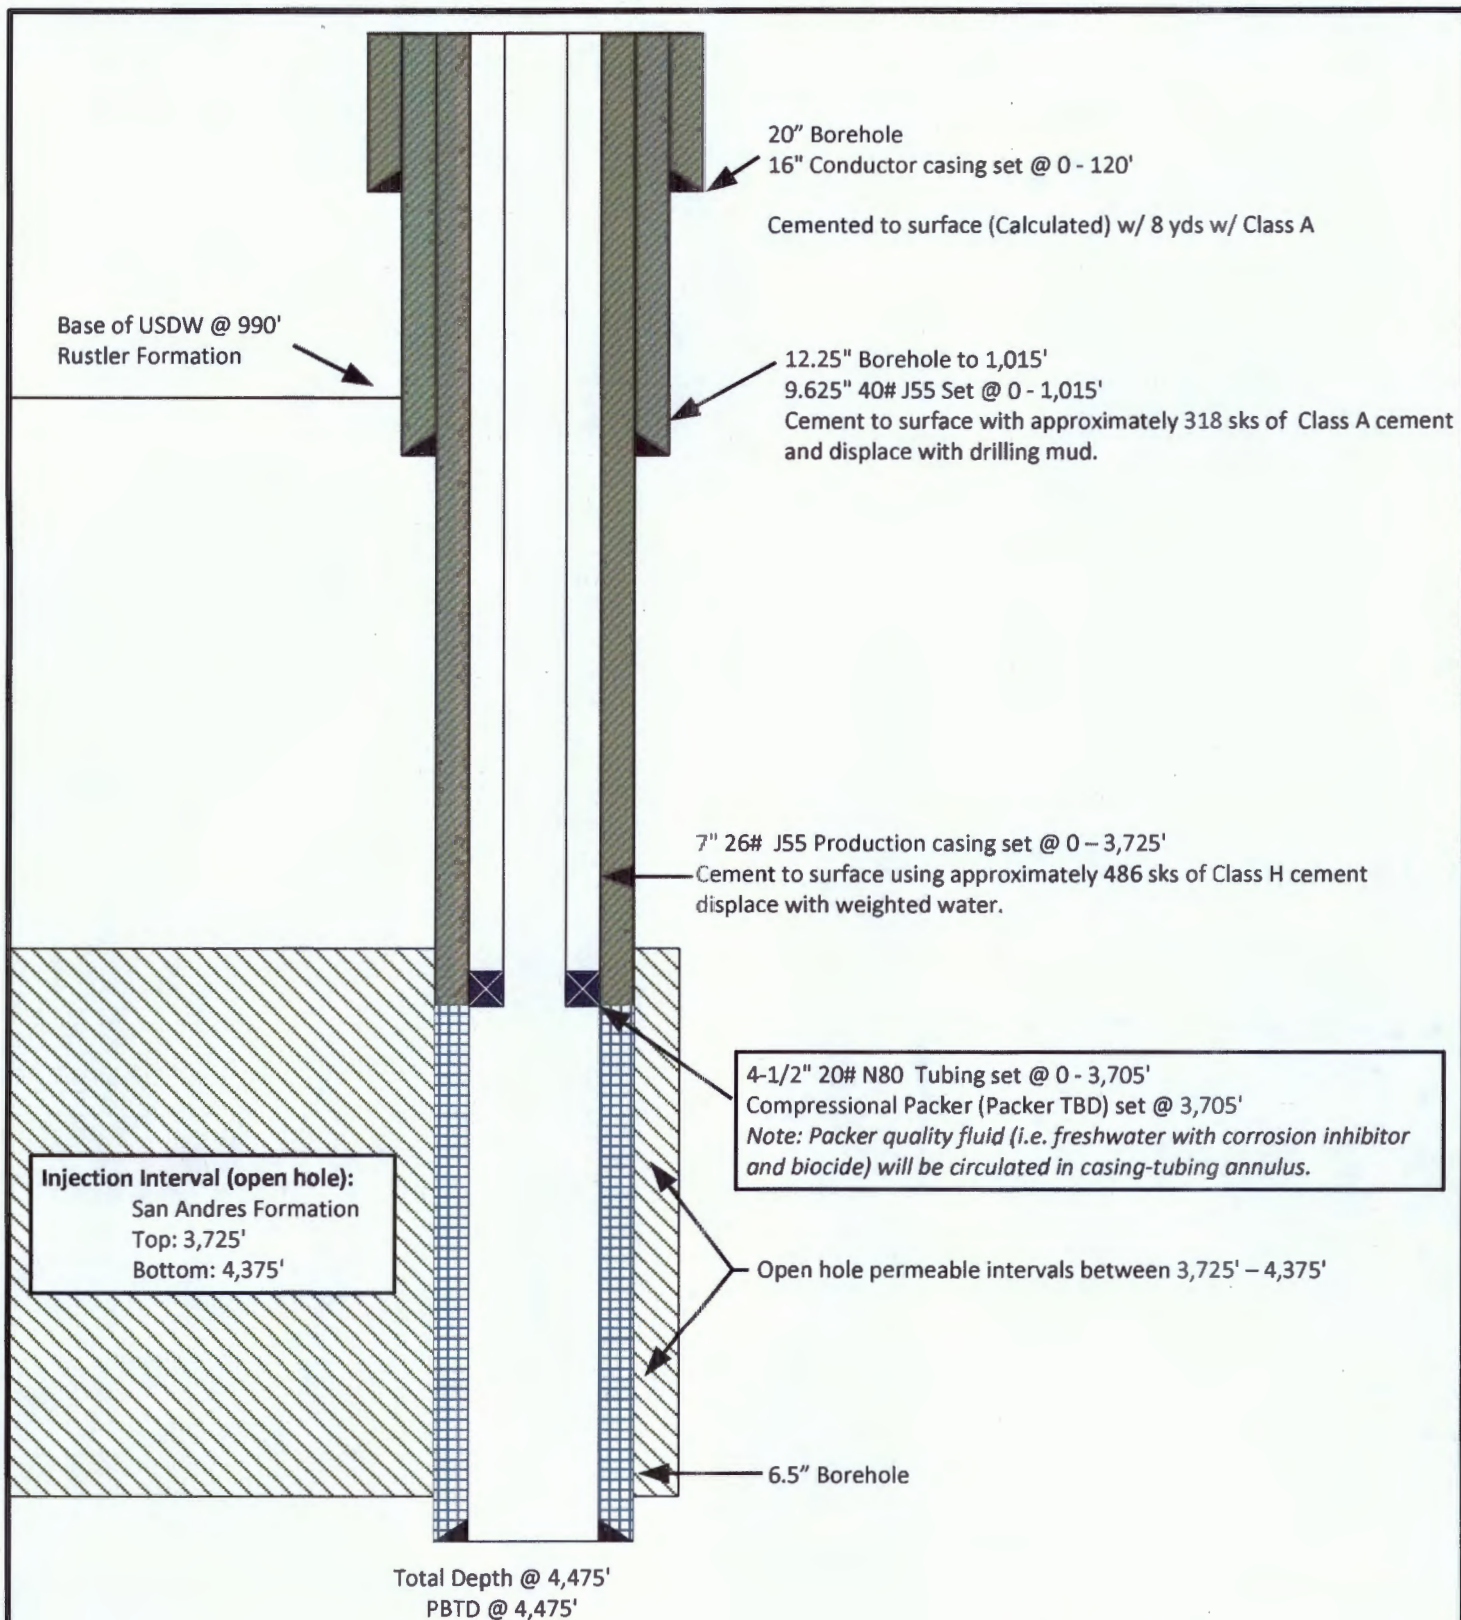

NOT TO SCALE

Note: Listed depths and cement volumes are approximates based on available information.

Prepared by:

ALLCONSULTING

Drawn by: Joshua Ticknor

Project Manager:
Nathan Alleman

Date: 03/27/2019

Goodnight Midstream Permian, LLC
Willis 35 SA 1
Section 35, Twp 25S, Rng 37E
1,462' FSL & 1,987' FEL
Lea County, NM

Goodnight Midstream Permian, LLC

Willis 35 SA 1

1,462' FSL & 1,987' FEL

Section 35, Twp 25S, Rng 37E

Lea County, New Mexico

Proposed Drilling Plan for New SWD

1. Geologic Information: Permian geologic formations

The Middle Permian San Andres Formation consist of interbedded carbonates rocks including dolomites and limestones. Several thick sections of porous and permeable intervals are present within this formation in the area. Geologic information and depths of formation tops were obtained from surrounding wells within the area of interest. Total depth is 100 feet below the base of the San Andres Formation. The base of the Rustler Formation and top of the Salado Formation is at approximately 990 feet plus 25 feet equals 1,015 feet to set bottom of the surface casing to protect the deepest underground sources of drinking water (USDWs).

Estimated Formation Top Depths:

Rustler	850'
Salado	990'
Grayburg	3,350'
San Andres	3,725'
Total Depth	4,475'

2. Proposed Drilling Plan:

- a. Move in equipment, excavate cellar and install tinhorn, and then drill conductor hole and set and cement in conductor casing.
- b. Mobilize drilling rig and rig up drilling rig and associated equipment onsite. Set up H2S wind direction indicators and monitors; brief all personnel on Emergency Evacuation Routes and ALL Consulting Site Health and Safety Plan.
- c. Everyone onsite will have stop work authority.
- d. Perform Job Safety Analysis (JSA) meetings before each drilling shift change and prior to any subcontractor performing any task on the location. All equipment should be inspected daily and repaired or replaced as required.
- e. Drilling operations commence.
- f. Have mud logger monitoring returns. All drill cuttings and waste hauled to specified waste facility.
- g. After drilling the surface hole and setting and cementing the casing; if hydrogen sulfide (H2S) levels are detected greater than 10ppm, implement H2S Plan by ceasing operations, shut in well, employ H2S safety trailer and personnel safety devices, install flare line, etc. – refer to plan.
- h. Proper secondary containment needs to be in place. Spills need to be cleaned up immediately. Repair or otherwise correct the situation within 48 hours before resuming operations. Notify Oil Conservation Division (OCD) within 24 hours. Remediation started as soon as possible if required. Operator shall comply with 19.15.29 NMAC and 19.15.30 NMAC, as appropriate.

Proposed Willis 35 SA 1 Drilling Plan

i. Sundry forms need to be completed and filed as required by OCD.

3. **Proposed Casing Program:** Casing designed as follows:

STRING	HOLE SZ	DEPTH	CSG SZ	COND	WT/GRD	CLLPS/BRS	TNSN
						(Minimum Safety Factors)	
Conductor	20"	0-120'	16.0"	n/a	n/a	n/a	n/a
Surface	12.25"	0-1,015'	9.625"	New	40# J55	1.125/1.1	1.8
Production	8.75"	0-3,725'	7.0"	New	26# J55	1.125/1.1	1.8
Tubing	6.276"	0-3,705'	4.5"	New	20# N80 IPC	1.125/1.1	1.8
Open hole	6-1/2" hole	3,725-4,475'	n/a	n/a	n/a	n/a	n/a

Notes:

- ✓ A deviation survey will be conducted and submitted with the Well Completion Report (Form C-105)
- ✓ While running all casing strings, the pipe will be kept a minimum of 1/3 full at all times to avoid approaching the collapse pressure of casing.
- ✓ Based on well completions and geophysical logs on adjacent wells, 7.0" casing shoe is expected to be set at 3,725'. Similarly, total depth will be approximately 4,475' as determined by open hole geophysical logging and after suitable porosity and low resistivity values have been identified. Maximum open hole interval is anticipated to be from 3,725' to 4,475', but may change based upon actual wellbore determinations. A sundry notice will document such events as a C-105 well completion report filed within 60 days..

4. **Proposed Cementing Plans:**

Surface Casing: Cemented with approximately 318 sacks of Class A cement with 25% excess and circulated to the surface.

Production Casing: Cement with approximately 486 sacks of Class H cement with 25% excess and cement back to surface inside the 9-5/8" surface casing string. Cement top to be confirmed by cement bond logging after cement has cured to appropriate compressive strength.

5. **Pressure Control:** All Blowout Preventers (BOP) and related equipment will comply with well control requirements as described OCD Rules and Regulations and API RP 53, Section 17. The BOP will be either a Hydril, Cameron or equivalent. Minimum working pressure of the BOP and related equipment required for the drilling shall be 500 psi. The maximum working pressure is anticipated at 3,000 psig and the test pressure will be 3,000 psig. The OCD Hobbs district office shall be notified a minimum of 4 hours in advance for a representative to witness all BOP pressure tests. The test shall be performed by an independent service company utilizing a test plug (no cup of J-packer). The results of the test shall be recorded on a calibrated test chart submitted to the OCD district office. BOP testing shall be conducted at:

- a. Installation;
- b. After equipment or configuration changes;

Proposed Willis 35 SA 1 Drilling Plan

- c. At 30 days from any previous test, and;
- d. Any time operations warrant, such as well conditions.

The BOP specifications to be used during the various phases of the drilling and casing installation are included in the table below:

Casing Size	Annular Preventer	Rams
16"	26-3/4" – 3M, with diverter	None
9.625"	11" – 5M	Pipe & Blind/Shear – 5M
7.0"	11" – 5M	Pipe & Blind/Shear – 5M

A diagram showing the representative BOP setup is included as Attachment 1.

6. **Auxiliary Well Control and Monitoring:** Hydraulic remote BOP operation and mudlogging to monitor returns.

7. **Mud Program and Monitoring:** Mud will be balanced for all operations with adjustment as needed based on actual wellbore conditions and is proposed as follows:

DEPTH	MUD TYPE	WEIGHT	FV	PV	YP	FL	pH
0-1,015'	FW Spud Mud	8.5-9.2	70-40	20	12	NC	10.0
1,015'-4,475'	Brine Mud	9.2-10.0	28-32	NC	NC	NC	10.0

Mud and all cuttings monitored with all drill cuttings recovered for disposal. Returns shall be visually and electronically monitored. In the event of H₂S, mud shall be adjusted appropriately by weight and H₂S scavengers.

8. **H₂S Safety:** This well and related facilities are not expected to have H₂S releases. However, there may be H₂S in the area. There are no private residences or public facilities in the area but a contingency plan has been developed. Goodnight Midstream Permian, LLC will have a company representative available to personnel throughout all operations. If H₂S levels greater than 10ppm are detected or suspected, the H₂S Contingency Plan will be implemented at the appropriate level.

H₂S Safety – There is a low risk of H₂S in this area. The operator will comply with the provisions of New Mexico Administrative Code (NMAC) 19.15.11 and Bureau of Land Management (BLM) Onshore Oil and Gas Order #6.

- a. Monitoring – all personnel will wear monitoring devices.
- b. Warning Sign – a highly visible H₂S warning sign will be placed for obvious viewing at the vehicular entrance point onto location.
- c. Wind Detection – two (2) wind direction socks will be placed on location.
- d. Communications – will be via cellular phones and/or radios located within reach of the driller, the rig floor and safety trailer when applicable.
- e. Alarms – will be located at the rig floor, circulating pump/reverse unit area and the flare line and will be set for visual (red flashing light) at 15 ppm and visual and audible (115 decibel siren) at 20 ppm.
- f. Mud program – If H₂S levels require, proper mud weight, safe drilling practices and H₂S scavengers will minimize potential hazards.

Proposed Willis 35 SA 1 Drilling Plan

- g. Metallurgy – all tubulars, pressure control equipment, flowlines, valves, manifolds and related equipment will be rated for H₂S service if required.

The Goodnight Midstream Permian, LLC H₂S Contingency Plan will be implemented if levels greater than 10ppm H₂S are detected.

9. Geophysical Logging and Testing: Goodnight Midstream Permian, LLC expects to run:

- a. Geophysical logging through the proposed injection interval will ensure the target interval remains within the San Andres.
- b. An open hole gamma ray, SP, compensated density- neutron and dual resistivity log suite will be run from total depth to approximately 1,015'.
- c. A cement bond log with gamma ray and collar locator will be run (Radial, CET or equivalent) on the production casing.
- d. No cores or drill stem tests will be conducted. (The well may potentially be step rate tested in the future if additional injection pressures are required.)

10. Potential Hazards: H₂S is a potential hazard. No abnormal pressure or temperatures are anticipated, but drilling operations will be prepared in the event that those conditions occur.

No loss of circulation is expected to occur with the exception of drilling into the target disposal zone. All onsite personnel will be familiar with the safe operation of the equipment being used to drill this well. The maximum anticipated bottom-hole pressure is 2500 psig and the maximum anticipated bottom-hole temperature is 210°F.

11. Waste Disposal Management: All drill cuttings, fluids, and other solid wastes associated with drilling and completion operations will be transported to a solid waste facility and commercial Class IID injection operation that has been approved and permitted by the Environmental Bureau of the OCD.

12. Anticipated Drilling Commencement Date: Upon approval of the permit for saltwater disposal (SWD), operations would begin within 30 days based on rig availability. Drilling and completion of the well will take approximately six to seven weeks. Installation of the surface facility such as the secondary containment and tank battery, plumbing, injection pump(s), and other treatment and filtering associated equipment would be occurring after the well is completed. In any event, it is not expected for the construction of the surface facility of the project to last more than 90 days, pending on availability of subcontractors and equipment lead times.

13. Completion for Salt Water Disposal: Subsequent to SWD permit issuance from OCD and prior to commencing any work, a Notice of Intent (NOI) sundry will be submitted to complete the well for SWD and will detail the completion workover including all work otherwise described above, any change to the procedure noted herein and to perform mechanical integrity pressure testing per BLM and OCD test procedures (including appropriate OCD notification). The tubing and packer will be set at a depth of approximately 3,705 feet and the casing/tubing annulus will be filled with freshwater and corrosion inhibitor and pressure tested to the required test pressure using the standard annulus pressure test. Anticipated daily maximum volume is 35,000 barrels of water per day (bpd) and average of 17,500 bpd at a maximum surface injection pressure of 745 psig (0.2 psi/ft to the top of the open hole injection

Proposed Willis 35 SA 1 Drilling Plan

interval). If satisfactory disposals rates cannot be achieved at default pressure of .02 psi/ft, Goodnight Midstream Permian, LLC will conduct a step-rate test and apply for an injection pressure increase 50 psig below actual parting pressure achieved during the step-rate testing.

Attachment 1 – Representative BOP Setup

