



# CONTINENTAL OIL COMPANY

P. O. Box 460

HOBBS, NEW MEXICO 88240

PRODUCTION DEPARTMENT

HOBBS DIVISION

L. P. THOMPSON

*Division Manager*

G. C. JAMIESON

*Assistant Division Manager*

February 13, 1970

1001 NORTH TURNER  
TELEPHONE 393-4141

New Mexico Oil Conservation Commission  
P. O. Box 2088  
Santa Fe, New Mexico 87501

Attention Mr. A. L. Porter, Jr., Secretary Director

Gentlemen:

Subject: Amendment to Administrative Order P.C.-385

Administrative Order P.C.-385 authorized the commingling of Devonian and Wolfcamp oil and Morrow condensate from the Anderson Ranch Unit. At that time there were no wells which were in the top allowable category. Since that order was issued, we have recompleted Anderson Ranch Unit, Well No. 2 from the Devonian to the Wolfcamp formation. This well was completed as top allowable and remains top allowable at this time. The attached schematic diagram shows the revised battery arrangement since this well was completed. As shown, production from Anderson Ranch Unit No. 2 is being metered prior to commingling with production from the other wells. It is our intention to maintain this meter so long as the well is producing at top allowable rates.

It is respectfully requested that this method of commingling be approved, either by amendment to Administrative Order PC-385, or by the Commission taking cognizance of the fact that production from the well is being metered for reporting purposes.

Yours very truly,

L. P. Thompson

LPT-VM

Enc.

CC: NMOCC, Hobbs


R. L. Adams

J. J. Bowden

J. W. Kellahin

RECEIVED  
FEB 17 AM 8 2

# ARU-APPLICATION TO COMMINGLE WOLF CAMP, DEVONIAN, MORROW CRUDES

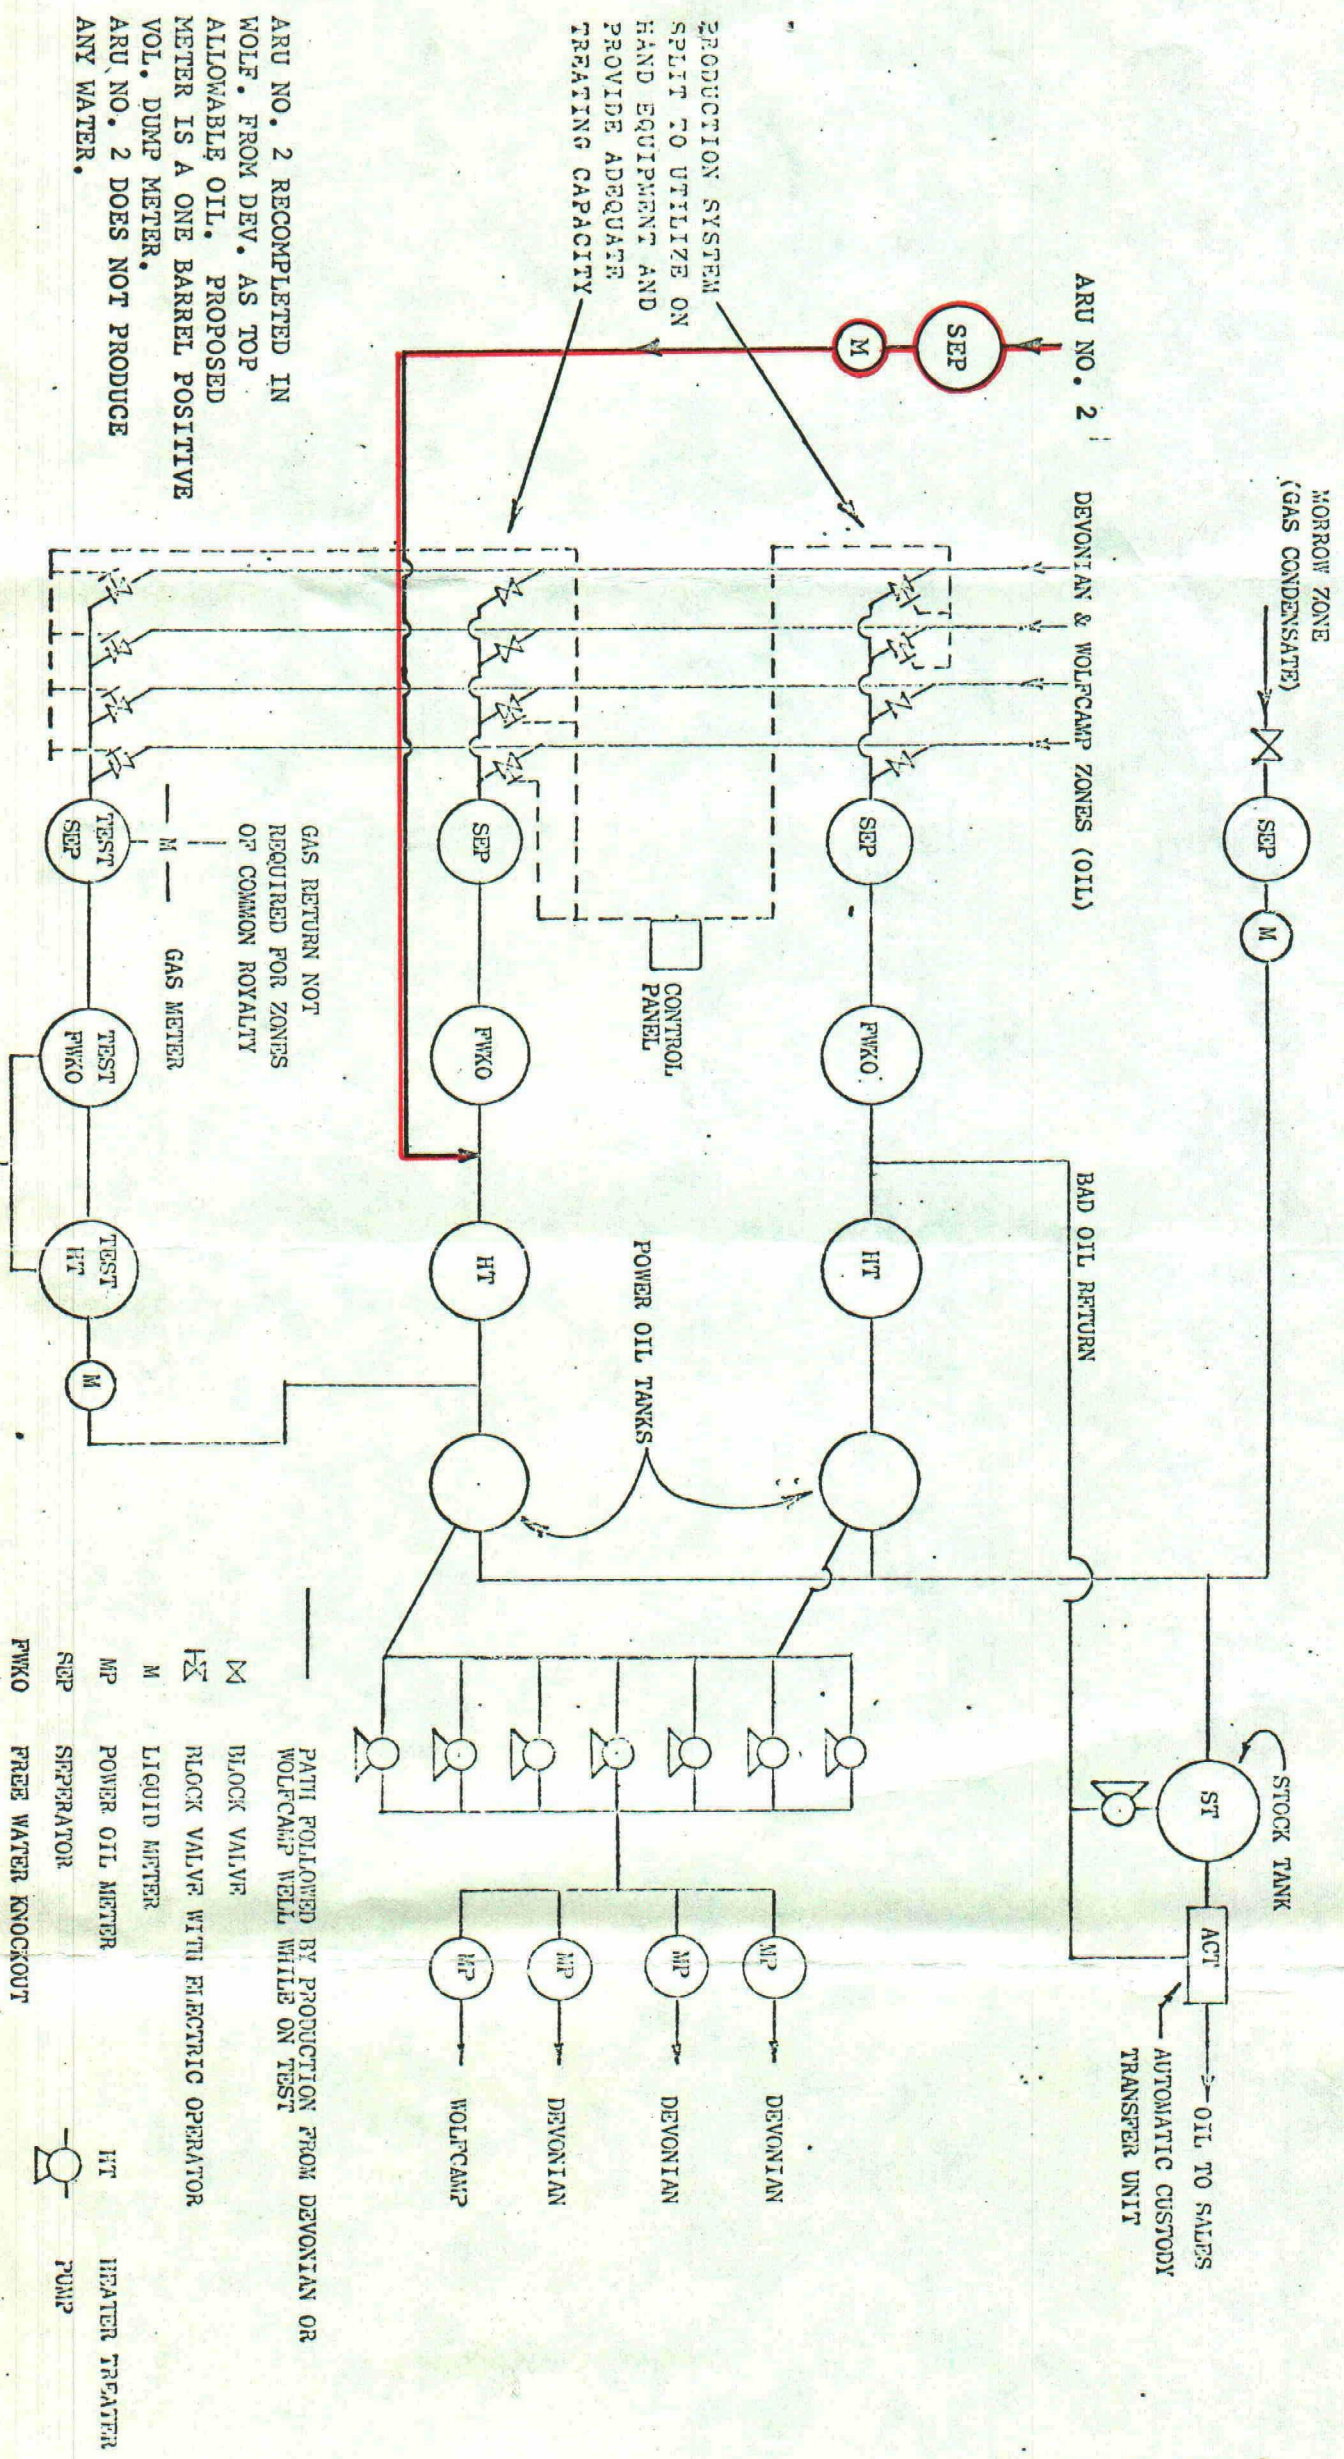

ARU NO. 2 RECOMPLETED IN WOLF. FROM DEV. AS TOP ALLOWABLE OIL. PROPOSED METER IS A ONE BARREL POSITIVE VOL. DUMP METER. ARU NO. 2 DOES NOT PRODUCE ANY WATER.

PRODUCTION SYSTEM SPLIT TO UTILIZE ON HAND EQUIPMENT AND PROVIDE ADEQUATE TREATING CAPACITY

GAS RETURN NOT REQUIRED FOR ZONES OF COMMON ROYALTY

POWER OIL TANKS

PATI FOLLOWED BY PRODUCTION FROM DEVONIAN OR WOLF CAMP WELL WHILE ON TEST

- Δ BLOCK VALVE
- HX BLOCK VALVE WITH ELECTRIC OPERATOR
- M LIQUID METER
- MP POWER OIL METER
- SEP SEPARATOR
- PWKO FREE WATER KNOCKOUT
- HT HEATER TREATER
- PUMP