


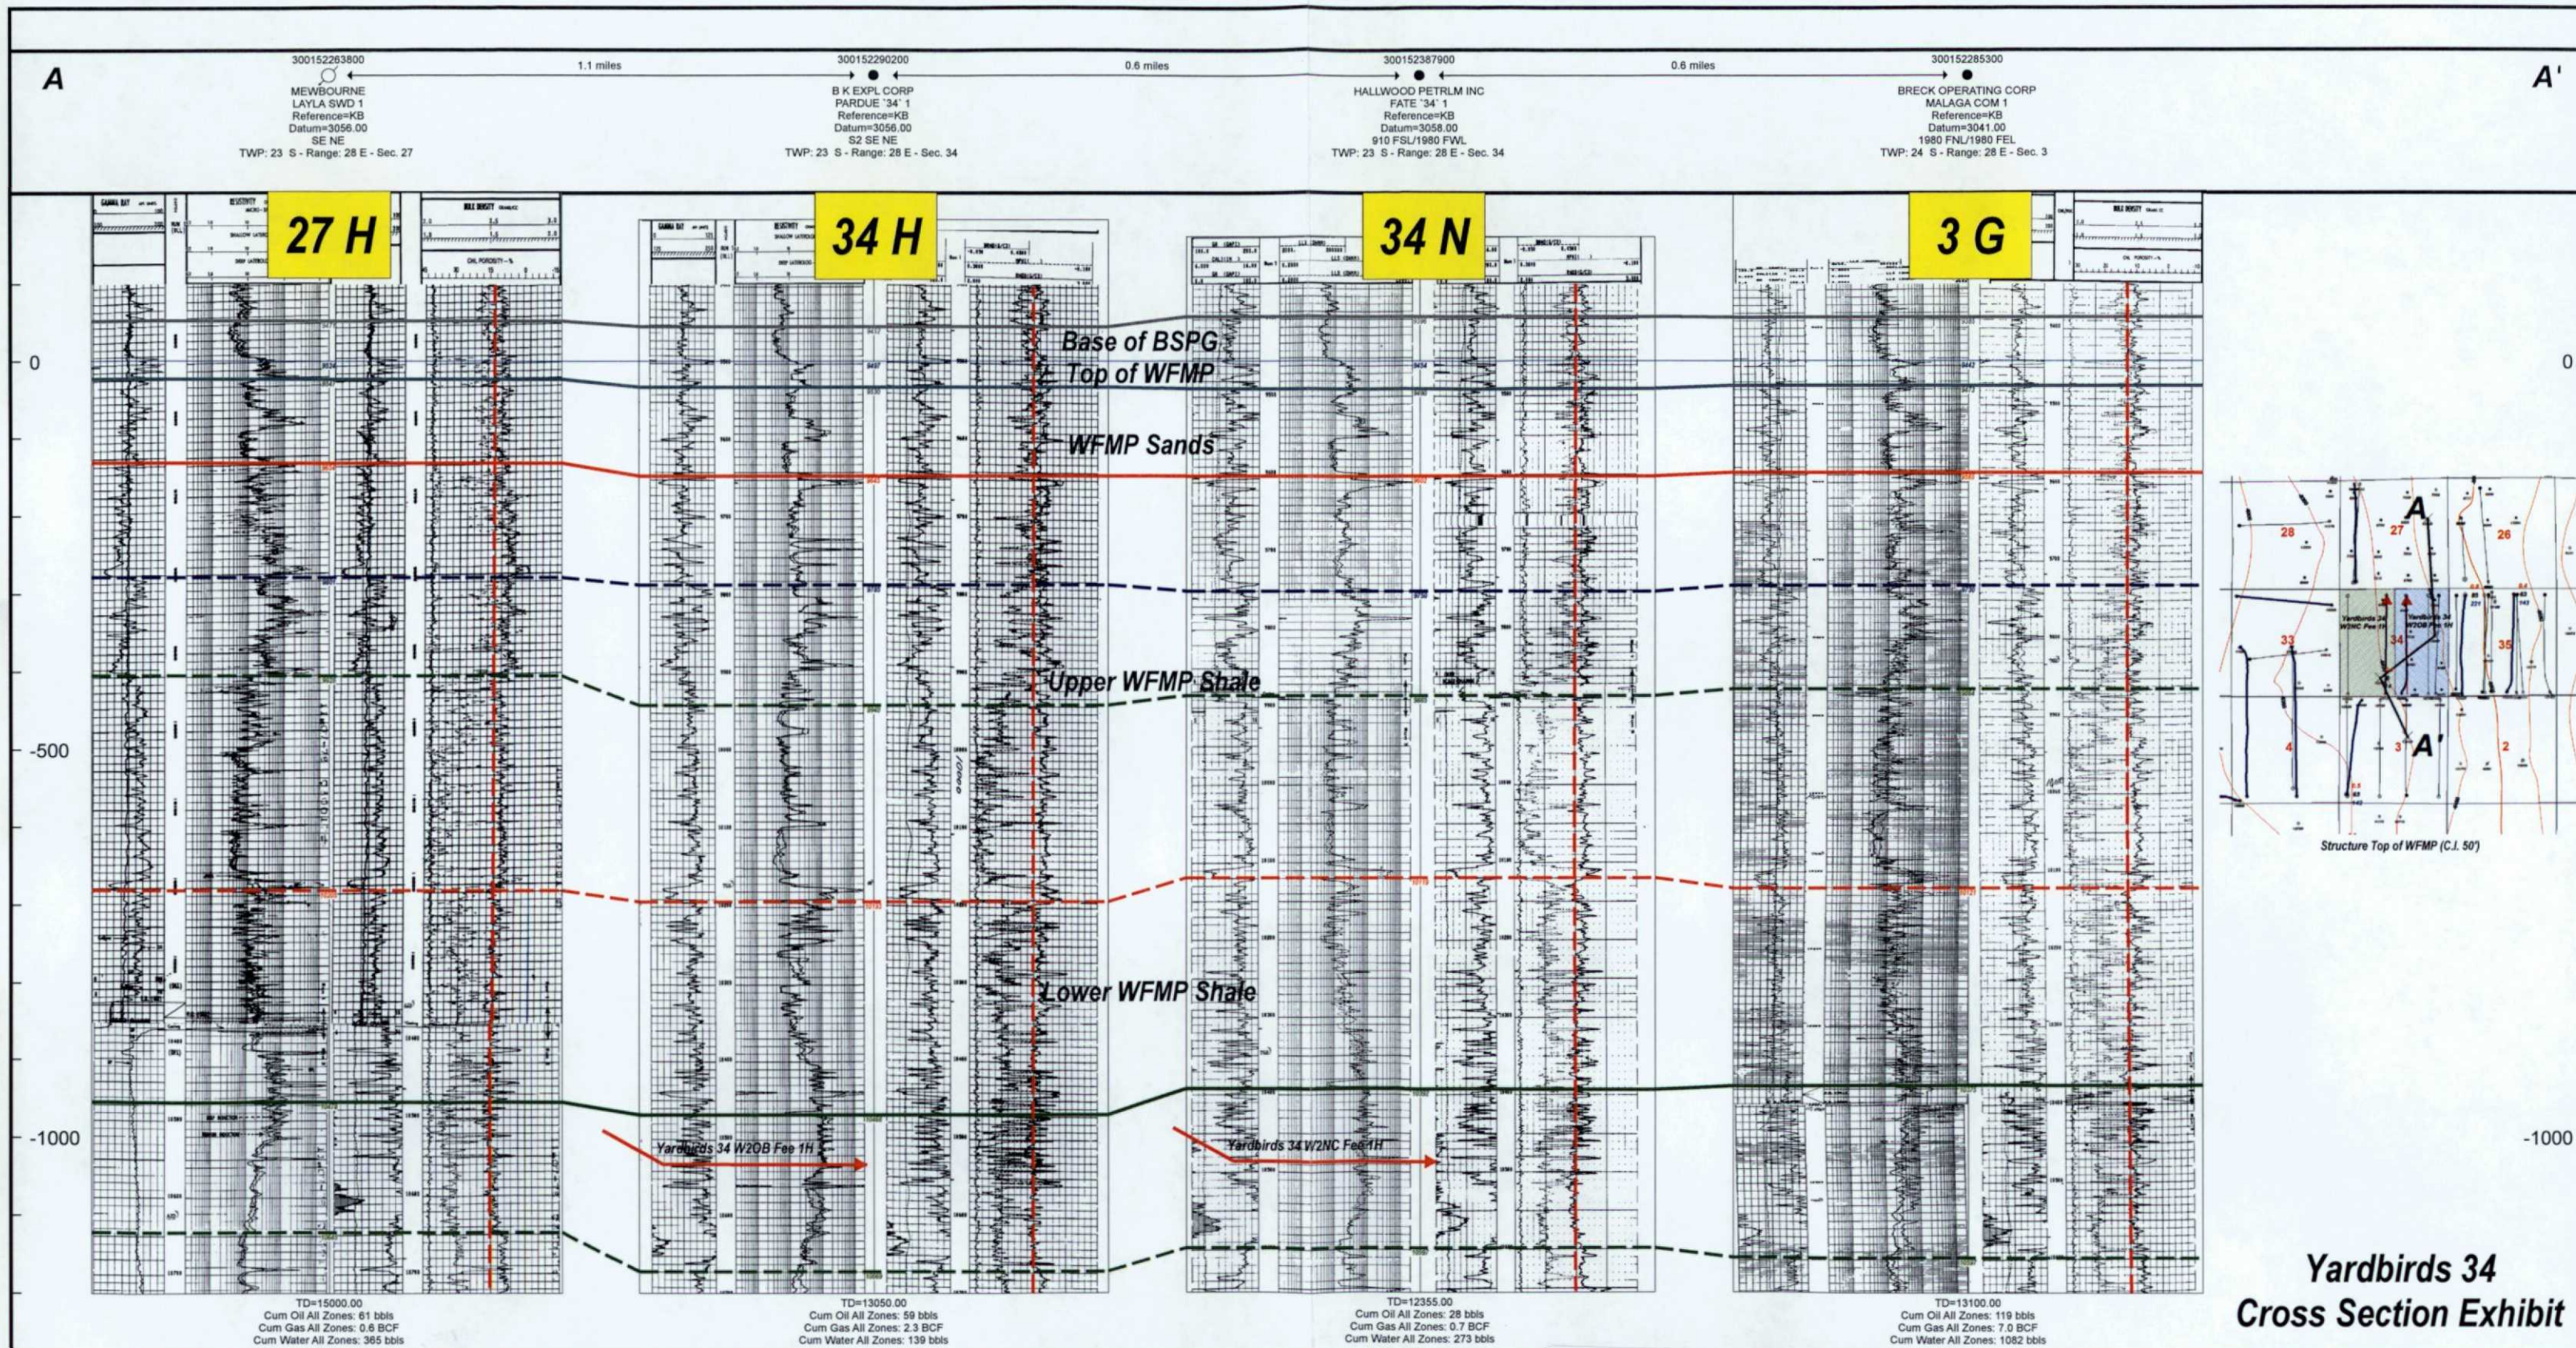

**Yardbirds 34
Cross Section Exhibit**

EXHIBIT

12

[illegible]

EXHIBIT 13

Mewbourne Oil Company

Eddy County, New Mexico

Yardbirds 34 W2NC Fee #1H

Sec 34, T23S, R28E

SL: 150' FSL & 2240' FWL

BHL: 330' FNL & 2240' FWL

LP: 722 FSL & 2240 FWL

Plan: Design #1

Standard Planning Report

17 March, 2016

EXHIBIT

14

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Yardbirds 34 W2NC Fee #1H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3061.0usft (Original Well Elev)
Project:	Eddy County, New Mexico	MD Reference:	WELL @ 3061.0usft (Original Well Elev)
Site:	Yardbirds 34 W2NC Fee #1H	North Reference:	Grid
Well:	Sec 34, T23S, R28E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 330' FNL & 2240' FWL		
Design:	Design #1		

Project	Eddy County, New Mexico		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site		Yardbirds 34 W2NC Fee #1H			
Site Position:		Northing:	456,416.00 usft	Latitude:	32° 15' 16.354 N
From:	Map	Easting:	579,507.00 usft	Longitude:	104° 4' 34.111 W
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.14 °

Well	Sec 34, T23S, R28E					
Well Position	+N/-S	0.0 usft	Northing:	456,416.00 usft	Latitude:	32° 15' 16.354 N
	+E/-W	0.0 usft	Easting:	579,507.00 usft	Longitude:	104° 4' 34.111 W
Position Uncertainty		0.0 usft	Wellhead Elevation:	3,061.0 usft	Ground Level:	3,034.0 usft

Wellbore	BHL: 330' FNL & 2240' FWL				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF200510	12/31/2009	7.98	60.18	48,757

Design	Design #1			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.0	0.0	0.0	0.78

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
9,965.0	0.00	0.00	9,965.0	0.0	0.0	0.00	0.00	0.00	0.00	
10,864.0	89.89	0.78	10,538.0	571.9	7.8	10.00	10.00	0.00	0.78	
15,124.5	89.89	0.78	10,546.0	4,832.0	66.0	0.00	0.00	0.00	0.00	BHL: 330' FNL & 2240'

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Yardbirds 34 W2NC Fee #1H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3061.0usft (Original Well Elev)
Project:	Eddy County, New Mexico	MD Reference:	WELL @ 3061.0usft (Original Well Elev)
Site:	Yardbirds 34 W2NC Fee #1H	North Reference:	Grid
Well:	Sec 34, T23S, R28E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 330' FNL & 2240' FWL		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
SL: 150' FSL & 2240' FWL									
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00
1,600.0	0.00	0.00	1,600.0	0.0	0.0	0.0	0.00	0.00	0.00
1,700.0	0.00	0.00	1,700.0	0.0	0.0	0.0	0.00	0.00	0.00
1,800.0	0.00	0.00	1,800.0	0.0	0.0	0.0	0.00	0.00	0.00
1,900.0	0.00	0.00	1,900.0	0.0	0.0	0.0	0.00	0.00	0.00
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.0	0.00	0.00	0.00
2,100.0	0.00	0.00	2,100.0	0.0	0.0	0.0	0.00	0.00	0.00
2,200.0	0.00	0.00	2,200.0	0.0	0.0	0.0	0.00	0.00	0.00
2,300.0	0.00	0.00	2,300.0	0.0	0.0	0.0	0.00	0.00	0.00
2,400.0	0.00	0.00	2,400.0	0.0	0.0	0.0	0.00	0.00	0.00
2,500.0	0.00	0.00	2,500.0	0.0	0.0	0.0	0.00	0.00	0.00
2,600.0	0.00	0.00	2,600.0	0.0	0.0	0.0	0.00	0.00	0.00
2,700.0	0.00	0.00	2,700.0	0.0	0.0	0.0	0.00	0.00	0.00
2,800.0	0.00	0.00	2,800.0	0.0	0.0	0.0	0.00	0.00	0.00
2,900.0	0.00	0.00	2,900.0	0.0	0.0	0.0	0.00	0.00	0.00
3,000.0	0.00	0.00	3,000.0	0.0	0.0	0.0	0.00	0.00	0.00
3,100.0	0.00	0.00	3,100.0	0.0	0.0	0.0	0.00	0.00	0.00
3,200.0	0.00	0.00	3,200.0	0.0	0.0	0.0	0.00	0.00	0.00
3,300.0	0.00	0.00	3,300.0	0.0	0.0	0.0	0.00	0.00	0.00
3,400.0	0.00	0.00	3,400.0	0.0	0.0	0.0	0.00	0.00	0.00
3,500.0	0.00	0.00	3,500.0	0.0	0.0	0.0	0.00	0.00	0.00
3,600.0	0.00	0.00	3,600.0	0.0	0.0	0.0	0.00	0.00	0.00
3,700.0	0.00	0.00	3,700.0	0.0	0.0	0.0	0.00	0.00	0.00
3,800.0	0.00	0.00	3,800.0	0.0	0.0	0.0	0.00	0.00	0.00
3,900.0	0.00	0.00	3,900.0	0.0	0.0	0.0	0.00	0.00	0.00
4,000.0	0.00	0.00	4,000.0	0.0	0.0	0.0	0.00	0.00	0.00
4,100.0	0.00	0.00	4,100.0	0.0	0.0	0.0	0.00	0.00	0.00
4,200.0	0.00	0.00	4,200.0	0.0	0.0	0.0	0.00	0.00	0.00
4,300.0	0.00	0.00	4,300.0	0.0	0.0	0.0	0.00	0.00	0.00
4,400.0	0.00	0.00	4,400.0	0.0	0.0	0.0	0.00	0.00	0.00
4,500.0	0.00	0.00	4,500.0	0.0	0.0	0.0	0.00	0.00	0.00
4,600.0	0.00	0.00	4,600.0	0.0	0.0	0.0	0.00	0.00	0.00
4,700.0	0.00	0.00	4,700.0	0.0	0.0	0.0	0.00	0.00	0.00
4,800.0	0.00	0.00	4,800.0	0.0	0.0	0.0	0.00	0.00	0.00
4,900.0	0.00	0.00	4,900.0	0.0	0.0	0.0	0.00	0.00	0.00
5,000.0	0.00	0.00	5,000.0	0.0	0.0	0.0	0.00	0.00	0.00
5,100.0	0.00	0.00	5,100.0	0.0	0.0	0.0	0.00	0.00	0.00
5,200.0	0.00	0.00	5,200.0	0.0	0.0	0.0	0.00	0.00	0.00

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Yardbirds 34 W2NC Fee #1H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3081.0usft (Original Well Elev)
Project:	Eddy County, New Mexico	MD Reference:	WELL @ 3061.0usft (Original Well Elev)
Site:	Yardbirds 34 W2NC Fee #1H	North Reference:	Grid
Well:	Sec 34, T23S, R28E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 330' FNL & 2240' FWL		
Design:	Design #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N-S (usft)	+E-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
5,300.0	0.00	0.00	5,300.0	0.0	0.0	0.0	0.00	0.00	0.00	
5,400.0	0.00	0.00	5,400.0	0.0	0.0	0.0	0.00	0.00	0.00	
5,500.0	0.00	0.00	5,500.0	0.0	0.0	0.0	0.00	0.00	0.00	
5,600.0	0.00	0.00	5,600.0	0.0	0.0	0.0	0.00	0.00	0.00	
5,700.0	0.00	0.00	5,700.0	0.0	0.0	0.0	0.00	0.00	0.00	
5,800.0	0.00	0.00	5,800.0	0.0	0.0	0.0	0.00	0.00	0.00	
5,900.0	0.00	0.00	5,900.0	0.0	0.0	0.0	0.00	0.00	0.00	
6,000.0	0.00	0.00	6,000.0	0.0	0.0	0.0	0.00	0.00	0.00	
6,100.0	0.00	0.00	6,100.0	0.0	0.0	0.0	0.00	0.00	0.00	
6,200.0	0.00	0.00	6,200.0	0.0	0.0	0.0	0.00	0.00	0.00	
6,300.0	0.00	0.00	6,300.0	0.0	0.0	0.0	0.00	0.00	0.00	
6,400.0	0.00	0.00	6,400.0	0.0	0.0	0.0	0.00	0.00	0.00	
6,500.0	0.00	0.00	6,500.0	0.0	0.0	0.0	0.00	0.00	0.00	
6,600.0	0.00	0.00	6,600.0	0.0	0.0	0.0	0.00	0.00	0.00	
6,700.0	0.00	0.00	6,700.0	0.0	0.0	0.0	0.00	0.00	0.00	
6,800.0	0.00	0.00	6,800.0	0.0	0.0	0.0	0.00	0.00	0.00	
6,900.0	0.00	0.00	6,900.0	0.0	0.0	0.0	0.00	0.00	0.00	
7,000.0	0.00	0.00	7,000.0	0.0	0.0	0.0	0.00	0.00	0.00	
7,100.0	0.00	0.00	7,100.0	0.0	0.0	0.0	0.00	0.00	0.00	
7,200.0	0.00	0.00	7,200.0	0.0	0.0	0.0	0.00	0.00	0.00	
7,300.0	0.00	0.00	7,300.0	0.0	0.0	0.0	0.00	0.00	0.00	
7,400.0	0.00	0.00	7,400.0	0.0	0.0	0.0	0.00	0.00	0.00	
7,500.0	0.00	0.00	7,500.0	0.0	0.0	0.0	0.00	0.00	0.00	
7,600.0	0.00	0.00	7,600.0	0.0	0.0	0.0	0.00	0.00	0.00	
7,700.0	0.00	0.00	7,700.0	0.0	0.0	0.0	0.00	0.00	0.00	
7,800.0	0.00	0.00	7,800.0	0.0	0.0	0.0	0.00	0.00	0.00	
7,900.0	0.00	0.00	7,900.0	0.0	0.0	0.0	0.00	0.00	0.00	
8,000.0	0.00	0.00	8,000.0	0.0	0.0	0.0	0.00	0.00	0.00	
8,100.0	0.00	0.00	8,100.0	0.0	0.0	0.0	0.00	0.00	0.00	
8,200.0	0.00	0.00	8,200.0	0.0	0.0	0.0	0.00	0.00	0.00	
8,300.0	0.00	0.00	8,300.0	0.0	0.0	0.0	0.00	0.00	0.00	
8,400.0	0.00	0.00	8,400.0	0.0	0.0	0.0	0.00	0.00	0.00	
8,500.0	0.00	0.00	8,500.0	0.0	0.0	0.0	0.00	0.00	0.00	
8,600.0	0.00	0.00	8,600.0	0.0	0.0	0.0	0.00	0.00	0.00	
8,700.0	0.00	0.00	8,700.0	0.0	0.0	0.0	0.00	0.00	0.00	
8,800.0	0.00	0.00	8,800.0	0.0	0.0	0.0	0.00	0.00	0.00	
8,900.0	0.00	0.00	8,900.0	0.0	0.0	0.0	0.00	0.00	0.00	
9,000.0	0.00	0.00	9,000.0	0.0	0.0	0.0	0.00	0.00	0.00	
9,100.0	0.00	0.00	9,100.0	0.0	0.0	0.0	0.00	0.00	0.00	
9,200.0	0.00	0.00	9,200.0	0.0	0.0	0.0	0.00	0.00	0.00	
9,300.0	0.00	0.00	9,300.0	0.0	0.0	0.0	0.00	0.00	0.00	
9,400.0	0.00	0.00	9,400.0	0.0	0.0	0.0	0.00	0.00	0.00	
9,500.0	0.00	0.00	9,500.0	0.0	0.0	0.0	0.00	0.00	0.00	
9,600.0	0.00	0.00	9,600.0	0.0	0.0	0.0	0.00	0.00	0.00	
9,700.0	0.00	0.00	9,700.0	0.0	0.0	0.0	0.00	0.00	0.00	
9,800.0	0.00	0.00	9,800.0	0.0	0.0	0.0	0.00	0.00	0.00	
9,900.0	0.00	0.00	9,900.0	0.0	0.0	0.0	0.00	0.00	0.00	
9,965.0	0.00	0.00	9,965.0	0.0	0.0	0.0	0.00	0.00	0.00	
KOP @ 9965'										
10,000.0	3.50	0.78	10,000.0	1.1	0.0	1.1	10.01	10.01	0.00	
10,100.0	13.50	0.78	10,098.8	15.8	0.2	15.8	10.00	10.00	0.00	
10,200.0	23.50	0.78	10,193.5	47.5	0.6	47.5	10.00	10.00	0.00	
10,300.0	33.50	0.78	10,281.2	95.2	1.3	95.2	10.00	10.00	0.00	

Planning Report

Database: Hobbs
 Company: Mewbourne Oil Company
 Project: Eddy County, New Mexico
 Site: Yardbirds 34 W2NC Fee #1H
 Well: Sec 34, T23S, R28E
 Wellbore: BHL: 330' FNL & 2240' FWL
 Design: Design #1

Local Co-ordinate Reference: Site Yardbirds 34 W2NC Fee #1H
 TVD Reference: WELL @ 3061.0usft (Original Well Elev)
 MD Reference: WELL @ 3061.0usft (Original Well Elev)
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
10,400.0	43.50	0.78	10,359.4	157.3	2.1	157.3	10.00	10.00	0.00
10,432.0	46.70	0.78	10,382.0	180.0	2.5	180.0	10.00	10.00	0.00
First Take Point: 330' FSL & 2240' FWL									
10,500.0	53.50	0.78	10,425.6	232.1	3.2	232.1	10.00	10.00	0.00
10,600.0	63.50	0.78	10,477.8	317.3	4.3	317.3	10.00	10.00	0.00
10,700.0	73.49	0.78	10,514.4	410.2	5.6	410.2	10.00	10.00	0.00
10,800.0	83.49	0.78	10,534.3	508.0	6.9	508.1	10.00	10.00	0.00
10,864.0	89.89	0.78	10,538.0	571.9	7.8	572.0	9.99	9.99	0.00
LP: 719' FSL & 2240' FWL									
10,900.0	89.89	0.78	10,538.1	607.9	8.3	607.9	0.00	0.00	0.00
11,000.0	89.89	0.78	10,538.3	707.9	9.7	707.9	0.00	0.00	0.00
11,100.0	89.89	0.78	10,538.4	807.9	11.0	807.9	0.00	0.00	0.00
11,200.0	89.89	0.78	10,538.6	907.8	12.4	907.9	0.00	0.00	0.00
11,300.0	89.89	0.78	10,538.8	1,007.8	13.8	1,007.9	0.00	0.00	0.00
11,400.0	89.89	0.78	10,539.0	1,107.8	15.1	1,107.9	0.00	0.00	0.00
11,500.0	89.89	0.78	10,539.2	1,207.8	16.5	1,207.9	0.00	0.00	0.00
11,600.0	89.89	0.78	10,539.4	1,307.8	17.9	1,307.9	0.00	0.00	0.00
11,700.0	89.89	0.78	10,539.6	1,407.8	19.2	1,407.9	0.00	0.00	0.00
11,800.0	89.89	0.78	10,539.8	1,507.8	20.6	1,507.9	0.00	0.00	0.00
11,900.0	89.89	0.78	10,539.9	1,607.8	22.0	1,607.9	0.00	0.00	0.00
12,000.0	89.89	0.78	10,540.1	1,707.8	23.3	1,707.9	0.00	0.00	0.00
12,100.0	89.89	0.78	10,540.3	1,807.8	24.7	1,807.9	0.00	0.00	0.00
12,200.0	89.89	0.78	10,540.5	1,907.8	26.1	1,907.9	0.00	0.00	0.00
12,300.0	89.89	0.78	10,540.7	2,007.7	27.4	2,007.9	0.00	0.00	0.00
12,400.0	89.89	0.78	10,540.9	2,107.7	28.8	2,107.9	0.00	0.00	0.00
12,500.0	89.89	0.78	10,541.1	2,207.7	30.2	2,207.9	0.00	0.00	0.00
12,600.0	89.89	0.78	10,541.3	2,307.7	31.5	2,307.9	0.00	0.00	0.00
12,700.0	89.89	0.78	10,541.4	2,407.7	32.9	2,407.9	0.00	0.00	0.00
12,800.0	89.89	0.78	10,541.6	2,507.7	34.3	2,507.9	0.00	0.00	0.00
12,900.0	89.89	0.78	10,541.8	2,607.7	35.6	2,607.9	0.00	0.00	0.00
13,000.0	89.89	0.78	10,542.0	2,707.7	37.0	2,707.9	0.00	0.00	0.00
13,100.0	89.89	0.78	10,542.2	2,807.7	38.3	2,807.9	0.00	0.00	0.00
13,200.0	89.89	0.78	10,542.4	2,907.7	39.7	2,907.9	0.00	0.00	0.00
13,300.0	89.89	0.78	10,542.6	3,007.6	41.1	3,007.9	0.00	0.00	0.00
13,400.0	89.89	0.78	10,542.8	3,107.6	42.4	3,107.9	0.00	0.00	0.00
13,500.0	89.89	0.78	10,542.9	3,207.6	43.8	3,207.9	0.00	0.00	0.00
13,600.0	89.89	0.78	10,543.1	3,307.6	45.2	3,307.9	0.00	0.00	0.00
13,700.0	89.89	0.78	10,543.3	3,407.6	46.5	3,407.9	0.00	0.00	0.00
13,800.0	89.89	0.78	10,543.5	3,507.6	47.9	3,507.9	0.00	0.00	0.00
13,900.0	89.89	0.78	10,543.7	3,607.6	49.3	3,607.9	0.00	0.00	0.00
14,000.0	89.89	0.78	10,543.9	3,707.6	50.6	3,707.9	0.00	0.00	0.00
14,100.0	89.89	0.78	10,544.1	3,807.6	52.0	3,807.9	0.00	0.00	0.00
14,200.0	89.89	0.78	10,544.3	3,907.6	53.4	3,907.9	0.00	0.00	0.00
14,300.0	89.89	0.78	10,544.5	4,007.6	54.7	4,007.9	0.00	0.00	0.00
14,400.0	89.89	0.78	10,544.6	4,107.5	56.1	4,107.9	0.00	0.00	0.00
14,500.0	89.89	0.78	10,544.8	4,207.5	57.5	4,207.9	0.00	0.00	0.00
14,600.0	89.89	0.78	10,545.0	4,307.5	58.8	4,307.9	0.00	0.00	0.00
14,700.0	89.89	0.78	10,545.2	4,407.5	60.2	4,407.9	0.00	0.00	0.00
14,800.0	89.89	0.78	10,545.4	4,507.5	61.6	4,507.9	0.00	0.00	0.00
14,900.0	89.89	0.78	10,545.6	4,607.5	62.9	4,607.9	0.00	0.00	0.00
15,000.0	89.89	0.78	10,545.8	4,707.5	64.3	4,707.9	0.00	0.00	0.00
15,100.0	89.89	0.78	10,546.0	4,807.5	65.7	4,807.9	0.00	0.00	0.00
15,124.5	89.89	0.78	10,546.0	4,832.0	66.0	4,832.5	0.00	0.00	0.00

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Yardbirds 34 W2NC Fee #1H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3061.0usft (Original Well Elev)
Project:	Eddy County, New Mexico	MD Reference:	WELL @ 3061.0usft (Original Well Elev)
Site:	Yardbirds 34 W2NC Fee #1H	North Reference:	Grid
Well:	Sec 34, T23S, R28E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 330' FNL & 2240' FWL		
Design:	Design #1		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
-----------------------------	--------------------	----------------	-----------------------------	-----------------	-----------------	-------------------------------	-------------------------------	------------------------------	-----------------------------

BHL: 330' FNL & 2240' FWL

Design Targets

Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
SL: 150' FSL & 2240' FV - plan hits target center - Point	0.00	0.00	0.0	0.0	0.0	456,416.00	579,507.00	32° 15' 16.354 N	104° 4' 34.111 W
KOP @ 9965' - plan hits target center - Point	0.00	0.00	9,965.0	0.0	0.0	456,416.00	579,507.00	32° 15' 16.354 N	104° 4' 34.111 W
First Take Point: 330' FS - plan hits target center - Point	0.00	0.00	10,382.0	180.0	2.5	456,596.00	579,509.46	32° 15' 18.135 N	104° 4' 34.078 W
LP: 719' FSL & 2240' FV - plan hits target center - Point	0.00	0.01	10,538.0	571.9	7.8	456,987.90	579,514.80	32° 15' 22.013 N	104° 4' 34.005 W
BHL: 330' FNL & 2240' F - plan hits target center - Point	0.00	0.00	10,546.0	4,832.0	66.0	461,248.00	579,573.00	32° 16' 4.171 N	104° 4' 33.208 W

Yardbirds 34 W2NC Fee #1H

