


SAN JUAN 29-7 UNIT
MESAVERDE INCREASE DENSITY PILOT PROJECT
T29N,R7W



- INFILL WELLS DRILLED IN 1996
- INFILL WELLS DRILLED IN 1997 (NOT STAKED)
- INCREASE DENSITY WELLS (STAKED)

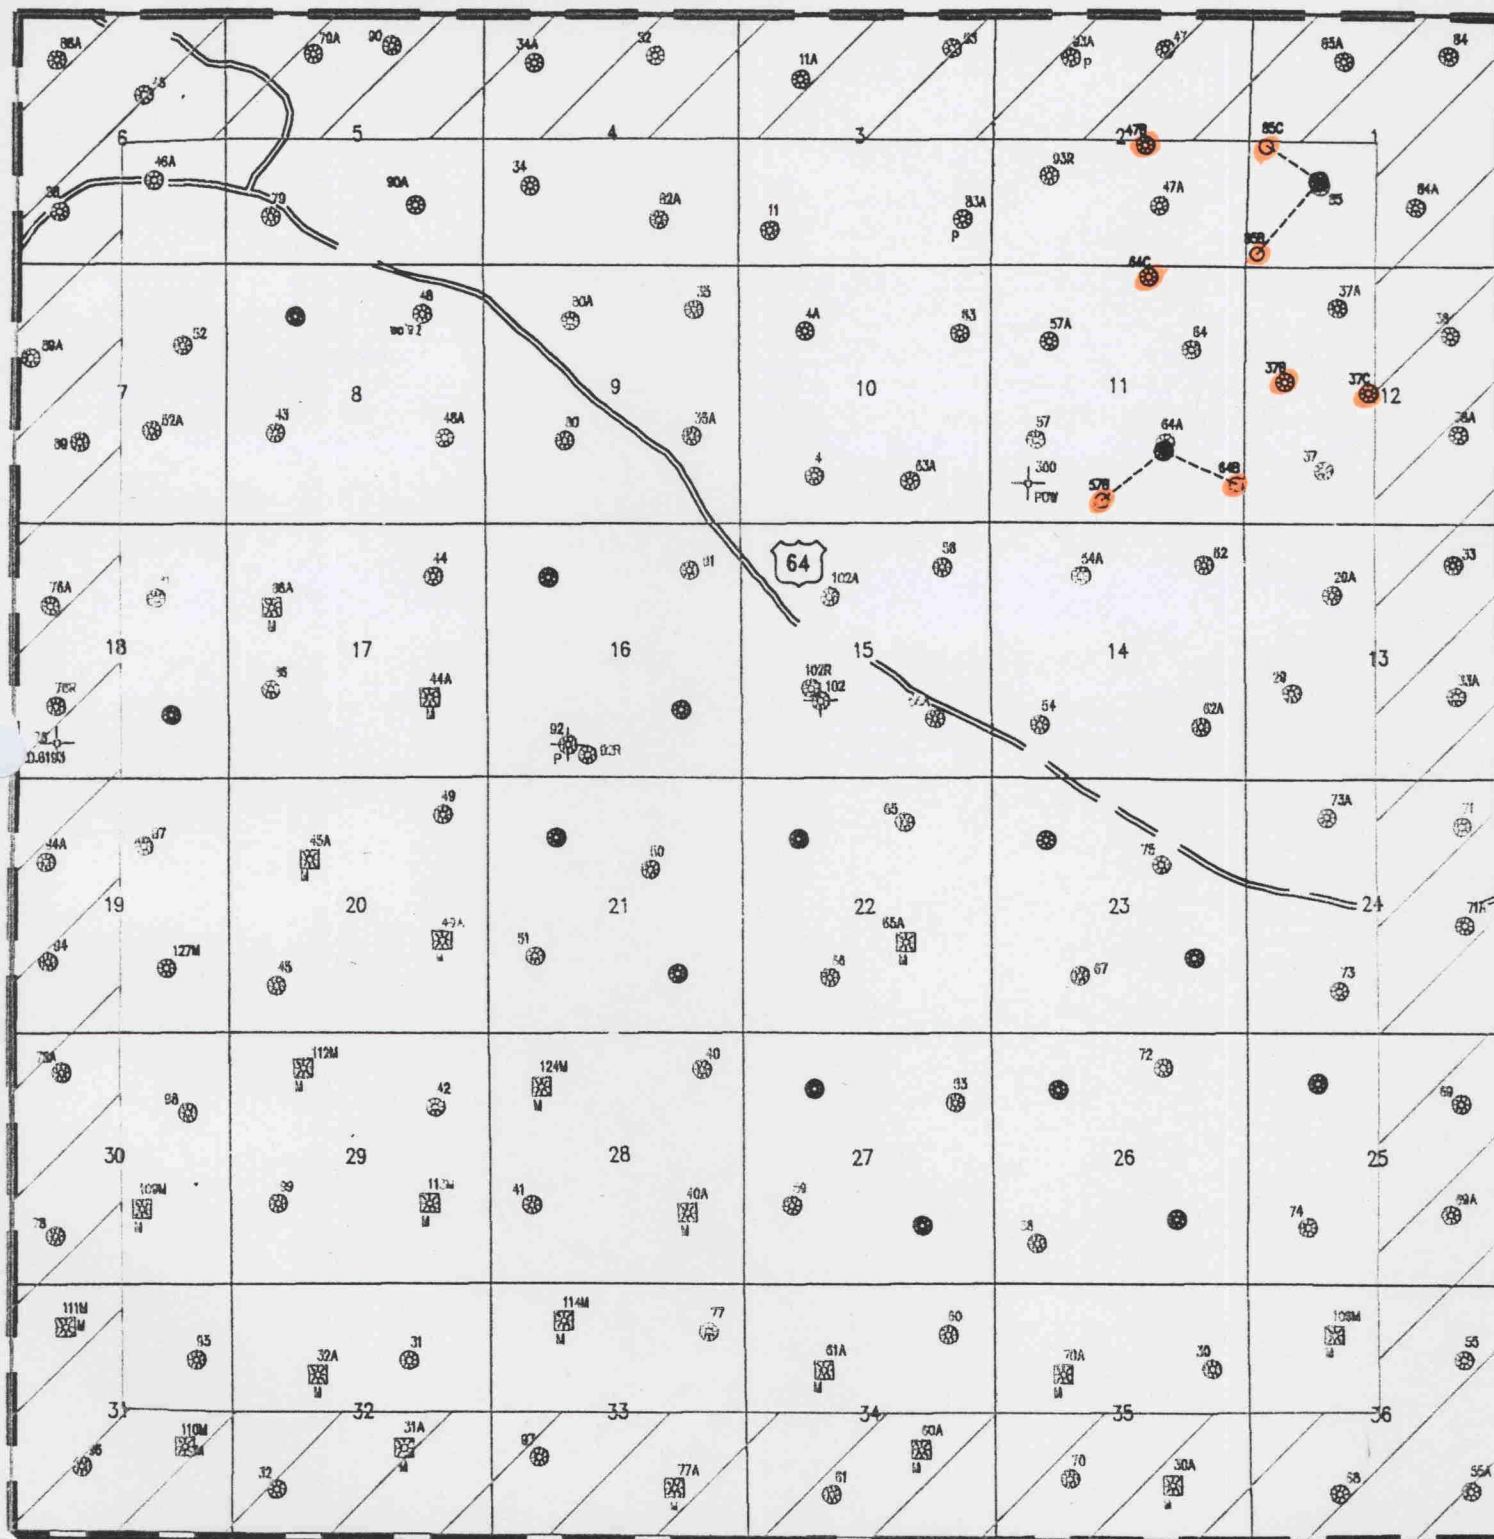


PROPOSED
BUFFER ZONE

1997 San Juan 29-7 Infill Results

Well	Actual BHP (psi)	Model BHP (psi)	Actual Initial 30 day Avg Rate (MCFD)	Model Projected Initial 30 day Avg Rate (MCFD)
37C	1,135	983	684	724
37B	1,029	1,044	1,230	725
64C	875	888	600	767
57B	1,000	865	900	527
64B	1,086	1,006	1,055	600
85B	1,064	1,060	813	748
85C	999	1,068	987	688
47B	920	1,017	1,019	749
Average	1,014	991	911	691

Note: Rates are gross production

San Juan 29-7 Unit - 8 MV Infills - 1997
Actual vs Model Predicted 30 Day Average Initial Rate

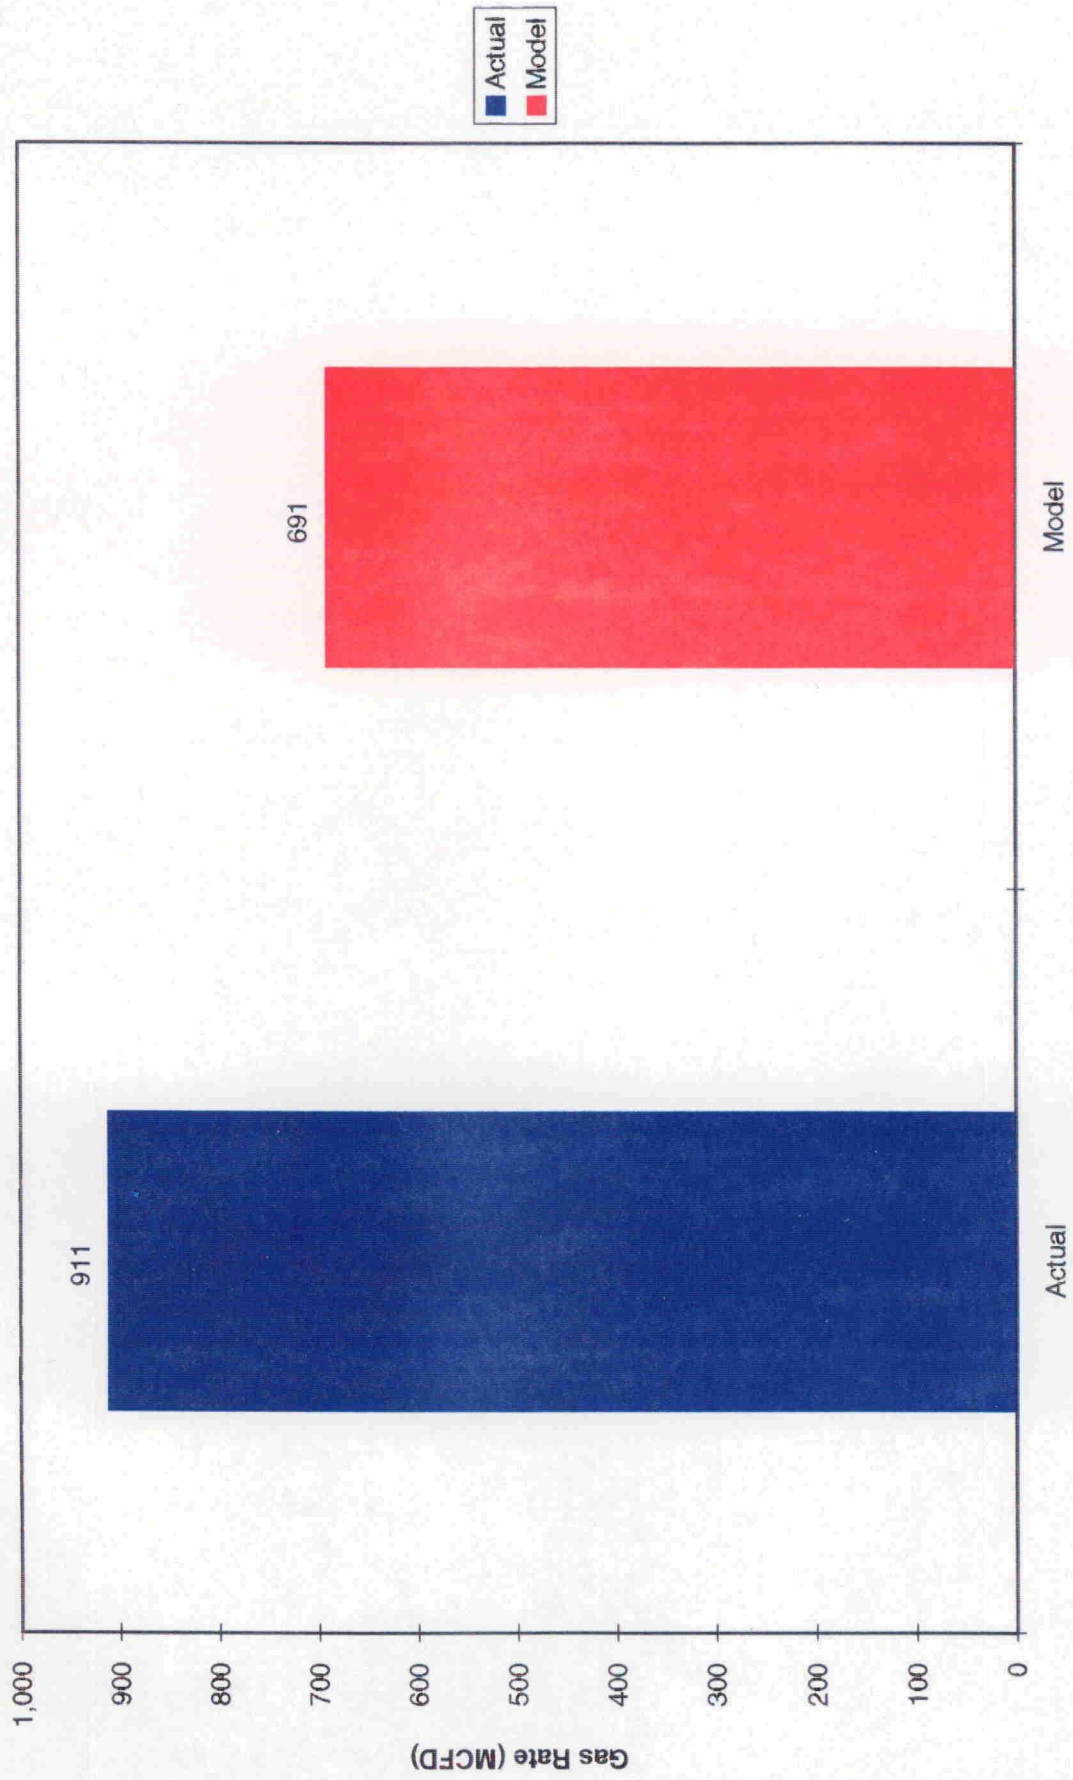

San Juan 29-7 Unit - 8 MV Infills - 1997
Actual vs Model Predicted Average BHP

