

Tree Showing Rams Closed

Drinkard Production

Blinebry Flow Line

8<sup>5</sup>/<sub>8</sub>" Casing Cemented @ 2908'  
Cement Circulated to surface w/ 1500  
sxs. 3% & 500 sxs. Neat.

Casing Jet Perforated  
w/ 4-21gram shots / foot.  
From 5510' to 5621'.

Otis Side Door Choke  
Blanked Off  
@ 6495'


Baker Model "D" Retainer  
Production Packer  
set @ 6500'

5<sup>1</sup>/<sub>2</sub>" Casing Cemented @ 6550' w/ 500 sxs Neat  
Estimated Top Cement 3500'.

Tubing Perforations

TD - 6633'

Detail of Mechanical Equipment To Be  
Installed In Dually Completed Drinkard And  
Blinebry Wells For Submission To Oil  
Conservation Commission

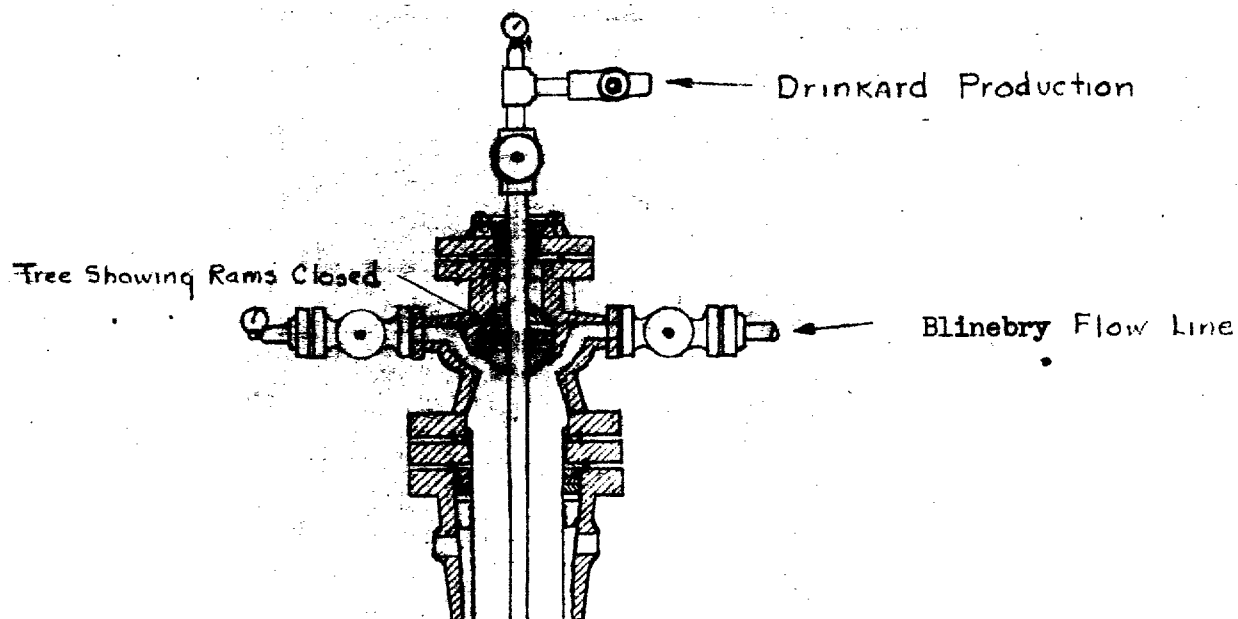

8 5/8" Casing Cemented @ 2908'  
 Cement Circulated to surface w/ 1500  
 SXS. 3% & 500 SXS. Neat.

Casing Jet Perforated  
 w/ 4-21gram shots / foot.  
 From 5510' to 5621'.

Otis Side Door Choke  
 Blanked Off  
 @ 6495'

Baker Model "D" Retainer  
 Production Packer  
 set @ 6500'

5 1/2" Casing Cemented @ 6550' w/ 500 SXS Neat  
 Estimated Top Cement 3500'

Tubing Perforations

TD - 6633'

Detail of Mechanical Equipment To Be  
 Installed In Dually Completed Drinkard And  
 Blinebry Wells For Submission To Oil  
 Conservation Commission