

MAIN OFFICE 000

THE TEXAS COMPANY

TEXACO PETROLEUM PRODUCTS

*Examined
by
H. J. DSN
before
on 8/2/56*

PRODUCING DEPARTMENT 1:05
WEST TEXAS DIVISION



P. O. BOX 1720
FORT WORTH 1, TEXAS

1135

*PAC to Rule 112(A)
Blinebry oil
Tubb Gas
use parallel tubing strings*

July 27, 1956

APPLICATION TO DUALY COMPLETE
The Texas Company's A. H. Blinebry (NCT-1)
Well No. 3, Blinebry Oil Pool and Tubb Gas
Pool, Lea County, New Mexico

New Mexico Oil Conservation Commission
Box 871
Santa Fe, New Mexico

Gentlemen:


By this letter of application The Texas Company wishes to state the following:

- (a) That The Texas Company's A. H. Blinebry (NCT-1) Well No. 3, located in the SE/4 NW/4 of Section 29, T-22-S, R-21-E, is to be completed at an approximate total depth of 6300' by plugging back from an original total depth of 6995'. The attached Exhibit "A" shows the location of the subject well on the A. H. Blinebry (NCT-1) Lease with the location of all offset wells. The attached Exhibit "B" shows diagrammatically a sketch of the proposed dual completion.
- (b) That the subject well has 7-inch casing set at 6893' and cemented with 500 sacks of cement which extends behind pipe to approximately 5000'. The well is to be an oil-gas dual, having open the interval 6152-6190' from the Tubb formation in the Tubb Gas Pool, and the interval 5665-5695' from the Blinebry formation in the Blinebry Oil Pool.
- (c) That the applicant proposes to dualy complete the well in the following manner:
 1. Set a production retainer packer at 6100' between the Blinebry and Tubb formations to separate the two pay zones.
 2. Using parallel tubing strings, one of which will extend through the production retainer packer, produce the Tubb Gas Pool gas through the long tubing string and the Blinebry Oil Pool oil through the short tubing string.

- (d) That the granting of this application for permission to produce the well as a dual completion with oil from the Blinebry Oil Pool and gas from the Tubb Gas Pool is in the interest of conservation and the protection of correlative rights.
- (e) That the applicant will comply with all rules and regulations of the New Mexico Oil Conservation Commission to maintain separation of production from the two pay zones.
- (f) That the manner and method of the proposed dual completion is mechanically feasible and practical.
- (g) By copy of this letter of application, all offset operators are notified by registered mail of the proposed dual completion.

Therefore, The Texas Company respectfully requests that the New Mexico Oil Conservation Commission set for hearing this application to dually complete the subject well as proposed.

Yours very truly,




H. N. Wade
Petroleum Engineer

HNW-MFT

cc-Gulf Oil Corp.
Western Oil Fields, Inc.

DIAGRAMMATIC SKETCH SHOWING DUAL COMPLETION INSTALLATION

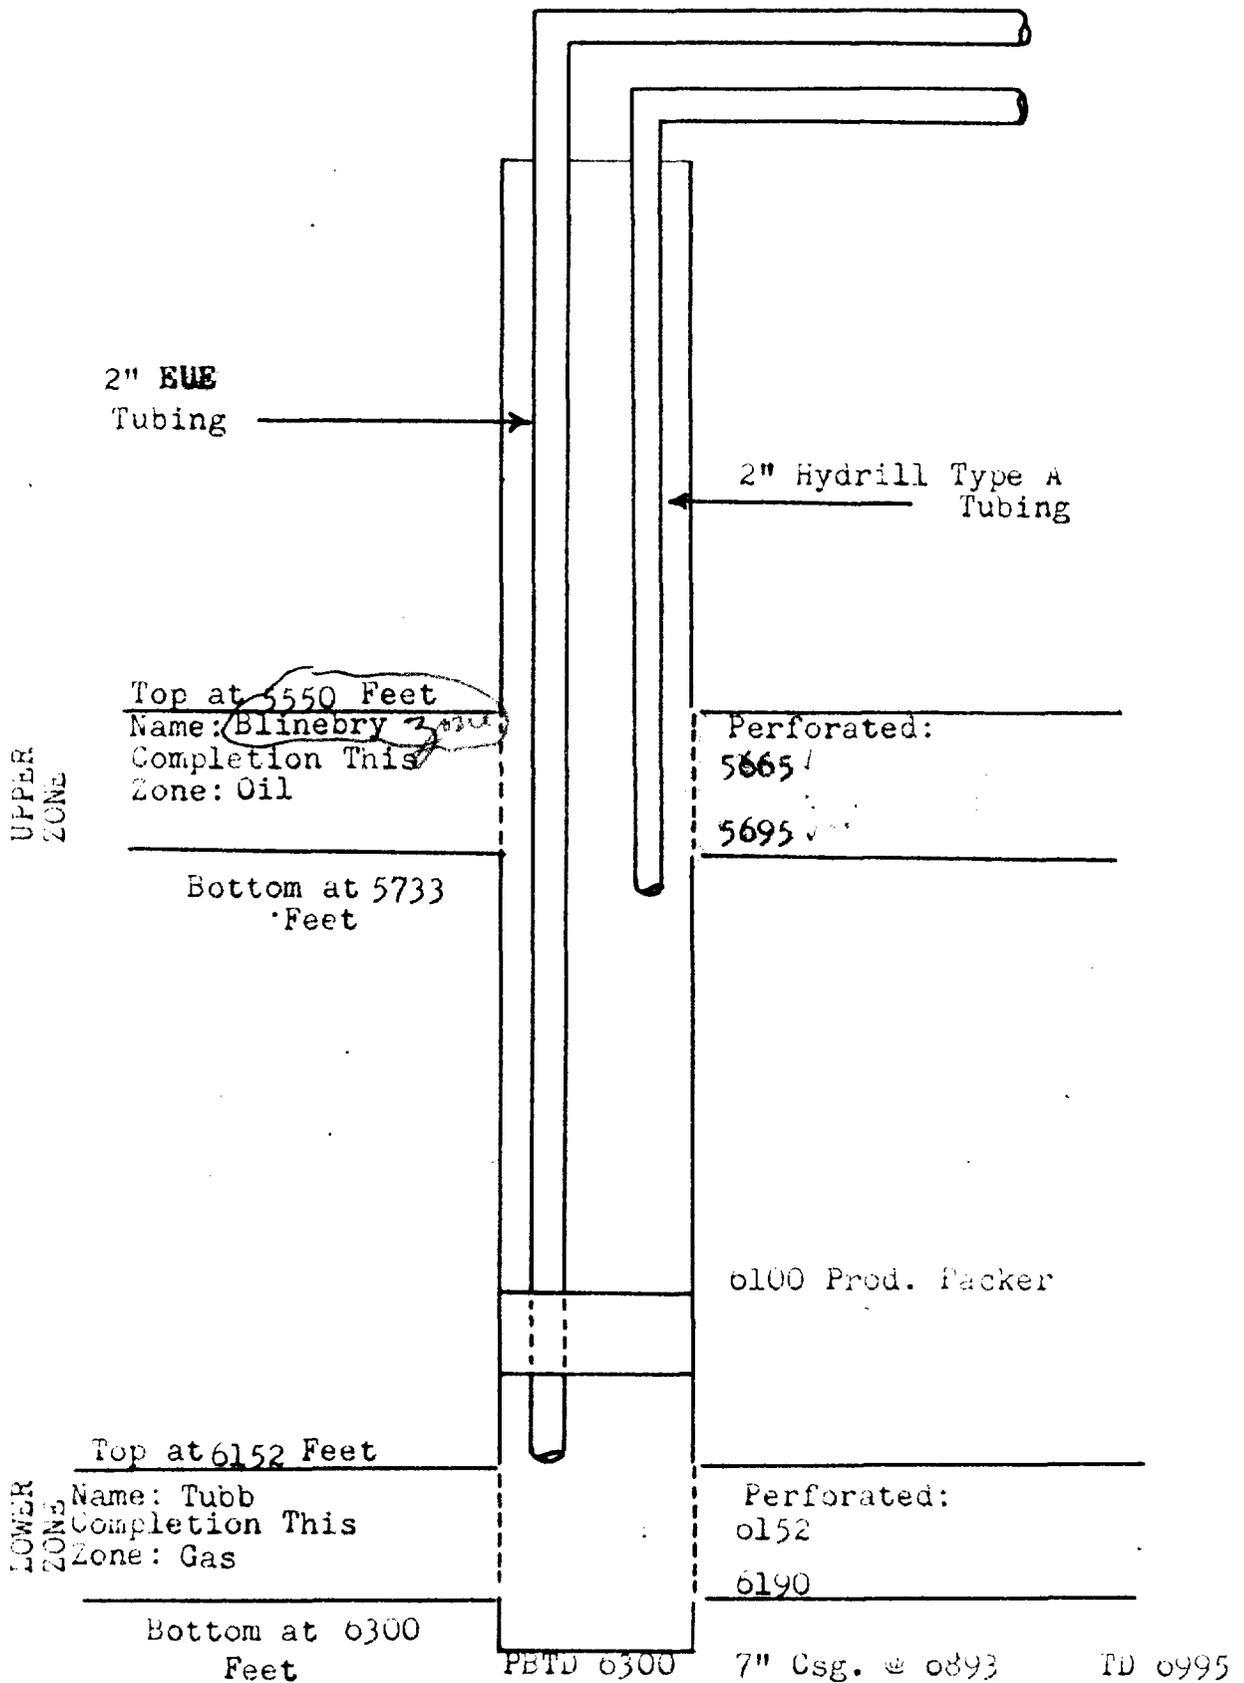

COMPANY: The Texas Company
 LEASE: AH Blinebry (NCT-1) Well No. 3
 FIELD: blinebry and Tubb Gas
 DATE: 7-26-50