c/5/

KECEIVED

APR 0 9 1993

C. L. D.

3160(067) NM-45235

MAR 2 5 1993

CERTIFIED--RETURN RECEIPT REQUESTED P 135 580 028

Santa Fe Energy Operation Partners, L. P. Attention: Darrell Roberts 550 W. Texas, Suite 1330 Midland, TX 79701

RE: Pure Gold C-17 Federal Well No. 11 NM-45235 330' FSL & 1980' FWL, Sec. 17, T23S, R31E Eddy County, New Mexico

Dear Mr. Roberts:

On December 10, 1992, Santa Fe Energy Operating Partners, L. P. filed an Application for Permit to Drill (APD) at the above referenced location. I am pleased to approve your APD at the present location. Your copy of the APD, with attached stipulations, is enclosed.

Through our analysis of the APD, we have determined that the well site is located a sufficient distance from the ore zones that potash resources should not be impacted.

If you need any additional information, please contact Tony Herrell in the Carlsbad Resource Area at (505) 887-6544.

Sincerely,

15/Monte G. Jordan

For Larry L. Woodard State Director

1 Enclosure

bcc:

NM (910, L. Woodard)
NM (920, R. Smith)
NM (060, A. Lopez)
NM (060, L. Cone)
NM (067, T. Herrell)

SPECIAL STIPULATIONS

SUBMIT IN TRIPLICATES

(Other instructions on reverse side)

30-07-27-2

Form approved,
Budget Bureau No. 1004—0136
Expires August 21, 1005

November 1983) ((ormerly 9—331C)		ED STATES		(Other instruc		Expires August 31, 1985
DEPARTMENT OF THE INT					5. LEASE DESIGNATION AND SERIAL NO. NM-45235	
APPLICATION	N FOR PERMIT 1	O CORILLY A	EEP	N, OR PLUG B	ACK	6. IF INDIAN, ALLOTTED OR TRIBE HAME
A. TYPE OF WORK DRI D. TYPE OF WELL		DE OFFERN S	ZZ	PLUG BAC	х 🗆	7. UNIT AGRANGISHT NAME
OTL X	THE DISTRIBUTE	7	811 20	Fre Accession		8. FARM OR LEASE NAME
. NAME OF OPERATOR	Fe Energy Opera	· · · · · · · · · · · · · · · · · · ·		- KOD 0 9 10	กว	Pure Gold C-17 Federal
122224			rs	L.P. APR U J 15	5 5	9. WELL NO. 11
550 W	. Texas, Suite	Sign Mara	nd, T	exas 79 mi D.	c P	10. FIELD AND POOL, OR WILDCAT
At surface	eport location clearly and	in accordance wit	h any Si	ate requirements.*)		Sand Dunes, West (Delaward
_	30' FSL and 1980)' FWL, Sec.	17,	T-23S, R-31E	12.	11. SEC., T., R., M., OR BLE. AND SURVEY OR AREA
At proposed prod. sot	28			SESW V	$^{\mathcal{H},\mathcal{V}}$	Sec. 17, T-23S, R-31E
	AND DIRECTION FROM NEA			•		12. COUNTY OR PARISH 13. STATE
	East of Loving,	New Mexico				Eddy NM
5. DISTANCE FROM PROP LOCATION TO NEARES PROPERTY OR LEASE!	T LINE, FT.	330'	16. NO	480		OF ACRES ASSIGNED HIS WALL 40
S. DISTANCE FROM PRO	POSED LOCATION®		19. PR	POSED DEPTH	20. BOTA	RY OR CABLE TOOLS
OR APPLIED FOR, ON TE	DRILLING, COMPLETED, THE LEASE, FT.	330'		8200'		Rotary
-	sether DF, RT, GR, etc.)		,			22. APPROX. DATE WORK WILL START*
3326' GI	K					May 2, 1993 tary's Rober / R-111-P Pota
		,		CEMENTING PROGRAM	4 pecre	
SIZE OF HOLE	BIZE OF CABING	WEIGHT PER FO	200	SETTING DEPTH	600 8	QUANTITY OF CEMENT
17-1/2" 12-1/4"	13-3/8" 8-5/8"	48.0 32.0		4130'		x to <u>circulate</u> sx to circulate
7-7/8"	5-1/2"	15.50)	8200'		e back to 4130 at least 39
productive, plugged and programs as attachments:	5-1/2" casing wabandoned in a per Onshore Oil:	ill be ceme manner cons	nted ister	at TD. If non nt with Federal	-produ Regul	formation for oil. If ctive, the well will be ations. Specific the following
Exhibit Exhibit Exhibit	ng Program A - Operations B - BOP and Ch C - Drilling F	oke luid Progra	ım	Exhibit G -	Well S	howing Existing Wells ite Layout erations Plan
	E D - Auxiliary E E - Topo Map o					F57 20 "
	• •					2. W. 3.
						is box 104 * April
N ABOVE SPACE DESCRIE one. If proposal is to reventer program, if a:	drill or deepen direction	proposal is to deep ally, give pertinen	pen or p t data o	lug back, give data on p n subsurface locations a	resent pro-	ductive some and proposed new productive ed and true vertical depths. Give blowout
-	neel Poheto	TT	TLE	Sr. Drilling En	gineer	November 19, 19
(This space for Fed	leral or State office use)					
PERMIT NO.				APPROVAL DATE		
* DDBOARD BA			PLE			3 25·93
APPROVED BY	VAL IF ANY:					
GENERAL REQUIREN	MENTS AND					

ATTACHED and to NMOCD IS R-111-P. See Instructions On Reverse Side

Well No.

DISTRICT I P. O. Box 1980 Hobbs, NM 88240

DISTRICT II P. O. Drower DD Artesia, NM 88210

OIL CONSERVATION DIVISION P. O. Box 2088 Santa Fe, New Mexico 87504-2088

DISTRICT III 1000 Rio Brazos Rd Aztec, NM 87410

Operator


WELL LOCATION AND ACREAGE DEDICATION PLAT

All distances must be from the outer boundaries of the section.

CALITA CE								
SANIA FE	ENERGY OPE	ER. PARTNE	ERS, L.P.	PURE (GOLD 'C-17'	Fed.	11	
Unit Letter	Section	Township		Range		County	<u> </u>	
N	17	23	SOUTH	31 EAST, N.	м.Р.м.	1	EDDY	
Actual Footage Location of Well								
330	feet from the	SOUTH	line and	d 1980	feet from the	WES	T line	
Ground Level Ele	Producing Fo			Pool	-+ (D-1			
3326'	Delawa	are		Sand Dunes, We	st (Delaware	2)	40	Acres
1. Outlir 2. If mo to w	ne the acreage of ore than one lead orking interest of the oregin of the	dedicated to to see is dedicated and royalty).	ed to the v	well by colored pen well, outline each and is dedicated to the	icil or hachure d identify the o	marks on wnership	the plat belo thereof (both	w. as

unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interest, has been approved by the division. OPERATOR CERTIFICATION

No allowable will be assigned to the well until all interests have been consolidated (by communitization,

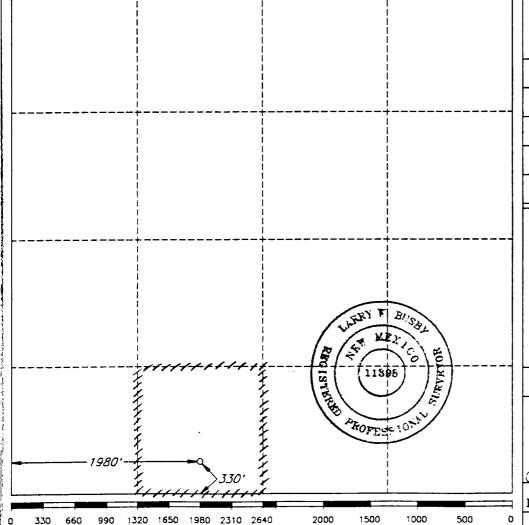

I hereby certify that the information herein is true and complete to the best of my knowledge and belief.

Signature Danell Printed Name

Darrell Roberts

Position

Sr. Drilling Engineer

Company Santa Fe Energy Operating Partners, L.P.

Date November 19, 1992

SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.

Date Surveyed

NOVEMBER 3, 1992

Signature and Seal of Professional Surveyor

Certificate No.

LARRY W. BUSBY

JOB NO. 92823

V.H.B.

DRILLING PROGRAM

SANTA FE ENERGY OPERATING PARTNERS, L.P.

Pure Gold C-17 Federal No. 11

In conjunction with Form 3160-3, Application to Drill the subject well, Santa Fe Energy Operating Partners, L.P., submits the following ten items of pertinent information in accordance with Onshore Oil & Gas Order No. 10.

1. Geologic Name of Surface Formation: Alluvium

2. Estimated Tops of Significant Geologic Markers:

750'
3840'
4170'
5070'
7790'
8060'
8200'

3. The estimated depths at which water, oil, or gas formations are expected:

Water None expected in area
Oil Delaware Sand @ 4170'

Oil Lower Brushy Canyon @ 7790'

4. **Proposed Casing Program**: See Form 3160-3 and Exhibit A.

5. Pressure Control Equipment: See Exhibit B.

6. Drilling Fluid Program: See Exhibit C.

7. Auxiliary Equipment: A mud logging unit will be utilized to monitor penetration rate and hydrocarbon shows while drilling below the intermediate casing at 4100'.

8. Testing, Logging and Coring Program:

Drill Stem Tests: (all DST's to be justified on the basis of a valid show of oil or gas):

Ramsey Sand 4170'-4300' Lower Brushy Canyon 7790'-7900'

DRILLING PROGRAM

Pure Gold C-17 Federal No. 11 Page 2

Logging:

Dual Laterolog w/MSFL and Gamma Ray 4100'-8200' Compensated Neutron/Litho-Density/Gamma Ray 4100'-8200' Compensated Neutron/Gamma Ray (thru csg) Surface-4100'

Coring: No conventional cores are planned.

9. Abnormal Conditions, Pressures, Temperatures, & Potential Hazards:

No abnormal pressures or temperatures are anticipated. The estimated bottom hole temperature is 135 °F and the estimated bottom hole pressure is 3500 psi. No Hydrogen Sulfide or other hazardous gases or fluids have been encountered, reported or are known to exist at this depth in this area. No major lost circulation zones have been reported in the offsetting wells.

10. Anticipated Starting Date and Duration of Operations:

Road and location work will not begin until approval has been received from the BLM. The anticipated spud date is May 2, 1993. Once spudded, the drilling operation should be completed in approximately 16 days. If the well is productive, an additional 30 days will be required for completion and testing before permanent facilities are installed.


SANTA FE ENERGY OPERATING PARTNERS,L.P. OPERATIONS PLAN

Pure Gold C-17 Federal No. 11

- 1. Drill a 17 1/2" hole to approximately 600'.
- 2. Run 13 3/8" 48.0 ppf H-40 ST&C casing. Cement with 600 sx Class "C" cement containing 2% CaCl₂. Run centralizers on every other joint above the shoe. Apply thread lock to bottom two joints and guide shoe.
- 3. Wait on cement four hours prior to cutting off.
- 4. Nipple up a annular BOP system and test casing to 600 psi.
- 5. Drill a 12 1/4" hole to approximately 4130'.
- 6. Run 8 5/8" 32.0 ppf K-55 ST&C casing. Cement with 1750 sx Cl "C" Lite containing 12 pps salt and 1/4 pps celloflake followed by 250 sx Class "C" with 2% CaCl₂. Run guide shoe on bottom and float collar two joints of bottom. Centralize every other joint for bottom 400' of casing and place two centralizers in surface casing. Thread lock bottom 2 joints.
- 7. Wait on cement for six hours prior to cutting off.
- 8. Nipple up and install a 3000 psi. Double Ram and Annular BOP system with choke manifold.
- 9. Test BOP system to 3000 psi. Test casing to 1500 psi.
- 10. Drill 7 7/8" hole to 8200'. Run logs.
- 11. Either run and cement 5 1/2" 15.50 ppf K-55 LT&C casing or plug and abandon as per BLM requirements.

Exhibit A
Santa Fe Energy Operating Partners, L.P.
Pure Gold C-17 Federal No. 11
Section 17, T-23S, R-31E
Eddy County, New Mexico

DDR:PGC1711

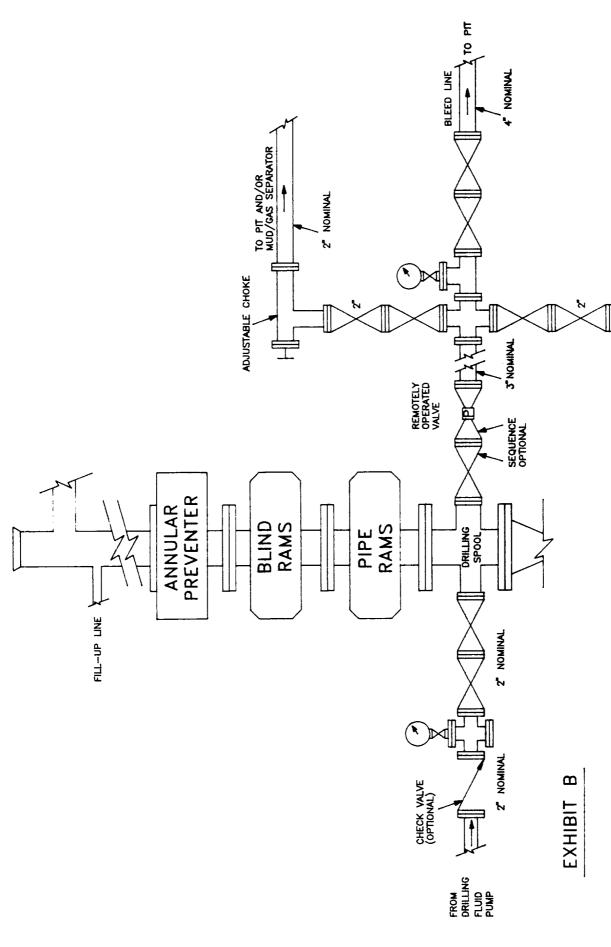

SANTA FE ENERGY OPERATING PARTNERS, LP Pure Gold C-17 Federal No. 330' FSL and 1980' FWL **F23S, R31E**

TO PIT AND/OR MUD/GAS SEPARATOR

NOMINAL

REMOTELY OPERATED OR ADJUSTABLE CHOKE

Eddy Co., New Mexico

PROPOSED DRILLING FLUID PROGRAM

0 - 600'

Spud mud consisting of fresh water gel flocculated with Lime. Use ground paper for seepage control and to sweep the hole. MW-8.5 ppg and Vis-40.

600-4130'

Drill out with brine water circulating the inner portion of the reserve pit. Utilize ground paper mixed in prehydrated fresh gel to sweep the hole. MW-10.0 ppg and Vis-28.

4130-8200'

Drill out with cut brine (30,000 ppm chlorides minimum) circulating the outer portion of the reserve pit. Maintain pH at 8.5-9.5 with caustic and sweep the hole as necessary with ground paper. If it becomes necessary to mud up due to hole conditions, utilize a cut brine/Drispac system for 15-20 WL and a Vis of 30-32. MW-8.5/8.9 ppg.

Exhibit C
Santa Fe Energy Operating Partners, L.P.
Pure Gold C-17 Federal No. 11
Section 17, T-23S, R-31E
Eddy County, New Mexico

DDR:PGC1711

AUXILIARY EQUIPMENT

DRAWWORKS BDW 650M 650 HP, with Parmac Hydromatic brake

ENGINES Two Caterpillar D-353 diesels rated at 425 HP each

ROTARY Ideco 23", 300 ton capacity

MAST/SUB Ideal 132',550,000 lb rated static hook load with 10 line

Wagner 15' high substructure

TRAVELLING Gardner-Denver, 300 ton, 5 sheave w/ BJ 250 ton hook.

EQUIPMENT Brewster Model 7 SX 300 ton swivel.

PUMPS Continental-EMSCO DC-700 and DB-550, 5 1/2 X 16" Duplex, Compound

driven.

PIT SYSTEM 1-Shale Pit 6X7X35',1-Settling Pit 6X7X38', 1-Suction Pit 6X7X34' w/ 5 mud

agitators. Two centrifugal mud mixing pumps and a Double Screen Shale

Shaker.

LIGHT Two CAT 3306 diesel electric sets 180 KW prime power.

PLANT

BOP 13 5/8" 5000 psi WP double ram and 13 5/8" 5000 psi WP Shaffer Annular

EQUIP Preventer. Choke manifold rated at 5000 psi. Valvcon 5-station 80 gallon

closing unit.

Exhibit D

Santa Fe Energy Operating Partners, L.P.

Pure Gold C-17 Federal No. 11 Section 17, T-23S, R-31E Eddy County, New Mexico

DDR:PGC1711

LOC, ON & ELEVATION VERIF, ATION MAP

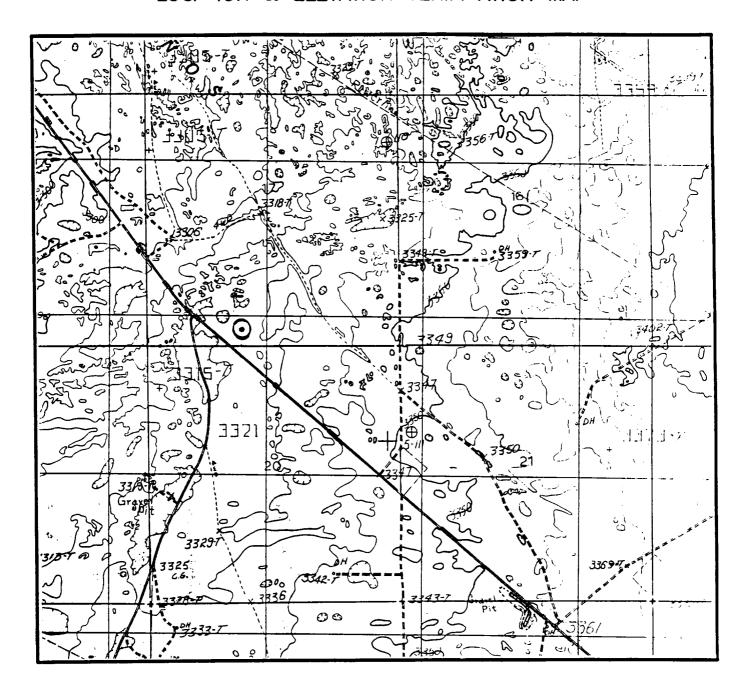


EXHIBIT E

SANTA FE ENERGY OPERATING PARTNERS, LP Pure Gold C-17 Federal No. 11 330' FSL and 1980' FWL Sec 17, T23S,R31E Eddy Co., New Mexico


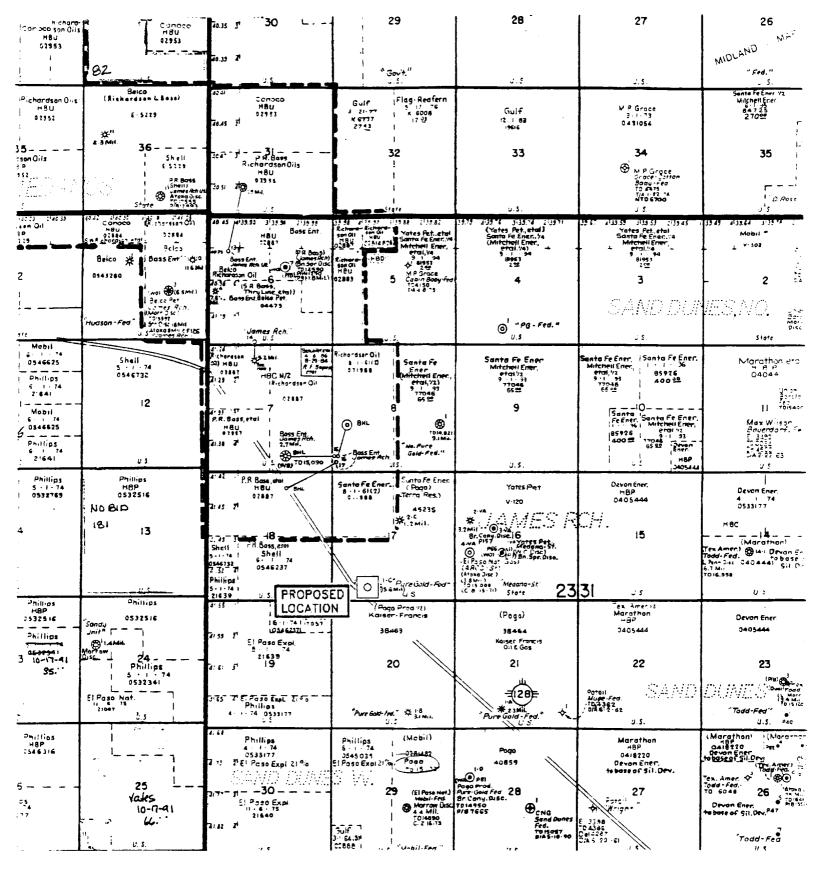


EXHIBIT F

SANTA FE ENERGY OPERATING PARTNERS, LP Pure Gold C-17 Federal No. 11 330' FSL and 1980' FWL Sec. 17, T23S, R31E Eddy Co., New Mexico

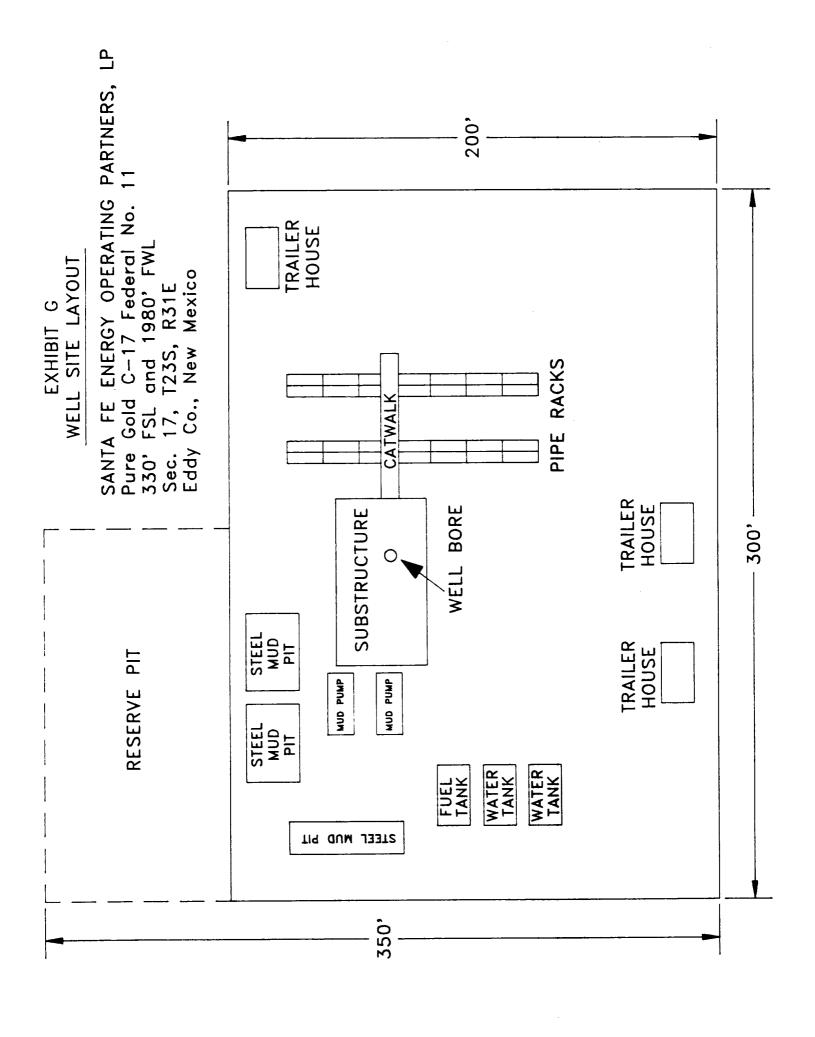

MULTI-POINT SURFACE USE AND OPERATIONS PLAN SANTA FE ENERGY OPERATING PARTNERS, L.P.

Pure Gold C-17 Federal No. 11 330' FSL & 1980' FWL Section 17, T-23S, R-31E Eddy County, New Mexico

This plan is submitted with Form 3160-3, Application for Permit to Drill, covering the above described well. The purpose of this plan is to describe the location of the proposed well, the proposed construction activities and operations plan, the magnitude of necessary surface disturbance involved, and the procedures to be followed by rehabilitating the surface after completion of the operations, so that a complete appraisal can be made of the environmental effects associated with the operation.

1. EXISTING ROADS.

A. Exhibit E is a 15 minute topographic map which shows location of the proposed wellsite and roads in the vicinity. The proposed location is situated approximately 18 miles northeast of Loving, New Mexico.

DIRECTIONS:

- 1. From the intersection of State Highway 128 and the Lea/Eddy County line, go northwest 6.3 miles on State Highway 128.
- 2. Turn left (Northeast) onto lease road and continue 400' to the location.

2. PLANNED ACCESS ROAD.

A 14' wide access road will extend from an existing lease road 65' north of the location.

3. LOCATION OF EXISTING WELLS.

- A. The well Locations in the vicinity of the proposed well are shown Exhibits E & F.
- 4. LOCATION OF EXISTING AND/ OR PROPOSED FACILITIES.
 - A. There are two existing producing gas wells on this lease at this time.
 - B. In the event the well is productive, the necessary production equipment will be installed on the drilling pad. If the well is productive of oil, a gas or diesel self-contained unit will be used to the necessary power.

Multi-Point Surface Use and Operations Plan

Pure Gold C-17 Federal No. 11

Page 2

5. LOCATION AND TYPE OF WATER SUPPLY

A. It is planned to drill the well with both fresh water and brine water systems. Both types of waters will be hauled to the location by truck over existing roads. Both types will be obtained from commercial sources.

6. SOURCES OF CONSTRUCTION MATERIALS.

A. Any caliche required for construction of the drilling pad will be obtained from a pit located of the wellsite.

7. METHODS OF HANDLING WASTE DISPOSAL

- A. Drill cuttings will be disposed of in the reserve pits.
- B. Drilling fluids will be allowed to evaporate in the reserve pits until the pits are dry.
- C. Water produced during operations will be either placed in the reserve pits and allowed to evaporate or collected in tanks until hauled to an approved disposal system or a separate disposal application will be submitted to the BLM for appropriate approval.
- D. Oil produced during operations will be stored in tanks until sold.
- E. Human waste will be disposed of per current standards.
- F. Trash, waste paper, garbage, and junk will be collected in trash trailers and disposed of in an approved waste facility such as a land fill. The trash trailers contain all of the material to prevent scattering by the wind.
- G. All debris will be removed from the wellsite within 30 days after finishing drilling and/or completion operations.

8. ANCILLARY FACILITIES.

None required

9. WELLSITE LAYOUT

A. Exhibit G shows the dimensions of the well pad and reserve pits, and the location of major rig components.

Multi-Point Surface Use and Operations Plan

Pure Gold C-17 Federal No. 11

Page 3

- B. The ground surface of the location is located among several sand dunes with vegetation growing on them. The location will constructed by leveling the necessary dune and covering the sand with at least six inches of compacted caliche.
- C. The reserve pits will be plastic lined.
- D. A 400' X 400' work area which will contain the pad and pit area has been staked and flagged.

10. PLAN FOR RESTORATION OF THE SURFACE.

- A. After finishing drilling and/or completion operations, all equipment and other material not needed for further operations will be removed. The location will be cleared of all trash and junk, to leave the wellsite in as aesthetically pleasing a condition as possible.
- B. Unguarded pits, if any, containing fluid will be fenced until they have been filled.
- C. If the proposed well is non-productive, all rehabilitation and/or vegetation requirements of the Bureau of Land Management and the United States Geological Survey will be complied with and will be accomplished as expeditiously as possible. All pits will be filled and levelled within 300 days after abandonment.

11. TOPOGRAPHY

- A. The wellsite and access route are located in a relatively flat area.
- B. The top soil at the wellsite is sandy.
- C. The vegetation cover at the wellsite is moderately sparse, with prairie grasses, some mesquite bushes, and shinnery oak.
- D. No wildlife was observed but it is likely that deer, rabbits, coyotes, and rodents traverse the area.
- E. There are no ponds, lakes, streams, or rivers within one mile of the wellsite.
- F. There is no evidence of any archaeological, historical, or cultural sites in the vicinity of the location.

Multi-Point Surface Use and Operations Plan

Pure Gold C-17 Federal No. 11 Page 4

12. OPERATOR'S REPRESENTATIVES.

A. The field representatives responsible for assuring compliance with the approved surface use plan are:

Michael R. Burton	Darrell Roberts
Division Operations Manager	Senior Drilling Engineer
Santa Fe Energy Operating	Santa Fe Energy Operating
Partners, L.P.	Partners, L.P.
550 W. Texas, Suite 1330	550 W. Texas, Suite 1330
Midland, Texas 79701	Midland, Texas 79701
915-686-6616 - office	915-686-6614 - office
915-699-1260 - home	915-684-4130 - home
915-559-6842 - cellular	915-553-1214 - cellular

13. CERTIFICATION

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Santa Fe Energy Operating Partners, L.P., and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved.

SIGNED this	19	day of November, 1992.	Daniel	Pohento
		,		Senior Drilling Engineer

/tjm PGC1711