

Form 3160-3
(June 2015)UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

1a. Type of work: ☒ DRILL ☐ REENTER		5. Lease Serial No. NMNM015303
1b. Type of Well: ☒ Oil Well ☐ Gas Well ☐ Other		6. If Indian, Allottee or Tribe Name
1c. Type of Completion: ☐ Hydraulic Fracturing ☐ Single Zone ☒ Multiple Zone		7. If Unit or CA Agreement, Name and No.
2. Name of Operator OXY USA INCORPORATED		8. Lease Name and Well No. CORRAL GORGE 12-13 FEDERAL COM 23H
3a. Address 5 Greenway Plaza, Suite 110, Houston, TX 77046	3b. Phone No. (include area code) (713) 366-5716	9. API Well No. 30-015-47198
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface NENW / 975 FNL / 1500 FWL / LAT 32.149291 / LONG -103.941753 At proposed prod. zone SESW / 20 FSL / 2260 FWL / LAT 32.122832 / LONG -103.939256		10. Field and Pool, or Exploratory CORRAL DRAW BONE SPRING/RED TA 11. Sec., T. R. M. or Blk. and Survey or Area SEC 12/T25S/R29E/NMP
14. Distance in miles and direction from nearest town or post office* 8 miles		12. County or Parish EDDY
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 20 feet		13. State NM
16. No of acres in lease 1280		17. Spacing Unit dedicated to this well 640.0
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 35 feet		20. BLM/BIA Bond No. in file FED: ESB000226
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3107 feet		22. Approximate date work will start* 12/14/2021
		23. Estimated duration 20 days
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be requested by the BLM. |

25. Signature (Electronic Submission)	Name (Printed/Typed) DAVID STEWART / Ph: (713) 366-5716	Date 12/27/2019
Title Sr. Regulatory Advisor		
Approved by (Signature) (Electronic Submission)	Name (Printed/Typed) Cody Layton / Ph: (575) 234-5959	Date 05/27/2020
Title Assistant Field Manager Lands & Minerals		
Office Carlsbad Field Office		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Entered 6/22/2020 - JAG

(Continued on page 2)



*(Instructions on page 2)

DISTRICT I
1625 N. FRENCH DR., HOBBS, NM 88240
Phone: (575) 393-9161 Fax: (575) 393-0720

DISTRICT II
811 S. FIRST ST., ARTESIA, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

DISTRICT III
1000 RIO BRAZOS RD., AZTEC, NM 87410
Phone: (505) 334-6176 Fax: (505) 334-6170

DISTRICT IV
1220 S. ST. FRANCIS DR., SANTA FE, NM 87506
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 SOUTH ST. FRANCIS DR.
Santa Fe, New Mexico 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-015-47198	Pool Code 96473	Pool Name Pierce Crossing Bone Springs, East
Property Code 328295	Property Name CORRAL GORGE 12_13 FEDERAL COM	Well Number 23H
GRID No. 16694	Operator Name OXY USA INC.	Elevation 3107.2'

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
C	12	25-S	29-E		975	NORTH	1500	WEST	EDDY

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
N	13	25-S	29-E		20	SOUTH	2260	WEST	EDDY

Dedicated Acres	Joint or Infill	Consolidation Code	Order No.
640	Y		

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

SURFACE LOCATION Y=418267.9 N X=662526.2 E LAT.=32.149291° N LONG.=103.941753° W 1500' 975' GRID AZ. = 38°54'31" HORZ. DIST. = 1199.3' GRID AZ. = 117°42'13" HORZ. DIST. = 1055.9' SECTION 12 SECTION 13 HORIZONTAL SPACING UNIT 397' 2260' 20.5' LIP 100' FSL & 2260' FWL Y=408725.3 N X=663333.6 E LAT.=32.123052° N LONG.=103.939256° W	KOP 50' FNL & 2260' FWL Y=419201.1 N X=663279.4 E LAT.=32.151849° N LONG.=103.939308° W FTP 100' FNL & 2260' FWL Y=419151.1 N X=663279.7 E LAT.=32.151711° N LONG.=103.939308° W <table><tr><th colspan="2">POINT LEGEND</th></tr><tr><td>1</td><td>Y=419225.6 N X=661019.2 E</td></tr><tr><td>2</td><td>Y=413910.8 N X=661057.8 E</td></tr><tr><td>3</td><td>Y=411258.7 N X=661065.8 E</td></tr><tr><td>4</td><td>Y=408605.1 N X=661074.2 E</td></tr><tr><td>5</td><td>Y=408828.9 N X=663731.3 E</td></tr><tr><td>6</td><td>Y=413944.9 N X=663703.8 E</td></tr><tr><td>7</td><td>Y=419255.4 N X=663876.6 E</td></tr></table> * ALL COORDINATES ARE NAD 83 VALUES PROPOSED BOTTOM HOLE LOCATION Y=408645.3 N X=663334.0 E LAT.=32.122832° N LONG.=103.939256° W	POINT LEGEND		1	Y=419225.6 N X=661019.2 E	2	Y=413910.8 N X=661057.8 E	3	Y=411258.7 N X=661065.8 E	4	Y=408605.1 N X=661074.2 E	5	Y=408828.9 N X=663731.3 E	6	Y=413944.9 N X=663703.8 E	7	Y=419255.4 N X=663876.6 E	OPERATOR CERTIFICATION I hereby certify that the information herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. <i>David Stewart</i> 12/26/19 Signature Date David Stewart Printed Name David.Stewart@oxy.com E-mail Address SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. JULY 8, 2019 Date of Survey Signature & Seal of Professional Surveyor CHAD L. HARCROW NEW MEXICO 17777 LICENSED PROFESSIONAL SURVEYOR <i>Chad Harcrow</i> 8/22/19 Certificate No. CHAD HARCROW 17777 W.O. # 19-1232 DRAWN BY: AM
POINT LEGEND																		
1	Y=419225.6 N X=661019.2 E																	
2	Y=413910.8 N X=661057.8 E																	
3	Y=411258.7 N X=661065.8 E																	
4	Y=408605.1 N X=661074.2 E																	
5	Y=408828.9 N X=663731.3 E																	
6	Y=413944.9 N X=663703.8 E																	
7	Y=419255.4 N X=663876.6 E																	

**PECOS DISTRICT
SURFACE USE
CONDITIONS OF APPROVAL**

Corral Gorge 12-13 Federal Com 1H	795 FNL and 1,430 FWL	Section 17, Township 22 South, Range 29 East	SLO
Corral Gorge 12-13 Federal Com 2H	795 FNL and 1,495 FWL		
Corral Gorge 12-13 Federal Com 3H	540 FNL and 2,262 FWL		
Corral Gorge 12-13 Federal Com 4H	540 FNL and 2,297 FWL		
Corral Gorge 12-13 Federal Com 5H	740 FNL and 1,170 FEL		
Corral Gorge 12-13 Federal Com 6H	740 FNL and 1,100 FEL		
Corral Gorge 12-13 Federal Com 11H	795 FNL and 1,460 FWL		
Corral Gorge 12-13 Federal Com 12H	795 FNL and 1,530 FWL		
Corral Gorge 12-13 Federal Com 13H	740 FNL and 1,200 FEL		
Corral Gorge 12-13 Federal Com 14H	740 FNL and 1,135 FEL		
Corral Gorge 12-13 Federal Com 21H	975 FNL and 1,430 FWL		
Corral Gorge 12-13 Federal Com 22H	975 FNL and 1,465 FWL		
Corral Gorge 12-13 Federal Com 23H	975 FNL and 1,500 FWL		
Corral Gorge 12-13 Federal Com 24H	920 FNL and 1,200 FEL		
Corral Gorge 12-13 Federal Com 25H	920 FNL and 1,165 FEL		
Corral Gorge 12-13 Federal Com 26H	920 FNL and 1,130 FEL		
Corral Gorge 12-13 Federal Com 31H	162 FNL and 250 FWL		
Corral Gorge 12-13 Federal Com 32H	162 FNL and 285 FWL		
Corral Gorge 12-13 Federal Com 33H	230 FSL and 2,605 FWL		
Corral Gorge 12-13 Federal Com 34H	230 FSL and 2,635 FWL		
Corral Gorge 12-13 Federal Com 35H	230 FSL and 2,645 FEL		
Corral Gorge 12-13 Federal Com 36H	230 FSL and 2,610 FEL		
Corral Gorge 12-13 Federal Com 37H	360 FNL and 225 FEL		
Corral Gorge 12-13 Federal Com 38H	360 FNL and 190 FEL		
Corral Gorge 12-13 Federal Com 41H	235 FSL and 1,270 FWL		
Corral Gorge 12-13 Federal Com 42H	235 FSL and 1,335 FWL		
Corral Gorge 12-13 Federal Com 43H	260 FSL and 970 FEL		
Corral Gorge 12-13 Federal Com 44H	260 FSL and 905 FEL		
Corral Gorge 12-13 Federal Com 51H	235 FSL and 1,300 FWL		
Corral Gorge 12-13 Federal Com 52H	235 FSL and 1,370 FWL		
Corral Gorge 12-13 Federal Com 53H	260 FSL and 940 FEL		
Corral Gorge 12-13 Federal Com 54H	260 FSL and 870 FEL		
Corral Gorge 12-13 Federal Com 71H	540 FNL and 1,987 FWL		
Corral Gorge 12-13 Federal Com 72H	540 FNL and 2,022 FWL		
Corral Gorge 12-13 Federal Com 73H	360 FNL and 535 FEL		

Commented [DKR1]: I thought it was T25S R29E Secs 1, 2, 11, and 12 and T25S R30E Sec 7

Corral Gorge 12-13 Federal Com 74H	360 FNL and 500 FEL		
Corral Gorge 12-13 Federal Com 311H	162 FNL and 320 FWL		
Corral Gorge 12-13 Federal Com 312H	360 FNL and 260 FEL		

FNL = feet from north line; FWL = feet from west line; FEL = feet from east line; FSL = feet from south line

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- ☐ **General Provisions**
- ☐ **Permit Expiration**
- ☐ **Archaeology, Paleontology, and Historical Sites**
- ☐ **Noxious Weeds**
- ☐ **Special Requirements**
 - Fee Fee Fed
- ☐ **Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- ☐ **Road Section Diagram**
- ☐ **Production (Post Drilling)**
 - Well Structures & Facilities
- ☐ **Interim Reclamation**
- ☐ **Final Abandonment & Reclamation**

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)
FEE FEE FED

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. EXCLOSURE FENCING (CELLARS & PITS)

Exclosure Fencing

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

G. ON LEASE ACCESS ROADS**Road Width**

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outslowing and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch

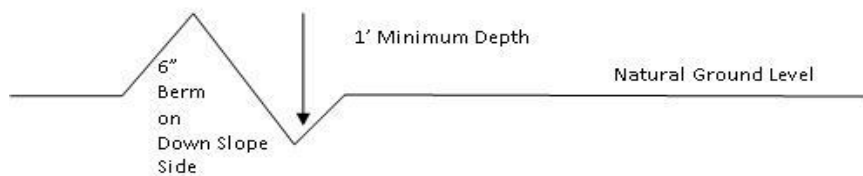

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

Cattle guards

An appropriately sized cattle guard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattle guards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattle guards that are in place and are utilized during lease operations.

Fence Requirement

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.


Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.


Construction Steps

1. Salvage topsoil
2. Construct road


3. Redistribute topsoil
4. Revegetate slopes

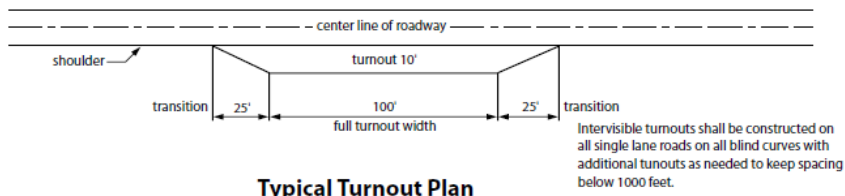


Typical Turnout Plan



Level Ground Section

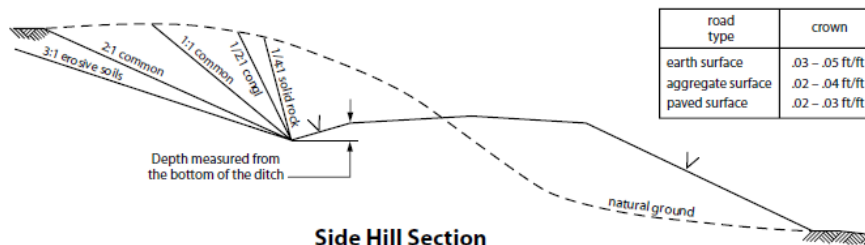

Side Hill Section

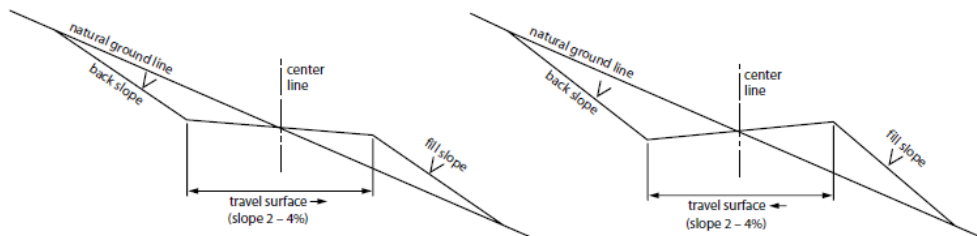

Typical Outsloped Section

Typical Insloped Section

Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

VII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Exclosure Netting (Open-top Tanks)

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

Chemical and Fuel Secondary Containment and Exclosure Screening

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

Open-Vent Exhaust Stack Exclosures

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

Containment Structures

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

VIII. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

IX. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory

revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

(Insert Seed Mixture Here)

PECOS DISTRICT

DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	OXY USA INCORPORATED
WELL NAME & NO.:	CORRAL GORGE 12-13 FEDERAL COM 23H
SURFACE HOLE FOOTAGE:	975'/N & 1500'/W
BOTTOM HOLE FOOTAGE:	20'/S & 2260'/W
LOCATION:	Section 12, T.25 S., R.29 E., NMP
COUNTY:	Eddy County, New Mexico

COA

H2S	☐ Yes	☒ No	
Potash	☒ None	☐ Secretary	☐ R-111-P
Cave/Karst Potential	☒ Low	☐ Medium	☐ High
Cave/Karst Potential	☐ Critical		
Variance	☐ None	☒ Flex Hose	☐ Other
Wellhead	☐ Conventional	☐ Multibowl	☒ Both
Other	☐ 4 String Area	☐ Capitan Reef	☐ WIPP
Other	☒ Fluid Filled	☒ Cement Squeeze	☐ Pilot Hole
Special Requirements	☐ Water Disposal	☒ COM	☐ Unit

A. HYDROGEN SULFIDE

Hydrogen Sulfide (H2S) monitors shall be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

Casing Design:

1. The **10-3/4** inch surface casing shall be set at approximately **729** feet (a minimum of **70 feet (Eddy County)** into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.

- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
- d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Intermediate casing must be kept fluid filled to meet BLM minimum collapse requirement.

- 2. The 7-5/8 inch intermediate casing shall be set at approximately **8450** feet. The minimum required fill of cement behind the 7-5/8 inch intermediate casing is:

Option 1 (Single Stage):

- Cement to surface. If cement does not circulate see B.1.a, c-d above.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.

Option 2:

Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.

- a. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
- b. Second stage above DV tool:
 - Cement to surface. If cement does not circulate, contact the appropriate BLM office.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.

Operator has proposed to pump down 10-3/4" X 7-5/8" annulus. Operator must run a CBL from TD of the 7-5/8" casing to surface. Submit results to BLM.

- 3. The minimum required fill of cement behind the 5-1/2 X 4-1/2 inch production casing is:

Option 1 (Single Stage):

- Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

Option 2:

Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.

- First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
- Second stage above DV tool:
 - Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

C. PRESSURE CONTROL

- Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
-

Option 1:

- Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **3000 (3M)** psi.
- Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the intermediate casing shoe shall be **3000 (3M)** psi.

Option 2:

- Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **3000 (3M)** psi.
 - Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.

- b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
- c. Manufacturer representative shall install the test plug for the initial BOP test.
- d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

Offline Cementing

- Contact the BLM prior to the commencement of any offline cementing procedure.

BOP Break Testing Variance

- BOP break testing is not permitted on this well.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)
393-3612

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including

lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).
- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

NMK04272020



APD ID: 10400052816

Submission Date: 12/27/2019

Highlighted data
reflects the most
recent changes

Operator Name: OXY USA INCORPORATED

Well Name: CORRAL GORGE 12-13 FEDERAL COM

Well Number: 23H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - General

APD ID: 10400052816

Tie to previous NOS? N

Submission Date: 12/27/2019

BLM Office: CARLSBAD

User: David Stewart

Title: Sr. Regulatory Advisor

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM015303

Lease Acres: 1280

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? N

Permitting Agent? NO

APD Operator: OXY USA INCORPORATED

Operator letter of designation:

Operator Info

Operator Organization Name: OXY USA INCORPORATED

Operator Address: 5 Greenway Plaza, Suite 110

Zip: 77046

Operator PO Box:

Operator City: Houston

State: TX

Operator Phone: (713)366-5716

Operator Internet Address:

Section 2 - Well Information

Well in Master Development Plan? NO

Master Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: CORRAL GORGE 12-13 FEDERAL COM

Well Number: 23H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: CORRAL DRAW
BONE SPRING

Pool Name: RED TANK; BONE
SPRING

Is the proposed well in an area containing other mineral resources? POTASH

Operator Name: OXY USA INCORPORATED

Well Name: CORRAL GORGE 12-13 FEDERAL COM

Well Number: 23H

Is the proposed well in an area containing other mineral resources? POTASH

Is the proposed well in a Helium production area? N

Use Existing Well Pad? N

New surface disturbance?

Type of Well Pad: MULTIPLE WELL

Multiple Well Pad Name: Corral

Number: 21H

Gorge 12-13 FEDERAL COM

Well Class: HORIZONTAL

Number of Legs: 1

Well Work Type: Drill

Well Type: OIL WELL

Describe Well Type:

Well sub-Type: INFILL

Describe sub-type:

Distance to town: 8 Miles

Distance to nearest well: 35 FT

Distance to lease line: 20 FT

Reservoir well spacing assigned acres Measurement: 640 Acres

Well plat: CorralGorge12_13FdCom23H_C102_20191226155336.pdf

CorralGorge12_13FdCom23H_SitePlan_20191226155349.pdf

Well work start Date: 12/14/2021

Duration: 20 DAYS

Section 3 - Well Location Table

Survey Type: RECTANGULAR

Describe Survey Type:

Datum: NAD83

Vertical Datum: NAVD88

Survey number:

Reference Datum: GROUND LEVEL

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this lease?
SHL Leg #1	975	FNL	1500	FWL	25S	29E	12	Aliquot NENW	32.149291	-103.941753	EDD Y	NEW MEXICO	NEW MEXICO	S	STATE	3107	0	0	N
KOP Leg #1	50	FNL	2260	FWL	25S	29E	12	Aliquot NENW	32.151849	-103.939308	EDD Y	NEW MEXICO	NEW MEXICO	S	STATE	-5235	8583	8342	N

Operator Name: OXY USA INCORPORATED

Well Name: CORRAL GORGE 12-13 FEDERAL COM

Well Number: 23H


Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this lease?
PPP Leg #1-1	3	FNL	2249	FWL	25S	29E	13	Aliquot NENW	32.137388	- 103.939282	EDD Y	NEW MEXICO	NEW MEXICO	F	NMNM 015303	- 5954	14836	9061	Y
PPP Leg #1-2	100	FNL	2260	FWL	25S	29E	12	Aliquot NENW	32.151711	- 103.939308	EDD Y	NEW MEXICO	NEW MEXICO	S	STATE	- 5962	9647	9069	Y
EXIT Leg #1	100	FSL	2260	FWL	25S	29E	13	Aliquot SESW	32.123052	- 103.939256	EDD Y	NEW MEXICO	NEW MEXICO	F	NMNM 015303	- 5947	20073	9054	Y
BHL Leg #1	20	FSL	2260	FWL	25S	29E	13	Aliquot SESW	32.122832	- 103.939256	EDD Y	NEW MEXICO	NEW MEXICO	F	NMNM 015303	- 5947	20153	9054	Y

OXY USA INC.

SITE PLAN

CEDCAN 1205

FAA PERMIT: NO

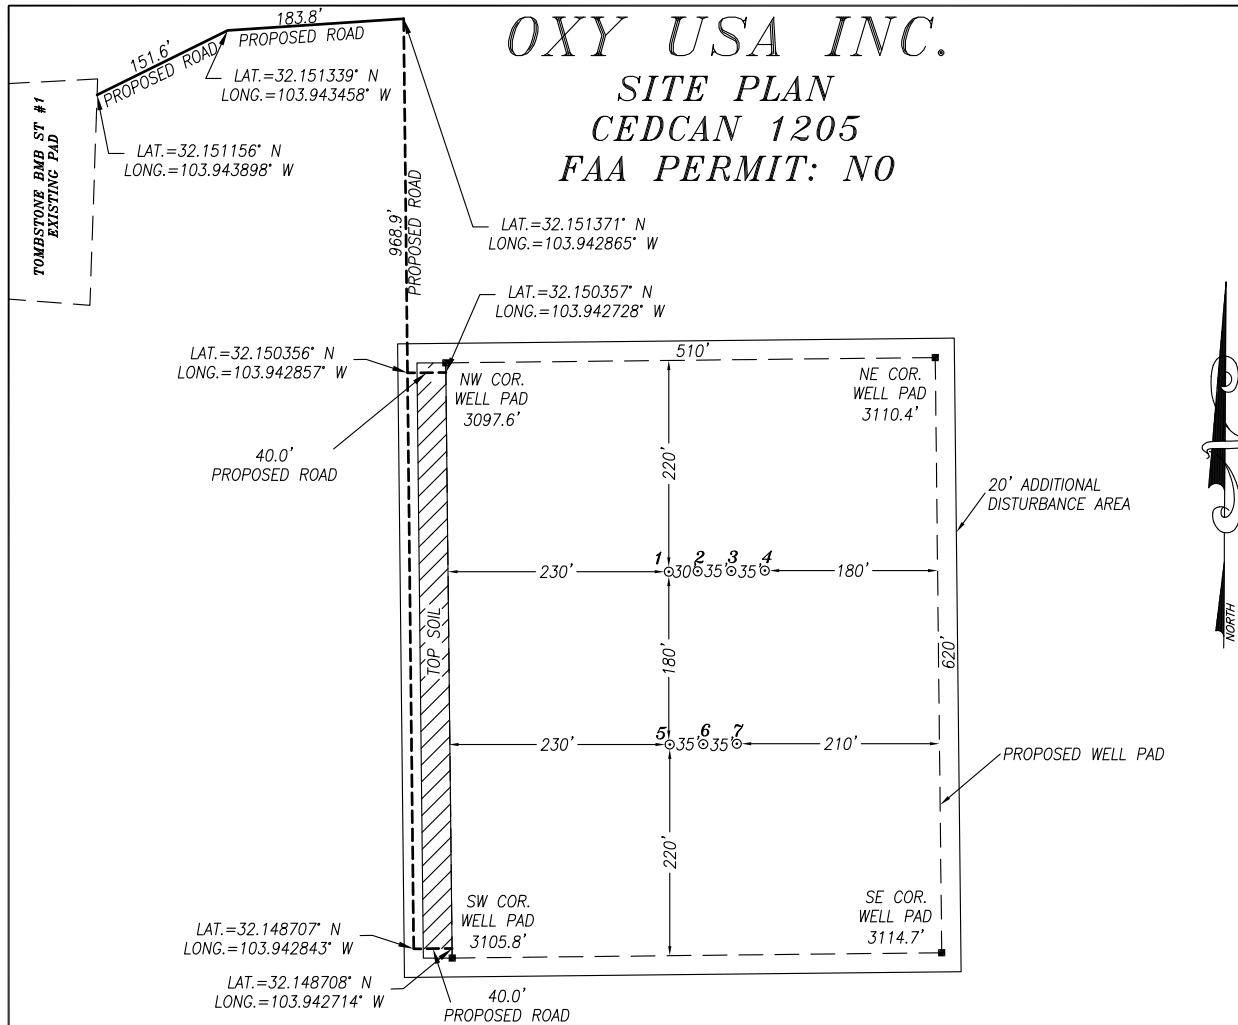

NO.	WELL	FOOTAGE	LAT.	LONG.	ELEV.	ID#
1	CORRAL GORGE 12_13 FED COM #11H	795' FNL & 1430' FWL	32.149785° N	103.941980° W	3103.5'	IP-SMS-2279
2	CORRAL GORGE 12_13 FED COM #11H	795' FNL & 1460' FWL	32.149785° N	103.941883° W	3104.6'	IP-SMS-2290
3	CORRAL GORGE 12_13 FED COM #2H	795' FNL & 1495' FWL	32.149786° N	103.941769° W	3104.6'	IP-SMS-2285
4	CORRAL GORGE 12_13 FED COM #12H	795' FNL & 1530' FWL	32.149786° N	103.941657° W	3105.7'	IP-SMS-2291
5	CORRAL GORGE 12_13 FED COM #21H	975' FNL & 1430' FWL	32.149290° N	103.941979° W	3106.6'	IP-SMS-2294
6	CORRAL GORGE 12_13 FED COM #22H	975' FNL & 1465' FWL	32.149290° N	103.941866° W	3107.8'	IP-SMS-2295
7	CORRAL GORGE 12_13 FED COM #23H	975' FNL & 1500' FWL	32.149291° N	103.941753° W	3107.2'	IP-SMS-2296

NOTES:

- 1) LATS & LONGS SHOWN HEREON ARE MERCATOR GRID AND CONFORM TO THE NEW MEXICO COORDINATE SYSTEM "NEW MEXICO EAST ZONE" NORTH AMERICAN DATUM 1983.
- 2) DISTANCES ARE GRID VALUES.
- 3) ALL FEATURES ARE EXISTING UNLESS OTHERWISE NOTED

CERTIFICATION


I, CHAD HARCROW, A NEW MEXICO REGISTERED PROFESSIONAL SURVEYOR CERTIFY THAT I DIRECTED AND AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



Chad Harcrow
CHAD HARCROW N.M.P.S. NO. 17777

8/22/19
DATE

HARCROW SURVEYING, LLC
2316 W. MAIN ST, ARTESIA, N.M. 88210
PH: (575) 746-2158
c.harcrow@harcrowsurveying.com



OXY USA INC.		
SURVEY DATE: JULY 8, 2019	SITE PLAN	
DRAFTING DATE: AUGUST 20, 2019	PAGE: 1	OF 1
APPROVED BY: CH	DRAWN BY: WN	FILE: 19-1220



APD ID: 10400052816

Submission Date: 12/27/2019

Highlighted data
reflects the most
recent changes

Operator Name: OXY USA INCORPORATED

Well Name: CORRAL GORGE 12-13 FEDERAL COM

Well Number: 23H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
620214	RUSTLER	3107	380	380	ANHYDRITE, DOLOMITE, SHALE	USEABLE WATER	N
620215	SALADO	2318	789	789	ANHYDRITE, DOLOMITE, HALITE, SHALE	OTHER : Salt	N
620216	CASTILE	1341	1766	1766	ANHYDRITE	OTHER : Salt	N
620217	LAMAR	-207	3314	3314	LIMESTONE, SANDSTONE, SILTSTONE	NATURAL GAS, OIL, OTHER : Brine	N
620218	BELL CANYON	-213	3320	3320	SANDSTONE, SILTSTONE	NATURAL GAS, OIL, OTHER : Brine	N
620219	CHERRY CANYON	-1116	4223	4255	SANDSTONE, SILTSTONE	NATURAL GAS, OIL, OTHER : Brine	N
620220	BRUSHY CANYON	-2461	5568	5669	LIMESTONE, SANDSTONE, SILTSTONE	NATURAL GAS, OIL, OTHER : Brine	N
620221	BONE SPRING	-3990	7097	7271	LIMESTONE, SANDSTONE, SILTSTONE	NATURAL GAS, OIL	Y
620222	BONE SPRING 1ST	-4931	8038	8266	LIMESTONE, SANDSTONE, SILTSTONE	NATURAL GAS, OIL	Y
620223	BONE SPRING 2ND	-5783	8890	9185	LIMESTONE, SANDSTONE, SILTSTONE	NATURAL GAS, OIL	Y

Section 2 - Blowout Prevention

Pressure Rating (PSI): 3M

Rating Depth: 9068

Equipment: 13-5/8" 5M/10M Annular, Blind Ram, Double Ram

Requesting Variance? YES

Variance request: OXY requests a variance for the use of a flexible choke line from the BOP to Choke Manifold.

Testing Procedure: OXY will utilize a 5M annular with a 10M BOPE stack. The BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. A multibowl or a unionized multibowl wellhead system will be employed. The wellhead and connection to the BOPE will meet all API 6A requirements. The BOP will be tested per Onshore Order #2 after installation on the surface casing which

Operator Name: OXY USA INCORPORATED

Well Name: CORRAL GORGE 12-13 FEDERAL COM

Well Number: 23H

will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested. We will test the flange connection of the wellhead with a test port that is directly in the flange. We are proposing that we will run the wellhead through the rotary prior to cementing surface casing as discussed with the BLM on October 8, 2015. BOP Break Testing Request OXY requests permission to adjust the BOP break testing requirements as per the agreement reached in the OXY/BLM meeting on September 5, 2019. A separate sundry will be sent prior to spud that reflects the pad based break testing plan. BOP break test under the following conditions: 1. After a full BOP test is conducted 2. When skidding to drill an intermediate section where ICP is set into the third Bone Spring or shallower. 3. When skidding to drill a production section that does not penetrate into the third Bone Spring or deeper. If the kill line is broken prior to skid, two tests will be performed. 1. Wellhead flange, co-flex hose, kill line connections and upper pipe rams 2. Wellhead flange, HCR valve, check valve, upper pipe rams If the kill line is not broken prior to skid, only one test will be performed. 1. Wellhead flange, co-flex hose, check valve, upper pipe rams

Choke Diagram Attachment:

CorralGorge12_13FdCom23H_ChkManifold_20191227092123.pdf

BOP Diagram Attachment:

CorralGorge12_13FdCom23H_BOP_20191227092134.pdf

CorralGorge12_13FdCom23H_FlexHoseCert_20191227092143.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	14.75	10.75	NEW	API	N	0	729	0	729	3107	2378	729	J-55	40.5	BUTT	1.125	1.2	BUOY	1.4	BUOY	1.4
2	INTERMEDIATE	9.875	7.625	NEW	API	N	0	8483	0	8250	3101	-5143	8483	HCL-80	26.4	BUTT	1.125	1.2	BUOY	1.4	BUOY	1.4
3	PRODUCTION	6.75	5.5	NEW	API	N	0	9033	0	8777	3101	-5670	9033	P-110	20	OTHER - DQX/SFWT ORQ/DQWT ORQ	1.125	1.2	BUOY	1.4	BUOY	1.4
4	PRODUCTION	6.75	4.5	NEW	API	N	9033	20153	8777	9054	-5670	-5947	11120	P-110	13.5	OTHER - DQXULTRA	1.125	1.2	BUOY	1.4	BUOY	1.4

Casing Attachments

Operator Name: OXY USA INCORPORATED

Well Name: CORRAL GORGE 12-13 FEDERAL COM

Well Number: 23H

Casing Attachments

Casing ID: 1 **String Type:** SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

CorralGorge12_13FdCom23H_CsgCriteria_20191227092226.pdf

Casing ID: 2 **String Type:** INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

CorralGorge12_13FdCom23H_CsgCriteria_20191227092252.pdf

Casing ID: 3 **String Type:** PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

CorralGorge12_13FdCom23H_CsgCriteria_20191227092331.pdf

CorralGorge12_13FdCom23H_5.5_20_P110CY_TMKUPDQWTORQ_20191227092341.pdf

CorralGorge12_13FdCom23H_5.5_20_P110HC_TMKUPSFTORQ_20191227092341.pdf

CorralGorge12_13FdCom23H_5.5_20_P110_DQX_20191227092341.pdf

Operator Name: OXY USA INCORPORATED

Well Name: CORRAL GORGE 12-13 FEDERAL COM

Well Number: 23H

Casing Attachments

Casing ID: 4 **String Type:** PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

CorralGorge12_13FdCom23H_CsgCriteria_20191227092435.pdf

CorralGorge12_13FdCom23H_4.5_13.5_P110_TMKUPULTRADQX_20191227092445.pdf

Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	729	597	1.33	14.8	794	100	CI C	Accelerator

INTERMEDIATE	Lead		0	5818	716	1.92	12.9	1375	10	CI C	Accelerator
INTERMEDIATE	Tail		5818	8483	371	1.65	13.2	612	5	CI H	Retarder, Dispersant, Salt
PRODUCTION	Lead		7983	20153	1417	1.38	13.2	1955	20	CI H	Retarder, Dispersant, Salt

PRODUCTION	Lead		7983	20153	1417	1.38	13.2	1955	20	CI H	Retarder, Dispersant, Salt
------------	------	--	------	-------	------	------	------	------	----	------	----------------------------

Operator Name: OXY USA INCORPORATED

Well Name: CORRAL GORGE 12-13 FEDERAL COM

Well Number: 23H

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times. The following is a general list of products: Barite, Bentonite, Gypsum, Lime, Soda Ash, Caustic Soda, Nut Plug, Cedar Fiber, Cotton Seed Hulls, Drilling Paper, Salt Water Clay, CACL2.

Describe the mud monitoring system utilized: PVT/MD Totco/Visual Monitoring

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	729	WATER-BASED MUD	8.6	8.8							
729	8483	OTHER : Saturated Brine Based Mud and/or Water Based and/or Oil Based Mud	8	10							
8483	20153	OTHER : Water Based and/or oil Based Mud	8	9.6							

Operator Name: OXY USA INCORPORATED

Well Name: CORRAL GORGE 12-13 FEDERAL COM

Well Number: 23H

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

GR from TD to surface (horizontal well - vertical portion of hole). Mud log from intermediate casing shoe to TD.

List of open and cased hole logs run in the well:

GAMMA RAY LOG, MUD LOG/GEOLOGICAL LITHOLOGY LOG,

Coring operation description for the well:

No coring is planned at this time.

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 4527

Anticipated Surface Pressure: 2531

Anticipated Bottom Hole Temperature(F): 153

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geohazards description:

Contingency Plans geohazards attachment:

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations plan:

CorralGorge12_13FdCom23H_H2S2_20191227092929.pdf

CorralGorge12_13FdCom23H_H2S3ECL_20191227092929.pdf

CorralGorge12_13FdCom23H_H2S1_20191227092929.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

CorralGorge12_13FdCom23H_DirectPlan_20191227092956.pdf

CorralGorge12_13FdCom23H_DirectPlot_20191227092956.pdf

Other proposed operations facets description:

OXY requests the option to set casing shallower yet still below the salts if losses or hole conditions require this. Cement volumes may be adjusted if casing is set shallower and a DV tool may be run in case hole conditions merit pumping a second stage cement job to comply with permitted top of cement. If cement circulated to surface during first stage, we will drop a cancellation cone and not pump the second stage.

OXY requests the option to run production casing with DQX, SF TORQ, and/or DQW TORQ connections to accommodate hole conditions or drilling operations.

OXY requests to pump a two stage Intermediate casing cement job with the first stage being pumped conventionally with the calculated TOC @ the Brushy Canyon and the second stage performed as a bradenhead squeeze with planned cement from the top of the Brushy Canyon to Surface.

OXY requests a variance to cement the 7-5/8" intermediate casing string offline, see attached for additional

Operator Name: OXY USA INCORPORATED

Well Name: CORRAL GORGE 12-13 FEDERAL COM

Well Number: 23H

information.

OXY requests permission to adjust the CBL requirement after bradenhead cement jobs, on 7-5/8 intermediate casings, as per the agreement reached in the OXY/BLM meeting on September 5, 2019.

Three string wells:

1. CBL will be required on one well per pad
2. If the pumped volume of cement is less than permitted in the APD, BLM will be notified and a CBL may be run
3. Echometer will be used after bradenhead cement job to determine TOC before pumping top-out cement

Annular Clearance Variance Request

As per the agreement reached in the OXY/BLM meeting on Feb 22, 2018, OXY requests permission to allow deviation from the 0.422 annular clearance requirement from Onshore Order #2 under the following conditions:

1. Annular clearance to meet or exceed 0.422 between intermediate casing ID and production casing coupling only on the first 500 overlap between both casings.
2. Annular clearance less than 0.422 is acceptable for the curve and lateral portions of the production open hole section.

Well will be drilled with a walking/skidding operation. Plan to drill the multiple well pad in batch by section: all surface sections, intermediate sections and production sections. The wellhead will be secured with a night cap whenever the rig is not over the well.

OXY requests the option to contract a Surface Rig to drill, set surface casing, and cement for this well. If the timing between rigs is such that OXY would not be able to preset surface, the Primary Rig will MIRU and drill the well in its entirety per the APD. See attached for additional spudder rig information.

Other proposed operations facets attachment:

CorralGorge12_13FdCom23H_DrillPlan_20191227093059.pdf

CorralGorge12_13FdCom23H_GasCapPlan_20191227093109.pdf

CorralGorge12_13FdCom23H_SpudRigData_20191227093124.pdf

Other Variance attachment:

CorralGorge12_13FdCom23H_OfflineCmtgDetail_20191227093138.pdf



Permian Drilling Hydrogen Sulfide Drilling Operations Plan New Mexico

Scope

This contingency plan establishes guidelines for the public, all company employees, and contract employees who's work activities may involve exposure to hydrogen sulfide (H₂S) gas.

While drilling this well, it is possible to encounter H₂S bearing formations. At all times, the first barrier to control H₂S emissions will be the drilling fluid, which will have a density high enough to control influx.

Objective

1. Provide an immediate and predetermined response plan to any condition when H₂S is detected. All H₂S detections in excess of 10 parts per million (ppm) concentration are considered an Emergency.
2. Prevent any and all accidents, and prevent the uncontrolled release of hydrogen sulfide into the atmosphere.
3. Provide proper evacuation procedures to cope with emergencies.
4. Provide immediate and adequate medical attention should an injury occur.

Discussion

Implementation:	This plan with all details is to be fully implemented before drilling to <u>commence</u> .
Emergency response Procedure:	This section outlines the conditions and denotes steps to be taken in the event of an emergency.
Emergency equipment Procedure:	This section outlines the safety and emergency equipment that will be required for the drilling of this well.
Training provisions:	This section outlines the training provisions that must be adhered to prior to drilling.
Drilling emergency call lists:	Included are the telephone numbers of all persons to be contacted should an emergency exist.
Briefing:	This section deals with the briefing of all people involved in the drilling operation.
Public safety:	Public safety personnel will be made aware of any potential evacuation and any additional support needed.
Check lists:	Status check lists and procedural check lists have been included to insure adherence to the plan.
General information:	A general information section has been included to supply support information.

Hydrogen Sulfide Training

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on the well:

1. The hazards and characteristics of H₂S.
2. Proper use and maintenance of personal protective equipment and life support systems.
3. H₂S detection.
4. Proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures and prevailing winds.
5. Proper techniques for first aid and rescue procedures.
6. Physical effects of hydrogen sulfide on the human body.
7. Toxicity of hydrogen sulfide and sulfur dioxide.
8. Use of SCBA and supplied air equipment.
9. First aid and artificial respiration.
10. Emergency rescue.

In addition, supervisory personnel will be trained in the following areas:

1. The effects of H₂S on metal components. If high tensile strength tubular is to be used, personnel will be trained in their special maintenance requirements.
2. Corrective action and shut-in procedures when drilling a well, blowout prevention and well control procedures.
3. The contents and requirements of the H₂S Drilling Operations Plan.

H₂S training refresher must have been taken within one year prior to drilling the well. Specifics on the well to be drilled will be discussed during the pre-spud meeting. H₂S and well control (choke) drills will be performed while drilling the well, at least on a weekly basis. This plan shall be available in the well site. All personnel will be required to carry the documentation proving that the H₂S training has been taken.

Service company and visiting personnel

- A. Each service company that will be on this well will be notified if the zone contains H₂S.
- B. Each service company must provide for the training and equipment of their employees before they arrive at the well site.
- C. Each service company will be expected to attend a well site briefing

Emergency Equipment Requirements

1. Well control equipment

The well shall have hydraulic BOP equipment for the anticipated pressures. Equipment is to be tested on installation and follow Oxy Well Control standard, as well as BLM Onshore Order #2.

Special control equipment:

- A. Hydraulic BOP equipment with remote control on ground. Remotely operated choke.
- B. Rotating head
- C. Gas buster equipment shall be installed before drilling out of surface pipe.

2. Protective equipment for personnel

- A. Four (4) 30-minute positive pressure air packs (2 at each briefing area) on location.
- B. Adequate fire extinguishers shall be located at strategic locations.
- C. Radio / cell telephone communication will be available at the rig.
 - Rig floor and trailers.
 - Vehicle.

3. Hydrogen sulfide sensors and alarms

- A. H₂S sensor with alarms will be located on the rig floor, at the bell nipple, and at the flow line. These monitors will be set to alarm at 10 ppm with strobe light, and audible alarm.
- B. Hand operated detectors with tubes.
- C. H₂S monitor tester (to be provided by contract Safety Company.)
- D. There shall be one combustible gas detector on location at all times.

4. Visual Warning Systems

- A. One sign located at each location entrance with the following language:

**Caution – potential poison gas
Hydrogen sulfide
No admittance without authorization**

Wind sock – wind streamers:

- A. One 36” (in length) wind sock located at protection center, at height visible from rig floor.
- B. One 36” (in length) wind sock located at height visible from pit areas.

Condition flags

- A. One each condition flag to be displayed to denote conditions.

green – normal conditions
yellow – potential danger
red – danger, H2S present

- B. Condition flag shall be posted at each location sign entrance.

5. Mud Program

The mud program is designed to minimize the risk of having H2S and other formation fluids at surface. Proper mud weight and safe drilling practices will be applied. H2S scavengers will be used to minimize the hazards while drilling. Below is a summary of the drilling program.

Mud inspection devices:

Garrett gas train or hatch tester for inspection of sulfide concentration in mud system.

6. Metallurgy

- A. Drill string, casing, tubing, wellhead, blowout preventers, drilling spools or adapters, kill lines, choke manifold, lines and valves shall be suitable for the H2S service.
- B. All the elastomers, packing, seals and ring gaskets shall be suitable for H2S service.

7. Well Testing

No drill stem test will be performed on this well.

8. Evacuation plan

Evacuation routes should be established prior to well spud for each well and discussed with all rig personnel.

9. Designated area

- A. Parking and visitor area: all vehicles are to be parked at a predetermined safe distance from the wellhead.
- B. There will be a designated smoking area.
- C. Two briefing areas on either side of the location at the maximum allowable distance from the well bore so they offset prevailing winds perpendicularly, or at a 45-degree angle if wind direction tends to shift in the area.

Emergency procedures

- A. In the event of any evidence of H₂S level above 10 ppm, take the following steps:
 - 1. The Driller will pick up off bottom, shut down the pumps, slow down the pipe rotation.
 - 2. Secure and don escape breathing equipment, report to the upwind designated safe briefing / muster area.
 - 3. All personnel on location will be accounted for and emergency search should begin for any missing, the Buddy System will be implemented.
 - 4. Order non-essential personnel to leave the well site, order all essential personnel out of the danger zone and upwind to the nearest designated safe briefing / muster area.
 - 5. Entrance to the location will be secured to a higher level than our usual “Meet and Greet” requirement, and the proper condition flag will be displayed at the entrance to the location.
 - 6. Take steps to determine if the H₂S level can be corrected or suppressed and, if so, proceed as required.
- B. If uncontrollable conditions occur:
 - 1. Take steps to protect and/or remove any public in the down-wind area from the rig – partial evacuation and isolation. Notify necessary public safety personnel and appropriate regulatory entities (i.e. BLM) of the situation.

2. Remove all personnel to the nearest upwind designated safe briefing / muster area or off location.
3. Notify public safety personnel of safe briefing / muster area.
4. An assigned crew member will blockade the entrance to the location. No unauthorized personnel will be allowed entry to the location.
5. Proceed with best plan (at the time) to regain control of the well. Maintain tight security and safety procedures.

C. Responsibility:

1. Designated personnel.
 - a. Shall be responsible for the total implementation of this plan.
 - b. Shall be in complete command during any emergency.
 - c. Shall designate a back-up.

All personnel:

1. On alarm, don escape unit and report to the nearest upwind designated safe briefing / muster area upw
2. Check status of personnel (buddy system).
3. Secure breathing equipment.
4. Await orders from supervisor.

Drill site manager:

1. Don escape unit if necessary and report to nearest upwind designated safe briefing / muster area.
2. Coordinate preparations of individuals to return to point of release with tool pusher and driller (using the buddy system).
3. Determine H2S concentrations.
4. Assess situation and take control measures.

Tool pusher:

1. Don escape unit Report to up nearest upwind designated safe briefing / muster area.
2. Coordinate preparation of individuals to return to point of release with tool pusher drill site manager (using the buddy system).
3. Determine H2S concentration.
4. Assess situation and take control measures.

Driller:

1. Don escape unit, shut down pumps, continue

- | | |
|---|--|
| | rotating DP. |
| | 2. Check monitor for point of release. |
| | 3. Report to nearest upwind designated safe briefing / muster area. |
| | 4. Check status of personnel (in an attempt to rescue, use the buddy system). |
| | 5. Assigns least essential person to notify Drill Site Manager and tool pusher by quickest means in case of their absence. |
| | 6. Assumes the responsibilities of the Drill Site Manager and tool pusher until they arrive should they be absent. |
| Derrick man
Floor man #1
Floor man #2 | 1. Will remain in briefing / muster area until instructed by supervisor. |
| Mud engineer: | 1. Report to nearest upwind designated safe briefing / muster area. |
| | 2. When instructed, begin check of mud for pH and H ₂ S level. (Garett gas train.) |
| Safety personnel: | 1. Mask up and check status of all personnel and secure operations as instructed by drill site manager. |

Taking a kick

When taking a kick during an H₂S emergency, all personnel will follow standard Well control procedures after reporting to briefing area and masking up.

Open-hole logging

All unnecessary personnel off floor. Drill Site Manager and safety personnel should monitor condition, advise status and determine need for use of air equipment.

Running casing or plugging

Following the same “tripping” procedure as above. Drill Site Manager and safety personnel should determine if all personnel have access to protective equipment.

Ignition procedures

The decision to ignite the well is the responsibility of the operator (Oxy Drilling Management). The decision should be made only as a last resort and in a situation where it is clear that:

1. Human life and property are endangered.
2. There is no hope controlling the blowout under the prevailing conditions at the well.

Instructions for igniting the well

1. Two people are required for the actual igniting operation. They must wear self-contained breathing units and have a safety rope attached. One man (tool pusher or safety engineer) will check the atmosphere for explosive gases with the gas monitor. The other man is responsible for igniting the well.
2. Primary method to ignite: 25 mm flare gun with range of approximately 500 feet.
3. Ignite upwind and do not approach any closer than is warranted.
4. Select the ignition site best for protection, and which offers an easy escape route.
5. Before firing, check for presence of combustible gas.
6. After lighting, continue emergency action and procedure as before.
7. All unassigned personnel will remain in briefing area until instructed by supervisor or directed by the Drill Site Manager.

Remember: After well is ignited, burning hydrogen sulfide will convert to sulfur dioxide, which is also highly toxic. **Do not assume the area is safe after the well is ignited.**

Status check list

Note: All items on this list must be completed before drilling to production casing point.

1. H2S sign at location entrance.
2. Two (2) wind socks located as required.
3. Four (4) 30-minute positive pressure air packs (2 at each Briefing area) on location for all rig personnel and mud loggers.
4. Air packs inspected and ready for use.
5. Cascade system and hose line hook-up as needed.
6. Cascade system for refilling air bottles as needed.
7. Condition flag on location and ready for use.
8. H2S detection system hooked up and tested.
9. H2S alarm system hooked up and tested.
10. Hand operated H2S detector with tubes on location.
11. 1 – 100' length of nylon rope on location.
12. All rig crew and supervisors trained as required.
13. All outside service contractors advised of potential H2S hazard on well.
14. No smoking sign posted and a designated smoking area identified.
15. Calibration of all H2S equipment shall be noted on the IADC report.

Checked by:_____ Date:_____

Procedural check list during H2S events

Perform each tour:

1. Check fire extinguishers to see that they have the proper charge.
2. Check breathing equipment to ensure that it is in proper working order.
3. Make sure all the H2S detection system is operative.

Perform each week:

1. Check each piece of breathing equipment to make sure that demand or forced air regulator is working. This requires that the bottle be opened and the mask assembly be put on tight enough so that when you inhale, you receive air or feel air flow.
2. BOP skills (well control drills).
3. Check supply pressure on BOP accumulator stand by source.
4. Check breathing equipment mask assembly to see that straps are loosened and turned back, ready to put on.
5. Check pressure on breathing equipment air bottles to make sure they are charged to full volume. (Air quality checked for proper air grade "D" before bringing to location)
6. Confirm pressure on all supply air bottles.
7. Perform breathing equipment drills with on-site personnel.
8. Check the following supplies for availability.
 - A. Emergency telephone list.
 - B. Hand operated H2S detectors and tubes.

General evacuation plan

1. When the company approved supervisor (Drill Site Manager, consultant, rig pusher, or driller) determines the H₂S gas cannot be limited to the well location and the public will be involved, he will activate the evacuation plan.
2. Drill Site Manager or designee will notify local government agency that a hazardous condition exists and evacuation needs to be implemented.
3. Company or contractor safety personnel that have been trained in the use of H₂S detection equipment and self-contained breathing equipment will monitor H₂S concentrations, wind directions, and area of exposure. They will delineate the outer perimeter of the hazardous gas area. Extension to the evacuation area will be determined from information gathered.
4. Law enforcement personnel (state police, police dept., fire dept., and sheriff's dept.) Will be called to aid in setting up and maintaining road blocks. Also, they will aid in evacuation of the public if necessary.
5. After the discharge of gas has been controlled, company safety personnel will determine when the area is safe for re-entry.

Important: Law enforcement personnel will not be asked to come into a contaminated area. Their assistance will be limited to uncontaminated areas. Constant radio contact will be maintained with them.

Emergency actions

Well blowout – if emergency

1. Evacuate all personnel to “Safe Briefing / Muster Areas” or off location if needed.
2. If sour gas – evacuate rig personnel.
3. If sour gas – evacuate public within 3000 ft radius of exposure.
4. Don SCBA and shut well in if possible using the buddy system.
5. Notify Drilling Superintendent and call 911 for emergency help (fire dept and ambulance) if needed.
6. Implement the Blowout Contingency Plan, and Drilling Emergency Action Plan.
6. Give first aid as needed.

Person down location/facility

1. If immediately possible, contact 911. Give location and wait for confirmation.
2. Don SCBA and perform rescue operation using buddy system.

Toxic effects of hydrogen sulfide

Hydrogen sulfide is extremely toxic. The acceptable ceiling concentration for eight-hour exposure is 10 ppm, which is .001% by volume. Hydrogen sulfide is heavier than air (specific gravity – 1.192) and colorless. It forms an explosive mixture with air between 4.3 and 46.0 percent by volume. Hydrogen sulfide is almost as toxic as hydrogen cyanide and is between five and six times more toxic than carbon monoxide. Toxicity data for hydrogen sulfide and various other gases are compared in table i. Physical effects at various hydrogen sulfide exposure levels are shown in table ii.

Table i
Toxicity of various gases

Common name	Chemical formula	Specific gravity (sc=1)	Threshold limit (1)	Hazardous limit (2)	Lethal concentration (3)
Hydrogen Cyanide	Hcn	0.94	10 ppm	150 ppm/hr	300 ppm
Hydrogen Sulfide	H2S	1.18	10 ppm	250 ppm/hr	600 ppm
Sulfur Dioxide	So2	2.21	5 ppm	-	1000 ppm
Chlorine	Cl2	2.45	1 ppm	4 ppm/hr	1000 ppm
Carbon Monoxide	Co	0.97	50 ppm	400 ppm/hr	1000 ppm
Carbon Dioxide	Co2	1.52	5000 ppm	5%	10%
Methane	Ch4	0.55	90,000 ppm	Combustible above 5% in air	

- 1) threshold limit – concentration at which it is believed that all workers may be repeatedly exposed day after day without adverse effects.
- 2) hazardous limit – concentration that will cause death with short-term exposure.
- 3) lethal concentration – concentration that will cause death with short-term exposure.

Toxic effects of hydrogen sulfide

Table ii
Physical effects of hydrogen sulfide

<u>Percent (%)</u>	<u>Ppm</u>	<u>Concentration</u> Grains <u>100 std. Ft3*</u>	<u>Physical effects</u>
0.001	<10	00.65	Obvious and unpleasant odor.

0.002	10	01.30	Safe for 8 hours of exposure.
0.010	100	06.48	Kill smell in 3 – 15 minutes. May sting eyes and throat.
0.020	200	12.96	Kills smell shortly; stings eyes and throat.
0.050	500	32.96	Dizziness; breathing ceases in a few minutes; needs prompt artificial respiration.
0.070	700	45.36	Unconscious quickly; death will result if not rescued promptly.
0.100	1000	64.30	Unconscious at once; followed by death within minutes.

*at 15.00 psia and 60'f.

Use of self-contained breathing equipment (SCBA)

1. Written procedures shall be prepared covering safe use of SCBA's in dangerous atmosphere, which might be encountered in normal operations or in emergencies. Personnel shall be familiar with these procedures and the available SCBA.
2. SCBA's shall be inspected frequently at random to insure that they are properly used, cleaned, and maintained.
3. Anyone who may use the SCBA's shall be trained in how to insure proper face-piece to face seal. They shall wear SCBA's in normal air and then wear them in a test atmosphere. (note: such items as facial hair {beard or sideburns} and eyeglasses will not allow proper seal.) Anyone that may be reasonably expected to wear SCBA's should have these items removed before entering a toxic atmosphere. A special mask must be obtained for anyone who must wear eyeglasses or contact lenses.
4. Maintenance and care of SCBA's:
 - a. A program for maintenance and care of SCBA's shall include the following:
 1. Inspection for defects, including leak checks.
 2. Cleaning and disinfecting.
 3. Repair.
 4. Storage.
 - b. Inspection, self-contained breathing apparatus for emergency use shall be inspected monthly.
 1. Fully charged cylinders.
 2. Regulator and warning device operation.
 3. Condition of face piece and connections.
 4. Rubber parts shall be maintained to keep them pliable and prevent deterioration.
 - c. Routinely used SCBA's shall be collected, cleaned and disinfected as frequently as necessary to insure proper protection is provided.
5. Persons assigned tasks that requires use of self-contained breathing equipment shall be certified physically fit (medically cleared) for breathing equipment usage at least annually.
6. SCBA's should be worn when:
 - A. Any employee works near the top or on top of any tank unless test reveals less than 10 ppm of H₂S.

- B. When breaking out any line where H₂S can reasonably be expected.
- C. When sampling air in areas to determine if toxic concentrations of H₂S exists.
- D. When working in areas where over 10 ppm H₂S has been detected.
- E. At any time there is a doubt as to the H₂S level in the area to be entered.

Rescue
First aid for H₂S poisoning

Do not panic!

Remain calm – think!

1. Don SCBA breathing equipment.
2. Remove victim(s) utilizing buddy system to fresh air as quickly as possible. (go up-wind from source or at right angle to the wind. Not down wind.)
3. Briefly apply chest pressure – arm lift method of artificial respiration to clean the victim's lungs and to avoid inhaling any toxic gas directly from the victim's lungs.
4. Provide for prompt transportation to the hospital, and continue giving artificial respiration if needed.
5. Hospital(s) or medical facilities need to be informed, before-hand, of the possibility of H₂S gas poisoning – no matter how remote the possibility is.
6. Notify emergency room personnel that the victim(s) has been exposed to H₂S gas.

Besides basic first aid, everyone on location should have a good working knowledge of artificial respiration.

Revised CM 6/27/2012

OXY Permian Delaware NM Basin Drilling & Completions Incident Reporting**OXY Permian Crisis Team Hotline Notification**

Person	Location	Office Phone	Cell/Mobile Phone
--------	----------	--------------	-------------------

Drilling & Completions Department			
Drilling & Completions Manager: John Willis	Houston	(713) 366-5556	(713) 259-1417
Drilling Superintendent: Simon Benavides	Houston	(713) 215-7403	(832) 528-3547
Completions Superintendent: Chris Winter	Houston	(713) 366-5212	(806) 239-8774
Drilling Eng. Supervisor: Diego Tellez	Houston	(713) 350-4602	(713) 303-4932
Drilling Eng. Supervisor: Randy Neel	Houston	(713) 215-7987	(713) 517-5544
Completions Eng. Supervisor: Evan Hinkel	Houston	(713) 366-5436	(281) 236-6153
Drilling & Completions HES Lead. Ryan Green	Houston	713-336-5753	281-520-5216
Drilling & Completions HES Advisor:Kenny Williams	Carlsbad	(432) 686-1434	(337) 208-0911
Drilling & Completions HES Advisor:Kyle Holden	Carlsbad	(432) 686-1435	(661) 369-5328
Drilling & Completions HES Advisor Sr:Dave Schmidt	Carlsbad		(559) 310-8572
Drilling & Completions HES Advisor. :Seth Doyle	Carlsbad		(337) 499-0756

HES / Enviromental & Regulatory Department	Location	Office	Cell Phone
Jon Hamil-HES Manager	Houston	(713) 497-2494	(832) 537-9885
Mark Birk-HES Manager	Houston	(713) 350-4615	(949) 413-3127
Austin Tramell	Midland	(432) 699-4208	(575) 499-4919
Rico Munoz	Midland	(432) 699-8366	(432) 803-4116
Amber DuckWorth	Midland		(832) 966-1879
Kelley Montgomery- Regulatory Manager	Houston	(713) 366-5716	(832) 454-8137
Sandra Musallam -Regulatory Lead	Houston	+1 (713) 366-5106	+1 (713) 504-8577
Bishop, Steve-DOT Pipeline Coordinator	Midland	432-685-5614	
Wilson, Dusty-Safety Advisor	Midland	432-685-5771	(432) 254-2336
John W Dittrich Eniromental Advisor	Midland		(575) 390-2828
William (Jack) Calhoun-Environmental Lead	Houston	+713 (350) 4906	(281) 917-8571
Robert Barrow-Risk Engineer Manager	Houston	(713) 366-5611	(832) 867-5336
Sarah Holmes-HSE Cordinator	Midland	432-685-5758	
Administrative	Location	Office	
Sarah Holmes	Midland	432-685-5830	
Robertson, Debbie	Midland	432-685-5812	
Laci Hollaway	Midland	(432) 685-5716	(432) 631-6341
Administrative	Location	Office	
Rosalinda Escajeda	Midland	432-685-5831	

Person	Location	Office Phone	Cell/Mobile Phone
Moreno, Leslie (contract)	Hobbs	575-397-8247	
Sehon, Angela (contractor)	Levelland	806-894-8347	
Vasquez, Claudia (contractor)	North Cowden	432-385-3120	
XstremeMD	Location	Office	
Medical Case Management	Orla, TX	(337) 205-9314	
Axiom Medical Consulting	Location	Office	
Medical Case Management		(877) 502-9466	
Regulatory Agencies			
Bureau of Land Management	Carlsbad, NM	(505) 887-6544	
Bureau of Land Management	Hobbs, NM	(505) 393-3612	
Bureau of Land Management	Roswell, NM	(505) 393-3612	
Bureau of Land Management	Santa Fe, NM	(505) 988-6030	
DOT Juisdictional Pipelines-Incident Reporting New Mexico Public Regulaion Commission	Santa Fe, NM	(505) 827-3549 (505) 490-2375	
DOT Juisdictional Pipelines-Incident Reporting Texas Railroad Commission	Austin, TX	(512) 463-6788	
EPA Hot Line	Dallas, Texas	(214) 665-6444	
Federal OSHA, Area Office	Lubbock, Texas	(806) 472-7681	
National Response Center	Washington, D. C.	(800) 424-8802	
National Infrastructure Coordinator Center		(202) 282-9201	
New Mexico Air Quality Bureau	Santa Fe, NM	(505) 827-1494	
New Mexico Oil Conservation Division	Artesia, NM	(505) 748-1283	After Hours (505) 370-7545
New Mexico Oil Conservation Division	Hobbs, NM	(505) 393-6161	
New Mexico Oil Conservation Division	Santa Fe, NM	(505) 471-1068	
New Mexico OCD Environmental Bureau	Santa Fe, NM	(505) 476-3470	
New Mexico Environmental Department	Hobbs, NM	(505) 827-9329	
NM State Emergency Response Center	Santa Fe, NM	(505) 827-9222	
Railroad Commission of TX	District 1 San Antonio,	(210) 227-1313	
Railroad Commission of TX	District 7C San Angelo	(325) 657-7450	
Railroad Commission of TX	District 8, 8A Midland	(432) 684-5581	
Texas Emergency Response Center	Austin, TX	(512) 463-7727	
TCEQ Air	Region 2 Lubbock, TX	(806) 796-3494	
TCEQ Water/Waste/Air	Region 3 Abilene, TX	(325) 698-9674	
TCEQ Water/Waste/Air	Region 7 Midland, TX	(432) 570-1359	
TCEQ Water/Waste/Air	Region 9 San Antonio,	(512) 734-7981	
TCEQ Water/Waste/Air	Region 8 San Angelo	(325) 655-9479	
Medical Facilities			
Abernathy Medical Clinic	Abernathy, TX	(806) 298-2524	
Alliance Hospital	Odessa, TX	(432) 550-1000	
Artesia General Hospital	Artesia, NM	(505) 748-3333	
Brownfield Regional Medical Center	Brownfield, TX	(806) 637-3551	

Person	Location	Office Phone	Cell/Mobile Phone
Cogdell Memorial Hospital	Snyder, TX	(325) 573-6374	
Covenant Hospital Levelland	Levelland, TX	(806) 894-4963	
Covenant Medical Center	Lubbock, TX	(806) 725-1011	
Covenant Medical Center Lakeside	Lubbock, TX	(806) 725-6000	
Covenant Family Health	Snyder, TX	(325) 573-1300	
Crockett County Hospital	Ozona, TX	(325) 392-2671	
Guadalupe Medical Center	Carlsbad, NM	(505) 887-6633	
Lea Regional Hospital	Hobbs, NM	(505) 492-5000	
McCamey Hospital	McCamey, TX	(432) 652-8626	
Medical Arts Hospital	Lamesa, TX	(806) 872-2183	
Medical Center Hospital	Odessa, TX	(432) 640-4000	
Medi Center Hospital	San Angelo, TX	(325) 653-6741	
Memorial Hospital	Ft. Stockton	(432) 336-2241	
Memorial Hospital	Seminole, TX	(432) 758-5811	
Midland Memorial Hospital	Midland, TX	(432) 685-1111	
Nor-Lea General Hospital	Lovington, NM	(505) 396-6611	
Odessa Regional Hospital	Odessa, TX	(432) 334-8200	
Permian General Hospital	Andrews, TX	(432) 523-2200	
Reagan County Hospital	Big Lake, TX	(325) 884-2561	
Reeves County Hospital	Pecos, TX	(432) 447-3551	
Shannon Medical Center	San Angelo, TX	(325) 653-6741	
Union County General Hospital	Clayton, NM	(505) 374-2585	
University Medical Center	Lubbock, TX	(806) 725-8200	
Val Verde Regional Medical Center	Del Rio, TX	(830) 775-8566	
Ward Memorial Hospital	Monahans, TX	(432) 943-2511	
Yoakum County Hospital	Denver City, TX	(806) 592-5484	
Law Enforcement - Sheriff			
Andrews Cty Sheriff's Department	Andrews County(Andr	(432) 523-5545	
Crane Cty Sheriff's Department	Crane, County (Crane)	(432) 558-3571	
Crockett Cty Sheriff's Department	Crockett County (Ozor	(325) 392-2661	
Dawson Cty Sheriff's Department	Dawson County (Lame	(806) 872-7560	
Ector Cty Sheriff's Department	Ector County (Odessa)	(432) 335-3050	
Eddy Cty Sheriff's Department	Eddy County (Artesia)	(505) 746-2704	
Eddy Cty Sheriff's Department	Eddy County (Carlsbad	(505) 887-7551	
Gaines Cty Sheriff's Department	Gaines County (Semin	(432) 758-9871	
Hockley Cty Sheriff's Department	Hockley County(Level	(806) 894-3126	
Kent Cty (Jayton City Sheriff's Dept.)	Kent County(Jayton)	(806) 237-3801	
Lea Cty Sheriff's Department	Lea County (Eunice)	(505) 384-2020	
Lea Cty Sheriff's Department	Lea County (Hobbs)	(505) 393-2515	
Lea Cty Sheriff's Department	Lea County (Lovington	(505) 396-3611	
Lubbock Cty Sheriff's Department	Lubbock Cty (Abernath	(806) 296-2724	
Midland Cty Sheriff's Department	Midland County (Midl	(432) 688-1277	

Person	Location	Office Phone	Cell/Mobile Phone
Pecos Cty Sheriff's Department	Pecos County (Iraan)	(432) 639-2251	
Reeves Cty Sheriff's Department	Reeves County (Pecos)	(432) 445-4901	
Scurry Cty Sheriff's Department	Scurry County (Snyder)	(325) 573-3551	
Terry Cty Sheriff's Department	Terry County (Brownfi)	(806) 637-2212	
Union Cty Sheriff's Department	Union County (Clayton)	(505) 374-2583	
Upton Cty Sheriff's Department	Upton County (Rankin)	(432) 693-2422	
Ward Cty Sheriff's Department	Ward County (Monaha)	(432) 943-3254	
Yoakum City Sheriff's Department	Yoakum Co. (Denever)	(806) 456-2377	
Law Enforcement - Police			
Abernathy City Police	Abernathy, TX	(806) 298-2545	
Andrews City Police	Andrews, TX	(432) 523-5675	
Artesia City Police	Artesia, NM	(505) 746-2704	
Brownfield City Police	Brownfield, TX	(806) 637-2544	
Carlsbad City Police	Carlsbad, NM	(505) 885-2111	
Clayton City Police	Clayton, NM	(505) 374-2504	
Denver City Police	Denver City, TX	(806) 592-3516	
Eunice City Police	Eunice, NM	(505) 394-2112	
Hobbs City Police	Hobbs, NM	393-2677	
Jal City Police	Jal, NM	(505) 395-2501	
Jayton City Police	Jayton, TX	(806) 237-3801	
Lamesa City Police	Lamesa, TX	(806) 872-2121	
Levelland City Police	Levelland, TX	(806) 894-6164	
Lovington City Police	Lovington, NM	(505) 396-2811	
Midland City Police	Midland, TX	(432) 685-7113	
Monahans City Police	Monahans, TX	(432) 943-3254	
Odessa City Police	Odessa, TX	(432) 335-3378	
Seminole City Police	Seminole, TX	(432) 758-9871	
Snyder City Police	Snyder, TX	(325) 573-2611	
Sundown City Police	Sundown, TX	(806) 229-8241	
Law Enforcement - FBI			
FBI	Albuquerque, NM	(505) 224-2000	
FBI	Midland, TX	(432) 570-0255	
Law Enforcement - DPS			
NM State Police	Artesia, NM	(505) 746-2704	
NM State Police	Carlsbad, NM	(505) 885-3137	
NM State Police	Eunice, NM	(505) 392-5588	
NM State Police	Hobbs, NM	(505) 392-5588	
NM State Police	Clayton, NM	(505) 374-2473; 911	
TX Dept of Public Safety	Andrews, TX	(432) 524-1443	
TX Dept of Public Safety	Big Lake, TX	(325) 884-2301	

Person	Location	Office Phone	Cell/Mobile Phone
TX Dept of Public Safety	Brownfield, TX	(806) 637-2312	
TX Dept of Public Safety	Iraan, TX	(432) 639-3232	
TX Dept of Public Safety	Lamesa, TX	(806) 872-8675	
TX Dept of Public Safety	Levelland, TX	(806) 894-4385	
TX Dept of Public Safety	Lubbock, TX	(806) 747-4491	
TX Dept of Public Safety	Midland, TX	(432) 697-2211	
TX Dept of Public Safety	Monahans, TX	(432) 943-5857	
TX Dept of Public Safety	Odessa, TX	(432) 332-6100	
TX Dept of Public Safety	Ozona, TX	(325) 392-2621	
TX Dept of Public Safety	Pecos, TX	(432) 447-3533	
TX Dept of Public Safety	Seminole, TX	(432) 758-4041	
TX Dept of Public Safety	Snyder, TX	(325) 573-0113	
TX Dept of Public Safety	Terry County TX	(806) 637-8913	
TX Dept of Public Safety	Yoakum County TX	(806) 456-2377	
Firefighting & Rescue			
Abernathy	Abernathy, TX	(806) 298-2022	
Amistad/Rosebud	Amistad/Rosebud, NM	(505) 633-9113	
Andrews	Andrews, TX	523-3111	
Artesia	Artesia, NM	(505) 746-5051	
Big Lake	Big Lake, TX	(325) 884-3650	
Brownfield-Administrative & other calls	Brownfield, TX	(816) 637-4547	
Brownfield emergency only	Brownfield, TX	-911	
Carlsbad	Carlsbad, NM	(505) 885-3125	
Clayton	Clayton, NM	(505) 374-2435	
Cotton Center	Cotton Center, TX	(806) 879-2157	
Crane	Crane, TX	(432) 558-2361	
Del Rio	Del Rio, TX	(830) 774-8650	
Denver City	Denver City, TX	(806) 592-3516	
Eldorado	Eldorado, TX	(325) 853-2691	
Eunice	Eunice, NM	(505) 394-2111	
Garden City	Garden City, TX	(432) 354-2404	
Goldsmith	Goldsmith, TX	(432) 827-3445	
Hale Center	Hale Center, TX	(806) 839-2411	
Halfway	Halfway, TX		
Hobbs	Hobbs, NM	(505) 397-9308	
Jal	Jal, NM	(505) 395-2221	
Jayton	Jayton, TX	(806) 237-3801	
Kermit	Kermit, TX	(432) 586-3468	
Lamesa	Lamesa, TX	(806) 872-4352	
Levelland	Levelland, TX	(806) 894-3154	
Lovington	Lovington, NM	(505) 396-2359	
Maljamar	Maljamar, NM	(505) 676-4100	

Person	Location	Office Phone	Cell/Mobile Phone
McCamey	McCamey, TX	(432) 652-8232	
Midland	Midland, TX	(432) 685-7346	
Monahans	Monahans, TX	(432) 943-4343	
Nara Visa	Nara Visa, NM	(505) 461-3300	
Notrees	Notress, TX	(432) 827-3445	
Odessa	Odessa, TX	(432) 335-4659	
Ozona	Ozona, TX	(325) 392-2626	
Pecos	Pecos, TX	(432) 445-2421	
Petersburg	Petersburg, TX	(806) 667-3461	
Plains	Plains, TX	(806) 456-8067	
Plainview	Plainview, TX	(806) 296-1170	
Rankin	Rankin, TX	(432) 693-2252	
San Angelo	San Angelo, TX	(325) 657-4355	
Sanderson	Sanderson, TX	(432) 345-2525	
Seminole	Seminole, TX	758-9871	
Smyer	Smyer, TX	(806) 234-3861	
Snyder	Snyder, TX	(325) 573-6215	
Sundown	Sundown, TX	911	
Tucumcari	Tucumcari, NM	911	
West Odessa	Odessa, TX	(432) 381-3033	
Ambulance			
Abernathy Ambulance	Abernathy, TX	(806) 298-2241	
Amistad/Rosebud	Amistad/Rosebud, NM	(505) 633-9113	
Andrews Ambulance	Andrews, TX	(432) 523-5675	
Artesia Ambulance	Artesia, NM	(505) 746-2701	
Big Lake Ambulance	Big Lake, TX	(325) 884-2423	
Big Spring Ambulance	Big Spring, TX	(432) 264-2550	
Brownfield Ambulance	Brownfield, TX	(806) 637-2511	
Carlsbad Ambulance	Carlsbad, NM	(505) 885-2111; 911	
Clayton, NM	Clayton, NM	(505) 374-2501	
Denver City Ambulance	Denver City, TX	(806) 592-3516	
Eldorado Ambulance	Eldorado, TX	(325) 853-3456	
Eunice Ambulance	Eunice, NM	(505) 394-3258	
Goldsmith Ambulance	Goldsmith, TX	(432) 827-3445	
Hobbs, NM	Hobbs, NM	(505) 397-9308	
Jal, NM	Jal, NM	(505) 395-2501	
Jayton Ambulance	Jayton, TX	(806) 237-3801	
Lamesa Ambulance	Lamesa, TX	(806) 872-3464	
Levelland Ambulance	Levelland, TX	(806) 894-8855	
Lovington Ambulance	Lovington, NM	(505) 396-2811	
McCamey Hospital	McCamey, TX	(432) 652-8626	
Midland Ambulance	Midland, TX	(432) 685-7499	

Person	Location	Office Phone	Cell/Mobile Phone
Monahans Ambulance	Monahans, TX	3731	
Nara Visa, NM	Nara Visa, NM	(505) 461-3300	
Odessa Ambulance	Odessa, TX	(432) 335-3378	
Ozona Ambulance	Ozona, TX	(325) 392-2671	
Pecos Ambulance	Pecos, TX	(432) 445-4444	
Rankin Ambulance	Rankin, TX	(432) 693-2443	
San Angelo Ambulance	San Angelo, TX	(325) 657-4357	
Seminole Ambulance	Seminole, TX	758-9871	
Snyder Ambulance	Snyder, TX	(325) 573-1911	
Stanton Ambulance	Stanton, TX	(432) 756-2211	
Sundown Ambulance	Sundown, TX	911	
Tucumcari, NM	Tucumcari, NM	911	
Medical Air Ambulance Service			
AEROCARE - Methodist Hospital	Lubbock, TX	(800) 627-2376	
San Angelo Med-Vac Air Ambulance	San Angelo, TX	(800) 277-4354	
Southwest Air Ambulance Service	Stanford, TX	(800) 242-6199	
Southwest MediVac	Snyder, TX	(800) 242-6199	
Southwest MediVac	Hobbs, NM	(800) 242-6199	
Odessa Care Star	Odessa, TX	(888) 624-3571	
NWTH Medivac	Amarillo, TX	(800) 692-1331	



Permian Drilling Hydrogen Sulfide Drilling Operations Plan Corral Gorge 12-13 Federal Com 23H

Open drill site. No homes or buildings are near the proposed location.

1. Escape

Personnel shall escape upwind of wellbore in the event of an emergency gas release. Escape can take place through the lease road on the Southeast side of the location. Personnel need to move to a safe distance and block the entrance to location. If the primary route is not an option due to the wind direction, then a secondary egress route should be taken.

▲ H2S Detectors. At least three detectors will be installed: bell nipple, rig floor and Shakers.

● Briefing Areas. At least two briefing areas will be placed, 90 deg off.


■ Wind direction indicators. Visible from rig floor and from the mud pits area.

A gas buster is connected to both the choke manifold and flowline outlets.

Secondary Briefing Area

Secondary Egress

Primary Briefing Area

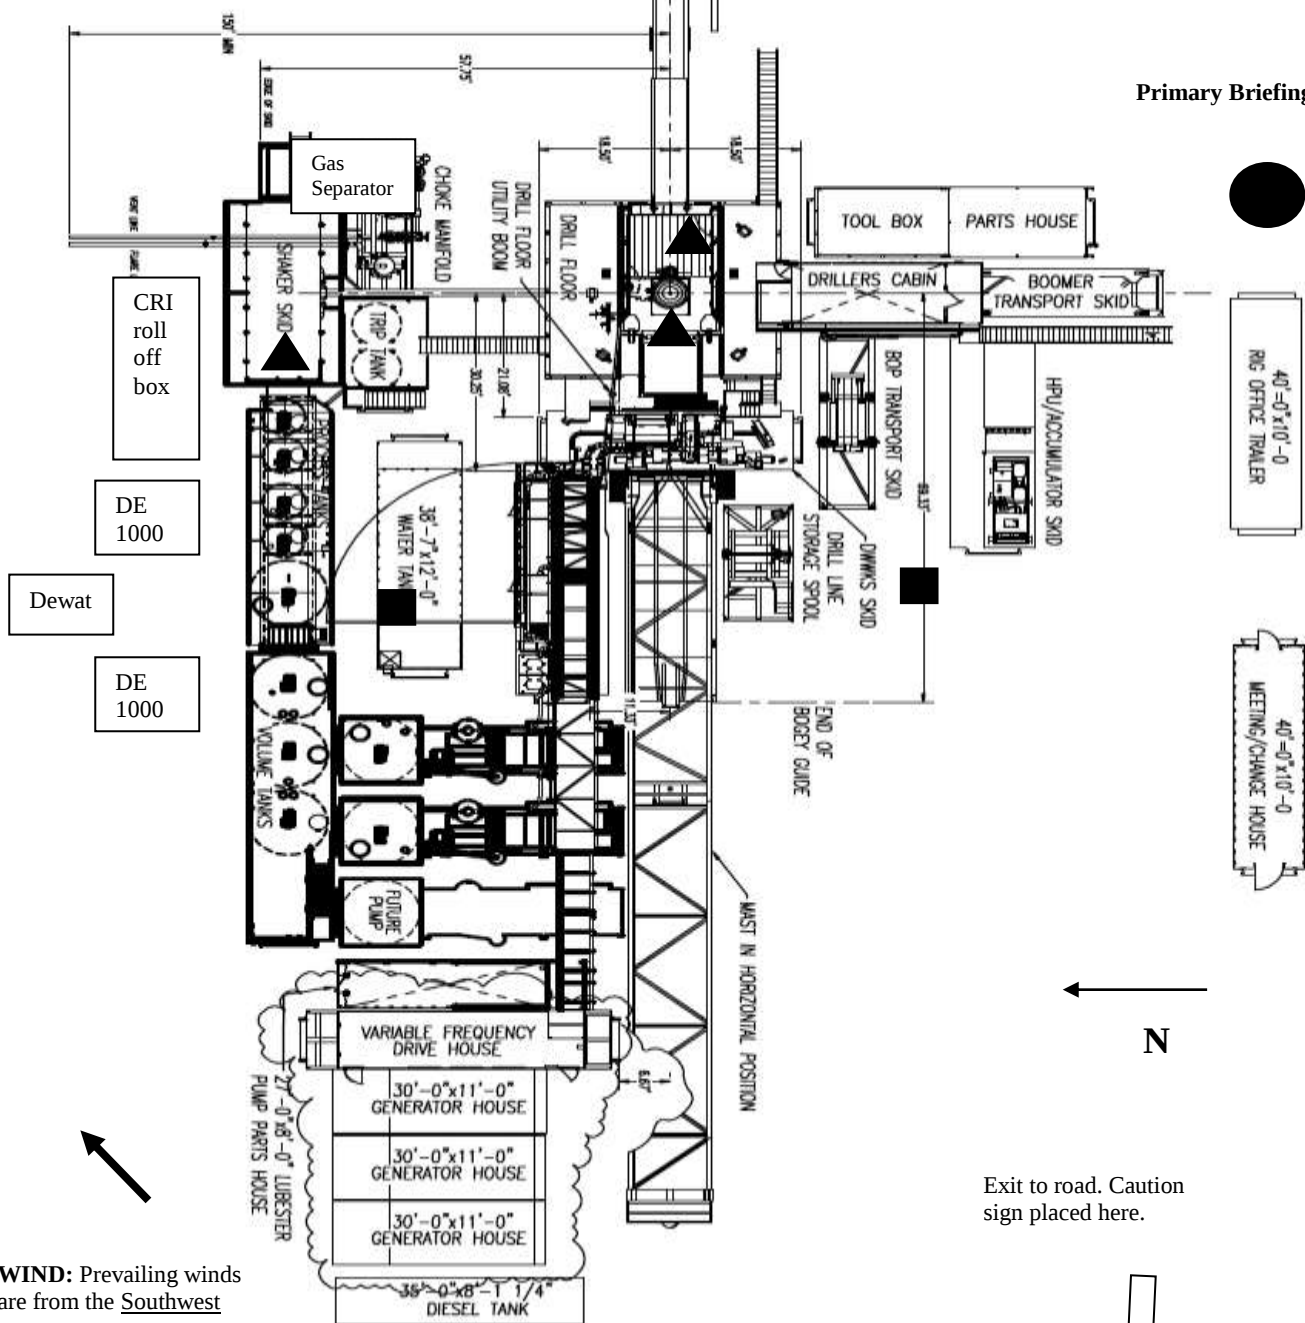

WIND: Prevailing winds are from the Southwest

OXY

PRD NM DIRECTIONAL PLANS (NAD 1983)

Corral Gorge 12_13

Corral Gorge 12_13 Fed Com 23H

Wellbore #1

Plan: Permitting Plan

Standard Planning Report

10 September, 2019

Oxy Inc.
Planning Report

Database:	HOPSPP	Local Co-ordinate Reference:	Well Corral Gorge 12_13 Fed Com 23H
Company:	ENGINEERING DESIGNS	TVD Reference:	RKB=26.5' @ 3133.70ft
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB=26.5' @ 3133.70ft
Site:	Corral Gorge 12_13	North Reference:	Grid
Well:	Corral Gorge 12_13 Fed Com 23H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permitting Plan		

Project	PRD NM DIRECTIONAL PLANS (NAD 1983)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		Using geodetic scale factor

Site						Corral Gorge 12_13											
Site Position:			Northing:			418,266.21 usft			Latitude:			32° 8' 57.433960 N					
From:			Map			Easting:			662,457.18 usft			Longitude:			103° 56' 31.111937 W		
Position Uncertainty:			1.00 ft			Slot Radius:			13.200 in			Grid Convergence:			0.21		

Well	Corral Gorge 12_13 Fed Com 23H					
Well Position	+N/-S	0.72 ft	Northing:	418,266.93 usft	Latitude:	32° 8' 57.438566 N
	+E/-W	70.00 ft	Easting:	662,527.17 usft	Longitude:	103° 56' 30.297785 W
Position Uncertainty		1.00 ft	Wellhead Elevation:		Ground Level:	3,107.20 ft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	HDGM_FILE	9/10/2019	6.82	59.82	47,832.60000000

Design	Permitting Plan			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.00	0.00	0.00	175.21

Plan Survey Tool Program	Date	9/10/2019		
Depth From (ft)	Depth To (ft)	Survey (Wellbore)	Tool Name	Remarks
1	0.00	20,153.14	Permitting Plan (Wellbore #1)	B001Mb_MWD+HRGM OWSG MWD + HRGM

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
3,042.00	0.00	0.00	3,042.00	0.00	0.00	0.00	0.00	0.00	0.00	
3,941.83	18.00	24.42	3,927.11	127.63	57.94	2.00	2.00	0.00	24.42	
8,583.44	18.00	24.42	8,341.63	1,433.46	650.72	0.00	0.00	0.00	0.00	
9,647.25	90.08	179.70	9,068.70	883.24	752.47	10.00	6.78	14.60	154.17	FTP (Corral Gorge
20,153.14	90.08	179.70	9,053.70	-9,622.49	806.87	0.00	0.00	0.00	0.00	PBHL (Corral Gorge

Oxy Inc.

Planning Report

Database:	HOPSPP	Local Co-ordinate Reference:	Well Corral Gorge 12_13 Fed Com 23H
Company:	ENGINEERING DESIGNS	TVD Reference:	RKB=26.5' @ 3133.70ft
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB=26.5' @ 3133.70ft
Site:	Corral Gorge 12_13	North Reference:	Grid
Well:	Corral Gorge 12_13 Fed Com 23H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permitting Plan		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00
3,042.00	0.00	0.00	3,042.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	1.16	24.42	3,100.00	0.53	0.24	-0.51	2.00	2.00	0.00
3,200.00	3.16	24.42	3,199.92	3.97	1.80	-3.80	2.00	2.00	0.00
3,300.00	5.16	24.42	3,299.65	10.57	4.80	-10.13	2.00	2.00	0.00
3,400.00	7.16	24.42	3,399.07	20.34	9.23	-19.50	2.00	2.00	0.00
3,500.00	9.16	24.42	3,498.05	33.27	15.10	-31.89	2.00	2.00	0.00
3,600.00	11.16	24.42	3,596.48	49.33	22.39	-47.28	2.00	2.00	0.00
3,700.00	13.16	24.42	3,694.23	68.51	31.10	-65.67	2.00	2.00	0.00
3,800.00	15.16	24.42	3,791.19	90.78	41.21	-87.02	2.00	2.00	0.00
3,900.00	17.16	24.42	3,887.23	116.12	52.71	-111.31	2.00	2.00	0.00
3,941.83	18.00	24.42	3,927.11	127.63	57.94	-122.34	2.00	2.00	0.00
4,000.00	18.00	24.42	3,982.43	143.99	65.37	-138.03	0.00	0.00	0.00
4,100.00	18.00	24.42	4,077.54	172.12	78.14	-164.99	0.00	0.00	0.00
4,200.00	18.00	24.42	4,172.65	200.26	90.91	-191.96	0.00	0.00	0.00
4,300.00	18.00	24.42	4,267.75	228.39	103.68	-218.93	0.00	0.00	0.00
4,400.00	18.00	24.42	4,362.86	256.52	116.45	-245.90	0.00	0.00	0.00
4,500.00	18.00	24.42	4,457.97	284.66	129.22	-272.86	0.00	0.00	0.00
4,600.00	18.00	24.42	4,553.08	312.79	141.99	-299.83	0.00	0.00	0.00
4,700.00	18.00	24.42	4,648.18	340.92	154.76	-326.80	0.00	0.00	0.00
4,800.00	18.00	24.42	4,743.29	369.06	167.53	-353.77	0.00	0.00	0.00
4,900.00	18.00	24.42	4,838.40	397.19	180.31	-380.73	0.00	0.00	0.00
5,000.00	18.00	24.42	4,933.51	425.32	193.08	-407.70	0.00	0.00	0.00
5,100.00	18.00	24.42	5,028.61	453.45	205.85	-434.67	0.00	0.00	0.00

Oxy Inc.
Planning Report

Database:	HOPSPP	Local Co-ordinate Reference:	Well Corral Gorge 12_13 Fed Com 23H
Company:	ENGINEERING DESIGNS	TVD Reference:	RKB=26.5' @ 3133.70ft
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB=26.5' @ 3133.70ft
Site:	Corral Gorge 12_13	North Reference:	Grid
Well:	Corral Gorge 12_13 Fed Com 23H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permitting Plan		

Planned Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
5,200.00	18.00	24.42	5,123.72	481.59	218.62	-461.64	0.00	0.00	0.00	
5,300.00	18.00	24.42	5,218.83	509.72	231.39	-488.60	0.00	0.00	0.00	
5,400.00	18.00	24.42	5,313.94	537.85	244.16	-515.57	0.00	0.00	0.00	
5,500.00	18.00	24.42	5,409.04	565.99	256.93	-542.54	0.00	0.00	0.00	
5,600.00	18.00	24.42	5,504.15	594.12	269.70	-569.51	0.00	0.00	0.00	
5,700.00	18.00	24.42	5,599.26	622.25	282.47	-596.47	0.00	0.00	0.00	
5,800.00	18.00	24.42	5,694.36	650.39	295.25	-623.44	0.00	0.00	0.00	
5,900.00	18.00	24.42	5,789.47	678.52	308.02	-650.41	0.00	0.00	0.00	
6,000.00	18.00	24.42	5,884.58	706.65	320.79	-677.38	0.00	0.00	0.00	
6,100.00	18.00	24.42	5,979.69	734.79	333.56	-704.34	0.00	0.00	0.00	
6,200.00	18.00	24.42	6,074.79	762.92	346.33	-731.31	0.00	0.00	0.00	
6,300.00	18.00	24.42	6,169.90	791.05	359.10	-758.28	0.00	0.00	0.00	
6,400.00	18.00	24.42	6,265.01	819.19	371.87	-785.25	0.00	0.00	0.00	
6,500.00	18.00	24.42	6,360.12	847.32	384.64	-812.21	0.00	0.00	0.00	
6,600.00	18.00	24.42	6,455.22	875.45	397.41	-839.18	0.00	0.00	0.00	
6,700.00	18.00	24.42	6,550.33	903.58	410.19	-866.15	0.00	0.00	0.00	
6,800.00	18.00	24.42	6,645.44	931.72	422.96	-893.12	0.00	0.00	0.00	
6,900.00	18.00	24.42	6,740.55	959.85	435.73	-920.08	0.00	0.00	0.00	
7,000.00	18.00	24.42	6,835.65	987.98	448.50	-947.05	0.00	0.00	0.00	
7,100.00	18.00	24.42	6,930.76	1,016.12	461.27	-974.02	0.00	0.00	0.00	
7,200.00	18.00	24.42	7,025.87	1,044.25	474.04	-1,000.99	0.00	0.00	0.00	
7,300.00	18.00	24.42	7,120.98	1,072.38	486.81	-1,027.96	0.00	0.00	0.00	
7,400.00	18.00	24.42	7,216.08	1,100.52	499.58	-1,054.92	0.00	0.00	0.00	
7,500.00	18.00	24.42	7,311.19	1,128.65	512.36	-1,081.89	0.00	0.00	0.00	
7,600.00	18.00	24.42	7,406.30	1,156.78	525.13	-1,108.86	0.00	0.00	0.00	
7,700.00	18.00	24.42	7,501.41	1,184.92	537.90	-1,135.83	0.00	0.00	0.00	
7,800.00	18.00	24.42	7,596.51	1,213.05	550.67	-1,162.79	0.00	0.00	0.00	
7,900.00	18.00	24.42	7,691.62	1,241.18	563.44	-1,189.76	0.00	0.00	0.00	
8,000.00	18.00	24.42	7,786.73	1,269.32	576.21	-1,216.73	0.00	0.00	0.00	
8,100.00	18.00	24.42	7,881.84	1,297.45	588.98	-1,243.70	0.00	0.00	0.00	
8,200.00	18.00	24.42	7,976.94	1,325.58	601.75	-1,270.66	0.00	0.00	0.00	
8,300.00	18.00	24.42	8,072.05	1,353.71	614.52	-1,297.63	0.00	0.00	0.00	
8,400.00	18.00	24.42	8,167.16	1,381.85	627.30	-1,324.60	0.00	0.00	0.00	
8,500.00	18.00	24.42	8,262.27	1,409.98	640.07	-1,351.57	0.00	0.00	0.00	
8,583.44	18.00	24.42	8,341.63	1,433.46	650.72	-1,374.07	0.00	0.00	0.00	
8,600.00	16.52	26.95	8,357.44	1,437.88	652.85	-1,378.30	10.00	-8.91	15.33	
8,700.00	9.02	58.59	8,455.00	1,454.68	666.01	-1,393.95	10.00	-7.51	31.64	
8,800.00	9.40	124.55	8,553.97	1,454.13	679.46	-1,392.27	10.00	0.39	65.96	
8,900.00	17.15	153.58	8,651.32	1,436.25	692.79	-1,373.34	10.00	7.75	29.03	
9,000.00	26.44	163.83	8,744.10	1,401.58	705.58	-1,337.72	10.00	9.28	10.26	
9,100.00	36.09	168.95	8,829.49	1,351.16	717.45	-1,286.49	10.00	9.65	5.12	
9,200.00	45.87	172.12	8,904.91	1,286.55	728.05	-1,221.21	10.00	9.78	3.17	
9,300.00	55.72	174.38	8,968.05	1,209.69	737.04	-1,143.87	10.00	9.85	2.26	
9,400.00	65.60	176.16	9,016.99	1,122.92	744.15	-1,056.81	10.00	9.88	1.78	
9,500.00	75.49	177.68	9,050.26	1,028.89	749.18	-962.69	10.00	9.90	1.52	
9,600.00	85.40	179.07	9,066.84	930.44	751.96	-864.35	10.00	9.91	1.39	
9,647.25	90.08	179.70	9,068.70	883.24	752.47	-817.27	10.00	9.91	1.35	
9,700.00	90.08	179.70	9,068.62	830.49	752.74	-764.69	0.00	0.00	0.00	
9,800.00	90.08	179.70	9,068.48	730.49	753.26	-665.00	0.00	0.00	0.00	
9,900.00	90.08	179.70	9,068.34	630.50	753.78	-565.31	0.00	0.00	0.00	
10,000.00	90.08	179.70	9,068.20	530.50	754.29	-465.61	0.00	0.00	0.00	
10,100.00	90.08	179.70	9,068.05	430.50	754.81	-365.92	0.00	0.00	0.00	
10,200.00	90.08	179.70	9,067.91	330.50	755.33	-266.23	0.00	0.00	0.00	
10,300.00	90.08	179.70	9,067.77	230.50	755.85	-166.54	0.00	0.00	0.00	

Oxy Inc.
Planning Report

Database:	HOPSPP	Local Co-ordinate Reference:	Well Corral Gorge 12_13 Fed Com 23H
Company:	ENGINEERING DESIGNS	TVD Reference:	RKB=26.5' @ 3133.70ft
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB=26.5' @ 3133.70ft
Site:	Corral Gorge 12_13	North Reference:	Grid
Well:	Corral Gorge 12_13 Fed Com 23H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permitting Plan		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
10,400.00	90.08	179.70	9,067.63	130.50	756.37	-66.85	0.00	0.00	0.00
10,500.00	90.08	179.70	9,067.48	30.50	756.88	32.85	0.00	0.00	0.00
10,600.00	90.08	179.70	9,067.34	-69.49	757.40	132.54	0.00	0.00	0.00
10,700.00	90.08	179.70	9,067.20	-169.49	757.92	232.23	0.00	0.00	0.00
10,800.00	90.08	179.70	9,067.05	-269.49	758.44	331.92	0.00	0.00	0.00
10,900.00	90.08	179.70	9,066.91	-369.49	758.95	431.62	0.00	0.00	0.00
11,000.00	90.08	179.70	9,066.77	-469.49	759.47	531.31	0.00	0.00	0.00
11,100.00	90.08	179.70	9,066.63	-569.49	759.99	631.00	0.00	0.00	0.00
11,200.00	90.08	179.70	9,066.48	-669.49	760.51	730.69	0.00	0.00	0.00
11,300.00	90.08	179.70	9,066.34	-769.48	761.03	830.38	0.00	0.00	0.00
11,400.00	90.08	179.70	9,066.20	-869.48	761.54	930.08	0.00	0.00	0.00
11,500.00	90.08	179.70	9,066.05	-969.48	762.06	1,029.77	0.00	0.00	0.00
11,600.00	90.08	179.70	9,065.91	-1,069.48	762.58	1,129.46	0.00	0.00	0.00
11,700.00	90.08	179.70	9,065.77	-1,169.48	763.10	1,229.15	0.00	0.00	0.00
11,800.00	90.08	179.70	9,065.63	-1,269.48	763.62	1,328.84	0.00	0.00	0.00
11,900.00	90.08	179.70	9,065.48	-1,369.48	764.13	1,428.54	0.00	0.00	0.00
12,000.00	90.08	179.70	9,065.34	-1,469.47	764.65	1,528.23	0.00	0.00	0.00
12,100.00	90.08	179.70	9,065.20	-1,569.47	765.17	1,627.92	0.00	0.00	0.00
12,200.00	90.08	179.70	9,065.06	-1,669.47	765.69	1,727.61	0.00	0.00	0.00
12,300.00	90.08	179.70	9,064.91	-1,769.47	766.20	1,827.31	0.00	0.00	0.00
12,400.00	90.08	179.70	9,064.77	-1,869.47	766.72	1,927.00	0.00	0.00	0.00
12,500.00	90.08	179.70	9,064.63	-1,969.47	767.24	2,026.69	0.00	0.00	0.00
12,600.00	90.08	179.70	9,064.48	-2,069.47	767.76	2,126.38	0.00	0.00	0.00
12,700.00	90.08	179.70	9,064.34	-2,169.46	768.28	2,226.07	0.00	0.00	0.00
12,800.00	90.08	179.70	9,064.20	-2,269.46	768.79	2,325.77	0.00	0.00	0.00
12,900.00	90.08	179.70	9,064.06	-2,369.46	769.31	2,425.46	0.00	0.00	0.00
13,000.00	90.08	179.70	9,063.91	-2,469.46	769.83	2,525.15	0.00	0.00	0.00
13,100.00	90.08	179.70	9,063.77	-2,569.46	770.35	2,624.84	0.00	0.00	0.00
13,200.00	90.08	179.70	9,063.63	-2,669.46	770.86	2,724.53	0.00	0.00	0.00
13,300.00	90.08	179.70	9,063.48	-2,769.46	771.38	2,824.23	0.00	0.00	0.00
13,400.00	90.08	179.70	9,063.34	-2,869.45	771.90	2,923.92	0.00	0.00	0.00
13,500.00	90.08	179.70	9,063.20	-2,969.45	772.42	3,023.61	0.00	0.00	0.00
13,600.00	90.08	179.70	9,063.06	-3,069.45	772.94	3,123.30	0.00	0.00	0.00
13,700.00	90.08	179.70	9,062.91	-3,169.45	773.45	3,222.99	0.00	0.00	0.00
13,800.00	90.08	179.70	9,062.77	-3,269.45	773.97	3,322.69	0.00	0.00	0.00
13,900.00	90.08	179.70	9,062.63	-3,369.45	774.49	3,422.38	0.00	0.00	0.00
14,000.00	90.08	179.70	9,062.49	-3,469.45	775.01	3,522.07	0.00	0.00	0.00
14,100.00	90.08	179.70	9,062.34	-3,569.44	775.53	3,621.76	0.00	0.00	0.00
14,200.00	90.08	179.70	9,062.20	-3,669.44	776.04	3,721.46	0.00	0.00	0.00
14,300.00	90.08	179.70	9,062.06	-3,769.44	776.56	3,821.15	0.00	0.00	0.00
14,400.00	90.08	179.70	9,061.91	-3,869.44	777.08	3,920.84	0.00	0.00	0.00
14,500.00	90.08	179.70	9,061.77	-3,969.44	777.60	4,020.53	0.00	0.00	0.00
14,600.00	90.08	179.70	9,061.63	-4,069.44	778.11	4,120.22	0.00	0.00	0.00
14,700.00	90.08	179.70	9,061.49	-4,169.44	778.63	4,219.92	0.00	0.00	0.00
14,800.00	90.08	179.70	9,061.34	-4,269.43	779.15	4,319.61	0.00	0.00	0.00
14,900.00	90.08	179.70	9,061.20	-4,369.43	779.67	4,419.30	0.00	0.00	0.00
15,000.00	90.08	179.70	9,061.06	-4,469.43	780.19	4,518.99	0.00	0.00	0.00
15,100.00	90.08	179.70	9,060.91	-4,569.43	780.70	4,618.68	0.00	0.00	0.00
15,200.00	90.08	179.70	9,060.77	-4,669.43	781.22	4,718.38	0.00	0.00	0.00
15,300.00	90.08	179.70	9,060.63	-4,769.43	781.74	4,818.07	0.00	0.00	0.00
15,400.00	90.08	179.70	9,060.49	-4,869.43	782.26	4,917.76	0.00	0.00	0.00
15,500.00	90.08	179.70	9,060.34	-4,969.42	782.78	5,017.45	0.00	0.00	0.00
15,600.00	90.08	179.70	9,060.20	-5,069.42	783.29	5,117.14	0.00	0.00	0.00
15,700.00	90.08	179.70	9,060.06	-5,169.42	783.81	5,216.84	0.00	0.00	0.00

Oxy Inc.

Planning Report

Database:	HOPSPP	Local Co-ordinate Reference:	Well Corral Gorge 12_13 Fed Com 23H
Company:	ENGINEERING DESIGNS	TVD Reference:	RKB=26.5' @ 3133.70ft
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB=26.5' @ 3133.70ft
Site:	Corral Gorge 12_13	North Reference:	Grid
Well:	Corral Gorge 12_13 Fed Com 23H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permitting Plan		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
15,800.00	90.08	179.70	9,059.92	-5,269.42	784.33	5,316.53	0.00	0.00	0.00
15,900.00	90.08	179.70	9,059.77	-5,369.42	784.85	5,416.22	0.00	0.00	0.00
16,000.00	90.08	179.70	9,059.63	-5,469.42	785.36	5,515.91	0.00	0.00	0.00
16,100.00	90.08	179.70	9,059.49	-5,569.42	785.88	5,615.61	0.00	0.00	0.00
16,200.00	90.08	179.70	9,059.34	-5,669.41	786.40	5,715.30	0.00	0.00	0.00
16,300.00	90.08	179.70	9,059.20	-5,769.41	786.92	5,814.99	0.00	0.00	0.00
16,400.00	90.08	179.70	9,059.06	-5,869.41	787.44	5,914.68	0.00	0.00	0.00
16,500.00	90.08	179.70	9,058.92	-5,969.41	787.95	6,014.37	0.00	0.00	0.00
16,600.00	90.08	179.70	9,058.77	-6,069.41	788.47	6,114.07	0.00	0.00	0.00
16,700.00	90.08	179.70	9,058.63	-6,169.41	788.99	6,213.76	0.00	0.00	0.00
16,800.00	90.08	179.70	9,058.49	-6,269.40	789.51	6,313.45	0.00	0.00	0.00
16,900.00	90.08	179.70	9,058.34	-6,369.40	790.03	6,413.14	0.00	0.00	0.00
17,000.00	90.08	179.70	9,058.20	-6,469.40	790.54	6,512.83	0.00	0.00	0.00
17,100.00	90.08	179.70	9,058.06	-6,569.40	791.06	6,612.53	0.00	0.00	0.00
17,200.00	90.08	179.70	9,057.92	-6,669.40	791.58	6,712.22	0.00	0.00	0.00
17,300.00	90.08	179.70	9,057.77	-6,769.40	792.10	6,811.91	0.00	0.00	0.00
17,400.00	90.08	179.70	9,057.63	-6,869.40	792.61	6,911.60	0.00	0.00	0.00
17,500.00	90.08	179.70	9,057.49	-6,969.39	793.13	7,011.30	0.00	0.00	0.00
17,600.00	90.08	179.70	9,057.35	-7,069.39	793.65	7,110.99	0.00	0.00	0.00
17,700.00	90.08	179.70	9,057.20	-7,169.39	794.17	7,210.68	0.00	0.00	0.00
17,800.00	90.08	179.70	9,057.06	-7,269.39	794.69	7,310.37	0.00	0.00	0.00
17,900.00	90.08	179.70	9,056.92	-7,369.39	795.20	7,410.06	0.00	0.00	0.00
18,000.00	90.08	179.70	9,056.77	-7,469.39	795.72	7,509.76	0.00	0.00	0.00
18,100.00	90.08	179.70	9,056.63	-7,569.39	796.24	7,609.45	0.00	0.00	0.00
18,200.00	90.08	179.70	9,056.49	-7,669.38	796.76	7,709.14	0.00	0.00	0.00
18,300.00	90.08	179.70	9,056.35	-7,769.38	797.28	7,808.83	0.00	0.00	0.00
18,400.00	90.08	179.70	9,056.20	-7,869.38	797.79	7,908.52	0.00	0.00	0.00
18,500.00	90.08	179.70	9,056.06	-7,969.38	798.31	8,008.22	0.00	0.00	0.00
18,600.00	90.08	179.70	9,055.92	-8,069.38	798.83	8,107.91	0.00	0.00	0.00
18,700.00	90.08	179.70	9,055.77	-8,169.38	799.35	8,207.60	0.00	0.00	0.00
18,800.00	90.08	179.70	9,055.63	-8,269.38	799.86	8,307.29	0.00	0.00	0.00
18,900.00	90.08	179.70	9,055.49	-8,369.37	800.38	8,406.98	0.00	0.00	0.00
19,000.00	90.08	179.70	9,055.35	-8,469.37	800.90	8,506.68	0.00	0.00	0.00
19,100.00	90.08	179.70	9,055.20	-8,569.37	801.42	8,606.37	0.00	0.00	0.00
19,200.00	90.08	179.70	9,055.06	-8,669.37	801.94	8,706.06	0.00	0.00	0.00
19,300.00	90.08	179.70	9,054.92	-8,769.37	802.45	8,805.75	0.00	0.00	0.00
19,400.00	90.08	179.70	9,054.78	-8,869.37	802.97	8,905.45	0.00	0.00	0.00
19,500.00	90.08	179.70	9,054.63	-8,969.37	803.49	9,005.14	0.00	0.00	0.00
19,600.00	90.08	179.70	9,054.49	-9,069.36	804.01	9,104.83	0.00	0.00	0.00
19,700.00	90.08	179.70	9,054.35	-9,169.36	804.52	9,204.52	0.00	0.00	0.00
19,800.00	90.08	179.70	9,054.20	-9,269.36	805.04	9,304.21	0.00	0.00	0.00
19,900.00	90.08	179.70	9,054.06	-9,369.36	805.56	9,403.91	0.00	0.00	0.00
20,000.00	90.08	179.70	9,053.92	-9,469.36	806.08	9,503.60	0.00	0.00	0.00
20,100.00	90.08	179.70	9,053.78	-9,569.36	806.60	9,603.29	0.00	0.00	0.00
20,153.14	90.08	179.70	9,053.70	-9,622.49	806.87	9,656.26	0.00	0.00	0.00

Oxy Inc.
Planning Report

Database:	HOPSP	Local Co-ordinate Reference:	Well Corral Gorge 12_13 Fed Com 23H
Company:	ENGINEERING DESIGNS	TVD Reference:	RKB=26.5' @ 3133.70ft
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB=26.5' @ 3133.70ft
Site:	Corral Gorge 12_13	North Reference:	Grid
Well:	Corral Gorge 12_13 Fed Com 23H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permitting Plan		

Design Targets									
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (usft)	Easting (usft)	Latitude	Longitude
PBHL (Corral Gorge - plan hits target center - Point	0.00	0.00	9,053.70	-9,622.49	806.87	408,645.17	663,333.98	32° 7' 22.192804 N	103° 56' 21.322478
FTP (Corral Gorge - plan hits target center - Point	0.00	0.00	9,068.70	883.24	752.47	419,150.10	663,279.58	32° 9' 6.151205 N	103° 56' 21.508185

Plan Annotations				
Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment
		+N/-S (ft)	+E/-W (ft)	
3,042.00	3,042.00	0.00	0.00	Build 2.00°/100'
3,941.83	3,927.11	127.63	57.94	Hold 18.00° Tangent
8,583.44	8,341.63	1,433.46	650.72	KOP, Build & Turn 10.00°/100'
9,647.25	9,068.70	883.24	752.47	Landing Point
20,153.14	9,053.70	-9,622.49	806.87	TD at 20153.14' MD



Project: PRD NM DIRECTIONAL PLANS (NAD 1983)
Site: Corral Gorge 12_13
Well: Corral Gorge 12_13 Fed Com 23H
Wellbore: Wellbore #1
Design: Permitting Plan

PROJECT DETAILS: NM DIRECTIONAL PLANS (NAD 1983)


Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Eastern Zone
System Datum: Mean Sea Level

WELL DETAILS: Corral Gorge 12_13 Fed Com 23H


+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
0.00	0.00	418266.93	3107.20 662527.17	32° 8' 57.438566 N	103° 56' 30.297785 W

SECTION DETAILS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSec	Annotation
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
3042.00	0.00	0.00	3042.00	0.00	0.00	0.00	0.00	0.00	Build 2.00°/100'
3941.83	18.00	24.42	3927.11	127.63	57.94	2.00	24.42	-122.34	Hold 18.00° Tangent
8583.44	18.00	24.42	8341.63	1433.46	650.72	0.00	0.00	-1374.07	KOP, Build & Turn 10.00°/100'
9647.25	90.08	179.70	9068.70	883.24	752.47	10.00	154.17	-817.27	Landing Point
20153.14	90.08	179.70	9053.70	-9622.49	806.87	0.00	0.00	9656.26	TD at 20153.14' MD



Azimuths to Grid North
True North: -0.21°
Magnetic North: 6.61°
Magnetic Field
Strength: 47832.6nT
Dip Angle: 59.82°
Date: 9/10/2019
Model: HDGM_FILE

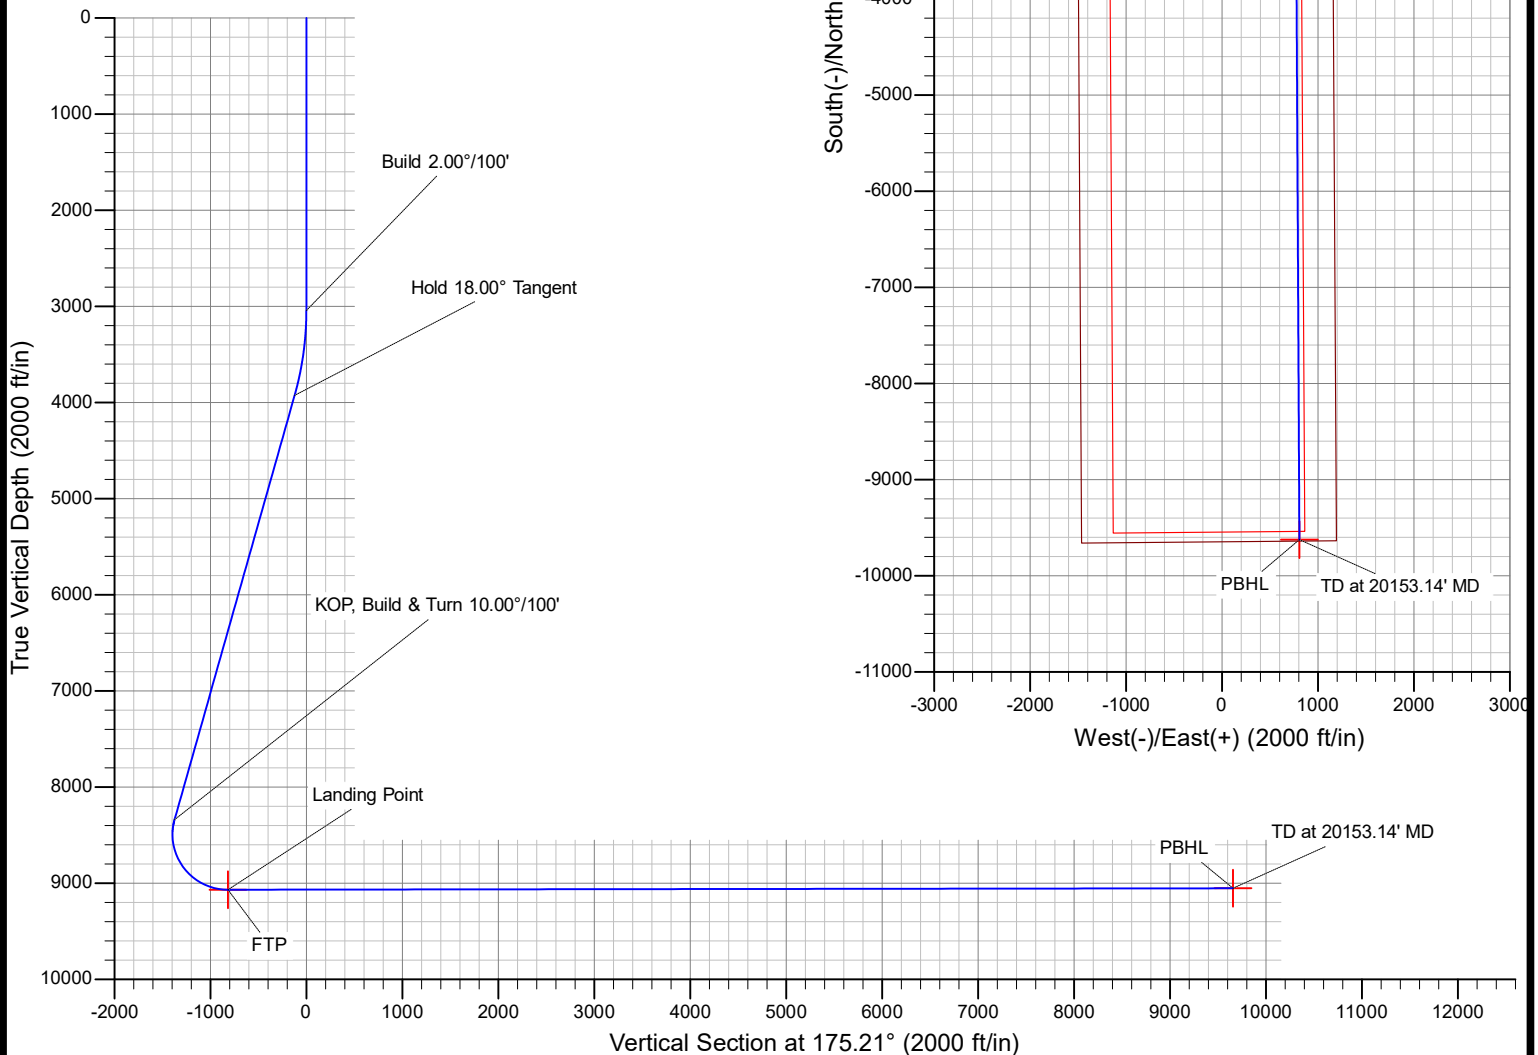

OXY USA Inc. - Corral Gorge 12-13 Federal Com 23H – Drill Plan

1. Geologic Formations

TVD of target	9068'	Pilot Hole Depth	N/A
MD at TD:	20153'	Deepest Expected fresh water:	380'

Delaware Basin

Formation	TVD - RKB	Expected Fluids
Rustler	380	
Salado	789	Salt
Castile	1,766	Salt
Lamar/Delaware	3,314	Oil/Gas/Brine
Bell Canyon	3,320	Oil/Gas/Brine
Cherry Canyon	4,223	Oil/Gas/Brine
Brushy Canyon	5,568	Losses
Bone Spring	7,097	Oil/Gas
1st Bone Spring	8,038	Oil/Gas
2nd Bone Spring	8,890	Oil/Gas

*H2S, water flows, loss of circulation, abnormal pressures, etc.

2. Casing Program

Hole Size (in)	Casing Interval		Csg. Size (in)	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	Buoyant	Buoyant
	From (ft)	To (ft)							Body SF Tension	Joint SF Tension
14.75	0	729	10.75	40.5	J-55	BTC	1.125	1.2	1.4	1.4
9.875	0	8483	7.625	26.4	L-80 HC	BTC	1.125	1.2	1.4	1.4
6.75	0	9033	5.5	20	P-110	DQX	1.125	1.2	1.4	1.4
6.75	9033	20153	4.5	13.5	P-110	DQX	1.125	1.2	1.4	1.4
SF Values will meet or Exceed										

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

*OXY requests the option to set casing shallower yet still below the salts if losses or hole conditions require this. Cement volumes may be adjusted if casing is set shallower and a DV tool may be run in case hole conditions merit pumping a second stage cement job to comply with permitted top of cement. If cement circulated to surface during first stage, we will drop a cancelation cone and not pump the second stage.

*OXY requests the option to run production casing with DQX, SF TORQ, and/or DQW TORQ connections to accommodate hole conditions or drilling operations.

OXY USA Inc. - Corral Gorge 12-13 Federal Com 23H – Drill Plan

Annular Clearance Variance Request

As per the agreement reached in the OXY/BLM meeting on Feb 22, 2018, OXY requests permission to allow deviation from the 0.422” annular clearance requirement from Onshore Order #2 under the following conditions:

1. Annular clearance to meet or exceed 0.422” between intermediate casing ID and production casing coupling only on the first 500’ overlap between both casings.
2. Annular clearance less than 0.422” is acceptable for the curve and lateral portions of the production open hole section.

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	Y
Does the above casing design meet or exceed BLM’s minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50’ above the Reef?	
Is well within the designated 4 string boundary.	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500’ into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100’ to 600’ below the base of salt?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

OXY USA Inc. - Corral Gorge 12-13 Federal Com 23H – Drill Plan

3. Cementing Program

Casing String	# Sk	Wt. (lb/gal)	Yld (ft ³ /sack)	H2O (gal/sk)	500# Comp. Strength (hours)	Slurry Description
Surface (Lead)	N/A	N/A	N/A	N/A	N/A	N/A
Surface (Tail)	597	14.8	1.33	6.365	5:26	Class C Cement, Accelerator
Intermediate 1st Stage (Lead)	N/A	N/A	N/A	N/A	N/A	N/A
Intermediate 1st Stage (Tail)	371	13.2	1.65	8.640	11:54	Class H Cement, Retarder, Dispersant, Salt
Intermediate 2nd Stage (Tail Slurry) to be pumped as Bradenhead Squeeze from surface, down the Intermediate annulus						
Intermediate 2nd Stage (Lead)	N/A	N/A	N/A	N/A	N/A	N/A
Intermediate 2nd Stage (Tail)	716	12.9	1.92	10.41	23:10	Class C Cement, Accelerator
Production (Lead)	N/A	N/A	N/A	N/A	N/A	N/A
Production (Tail)	1417	13.2	1.38	6.686	3:39	Class H Cement, Retarder, Dispersant, Salt

Casing String	Top (ft)	Bottom (ft)	% Excess
Surface (Lead)	N/A	N/A	N/A
Surface (Tail)	0	729	100%
Intermediate 1st Stage (Lead)	N/A	N/A	N/A
Intermediate 1st Stage (Tail)	5818	8483	5%
Intermediate 2nd Stage (Lead)	N/A	N/A	N/A
Intermediate 2nd Stage (Tail)	0	5818	10%
Production (Lead)	N/A	N/A	N/A
Production (Tail)	7983	20153	20%

*OXY requests a variance to cement the 9-5/8" and/or 7-5/8" intermediate casing strings offline, see attached for additional information.

Bradenhead CBL - OXY requests permission to adjust the CBL requirement after bradenhead cement jobs, on 7-5/8" intermediate casings, as per the agreement reached in the OXY/BLM meeting on September 5, 2019.

Three string wells:

- CBL will be required on one well per pad
- If the pumped volume of cement is less than permitted in the APD, BLM will be notified and a CBL may be run
- Echometer will be used after bradenhead cement job to determine TOC before pumping top-out cement

OXY USA Inc. - Corral Gorge 12-13 Federal Com 23H – Drill Plan

4. Pressure Control Equipment

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Type	✓	Tested to:
9.875" Hole	13-5/8"	3M	Annular	✓	70% of working pressure
		3M	Blind Ram	✓	250 psi / 3000 psi
			Pipe Ram		
			Double Ram	✓	
			Other*		
6.75" Hole	13-5/8"	3M	Annular	✓	70% of working pressure
		3M	Blind Ram	✓	250 psi / 3000 psi
			Pipe Ram		
			Double Ram	✓	
			Other*		

*Specify if additional ram is utilized.

Oxy will utilize a 5M annular with a 10M BOPE stack. The BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics.

	Formation integrity test will be performed per Onshore Order #2. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.i.
	A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.
Y	Are anchors required by manufacturer?
	A multibowl or a unionized multibowl wellhead system will be employed. The wellhead and connection to the BOPE will meet all API 6A requirements. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested. We will test the flange connection of the wellhead with a test port that is directly in the flange. We are proposing that we will run the wellhead through the rotary prior to cementing surface casing as discussed with the BLM on October 8, 2015. See attached schematics.

OXY USA Inc. - Corral Gorge 12-13 Federal Com 23H – Drill Plan

BOP Break Testing Request

OXY requests permission to adjust the BOP break testing requirements as per the agreement reached in the OXY/BLM meeting on September 5, 2019. A separate sundry will be sent prior to spud that reflects the pad based break testing plan.

BOP break test under the following conditions:

1. After a full BOP test is conducted
2. When skidding to drill an intermediate section where ICP is set into the third Bone Spring or shallower.
3. When skidding to drill a production section that does not penetrate into the third Bone Spring or deeper.

If the kill line is broken prior to skid, two tests will be performed.

1. Wellhead flange, co-flex hose, kill line connections and upper pipe rams
2. Wellhead flange, HCR valve, check valve, upper pipe rams

If the kill line is not broken prior to skid, only one test will be performed.

1. Wellhead flange, co-flex hose, check valve, upper pipe rams

5. Mud Program

Depth		Type	Weight (ppg)	Viscosity	Water Loss
From (ft)	To (ft)				
0	729	Water-Based Mud	8.6-8.8	40-60	N/C
729	8483	Saturated Brine-Based or Oil-Based Mud	8.0-10.0	35-45	N/C
8483	20153	Water-Based or Oil-Based Mud	8.0-9.6	38-50	N/C

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times. The following is a general list of products: Barite, Bentonite, Gypsum, Lime, Soda Ash, Caustic Soda, Nut Plug, Cedar Fiber, Cotton Seed Hulls, Drilling Paper, Salt Water Clay, CACL2. Oxy will use a closed mud system.

What will be used to monitor the loss or gain of fluid?	PVT/MD Totco/Visual Monitoring
---	--------------------------------

6. Logging and Testing Procedures

Logging, Coring and Testing.	
Yes	Will run GR from TD to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
No	Logs are planned based on well control or offset log information.
No	Drill stem test? If yes, explain
No	Coring? If yes, explain

Additional logs planned		Interval
No	Resistivity	
No	Density	
No	CBL	
Yes	Mud log	ICP - TD
No	PEX	

OXY USA Inc. - Corral Gorge 12-13 Federal Com 23H – Drill Plan

7. Drilling Conditions

Condition	Specify what type and where?
BH Pressure at deepest TVD	4527 psi
Abnormal Temperature	No
BH Temperature at deepest TVD	153°F

Pump high viscosity sweeps as needed for hole cleaning. The mud system will be monitored visually/manually as well as with an electronic PVT. The necessary mud products for additional weight and fluid loss control will be on location at all times. Appropriately weighted mud will be used to isolate potential gas, oil, and water zones until such time as casing can be cemented into place for zonal isolation.

Hydrogen Sulfide (H ₂ S) monitors will be installed prior to drilling out the surface shoe. If H ₂ S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.	
N	H ₂ S is present
Y	H ₂ S Plan attached

8. Other facets of operation

	Yes/No
Will the well be drilled with a walking/skidding operation? If yes, describe. We plan to drill the three well pad in batch by section: all surface sections, intermediate sections and production sections. The wellhead will be secured with a night cap whenever the rig is not over the well.	Yes
Will more than one drilling rig be used for drilling operations? If yes, describe. Oxy requests the option to contract a Surface Rig to drill, set surface casing, and cement for this well. If the timing between rigs is such that Oxy would not be able to preset surface, the Primary Rig will MIRU and drill the well in its entirety per the APD. Please see the attached document for information on the spudder rig.	Yes

Total estimated cuttings volume: 1405.1 bbls.

9. Company Personnel

Name	Title	Office Phone	Mobile Phone
Garrett Granier	Drilling Engineer	713-513-6633	832-265-0581
William Turner	Drilling Engineer Supervisor	713-350-4951	661-817-4586
Simon Benavides	Drilling Superintendent	713-522-8652	281-684-6897
Diego Tellez	Drilling Manager	713-350-4602	713-303-4932

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit Original
to Appropriate
District Office

GAS CAPTURE PLAN

Date: 12/3/2019

☒ Original

Operator & OGRID No.: OXY USA INC. - 16696

☐ Amended - Reason for Amendment: _____

This Gas Capture Plan outlines actions to be taken by the Operator to reduce well/production facility flaring/venting for new completion (new drill, recomple to new zone, re-frac) activity.

Note: Form C-129 must be submitted and approved prior to exceeding 60 days allowed by Rule (Subsection A of 19.15.18.12 NMAC).

Well(s)/Production Facility – Name of facility

The well(s) that will be located at the production facility are shown in the table below.

Well Name	API	Well Location (ULSTR)	Footages	Expected Peak MCF/D	Flared or Vented	Comments
Corral Gorge 12-13 Fd Com 1H	Pending	D-12-25S-29E	795 N 1430 W	3900	-	
Corral Gorge 12-13 Fd Com 2H	Pending	D-12-25S-29E	795 N 1495 W	3900	-	
Corral Gorge 12-13 Fd Com 3H	Pending	C-12-25S-29E	540 N 2262 W	3900	-	
Corral Gorge 12-13 Fd Com 4H	Pending	C-12-25S-29E	540 N 2297 W	3900	-	
Corral Gorge 12-13 Fd Com 5H	Pending	A-12-25S-29E	740 N 1170 E	3900	-	
Corral Gorge 12-13 Fd Com 6H	Pending	A-12-25S-29E	740 N 1100 E	3900	-	
Corral Gorge 12-13 Fd Com 11H	Pending	C-12-25S-29E	795 N 1460 W	3700	-	
Corral Gorge 12-13 Fd Com 12H	Pending	C-12-25S-29E	795 N 1530 W	3700	-	
Corral Gorge 12-13 Fd Com 13H	Pending	A-12-25S-29E	740 N 1200 E	3700	-	
Corral Gorge 12-13 Fd Com 14H	Pending	A-12-25S-29E	740 N 1135 E	3700	-	
Corral Gorge 12-13 Fd Com 21H	Pending	C-12-25S-29E	975 N 1430 W	3600	-	
Corral Gorge 12-13 Fd Com 22H	Pending	C-12-25S-29E	975 N 1465W	3600	-	
Corral Gorge 12-13 Fd Com 23H	Pending	C-12-25S-29E	975 N 1500 W	3600	-	
Corral Gorge 12-13 Fd Com 24H	Pending	A-12-25S-29E	920 N 1200 E	3600	-	
Corral Gorge 12-13 Fd Com 25H	Pending	A-12-25S-29E	920 N 1165 E	3600	-	
Corral Gorge 12-13 Fd Com 26H	Pending	A-12-25S-29E	920 N 1130 E	3600	-	
Corral Gorge 12-13 Fd Com 311H	Pending	D-12-25S-29E	162 N 320 W	4300	-	
Corral Gorge 12-13 Fd Com 312H	Pending	A-12-25S-29E	360 N 260 E	4300	-	
Corral Gorge 12-13 Fd Com 31H	Pending	D-12-25S-29E	162 N 250 W	4400	-	
Corral Gorge 12-13 Fd Com 32H	Pending	D-12-25S-29E	162 N 285 W	4400	-	
Corral Gorge 12-13 Fd Com 33H	Pending	N-1-25S-29E	230 S 2605 W	4400	-	
Corral Gorge 12-13 Fd Com 34H	Pending	N-1-25S-29E	230 S 2635 W	4400	-	
Corral Gorge 12-13 Fd Com 35H	Pending	O-1-25S-29E	230 S 2645 E	4400	-	
Corral Gorge 12-13 Fd Com 36H	Pending	O-1-25S-29E	230 S 2610 E	4400	-	
Corral Gorge 12-13 Fd Com 37H	Pending	A-12-25S-29E	360 N 225 E	4400	-	
Corral Gorge 12-13 Fd Com 38H	Pending	A-12-25S-29E	360 N 190 E	4400	-	

Well Name	API	Well Location (ULSTR)	Footages	Expected Peak MCF/D	Flared or Vented	Comments
Corral Gorge 12-13 Fd Com 41H	Pending	M-1-25S-29E	235 S 1270 W	6600	-	
Corral Gorge 12-13 Fd Com 42H	Pending	N-1-25S-29E	235 S 1335 W	6600	-	
Corral Gorge 12-13 Fd Com 43H	Pending	P-1-25S-29E	260 S 970 E	6600	-	
Corral Gorge 12-13 Fd Com 44H	Pending	P-1-25S-29E	260 S 905 E	6600	-	
Corral Gorge 12-13 Fd Com 51H	Pending	M-1-25S-29E	235 S 1300 W	7100	-	
Corral Gorge 12-13 Fd Com 52H	Pending	N-1-25S-29E	235 S 1370 W	7100	-	
Corral Gorge 12-13 Fd Com 53H	Pending	P-1-25S-29E	260 S 940 E	7100	-	
Corral Gorge 12-13 Fd Com 54H	Pending	P-1-25S-29E	260 S 870 E	7100	-	
Corral Gorge 12-13 Fd Com 71H	Pending	C-12-25S-29E	540 N 1987 W	1200	-	
Corral Gorge 12-13 Fd Com 72H	Pending	C-12-25S-29E	540 N 2022 W	1200	-	
Corral Gorge 12-13 Fd Com 73H	Pending	A-12-25S-29E	360 N 535 E	1200	-	
Corral Gorge 12-13 Fd Com 74H	Pending	A-12-25S-29E	360 N 500 E	1200	-	

Gathering System and Pipeline Notification

Well(s) will be connected to a production facility after flowback operations are complete, where a gas transporter system is in place. The gas produced from the production facility is sent to ETC Texas Pipeline, LTD (“ETC”) and Enterprise Field Services, LLC (“Enterprise”) via the Oxy gas network. This network is connected to Enterprise and ETC high pressure gathering systems located in Eddy County, New Mexico. Produced gas is compressed by OXY USA INC. (“OXY”) to the appropriate pressures for each gathering system. OXY provides (periodically) to ETC and Enterprise a drilling, completion and estimated first production date for wells that are scheduled to be drilled in the foreseeable future. In addition, OXY has periodic conference calls with these Midstream companies to discuss changes to drilling and completion schedules. Gas from these wells will be processed at the following plants:

Orla Plant Processing Plant located in Sec. 35, Block 57, T2, T&P RR CO, Reeves, County, Texas.

OXY USA WTP LP Processing Plant located in Sec. 23, Twn. 21S, Rng. 23E, Eddy County, New Mexico.

The actual flow of the gas will be based on compression operating parameters and gathering system pressures.

Flowback Strategy

After the fracture treatment/completion operations, well(s) will be produced to temporary production tanks and gas will be flared or vented. During flowback, the fluids and sand content will be monitored. When the produced fluids contain minimal sand, the wells will be turned to production facilities. Gas sales should start as soon as the wells start flowing through the production facilities, unless there are operational issues on Enterprise and/or ETC systems at that time. Based on current information, it is OXY’s belief the system can take this gas upon completion of the well(s).


Safety requirements during cleanout operations from the use of underbalanced air cleanout systems may necessitate that sand and non-pipeline quality gas be vented and/or flared rather than sold on a temporary basis.

Alternatives to Reduce Flaring


Below are alternatives considered from a conceptual standpoint to reduce the amount of gas flared.

- Power Generation – On lease
 - Only a portion of gas is consumed operating generators, remainder of gas would be flared
- Compressed Natural Gas – On lease
 - Gas flared would be minimal, but might be uneconomical to operate when gas volume declines
- NGL Removal – On lease
 - Plants are expensive, residue gas is still flared, and uneconomical to operate when gas volume declines

Oxy Single Centrifuge Closed Loop System – New Mexico Flex III May 28, 2013

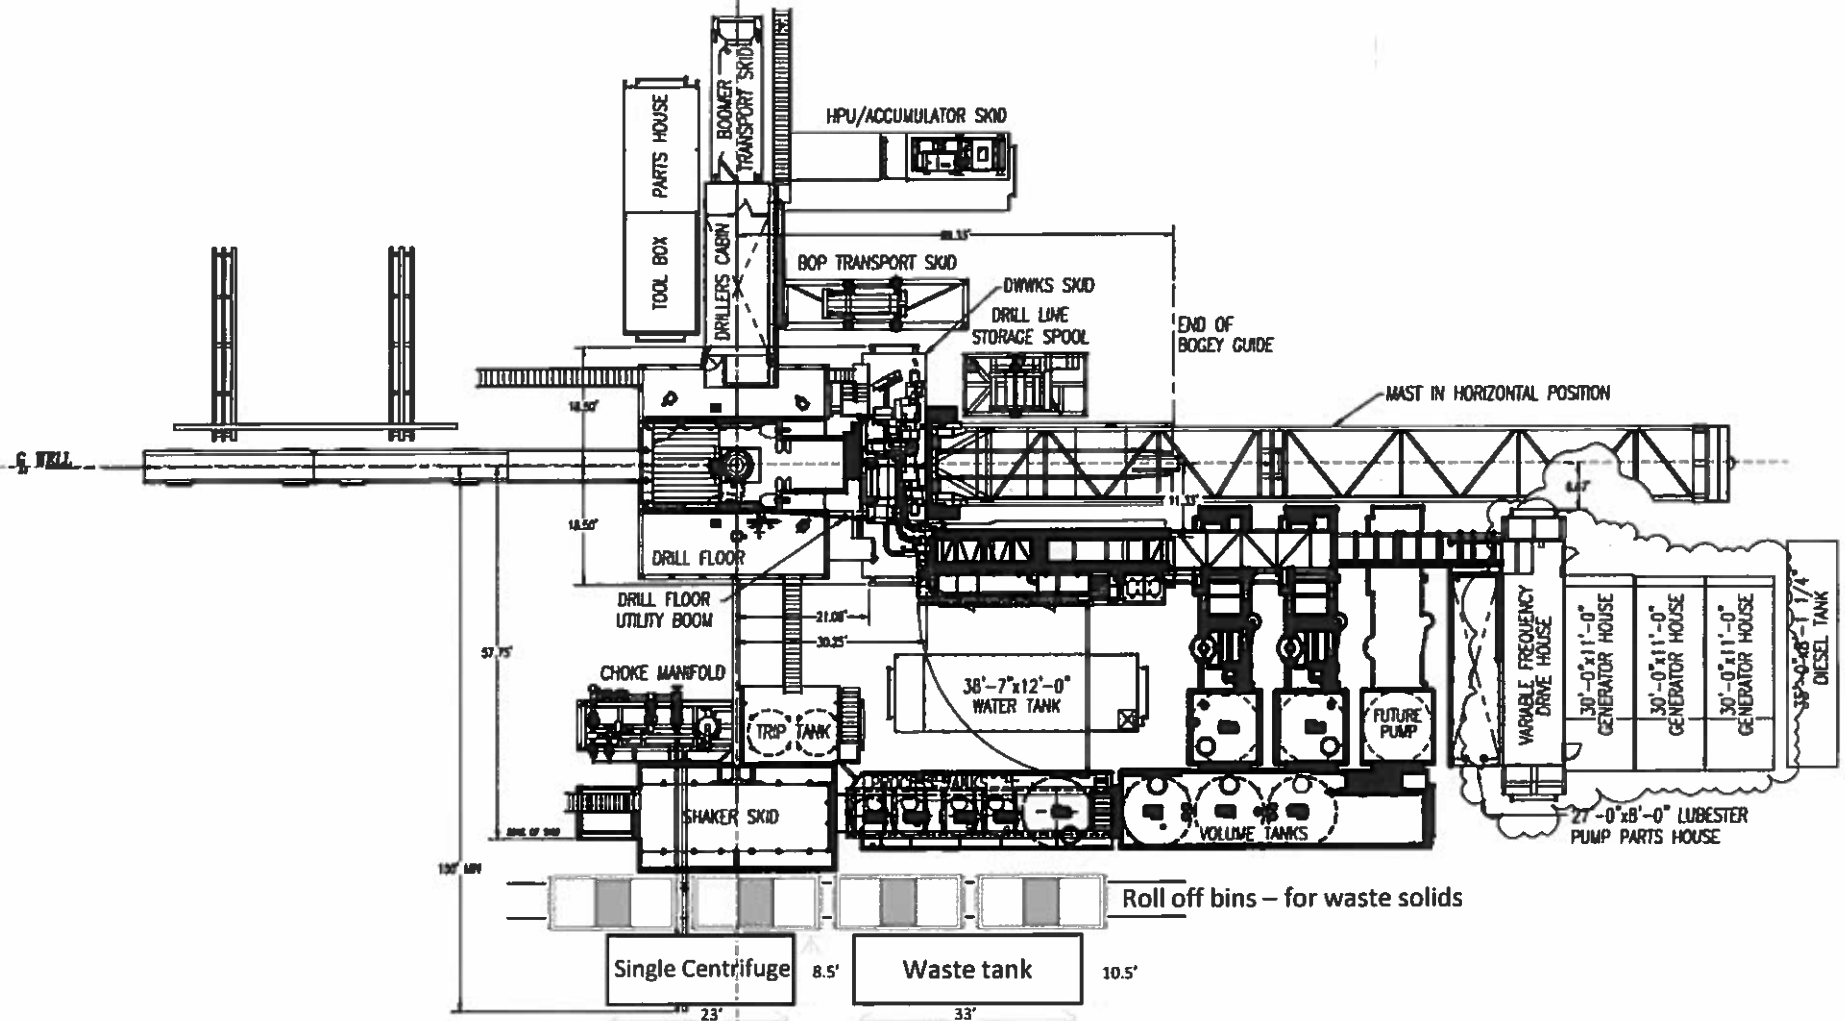

Oxy

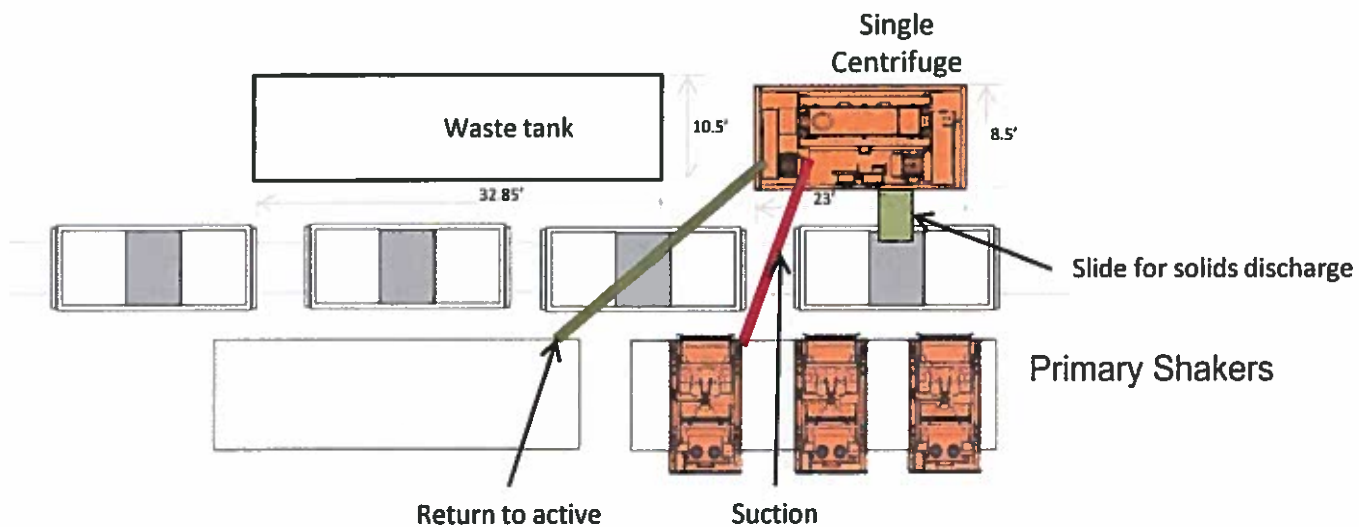

Oxy Single Centrifuge
Closed Loop System – New
Mexico Flex III
May 28, 2013