


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

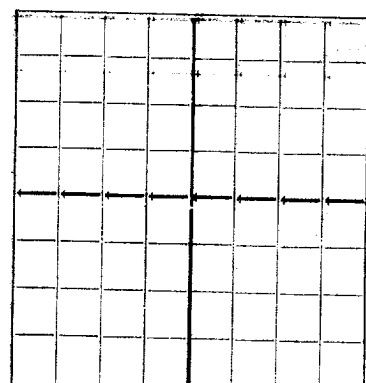

AREA 640 ACRES
LOCATE WELL CORRECTLY

The Engas Company

Company or Operator

Drawer H, Bennett, New Mexico

Address

Pecos-Irrigation

Well No. 1

in SE SW

of Sec. 9

T. 25

R. 28

N. M. P. M.

Wildcat

Field,

Eddy

County.

Well is 660 feet north south of the North line and 1980 feet east west of the East line of Sec. 9-25-28

If State land the oil and gas lease is No.

Assignment No.

If patented land the owner is Pecos-Irrigation Co.

Address Carlsbad, New Mexico

If Government land the permittee is

Address

The Lessee is

Address

Drilling commenced 9-12

19 44

Drilling was completed 11-13

19 44

Name of drilling contractor W. D. Cunningham

Address Artesia, New Mexico

Elevation above sea level at top of casing 2983 feet.

The information given is to be kept confidential until

19

OIL SANDS OR ZONES

No. 1, from _____ to _____ No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 150 to 160 feet.
No. 2, from 1245 to 50 feet.
No. 3, from 2610 to 2650 feet.
No. 4, from 3029 to 3043 feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
13"	40	8	J&L	190'	Texas			water
8 5/8	32	8	"	1339	"			"

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17"	13"	190'				28 sacks
10	8 5/8	1339		Halliburton		40 sacks

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools were used from 0 feet to 3043 feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing _____, 19 _____
The production of the first 24 hours was _____ barrels of fluid of which _____ % was oil; _____ % emulsion; _____ % water; and _____ % sediment. Gravity, Be _____
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

W. I. Owens

Driller

Driller

Jack Best

Driller

Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 16th

Bennett, New Mexico 11-15-44

Place

Date

day of November, 1944

Name W. K. Davis

Position Supt.

Representing The Engas Co.

Company or Operator

My Commission expires Oct 13, 1945

Address Drawer "H", Bennett, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	125	125	Red sand and shale
125	135	10	Gypsum
135	200	65	Dolomite and lime
200	296	96	Red Sand and shale
296	455	159	Anhydrite, sand and shale
455	550	95	Dolomite, anhydrite and shale
550	685	135	Anhydrite, sand and salt
685	740	55	Red shale and sand
740	1200	460	Anhydrite
1200	1705	505	Dolomite and anhydrite
1705	1880	175	Salt
1880	1980	100	Dolomite and anhydrite
1980	2280	300	Salt
2280	2488	208	Dolomite and anhydrite
2488	2520	32	Black sandy limestone
2520	2740	220	Grey silty sandstone
2740	2760	20	Black sandy shale
2760	2950	190	Grey silty sandstone
2950	2965	15	Black sandy shale
2965	3043	78	Grey fine silty sandstone