District I [®] 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Ave., Artesia, NM 88210 District III 1000 Rio Brazos Rd., Aztec, NM 87410 District IV	State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505	Form C-144 July 21, 2008 For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office.
1220 S. St. Francis Dr., Santa Fe, NM 87505	Pit, Closed-Loop System, Below-Grad	
Propos	sed Alternative Method Permit or Closur	
	-	
Type of action:	X Permit of a pit, closed-loop system, below-grade t Closure of a pit, closed-loop system, below-grade Modification to an existing permit Closure plan only submitted for an existing permit	tank, or proposed alternative method
	below-grade tank, or proposed alternative method	
Please be advised that approval	application (Form C-144) per individual pit, closed-low of this request does not relieve the operator of liability should operations relieve the operator of its responsibility to comply with any other applicable	result in pollution of surface water, ground water or the
1 Operator: Burlington Resources O	il & Gas Company, LP	OGRID#: 14538
Address: PO Box 4289, Farmingt		
Facility or well name: NEWCO 1A		
	3004529801 OCD Permit Numbe	T.
U/L or Qtr/Qtr: E Secti		9W County: San Juan
Center of Proposed Design: Latitud		-107.80991°W NAD: X 1927 1983
Surface Owner: X Federal	State Private Tribal Trust or India	
Permanent Emergency C Lined Unlined L String-Reinforced	rkover Cavitation P&A	HDPE PVC Other
Type of Operation: P&A [Drying Pad Above Grou Lined Unlined Line	tion H of 19.15.17.11 NMAC Drilling a new well Workover or Drilling (Applies to notice of intent) und Steel Tanks Haul-off Bins Other er type: Thickness mil LLDPE F Factory Other	activities which require prior approval of a permit or
4 X Below-grade tank: Subsection Volume: 120 120 Tank Construction material:	bbl Type of fluid: Produced Water Metal letection X Visible sidewalls, liner, 6-inch lift and auto Visible sidewalls only Other	omatic overflow shut-off
5 Alternative Method: Submittal of an exception request is re	equired. Exceptions must be submitted to the Santa Fe Enviro	onmental Bureau office for consideration of approval.
Form C-144	Oil Conservation Division	Page 1 of 5

Subsection D of 19.15.17.11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks)		
Chain link, six feet in height, two strands of barbed wire at top (<i>Required if located within 1000 feet of a permanent residence, school, hospital, ins</i> Iour foot height, four strands of barbed wire evenly spaced between one and four feet X Alternate. Please specify 4' hog wire fencing topped with two strands barbed wire.	titution or chu	rch)
7 Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other		
 8 Signs: Subsection C of 19.15.17.11 NMAC 12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers X Signed in compliance with 19.15.3.103 NMAC 		
9 Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s): Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for consideration of approval.	sideration of a	oproval.
10 <u>Siting Criteria (regarding permitting)</u> : 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system.		
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes	XNo
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes	XNo
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	XNo
(Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image		
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applied to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Yes XNA	No
Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	Yes	XNo
 NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site. Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended Written confirmation or verification from the municipality; Written approval obtained from the municipality 	Yes	XNo
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	Yes	XNo
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	Yes	XNo
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	Yes	XNo
Within a 100-year floodplain - FEMA map	Yes	XNo

Temperature Phy. Energency Phy. and Below-grade Tasks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Improved Design Report (Below grade Tasks) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Improved Design Control at appropriate requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Improved Design Control appropriate requirements of 19.15.17.1 NMAC Improved Design Inter- based upon the appropriate requirements of 19.15.17.1 NMAC Improved Design Inter- based upon the appropriate requirements of 19.15.17.9 NMAC Improved Design Inter- based upon the appropriate requirements of 19.15.17.9 NMAC Improved Design Intatch copy of design API Improved Design Intatch copy of de	 Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API or Permit
Implementation Proceedings (1) Subsection B of [9:15,17] NMAC Implementation Implementation Implementation Implementation States_Criteria Compliance Demonstrations - based upon the appropriate requirements of [9:15,17] NMAC Implementation Impleme	 X Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC X Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC X Design Plan - based upon the appropriate requirements of 19.15.17.10 NMAC X Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC X Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API or Permit
By Hydrogologic Data Cremponary and Emergency Pitty - based upon the equirements of 19.15.17.1 NMAC Sting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.1 NMAC Concer Plan - based upon the appropriate requirements of 19.15.7.1 NMAC Concer Plan - Based upon the appropriate requirements of 19.15.7.1 NMAC Concer Plan - Based upon the appropriate requirements of 19.15.7.2 NMAC Concer Plan - Based upon the appropriate requirements of 19.15.7.1 NMAC Previously Approved Design (attach copy of design) AP Concer Plan - Based upon the appropriate requirements of 19.15.7.1 NMAC Concerting and Maintenance Plan - Based upon the requirements of 19.15.7.1 NMAC Bitting Criteria Compliance Domostations (only for on-site Cosure) - based upon the appropriate requirements of 19.15.7.1 NMAC Design Plan - based upon the appropriate requirements of 19.15.7.1 NMAC Departing and Maintenance Plan - Based upon the appropriate requirements of 19.15.7.1 NMAC Departing and Maintenance Plan - Based upon the appropriate requirements of 19.15.7.1 NMAC Departing and Maintenance Plan - Based upon the appropriate requirements of 19.15.7.1 NMAC Departing and Maintenance Plan - Based upon the appropriate requirements of 19.15.7.1 NMAC Departing Plan - Based upon the appropriate requirements of 19.15.7.1 NMAC Previously Approved Design (tark copy of design) API Previously Approved	 Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) AP1 or Permit
Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintennee Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Previously Approved Design (attach copy of design) API Colsure Plan (Hydrogoologic) Data (only for on-site colsure) - based upon the appropriate requirements of 19.15.17.10 NMAC Colsure Plan (Hydrogoologic) Data (only for on-site colsure) - based upon the appropriate requirements of 19.15.17.9 Sing Criteria Compliance Demonstrations (only for on-site colsure) - based upon the appropriate requirements of 19.15.17.9 Design Plan - based upon the appropriate requirements of 19.15.17.10 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.10 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.10 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.10 NMAC Previously Approved Depring and Maintenance Plan API Previously Approved Depring and Maintenance Plan API Previously Approved Depring and Maintenance Plan API Sing Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Difference Design Plans - based upon the appropriate requirements of 19.15.17.10 NMAC Constration Design Plans - based upon the appropriate requirements of 19.15.17.10 NMAC Constration Design Plans - based upon the appropriate requirements of 19.15.17.10 NM	Image: Second systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Image: Second systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC
Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintennee Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Previously Approved Design (attach copy of design) API Colsure Plan (Hydrogoologic) Data (only for on-site colsure) - based upon the appropriate requirements of 19.15.17.10 NMAC Colsure Plan (Hydrogoologic) Data (only for on-site colsure) - based upon the appropriate requirements of 19.15.17.9 Sing Criteria Compliance Demonstrations (only for on-site colsure) - based upon the appropriate requirements of 19.15.17.9 Design Plan - based upon the appropriate requirements of 19.15.17.10 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.10 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.10 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.10 NMAC Previously Approved Depring and Maintenance Plan API Previously Approved Depring and Maintenance Plan API Previously Approved Depring and Maintenance Plan API Sing Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Difference Design Plans - based upon the appropriate requirements of 19.15.17.10 NMAC Constration Design Plans - based upon the appropriate requirements of 19.15.17.10 NMAC Constration Design Plans - based upon the appropriate requirements of 19.15.17.10 NM	Image: Structions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Solution of the specified equivalence of the specified requirements of 19.15.17.12 NMAC Solution of the specified equivalence of the specified equivalenc	X Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC X Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API or Permit 12 Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Secure Plan (Please complete Boxs 14 Horough 18, if applicable) - based upon the appropriate requirements of Subsection C of 1915.17.9 NMAC and 1915.17.13 NMAC. Previously Approved Design (tatch copy of design) API	Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API or Permit Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Previously Approved Design (attach copy of design) API	19.15.17.9 NMAC and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API or Permit 12 Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Closed-load Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Chemeritans: Each of the following items must be autoched to the application. Places indicate, by a check mark in the bat, that the documents are attached. Closed-load Hydrogeologic Data (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Closed-based upon the appropriate requirements of 19.15.17.11 NMAC Closed-based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Plass complete Descs 14 through 18, if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC Closure Plan (Plass complete Descs 14 through 18, if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC Closure Plan (Plass complete Descs 14 through 18, if applicable) - based upon the appropriate requirements of 19.15.17.9 NMAC Closure Plan (Plass complete Descs 14 through 18, if applicable) - based upon the appropriate requirements of 19.15.17.9 NMAC Closure Plan (Plass complete Descs 14 through 18, if applicable) - based upon the appropriate requirements of 19.15.17.9 NMAC Closure Plan (Plass complete Descs 14 through 18, if applicable) - based upon the appropriate requirements of 19.15.17.10 NMAC Closure Plan (Plass complete Descs 14 through 18, if applicable) - based upon the appropriate requirements of 19.15.17.10 NMAC Closure Plan (Plass complete appropriate requirements of 19.15.17.11 NMAC Closure Plan (Plass complete appropriate requirements of 19.15.17.11 NMAC Closure Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Closure Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Closure Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Closure Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Closure Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Closure Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Closure Plan - based upon the appropriate requirements of	¹² <u>Closed-loop Systems Permit Application Attachment Checklist:</u> Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Closed-loop Systems Permit Application Attachment Checklist; Subsection B of 19.15.179 NMAC Closed-loop Systems Permit Application Checklist; Subsection B of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan - Rese of Design Plan - Based upon the appropriate requirements of 19.15.17.10 NMAC Perviously Approved Design (attach corp of design) Previously Approved Operating and Maintenance Plan API Previously Approved Operating appropriate requirements of 19.15.17.1 NMAC Diaterotopy Previous Plan - based upon the appropriate requirements of 19.15.17.1 NMAC Diate Potentian Application Checklist: Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Diaterotopy Previous Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Diate Design Plan - based upon the	Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.19 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.10 NMAC Previously Approved Operating and Maintenance Plan API Previously Approved Operating and the appropriate requirements of 19.15.17.9 NMAC Instructions: Each of the following items must be attacked to the application. Places indicate, by a check mark in the box; that the documents are attacked. Hydrogeologic Report - based upon the appropriate requirements of 19.15.17.1 NMAC Dise Proteomate Plan Each upon the appropriate requirements of 19.15.17.1 NMAC Dise proteomate Plan Each upon the appropriate requirements of 19.15.17.1 NMAC Dise Proteomate Plan Each upon the appropriate requirements of 19.15.17.1 NMAC Dise Proteomate Plan Each upon the appropriate requirements of 19.15.17.1 NMAC Dise Proteomate Plan Each upon the appropriate requirements of 19.15.17.1 NMAC Dise Proteomate One Design Plan - based upon the appropriate requirements of 19.15.17.1 NMAC Lask Detection Design - Based upon the appropriate requirements of 19.15.17.1 NMAC Dise Proteomated and Overtoping Plan Eace upon the appropriate requirements of 19.15.17.1 NMAC Dise Proteomated and Overtoping Plane Eace upon the appropriate requirements of 19.15.17.1 NMAC Dise Proteomated and Overtoping Preveninton Plan — Descoprint requirements of 19.15.17.1 NMAC Disera	
Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Deparating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 MAAC and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Previously Approved Openting and Maintenance Plan API Dise Protection AS Structure in subs etailcache of the appropriate requirements of 19.15.17.11 NMAC Line Specification and Structure insed upon the appropriate requirements of 19.15.17.11 NMAC Line Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Line Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Line Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Preboad Overtoping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Line Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Instance Plan - based upon the ap	Geologie und Hydrogeologie Data (only for on bite closed apon die requirements of Futurgaph (5) of Subsection D of 17:15:17:7
Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Deparating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 MMAC and 19.15.17.13 NMAC Previously Approved Openting and Maintenance Plan API Previously Approved Openting Composition Checklest: Subsection B of 19.15.17.19 NMAC Disk Protection AStructure to the appropriate requirements of 19.15.17.11 NMAC Line Specification Stating Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Line Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Openting and Maintenance Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Line Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Openting and Maintenance Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Hortsen Reportse Plan Oli Field Waste Stream Characterization Mointoring and Insertion Design asset upon the appropriate r	
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Previously Approved Design (attach copy of design) API Previously Approved Operating and Maintenance Plan API Previously Approved Operating and Maintenance Plan API Subsection B of 19.15.17.19 NMAC Instructions: Each of the following litems must be attached to the appropriate requirements of P.15.17.19 NMAC Sting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Cartified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Cartified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Later XDetection and Structural Integrity Design: based upon the appropriate requirements of 19.15.17.11 NMAC Later Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Questing Maintenance Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Later XDetection and Structural Integrity Design: based upon the appropriate requirements of 19.15.17.11 NMAC Later XDetection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Questing and Maintenance Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Questing and Maintenance Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Questing and Maintenance Plan. based upon the appropriate requirements of 19.15.17.11 NMAC Questing and Maintenance Researchest de metage of the appropriate requirements of 19.15.17.11 NMAC Questing and Maintenance Researchest de metage of the appropriate requirements of 19.15.17.13 NMAC Preposed Closure; 19.15.17.13 NMAC Thereboard and Overtorpring Prevention Plan - based	
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Previously Approved Design (tach copy of design) API Previously Approved Operating and Maintenance Plan API Previously Approved Operating and Maintenance Plan API Previously Approved Operating and Maintenance Plan API Previously Approved Operating them smut be attached to the application. Please indicate. by a check mark in the box, that the documents are attached. Sting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.9 NMAC Climatological Factors Assessment Climatological Factors Assessment Detrified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Deservice on ad Structural Integrity Design based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Climatological Factors Assessment Deservice on ad Structural Integrity Design based upon the appropriate requirements of 19.15.17.11 NMAC Deservice on ad Structural Integrity Design based upon the appropriate requirements of 19.15.17.11 NMAC Climatological Pactors Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Climatological Pactors Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Climatological Pactors - based upon the appropriate requirements of 19.15.17.11 NMAC Climatological Pactors - based upon the appropriate requirements of 19.15.17.11 NMAC Climatological Pactors - based upon the appropriate requirements of 19.15.17.11 NMAC Climatological Pactors Characterization Monitoring and Maintenance Plan based upon the appropriate requirements of 19.15.17.11 NMAC Climatological Pactors Characterization Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Climatological Pactors Closure Plan - based upon the appropriate requirements of 19	
MAC and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Previously Approved Operating and Maintenance Plan API 13 Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following times must be attached to the application. Please thatface, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dake Protection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection and Structural Integrity Design: based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Dake Protection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Cata Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Prechoard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Interspective Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Closure Plan - based upon the appropriate requirements of 19.15.17.13 NMAC Interretions	
Previously Approved Operating and Maintenance Pan API 13 Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the appropriate requirements of 19.15.17.1 NMAC Instructions: Each of the following items must be attached to the appropriate requirements of 19.15.17.1 NMAC Implicing Instructions: Each of the following items must be attached upon the appropriate requirements of 19.15.17.1 NMAC Instructions: Each of the following items must be attached to the appropriate requirements of 19.15.17.11 NMAC Implicing Instructions: Each of the appropriate requirements of 19.15.17.11 NMAC Instructions: Each of the appropriate requirements of 19.15.17.11 NMAC Instructions: Each of the appropriate requirements of 19.15.17.11 NMAC Instructions: Each of the following provide requirements of 19.15.17.11 NMAC Instructions: Each of the appropriate requirements of 19.15.17.11 NMAC Instructions: Each of the appropriate requirements of 19.15.17.11 NMAC Instructions: Each of the appropriate requirements of 19.15.17.11 NMAC Instructions: Each of the appropriate requirements of 19.15.17.11 NMAC Instructions: Each of the appropriate requirements of 19.15.17.11 NMAC Instructions: Each of the appropriate requirements of 19.15.17.13 NMAC Instructions: Each of the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Instructions: Each of the appropriate requirements of Subsection C of 19.15.17.13 NMAC Int	NMAC and 19.15.17.13 NMAC
13 Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report-hased upon the requirements of 19.05.17.9 NMAC Sitting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Like Potection and Structural Integrity Design: based upon the appropriate requirements of 19.15.17.11 NMAC Like Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Instructions: Report Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Errosin Control Plan Errosin Control Plan Errosin Control Plan Closure Plan - based upon the appropriate requirements of 19.15.17.9 NMAC and 19.15.17.13 NMAC Instructions: Place During in Planse Boxe, Boxes 14 through 18, in regards to the proposed closure plan. Proposed Closure 19.15.17.13 NMAC Instruction: Place Buring in Place Buring in Place Boxing Resores Plan	
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. hydrogeologic Report-Assed upon the requirements of Paragraph (1) of Subsection B of 19.15.17.19 NMAC childing Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.11 NMAC childing Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.11 NMAC childing Criteria Compatibility Assurance Orometality Massessment - based upon the appropriate requirements of 19.15.17.11 NMAC childing Criteria Compatibility Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.11 NMAC quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Musta Crean Characterization Monitoring and Inspection Plan Closure Plan - based upon the appropriate requirement of the proposed closure plan. Proposed Closure Plan - based upon the appropriate requirement of 19.15.17.13 NMAC defence conduce the applicable back, Back & I through 18, in regarks to the proposed closure plan. Type: Drilling Workover Emergency Cavitation P&A Perman	Previously Approved Operating and Maintenance Plan APl
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.8 NMAC Climatological Factors Assessment Climatological Factors Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection and Structural Integrity Design: based upon the appropriate requirements of 19.15.17.11 NMAC Currely Control/Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H2S, Prevention Plan Emergency Response Plan Oli Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Instructions: Planes complicate the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Trype Cavitation P&	
Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Report - based upon the appropriate requirements of 19.15.17.10 NMAC Cimitatological Factors Assessment Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Using Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Hydrogeologic Report Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Herostoard All Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Interregory Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Ensergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Closure Plan - based upon the appropriate requirements of 19.15.17.9 NMAC and 19.15.17.13 NMAC Interregory Closure: 19.15.17.13 NMAC Interregory Closure: 19.15.17.13 NMAC Interregorefore Plan Closure Plan Closure Plan Checklist; (1	Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Preboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Imargency Response Plan Oil Field Waste Stream Characterization Moning and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of 19.15.17.9 NMAC and 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workeer Emergency Closure Plan Closure Plan. Uprosed Closure; 19.15.17.13 NMAC Instructions: Plane complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workeer Emergenc	
Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance on Hazardous Odors, including H2S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of 19.15.17.9 NMAC and 19.15.17.13 NMAC Interactions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Orlling Quality Closure Method (only for temporary plas and closed-loop systems only) Quality Closure Method (introperaty plas and closed-loop systems only) Quality Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration) 14 Proposed Closure; 19.15.17.13 NMAC Internative	
Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Preeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H2S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of 19.15.17.9 NMAC and 19.15.17.13 NMAC Instructions: Plane complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Closure: In-place Burial On-site Closure Method (Closed-loop systems only) On-site Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration) 15 Weste Exercontion and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. 15 16 Weste Exercontion and Removal Closure Plan Checklist: (19.15.17.13	
Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Nuisance or Hazardous Odors, including H2S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Dirlling Workover Emergency Closure Plan. Closure Plan - based upon the appropriate requirements of 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Dirlling Workover Emergency Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (only for temporary pits and closed-loop systems) In-place Burial On-site Trench Alternative Closure Method	
Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Wisance or Hazardous Odors, including H2S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Closure Method: X]Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Instructions: Back of the following items must be attached to the closure plan. 13 Waste Excavation and Removal Closure Plan Checklist; (19.15.17.13 NMAC) 14 Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC 15 Waste Excavation and Removal (Closed-loop systems only) 0n-site Closure Method (Exceptions must be submitted to the Santa Fe E	
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H2S, Prevention Plan Enceion Control Plan Encode Closure Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Oil Field Waste Stream Characterization Oil Field Waste Stream Characterization Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Cavitation P&A Permanent Pit KBelow-grade Tank Closed-loop System Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (exceptions must be submitted to the Santa Fe Environmental Bureau for consideration) 15 Waste Excavation and Removal Closure Plan Checklist; (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Prevate indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC X Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	
Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H2S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Closure: Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Closure Method: Waste Excavation and Removal Maste Removal (Closure-loop systems only) On-site Closure Method (only for temporary pits and closed-loop systems) In-place Burial On-site Trench Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration) 15 Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. <	Quality Control/Quality Assurance Construction and Installation Plan
Nuisance or Hazardous Odors, including H2S, Prevention Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Portiling Workover Emergency Cavitation Waste Excavation and Removal Waste Excavation and Removal Waste Closure Method [Muste Closure Method (only for temporary pits and closed-loop systems) In-place Burial On-site Trench In-place Burial [On-site Trench Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC IX Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. 15 Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Prease indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC IX Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC <	Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
□ Emergency Response Plan □ Oil Field Waste Stream Characterization □ Monitoring and Inspection Plan □ Erosion Control Plan □ Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC 14 Proposed Closure: Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: □ □ Drilling □ Workover □ Emergency □ Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □	
□ Oil Field Waste Stream Characterization □ Monitoring and Inspection Plan □ Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC 14 Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: □ Drilling □ Workover □ Emergency □ Cavitation □ P&A □ Permanent Pit ③ Below-grade Tank □ Closure Method: ○ Waste Excavation and Removal □ Maste Removal (Closed-loop systems only) □ On-site Closure Method (only for temporary pits and closed-loop systems) □ In-place Burial □ On-site Trench □ Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration) 15 Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Preposed and Procedures - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC IX Protocols and Procedures - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC IX Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection H of 19.15.17.13	
Monitoring and Inspection Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Methods and the proposed Closure plan. Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Methods and provide the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Selow-grade Tank Closed-loop System Atternative Proposed Closure Method: SWaste Excavation and Removal Waste Removal (Closed-loop systems only) Con-site Closure Method (only for temporary pits and closed-loop systems) Con-site Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)	
Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC It Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Stelow-grade Tank Closued Vertice Closed-loop System Alternative Waste Excavation and Removal Waste Closure Method: Waste Removal (Closed-loop systems only) On-site Closure Method (only for temporary pits and closed-loop systems) In-place Burial In-place Burial On-site Trench Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration) 15 Waste Excavation and Removal Closure Plan Checklist; (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Prease indicate, by a check mark in the box, that the documents are attached. X Protocols and Procedures - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC X Protocols and Procedures - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC	
Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Closure Plan - based upon the appropriate requirements of 19.15.17.9 NMAC and 19.15.17.13 NMAC Closure Plan - based upon the appropriate requirements of 19.15.17.9 NMAC and 19.15.17.13 NMAC Closure Plane Closure Plane Closure Plane Permanent Pit Selow-grade Tank Closed-loop System Alternative Proposed Closure Method: Waste Excavation and Removal Closure Method (only for temporary pits and closed-loop systems) Closure Method (only for temporary pits and closed-loop systems) Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration) Sector Mathematice Protocols and Procedures - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC X Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC X Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	
14 Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Closed-loop System Alternative Proposed Closure Method: X Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (only for temporary pits and closed-loop systems) In-place Burial On-site Trench Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration) 15 Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC X Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC X Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) X Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Cavitation P&A Permanent Pit X Below-grade Tank Closed-loop System Alternative Proposed Closure Method: X Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (only for temporary pits and closed-loop systems) In-place Burial On-site Trench Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration) 15 Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. X Protocols and Procedures - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC X Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC X Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative Waste Excavation and Removal Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (only for temporary pits and closed-loop systems) In-place Burial On-site Trench In-place Burial On-site Trench Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration) 15 Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. Yerotocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC X Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC X Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) X Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	Proposed Closure: 19.15.17.13 NMAC
Alternative Proposed Closure Method: X Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (only for temporary pits and closed-loop systems) In-place Burial On-site Trench Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration) 15 Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. X Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC X Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC X Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) X Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	
Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (only for temporary pits and closed-loop systems) In-place Burial On-site Trench Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)	
Waste Removal (Closed-loop systems only) On-site Closure Method (only for temporary pits and closed-loop systems) In-place Burial On-site Trench Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration) 15 Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. X Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC X Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC X Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) X Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	
On-site Closure Method (only for temporary pits and closed-loop systems) In-place Burial On-site Trench Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration) 15 Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. X Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC X Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC X Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) X Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	
In-place Burial On-site Trench Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration) 15 Waste Excavation and Removal Closure Plan Checklist; (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. X Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC X Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC X Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) X Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	
 ¹⁵ Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. X Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC X Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC X Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) X Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC 	
 ¹⁵ Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC 	
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. X Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC X Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC X Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) X Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
 X Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC X Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC X Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) X Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC 	
 X Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC X Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) X Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC 	15 Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure p
 X Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) X Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC 	15 <u>Waste Excavation and Removal Closure Plan Checklist:</u> (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure p Please indicate, by a check mark in the box, that the documents are attached.
Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	15 Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure p Please indicate, by a check mark in the box, that the documents are attached. X Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC
	 ¹⁵ Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure p Please indicate, by a check mark in the box, that the documents are attached. [X] Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC [X] Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
X Re-vegetation Plan - based upon the appropriate requirements of Subsection 1 of 19.15.17.13 NMAC	 ¹⁵ Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure p Please indicate, by a check mark in the box, that the documents are attached. [X] Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC [X] Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC [X] Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)
X Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	 ¹⁵ Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure p Please indicate, by a check mark in the box, that the documents are attached. [X] Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC [X] Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC [X] Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)


16 Waste Removal <u>Closure For Closed-loop Systems That Utilize Above Ground Steel</u>			
Instructions: Please identify the facility or facilities for the disposal of liquids, drilling fi are required.	huids and drill cuttings. Use attachment if more than two fo	cilities	
Disposal Facility Name:	Disposal Facility Permit #:		
Will any of the proposed closed-loop system operations and associated activities Yes (If yes, please provide the information No	Vill any of the proposed closed-loop system operations and associated activities occur on or in areas that <i>will not</i> be used for future service and operations? Ves (If yes, please provide the information No		
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specification - based upon the appropriate Re vegetation Plan - based upon the appropriate requirements of Subsect Site Reclamation Plan - based upon the appropriate requirements of Subsect	ion I of 19.15.17.13 NMAC	:	
17 <u>Siting Criteria (Regarding on-site closure methods only:</u> 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Re certain string criteria may require administrative approval from the appropriate district office or for consideration of approval. Justifications and/or demonstrations of equivalency are required.	may be considered an exception which must be submitted to the .		
Ground water is less than 50 feet below the bottom of the buried waste.		Yes No	
- NM Office of the State Engineer - iWATERS database search; USGS: Data obtain	ned from nearby wells	N/A	
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS: Data obtain	ed from nearby wells	Yes No	
Ground water is more than 100 feet below the bottom of the buried waste.			
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtain	ed from nearby wells	L N/A	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significa (measured from the ordinary high-water mark).	nt watercourse or lakebed, sinkhole, or playa lake	Yes No	
 Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in ex 	vistance at the time of initial application	Yes No	
 Visual inspection (certification) of the proposed site; Aerial photo; satellite image 	instance at the time of initial appreation.		
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than purposes, or within 1000 horizontal fee of any other fresh water well or spring, in exister		Yes No	
 NM Office of the State Engineer - iWATERS database; Visual inspection (certifica Within incorporated municipal boundaries or within a defined municipal fresh water wel pursuant to NMSA 1978, Section 3-27-3, as amended. Written confirmation or verification from the municipality; Written approval obtain 	I field covered under a municipal ordinance adopted	Yes No	
 Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspec 		Yes No	
Within the area overlying a subsurface mine. - Written confirantion or verification or map from the NM EMNRD-Mining and Mi		Yes No	
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mind	eral Resources; USGS; NM Geological Society;	Yes No	
Topographic map Within a 100-year floodplain. - FEMA map		Yes No	
18			
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of by a check mark in the box, that the documents are attached.	f the following items must bee attached to the closure	plan. Please indicate,	
Siting Criteria Compliance Demonstrations - based upon the appropriate r	equirements of 19.15.17.10 NMAC		
Proof of Surface Owner Notice - based upon the appropriate requirements	of Subsection F of 19.15.17.13 NMAC		
Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC			
Construction/Design Plan of Temporary Pit (for in place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.11 NMAC			
Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC			
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC			
Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC			
 Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved) Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC 			


Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC


Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

19 Operator Application Certification:	
I hereby certify that the information submitted with this application is true, accur	rate and complete to the best of my knowledge and belief.
Name (Print): Crystal Tafoya	Title: Regulatory Technician
Signature: Auptal Eatour	Date: 12/22/2008
e-mail address:crystal.tafola@conocophillips.com	Telephone:505-326-9837
OCD Approval: Permit Application (including closure plan)	Closure Plan (only) OCD Conditions (see attachment)
OCD Representative Signature:	Approval Date:
Title:	OCD Permit Number:
21	
Closure Report (required within 60 days of closure completion): Subsec Instructions: Operators are required to obtain an approved closure plan prior to	sction K of 19.15.17.13 NMAC p implementing any closure activities and submitting the closure report. The closure
	n of the closure activities. Please do not complete this section of the form until an
approved closure plan has been obtained and the closure activities have been co	mpleted.
	Closure Completion Date:
22	
Closure Method:	
Waste Excavation and Removal On-site Closure Method	Alternative Closure Method Waste Removal (Closed-loop systems only)
If different from approved plan, please explain.	
23	
Closure Report Regarding Waste Removal Closure For Closed-loop Systems	That Utilize Above Ground Steel Tanks or Haul-off Bins Only:
	ing fluids and drill cuttings were disposed. Use attachment if more than two facilities
were utilized.	
Disposal Facility Name:	Disposal Facility Permit Number:
Disposal Facility Name:	Disposal Facility Permit Number:
Were the closed-loop system operations and associated activities performed o	
Yes (If yes, please demonstrate compliane to the items below)	No
Required for impacted areas which will not be used for future service and ope	erations:
Site Reclamation (Photo Documentation)	
Soil Backfilling and Cover Installation	
Re-vegetation Application Rates and Seeding Technique	
24	
	wing items must be attached to the closure report. Please indicate, by a check mark in
the box, that the documents are attached.	
Proof of Closure Notice (surface owner and division)	
Proof of Deed Notice (required for on-site closure)	
Plot Plan (for on-site closures and temporary pits)	
Confirmation Sampling Analytical Results (if applicable)	
Waste Material Sampling Analytical Results (if applicable)	
Disposal Facility Name and Permit Number	
Soil Backfilling and Cover Installation	
Re-vegetation Application Rates and Seeding Technique	
Site Reclamation (Photo Documentation)	
On-site Closure Location: Latitude:	Longitude: NAD 1927 1983
25	
Operator Closure Certification:	
	report is ture, accurate and complete to the best of my knowledge and belief. I also certify that
the closure complies with all applicable closure requirements and conditions spe	cified in the approved closure plan.
Name (Print):	Title:
Signature:	Date:
e-mail address:	Telephone:

Oil Conservation Division

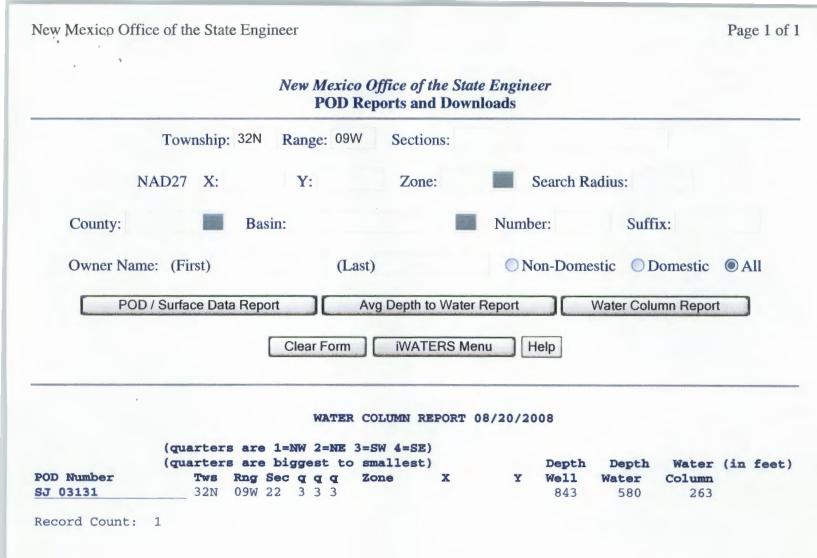


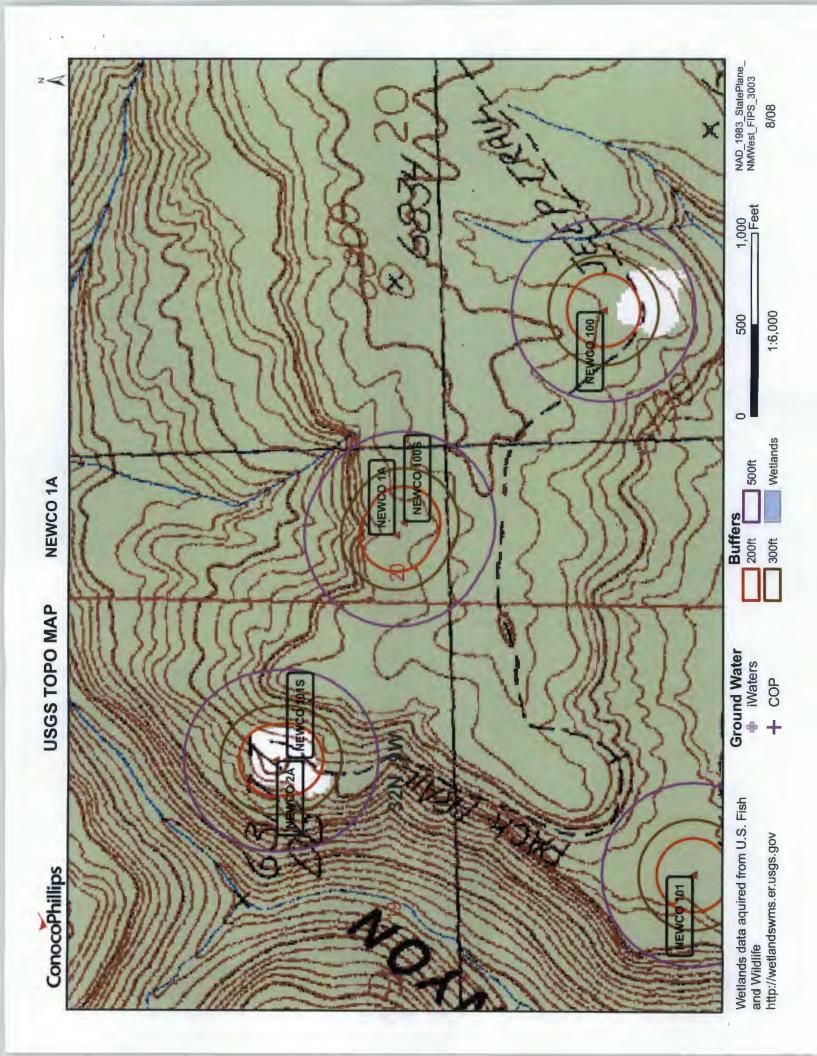

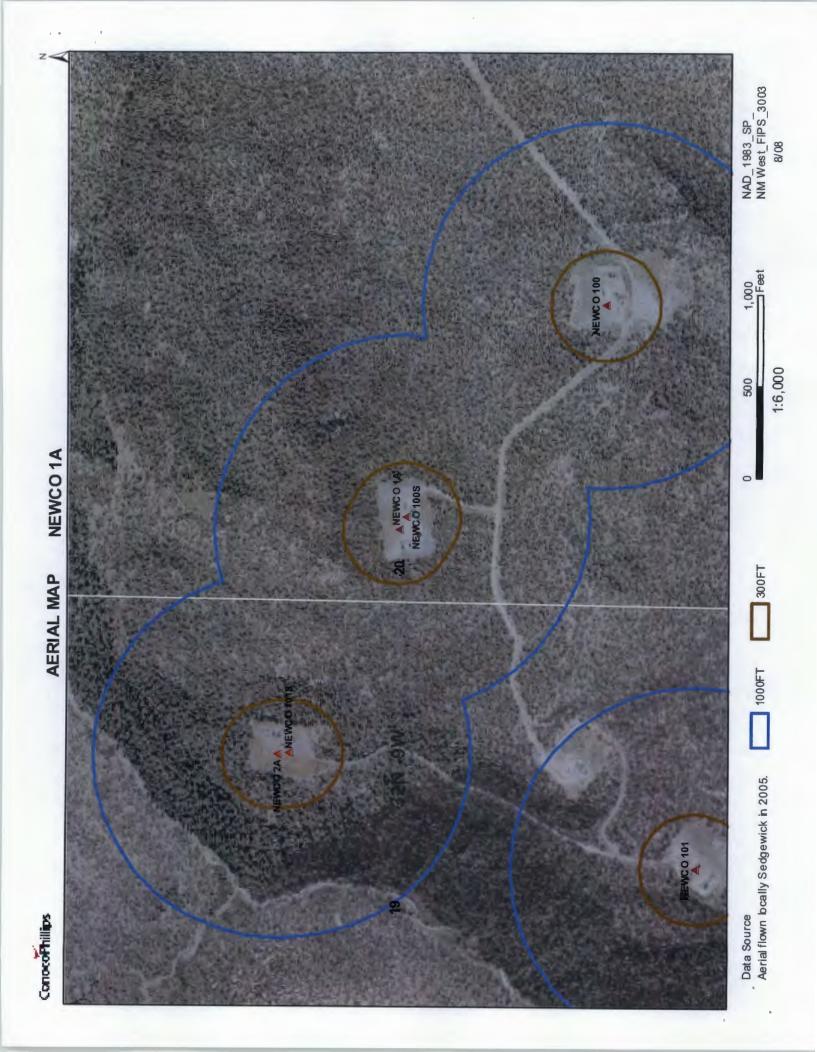

Mines, Mills and Quarries Web Map NEWCO 1A


Unit Letter: E, Section: 20, Town: 032N, Range: 009W

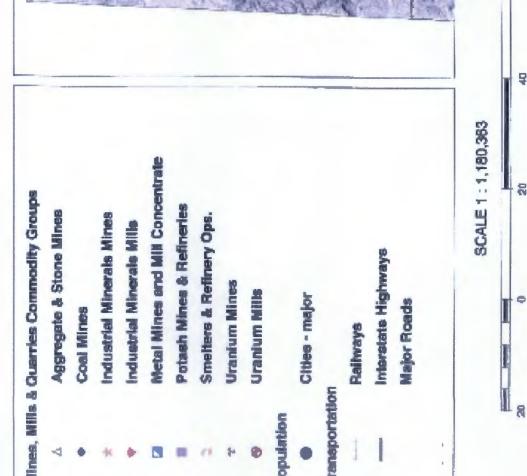





8

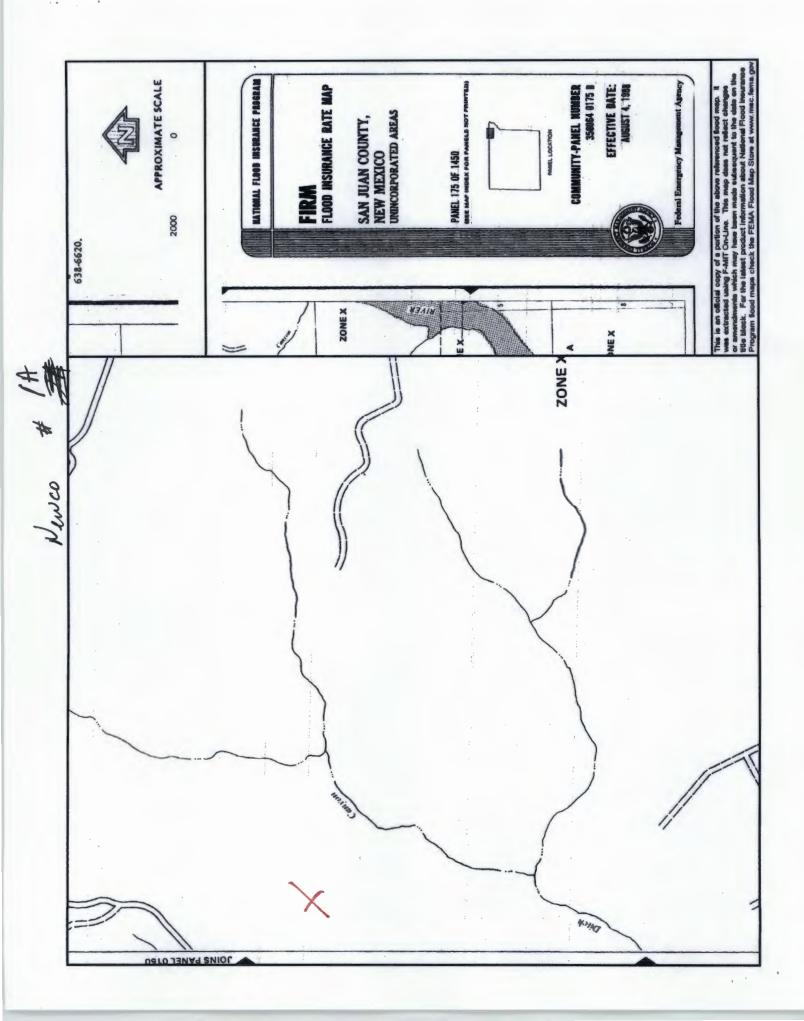

NEWCO 1A

Site Specific Hydrogeology

A visual site inspection confirming the information contained herein was performed on the well 'NEWCO 1A', which is located at 36.97047 degree, North latitude and 107.80991 degree, West longitude. This location is located on the Mount Nebo 7.5' USGS topographic quadrangle. This location is in section 20 of Township 32 North Range 9 West of the Public Land Survey System (New Mexico Principal Meridian). This location is located in San Juan County, New Mexico. The nearest town is Cedar Hill, located 4.8 miles to the southwest. The nearest large town (population greater than 10,000) is Durango, located 21.4 miles to the north (National Atlas). The nearest highway is US Highway 550, located 3.7 miles to the west. The location is on BLM land and is 5,315 feet from the edge of the parcel as notated in the BLM land status layer updated January 2008. This location is in the Animas. Colorado, New Mexico, Sub-basin. This location is located 2067 meters or 6779 feet above sea level and receives 16.5 inches of rain each year. The vegetation at this location is classified as Inter-Mountain Basins Shale Badland as per the Southwest Regional Gap Analysis Program.

The estimated depth to ground water at this point is 369 feet. This estimation is based on the data published on the New Mexico Engineer's iWaters Database website and water depth data from ConocoPhillips' Cathodic wells. Groundwater data available from the NM State Engineer's iWaters Database for wells near the proposed site are attached. The nearest stream is 443 feet to the northeast and is classified by the USGS as an intermittent stream. The nearest perennial stream is 10,354 feet to the east. The nearest water body is 10,339 feet to the east. It is classified by the USGS as an intermittent lake and is 0.9 acres insize. The nearest spring is 5,268 feet to the southwest. All stream, river, water body and spring information was determined as per the USGS Hydrographic Dataset (High Resolution), downloaded 3/2008. The nearest water well is 5,494 feet to the west. There is no wetland data available for this area. The slope at this location is 5 degree, to the north as calculated from USGS 30M National Elevation Dataset. This information is also discerned from the aerial and topographic map included. The surface geology at this location is SAN JOSE FORMATION--Siltstone, shale, and sandstone with a Sandstone dominated. formations of all ages substrate. The soil at this location is 'Rock outcrop-Travessilla-Weska complex, on is extremely steep' and is well drained and not hydric with severe erosion potential as taken from the NRCS SSURGO map unit, downloaded January 2008. The nearest underground mine is 4.6 miles to the west as 5 E miles to the indicated on the Mines, Mills and Quarries Map of New Mexico provided. go, located 23.4 miles to the

Regional Hydrogeological context:

ate 1.3.7 miles to the west. The location

The San Jose Formation of Eocene age occurs in New Mexico and Colorado, and its outcrop forms the land surface over much of the eastern half of the central basin. It overlies the Nacimiento Formation in the area generally south of the Colorado-New Mexico State line and overlies the Animas Formation in the area generally north of the State line. The San Jose Formation was deposited in various fluvial-type environments. In general, the unit consists of an interbedded sequence of sandstone, siltstone, and variegated shale. Thickness of the San Jose Formation generally increases from west to east (200 feet in the west and south to almost 2,700 feet in the center of the structural basin). Ground water is associated. with alluvial and fluvial sandstone aquifers. Thus, the occurrence of ground water is mainly controlled by the distribution of sandstone in the formation. The distribution of such sandstone is the result of original depositional extent plus any post-depositional modifications, namely erosion and structural deformation Transmissivity data for San Jose Formation are minimal. Values of 40 and 120 feet squared per day were determined from two aquifer tests (Stone et al, 1983, table 5). The reported or measured discharge from 46 water wells completed in San Jose Formation ranges from 0.15 to 61 gallons per minute and the median is 5 gallons per minute. Most of the wells provide water for livestock and domestic use. The San Jose Formation is a very suitable unit for recharge from precipitation because soils that form on the unit are sandy and highly permeable and therefore readily adsorb precipitation. However, low annual precipitation, relatively high transpiration and evaporation rates, and deep dissection of the San Jose Formation by the San Juan River and its tributaries all tend to reduce the effective recharge to the unit. er from the NPCS

Stone et al., 1983, Hydrogeology and Water Resources of the San Juan Basin, New Mexico: Socorro, New Mexico Bureau of Mines and Mineral Resources Hydrologic Report 6, 70 p.

Resort . Huming

The East July Formation automic over much the


Burlington Resources Oil & Gas Company, LP San Juan Basin Below Grade Tank Design and Construction

In accordance with NMAC 19.15.17 the following information describes the design and construction of below grade tanks on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all below grade tanks (BGT). A separate plan will be submitted for any BGT which does not conform to this plan.

General Plan:

- 1. BR will design and construct a properly sized and approved BGT which will contain liquids and should prevent contamination of fresh water to protect the public health and environment.
- BR signage will comply with 19.15.3.103 NMAC when BR is the operator. If BR is not the operator it will comply with 19.15.17.11NMAC. BR includes Emergency Contact information on all signage.
- 3. BR has approval to use alternative fencing that provid∈s better protection. BR constructs fencing around the BGT using 4 foot hog wire fencing topped with two strands of barbed wire, or with a pipe top rail. A six foot chain link fence topped with three strands of barbed wire will be use if the well location is within 1000 feet of permanent residence, school, hospital, institution or church. BR ensures that all gates associated with the fence are closed and locked when responsible personnel are not onsite.
- 4. BR will construct a screened, expanded metal covering, on the top of the BGT.
- 5. BR shall ensure that a below-grade tank is constructed of materials resistant to the below-grade tank's particular contents and resistant to damage from sunlight as shown on design drawing and specification sheet.
- 6. The BR below-grade tank system shall have a properly constructed foundation consisting of a level base free of rocks, debris, sharp edges or irregularities to prevent punctures, cracks or indentations of the liner or tank bottom as shown on design drawing.
- 7. BR shall operate and install the below-grade tank to prevent the collection of surface water run-on. BR has built in shut off devices that do not allow a belowgrade tank to overflow. BR constructs berms and corrugated retaining walls at least 6" above ground to keep from surface water run-on entering the below grade tank as shown on the design plan.
- 8. BR will construct and use a below-grade tank that does not have double walls. The below-grade tank's side walls will be open for visual inspection for leaks, the below-grade tank's bottom is elevated a minimum of six inches above the underlying ground surface and the below-grade tank is underlain with a geomembrane liner to divert leaked liquid to a location that can be visually inspected.

- 9. BR has equipped the below-grade tanks with the ability to detect high level in the tank and provide alarm notification and shutdown process streams into the tank. Once high level is detected RTU logic closes the inlet separator sales valve and does not permit vent valve to open. This shutdown of the sales valve and gagging of the vent valves prevents any hydrocarbon process streams from entering the pit tank once a high level is detected. Furthermore, an electronic page is sent to the BR MSO for that well site and to the designated contract "Water-Hauling" Company indicating a high level and that action must be taken to address this alarm. The environmental drain line from BR's compressor skid under normal operating conditions is in the open position. The environmental drain line is in place to capture any collected rain water or spilled lubricants from our compressor skids. The swab drain line is a manually operated drain and by normal operating procedures is in the closed position. The tank drain line is also a manually operated drain and during normal operations it is in the closed position.
- 10. The geomembrane liner consists of a 45-mil flexible LLDPE material manufactured by Raven Industries as J45BB. This product is a four layer reinforced laminated containing no adhesives. The outer layers consist of a high strength polyethylene film manufactured using virgin grade resins and stabilizers for UV resistance in exposed applications. The J45BB is reinforced with 1300 denier (minimum) tri-directional scrim reinforcement. It exceeds ASTMD3083 standard by 10%. J45BB has a warranty for 20 years from Raven Industries and is attached. It is typically used in Brine Pond, Oilfield Pit liner and other industrial applications. The manufacture specific sheet is attached and the design attached displays the proper installation of the liner.
- 11. The general specification for design and construction are attached in the BR document.

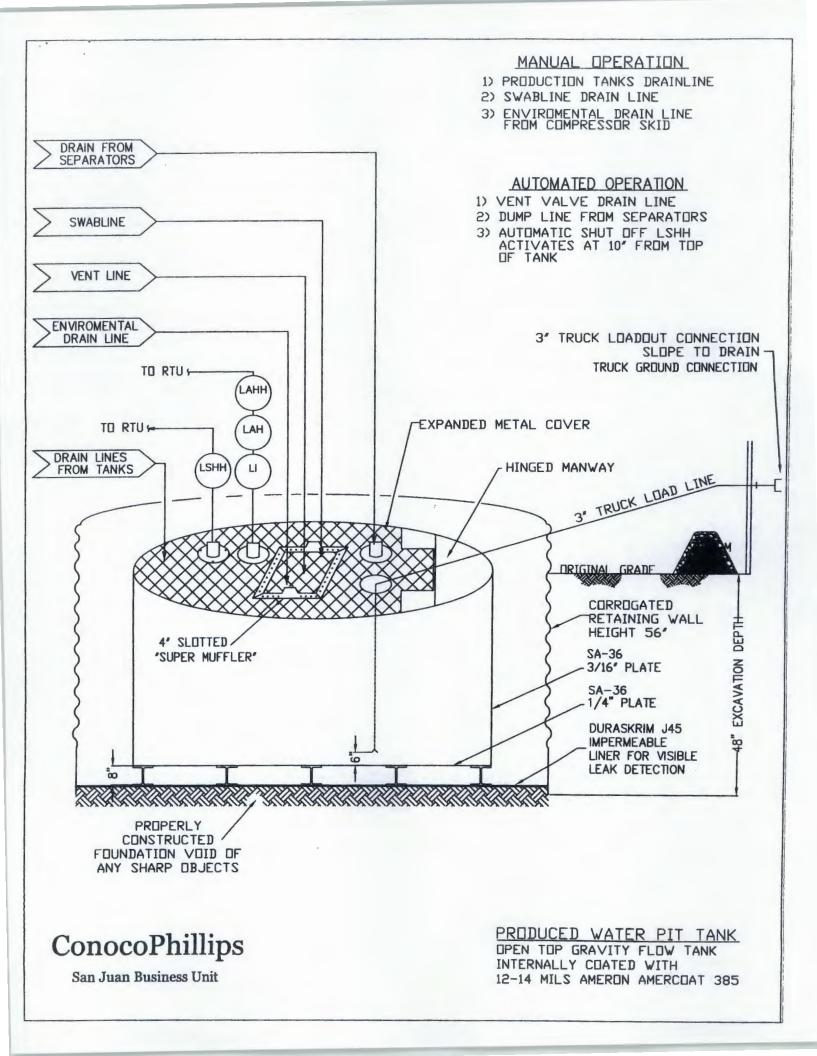

PROPERTIES	TEST METHOD	J30BB		J36BB		J45BB	
		Min. Roll Averages	Typical Roll Averages	Min. Roll Averages	Typical Roll Averages	Min. Roll Averages	Typical Roll Averages
Appearance		Black/Black		Black/Black		Black/Black	
Thickness	ASTM D 5199	27 mil	30 mil	32 mil	36 mil	40 mil	45 mil
Weight Lbs Per MSF (oz/yd²)	ASTM D 5261	126 lbs (18.14)	140 lbs (20.16)	151 lbs (21.74)	168 lbs (24.19)	189 lbs (27.21)	210 lbs (30.24)
Construction		**Extrusion laminated with encapsulated tri-directional scrim reinforcement					
Ply Adhesion	ASTM D 413	16 lbs	20 lbs	19 lbs	24 lbs	25 lbs	31 lbs
1* Tensile Strength	ASTM D 7003	88 lbf MD 63 lbf DD	110 lbf MD 79 lbf DD	90 lbf MD 70 lbf DD	113 lbf MD 87 lbf DD	110 lbf MD 84 lbf DD	138 lbf MD 105 lbf DD
1* Tensile Elongation @ Break % (Film Break)	ASTM D 7003	550 MD 550 DD	750 MD 750 DD	550 MD 550 DD	750 MD 750 DD	550 MD 550 DD	750 MD 750 DD
1" Tensile Elongation @ Peak % (Scrim Break)	ASTM D 7003	20 MD 20 DD	33 MD 33 DD	20 MD 20 DD	30 MD 31DD	20 MD 20 DD	36 MD 36 DD
Tongue Tear Strength	ASTM D 5884	75 lbf MD 75 lbf DD	97 lbf MD 90 lbf DD	75 lbf MD 75 lbf DD	104 lbf MD 92 lbf DD	100 lbf MD 100 lbf DD	117 lbf MD 118 lbf DD
Grab Tensile	ASTM D 7004	180 lbf MD 180 lbf DD	218 lbf MD 210 lbf DD	180 lbf MD 180 lbf DD	222 lbf MD 223 lbf DD	220 lbf MD 220 lbf DD	257 lbf MD 258 lbf DD
Trapezoid Tear	ASTM D 4533	120 lbf MD 120 lbf DD	146 lbf MD 141 lbf DD	130 lbf MD 130 lbf DD	189 lbf MD 172 lbf DD	160 lbf MD 160 lbf DD	193 lbf MD 191 lbf DD
* Dimensional Stability	ASTM D 1204	<1	<0.5	<1	<0.5	<1	<0.5
Puncture Resistance	ASTM D 4833	50 lbf	64 lbf	65 lbf	83 lbf	80 lbf	99 lbf
Maximum Use Temperature		180° F	180° F	180° F	180° F	180° F	180° F
Minimum Use Temperature		-70° F	-70° F	-70° F	-70° F	-70° F	-70° F

MD = Machine Direction

DD = Diagonal Directions

OURA-SIDIM'

Note: Minimum Roll Averages are set to take into account product variability in addition to testing variability between laboratories.

*Dimensional Stability Maximum Value

**DURA-SKRIM J30BB, J36BB & J45BB are a four layer reinforced laminate containing no adhesives. The outer layers consist of a high strength polyethylene film manufactured using virgin grade resins and stabilizers for UV resistance in exposed applications. DURA-SKRIM J30BB, J36BB & J45BB are reinforced with a 1300 denier (minimum) tri-directional scrim reinforcement.

Note: RAVEN INDUSTRIES MAKES NO WARRANTIES AS TO THE FITNESS FOR A SPECIFIC USE OR MERCHANTABILITY OF PRODUCTS REFERRED TO, no guarantee of satisfactory results from reliance upon contained information or recommendations and disclaims all liability for resulting loss or damage.





Sioux Falls, South Dakota

SALES OFFICE

P.O. Box 5107 Sioux Falls, SD 57117-5107 (605) 335-0174 (605) 331-0333 FAX 800-635-3456

30, J36 a J45

RAVEN INDUSTRIES INC. EXPOSED GEOMEMBRANE LIMITED WARRANTY

Raven Industries Inc. warrants Dura-Skrim J30BB, J36BB, and J45BB to be free from manufacturing defects and to be able to withstand normal exposure to sunlight for a period of 20 years from the date of sale for normal use in approved applications in the U.S and Canada, excluding Hawaii. This warranty is effective for products sold and shipped from January 1, 2008 to December 31, 2008. These dates will be updated prior to December 31, 2008.

This Limited Warranty does not include damages or defects in the Raven geomembrane resulting from acts of God, casualty or catastrophe including but not limited to: earthquakes, floods, piercing hail, or tomadoes. The term "normal use" as used herein does not include, among other things improper handling during transportation, unloading, storage or installation, the exposure of Raven geomembranes to harmful chemicals, atypical atmospheric conditions, abuse of Raven geomembranes by machinery, equipment or people; improper site preparation or covering materials, excessive pressures or stresses from any source or improper application or installation. Raven geomembrane material warranty is intended for commercial use only and is not in effect for the consumer as defined in the Magnuson Moss Warranty or any similar federal, state, or local statues. The parties expressly agree that the sale hereunder is for commercial or industrial use only.

Should defects or premature loss of use within the scope of the above Limited Warranty occur, Raven Industries Inc. will, at its option, repair or replace the Raven geomembrane on a pro-rata basis at the then current price in such manner as to charge the Purchaser/User only for that portion of the warranted life which has elapsed since purchase of the material. Raven Industries Inc. will have the right to inspect and determine the cause of any alleged defect in the Raven geomembrane and to take appropriate steps to repair or replace the Raven geomembrane if a defect exists which is covered under this warranty. This Limited Warranty extends only to Raven's geomembrane, and does not extend to the installation service of third parties nor does it extend to materials furnished or installed by others in connection with the intended use of the Raven geomembranes.

Any claim for any alleged breach of this warranty must be made in writing, by certified mail, to the General Manager of Engineered Films Division of Raven Industries Inc. within ten (10) days of becoming aware of the alleged defect. Should the required notice not be given, the defect and all warranties are waived by the Purchaser, and Purchaser shall not have any rights under this warranty. Raven Industries Inc. shall not be obligated to perform repairs or replacements under this warranty unless and until the area to be repaired or replaced is clean, dry, and unencumbered. This includes, but is not limited to, the area made available for repair and/or replacement of Raven geomembrane to be free from all water, dirt, sludge, residuals and liquids of any kind. If after inspection it is determined that there is no claim under this Limited Warranty, Purchaser shall reimburse Raven Industries Inc. for its costs associated with the site inspection.

In the event the exclusive remedy provided herein fails in its essential purpose, and in that event only, the Purchaser shall be entitled to a return of the purchase price for so much of the material as Raven Industries Inc. determines to have violated the warranty provided herein. Raven Industries Inc. shall not be liable for direct, indirect, special, consequential or incidental damages resulting from a breach of this warranty including, but not limited to, damages for loss of production, lost profits, personal injury or property damage. Raven Industries Inc. shall not be obligated to reimburse Purchaser for any repairs, replacement, modifications or alterations made by Purchaser unless Raven Industries Inc. specifically authorized, in writing, said repairs, replacements, modifications or alteration in advance of them having been made. Raven Industry's liability under this warranty shall in no event exceed the replacement cost of the material sold to the Purchaser for the particular installation in which it failed.

Raven Industries Inc. neither assumes nor authorizes any person other than the undersigned of Raven Industries Inc. to assume for it any other or additional liability in connection with the Raven geomembrane made on the basis of the Limited Warranty. The Limited Warranty on the Raven geomembrane herein is given in lieu of all other possible material warranties, either expressed or implied, and by accepting delivery of the material; Purchaser waives all other possible warranties, except those specifically given. This Limited Warranty may only be modified by written document mutually executed by Owner and Raven Industries Inc.

Limited Warranty is extended to the purchaser/owner and is non-transferable and non-assignable; i.e., there are no third-party beneficiaries to this warranty.

Purchaser acknowledges by acceptance that the Limited Warranty given herein is accepted in preference to any and other possible materials warranties.

THIS LIMITED WARRANTY SHALL BE GOVERNED BY SOUTH DAKOTA LAW AND VENUE FOR ALL LEGAL PROCEEDINGS IN CONNECTION WITH THIS LIMITED WARRANTY SHALL BE IN MINNEHAHA COUNTY, SOUTH DAKOTA. RAVEN INDUSTRIES INC. MAKES NO WARRANTY OF ANY KIND OTHER THAN THAT GIVEN ABOVE AND HEREBY DISCLAIMS ALL WARRANTIES, BOTH EXPRESSED OR IMPLIED, OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THIS IS THE ONLY WARRANTY THAT APPLIES TO THE MATERIALS REFERED TO HEREIN AND RAVEN INDUSTRIES INC. DISCLAIMS ANY LIABILITY FOR ANY WARRANTIES GIVEN BY ANY OTHER PERSON OR ENTITY, EITHER WRITTEN OR ORAL.

RAVEN INDUSTRIES' WARRANTY BECOMES AN OBLIGATION OF RAVEN INDUSTRIES INC. TO PERFORM UNDER THE WARRANTY ONLY UPON RECEIPT OF FINAL PAYMENT AND EXECUTION BY A DULY AUTHORIZED OFFICER OF RAVEN INDUSTRIES INC.

Burlington Resources Oil & Gas Company, LP San Juan Basin Below Grade Tank Maintenance and Operating Plan .

In accordance with Rule 19.15.17 the following information describes the operation and maintenance of Below Grade Tank (BGT) on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all BGT. A separate plan will be submitted for any BGT which does not conform to this plan.

General Plan:

- BR will operate and maintain a BGT to contain liquids and solids and maintain the integrity of the liner, liner system and secondary containment system to prevent contamination of fresh water and protect public health and environment. BR will accomplish this by performing an inspection on a monthly basis, installing cathodic protection, and automatic overflow shutoff devices as seen on the design plan.
- 2. BR will not discharge into or store any hazardous waste in the BGT.
- 3. BR shall operate and install the below-grade tank to prevent the collection of surface water run-on. BR has built in shut off devices that do not allow a below-grade tank to overflow. BR constructs berms and corrugated retaining walls at least 6" above ground to keep from surface water run-on entering the below grade tank as shown on the design plan.
- 4. As per 19.17.15.12 Subsection D, Paragraph 3, BR will inspect the below-grade tank at least monthly reviewing several items which include 1) containment berms adequate and no oil present, 2) tanks had no visible leaks or sign of corrosion, 3) tank valves, flanges, and hatches had no visible leaks and 4) no evidence of significant spillage of produced liquids. In addition, BR's multi-skilled operators (MSOs) are required to visit each well location once per week. If detected on either inspection, BR shall remove any visible or measurable layer of oil from the fluid surface of a below-grade tank in an effort to prevent significant accumulation of oil overtime. The written record of the monthly inspections will include the items listed above and will be maintained for five years.
- 5. BR shall require and maintain a 10" adequate freeboard to prevent overtopping of the below-grade tank.
- 6. If the below grade tank develops a leak, or if any penetration of the pit liner or below grade tank, occurs below the liquid's surface, then BR shall remove all liquid above the damage or leak line within 48 hours. BR shall notify the appropriate district office. BR shall repair or replace the pit liner or below grade tank, within 48 hours of discovery. If the below grade tank or pit liner does not demonstrate integrity, BR shall promptly remove and install a below grade tank or pit liner that complies with Subsection I of 19.15.17.11 NMAC. BR shall notify the appropriate district office of a discovery of leaks less than 25 barrels as required pursuant to Subsection B of 19.15.3.116 NMAC shall be reported within twenty-four (24) hours of discovery of leaks greater than 25 barrels. In addition, immediate verbal notification pursuant to Subsection B, Paragraph (1), and Subparagraph (d) of 19.15.3.116 NMAC shall be reported to the division's Environmental Bureau Chief.

Burlington Resources Oil & Gas Company, LP San Juan Basin Below Grade Tank Closure Plan

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure requirements of Below Grade Tanks (BGTs) on Burlington Resources Oil & Gas Company, LP locations hereinafter known as BR locations. This is BR's standard procedure for all BGTs. A separate plan will be submitted for any BGT which does not conform to this plan.

General Requirements:

- BR shall close a below-grade tank within the time periods provided in Subsection A of 19.15.17.13 NMAC. This will include a) below-grade tanks that do not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I o f19.15.17.11 NMAC within five years, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC; b) permitted below-grade tanks within 60 days of cessation of the below-grade tank's operation., or c) an earlier date that the division requires because of imminent danger to fresh water, public health or the environment. For any closure, BR will file the C144 Closure Report as required.
- 2. BR shall remove liquids and sludge from a below-grade tank prior to implementing a closure method and shall dispose of the liquids and sludge in a division-approved facility. The facilities to be used will be Basin Disposal (Permit #NM-01-005) and Envirotech Land Farm (Permit #NM-01-011). The liner after being cleaned well (Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC) will be disposed of at the San Juan County Regional Landfill located on CR 3100.
- 3. BR will receive prior approval to remove the below-grade tank and dispose of it in a division-approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves. Documentation of how the below-grade tank was disposed of or recycled will be provided in the closure report.
- 4. If there is any on-site equipment associated with a below-grade tank, then BR shall remove the equipment, unless the equipment is required for some other purpose.
- 5. BR shall test the soils beneath the below-grade tank to determine whether a release has occurred. BR shall collect, at a minimum, a five point, composite sample; collect individual grab samples from any area that is wet, discolored or showing other evidence of a release; and analyze for BTEX, TPH and chlorides to demonstrate that the benzene concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 0.2 mg/kg; total BTEX concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 0.2 mg/kg; total BTEX concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 50 mg/kg; the TPH concentration, as determined by EPA method 418.1 or other EPA method that the division approves, does not exceed 100 mg/kg; and the chloride concentration, as determined by EPA method that the division approves, does not exceed 250 mg/kg, or the background concentration, whichever is greater. BR shall notify the division of its results on form C-141.
- 6. If BR or the division determines that a release has occurred, then BR shall comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC, as appropriate.

- 7. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Paragraph (4) of Subsection E of 19.15.17.13 NMAC, then BR shall backfill the excavation with compacted, non-waste containing, earthen material; construct a division-prescribed soil cover; recontour and re-vegetate the site.
- Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.
- 9. The surface owner shall be notified of BR's closing of the below-grade tank prior to closure as per the approved closure plan via certified mail, return receipt requested.
- 10. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 11. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM stipulated seed mixes will used on federally jurisdicted lands and division-approved seed mixtures (administratively approved if required) will be utilized on all State or private lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. If alternate seed mix is required by the state, private owner or tribe, it will be implemented with administrative approval if needed. BR will repeat seeding or planting will be continued until successful vegetative growth occurs.
- 12. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.
- 13. All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on C-144 and incorporate the following:
 - Soil Backfilling and Cover Installation
 - Re-vegetation application rates and seeding techniques
 - · Photo documentation of the site reclamation
 - Confirmation Sampling Results
 - Proof of closure notice

- Signed C-144 (Page 5 of C-144)
- Site Specific Hydrogeology

19.15.17.10 NMAC SITTING REQUIREMENTS

- ✓ New Mexico Office of State Engineer attachment
- USGS TOPO map
- 🖌 Aerial Map
- ✓ Mines, Mills and Quarries Map
- FIRM map (flood insurance rate map from Federal Emergency Agency)

19.15.17.11 NMAC DESIGN PLAN CONTENTS

Below Grade Tank Design and Construction Plan

19.15.17.12 NMAC OPERATING AND MAINTENCE PLAN

Below Grade Tank Operating and Maintenance Plan

19.15.17.13 NMAC CLOSURE PLAN

Below Grade Tank Closure Plan

REGISTRATION DATE:

05/27/2015

NOTES: