District I 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Closed-Loop System, Below-Grade Tank 16 NOV 25 PM 1 12 Proposed Alternative Method Permit or Closure Plan Application

Type of action: Existing BGT Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Modification to an existing permit Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method
Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request
lease be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the avironment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances
1. Operator: <u>XTO Energy, Inc.</u> OGRID #: <u>5380</u>
Address: #382 County Road 3100, Aztec, NM 87410
Facility or well name:MOUNTAIN UTE GAS COM N-I
API Number: <u>30-045-29865</u> OCD Permit Number:
U/L or Qtr/QtrASection10
Center of Proposed Design: Latitude <u>36.92082 Longitude</u> <u>108.28873</u> NAD: □1927 ☑ 1983
Surface Owner: 🗍 Federal 🔲 State 🔲 Private 🔀 Tribal Trust or Indian Allotment
Pit: Subsection F or G of 19.15.17.11 NMAC Temporary: Drilling Workover Permanent Emergency Cavitation P&A Lined Unlined Liner type: Thicknessmil LLDPE HDPE PVC Other String-Reinforced Liner Seams: Welded Factory Other Volume: bbl Dimensions: Lx Wx D Closed-loop System: Subsection H of 19.15.17.11 NMAC Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent) Drying Pad Above Ground Steel Tanks Haul-off Bins Other Lined Unlined Liner type: Thicknessmil LLDPE HDPE PVC Other Liner Seams: Welded Factory Other
Below-grade tank: Subsection I of 19.15.17.11 NMAC Volume: 120 bbl Type of fluid: Produced Water Tank Construction material: Steel Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off Visible sidewalls and liner Visible sidewalls only OtherVisible sidewalls, vaulted, automatic high-level shut off, no liner Liner type: Thickness
5. Alternative Method: Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)	
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school,	hospital,
institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet	
Alternate. Please specify Four foot height, steel mesh field fence (hogwire) with pipe top railing	
7.	
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)	
☐ Screen ☐ Netting ☑ Other Expanded metal or solid vaulted top	
Monthly inspections (If netting or screening is not physically feasible)	
8.	
Signs: Subsection C of 19.15.17.11 NMAC 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers	
Signed in compliance with 19.15.3.103 NMAC	
9. Administrative Approvals and Exceptions:	
Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank:	
Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau	office for
consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	
10.	
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptance.	ntahla saussa
material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appro	priate district
office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of a Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to dry	
above-grade tanks associated with a closed-loop system.	
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).	Yes 🛛 No
- Topographic map; Visual inspection (certification) of the proposed site	
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	│
(Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	☐ Yes ☐ No 図 NA
(Applies to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	M NA
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock	☐ Yes 🛭 No
watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	Yes 🛛 No
adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	│ □ Yes ☑ No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☑ No
Within an unstable area.	│ │
 Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	
Within a 100-year floodplain.	☐ Yes 🛭 No

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application. Please indicate, by a check mark in the box, that the documents are tracked. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.19 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.19 NMAC String Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.11 NMAC Deparating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC Previously Approved Design (attach copy of design) API Number:
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC
Remanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are ttached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are ttached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan
Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
roposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative Troposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
3.
Vaste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the losure plan. Please indicate, by a check mark in the box, that the documents are attached. ☐ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC ☐ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC ☐ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) ☐ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC ☐ Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC ☐ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17.13.I Instructions: Please indentify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if facilities are required.	NMAC) more than two
Disposal Facility Name: Disposal Facility Permit Number:	
Disposal Facility Name: Disposal Facility Permit Number:	
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future services and associated activities occur on or in areas that will not be used for future services and associated activities occur on or in areas that will not be used for future services and associated activities occur on or in areas that will not be used for future services.	vice and operations
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	c
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sour provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate disting considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justif demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.	rict office or may b
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	Yes No
Within a 100-year floodplain FEMA map	☐ Yes ☐ No
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	15.17.11 NMAC

Operator Application Certification: I hereby certify that the information submitted with this application is true, a	ccurate and complete to the best of my knowledge and belief.
Name (Print): Kim Champlin	Title: Environmental Representative
Signature: Kim Champlen	Date:11/21/08
e-mail address: kim_champlin@xtoenergy.com	Telephone: (505) 333-3100
20.	
OCD Approval: Permit Application (including closure plan) XXClosu	re Plan (only) OCD Conditions (see attachment)
OCD Representative Signature: Zandoursufiss	Approval Date: 26Feb18
Title: Hydrologist	OCD Permit Number: na
Closure Report (required within 60 days of closure completion): Subsectinstructions: Operators are required to obtain an approved closure plan properties required to be submitted to the division within 60 days section of the form until an approved closure plan has been obtained and the	ior to implementing any closure activities and submitting the closure report. of the completion of the closure activities. Please do not complete this e closure activities have been completed.
	Closure Completion Date:
22. Closure Method: Waste Excavation and Removal On-Site Closure Method Ale If different from approved plan, please explain.	ernative Closure Method Waste Removal (Closed-loop systems only)
23. Closure Report Regarding Waste Removal Closure For Closed-loop Syst Instructions: Please indentify the facility or facilities for where the liquids, two facilities were utilized.	ems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: drilling fluids and drill cuttings were disposed. Use attachment if more than
Disposal Facility Name:	Disposal Facility Permit Number:
B: 15 W. M	
Were the closed-loop system operations and associated activities performed o ☐ Yes (If yes, please demonstrate compliance to the items below) ☐ No	n or in areas that will not be used for future service and operations?
Required for impacted areas which will not be used for future service and open Site Reclamation (Photo Documentation) Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique	erations:
Closure Report Attachment Checklist: Instructions: Each of the following mark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division) Proof of Deed Notice (required for on-site closure) Plot Plan (for on-site closures and temporary pits) Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (required for on-site closure) Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation)	re)
On-site Closure Location: Latitude Lo	ngitude NAD: 1927 1983
Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure belief. I also certify that the closure complies with all applicable closure requ	are report is true, accurate and complete to the best of my knowledge and irements and conditions specified in the approved closure plan.
Name (Print):	
Signature:	Date:
e-mail address:	Telephone:

PO 80x 1980, Hobbs. NM 8824:-1980

District II PO Drawer OD, Artesia, NM 88211-0719

District III 1000 Rio Brazos Rd., Aztec, NM 87410

Jistrict IV PO Box 2088, Santa Fe, NM 87504-2088

State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION PO Box 2088 Santa Fe. NM 87504-2088

Form C-102 Revised February 21, 1994 Instructions on back Submit to Appropriate District Office State Lease - 4 Copies Fee Lease - 3 Copies

AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

20-04	PI Numbe	9865	-	*Pool Cod 86760	1		U	TE (POBL NAM		<	 -
Property 243	Code 43	, , , , , ,		MOL			Name GAS COM I	٧			*We	11 Number
. 'OGRIO N 15706	70		CF	ROSS T			Name ERATING CO	MPAN	14			Tevation 5916
10 101	Section	Township	Range	Lot Ion	¹⁰ Sunfa		LOCATION North/South line	T 5		Page 600		County
A A	10	31N	14W	100 101	655		NORTH	1	t from the	East/we EA		SAN JUAN
			ottom		ocation		Different		m Surf		<u> </u>	1
UL or lot no.	Section	Township	Range	Lat Idn	Feet from	the	North/South line	Fee	t from the	East/He	st line	County
12 Dedicated Acres	<u> </u>	¹³ Joint or Inf	ill ^M Cons	alidation Code	⁵ Order N	D.						
NO ALLOW	ABLE W	ILL BE A	SSIGNEI NON-ST	D TO THE	IS COMPL UNIT HAS	ETIC S BE	ON UNTIL ALL EN APPROVED	INTE BY T	RESTS H	AVE BE	EN CON	NSOL IDATED
5280.00	12		528	000	MAR - DIS CO	5 19 Tillo		5280.00'	Signatur Gary L Printed Vice-P Title 18 SURVI I rerespondent was splay took was splay took are splay took correct to the	e Mark Name reside YOR If that the position is a best of ey OBER Survey	cestad cent / F CERTI well loss; tes of actuary or belief.	FICATION on shown on this plat is purveys made by the same is true and
			521	81.32					585 Certific	N (MET CO	

	_	Dia D	Client:	XTO Energy
Lodestar Servic	es, Inc.	Pit Permit	Project:	Pit Permits
PO Box 4465, Duran	go, CO 81302	Siting Criteria	Revised:	9/29/2008
l V		Information Sheet	Prepared by:	Daniel Newman
API#:		3004529865	USPLSS:	T31N,R14W,10A
Nie we ex	****		1-4/1	25 00000 400 0000
Name:	MOUNT	AIN UTE GAS COM N-1	Lat/Long:	36.92082, -108.28873
Depth to groundwater:		>100'	Geologic formation:	Menefee Formation
Distance to closest continuously flowing watercourse:		ast to the La Plata River		
Distance to closest significant watercourse, lakebed, playa lake, or sinkhole:		to Purgatory Canyon		
	MI.	The State of the Land	Soil Type:	Entisols
Permanent residence, school, hospital, institution or church within 300'		No		
			Annual	8.21" Farmington FAA Airport
			Precipitation:	6.21 Tarmingtorr As Airport
Domestic fresh water well or spring within 500'		No	Precipitation Notes:	3.82" largest daily rainfall on record
Any other fresh water well or spring within 1000'		No		
	11123 N			
Within incorporated municipal boundaries		No	Attached Documents:	
Within defined municipal fresh water well field		No		Topo map, ground water data map, ariel photo, mines and quarries map,
Wetland within 500'		No	Mining Activity:	No
Within unstable area		No		-
within unstable afea		NU		
Within 100 year flood plain	No F	EMA data availble		
Additional Notes:				

MOUNTAIN UTE GAS COM N-1 Below Grade Tank Siting Criteria and Closure Plan

General Geology and Hydrology

The San Juan Basin is a typical Rocky Mountain basin with a gently dipping southern flank and a steeply dipping northern flank. Asymmetrically layered Tertiary sandstones and shales, along with Quaternary alluvial deposits dominate surficial geology (Dane and Bachman, 1965). The proposed below ground tank location will be located in the northwest corner of the San Juan Basin, where the Hogback monocline ends. Thicker sequences common throughout the central basin begin to pinch out and older units of Cretaceous Age are exposed, specifically components of the Late Cretaceous Mesaverde Group (Point Lookout Sandstone, Menefee Formation and Cliff House Sandstone; (Brister and Hoffman, 2002). The resistant Point Lookout and Cliff House sandstones form prominent cliff bands, while shales and smaller sandstones of the Menefee Formation are exposed at lower, more eroded elevations. The stratigraphic section reflects deposition in a transgressive marine to coastal plain environment and consists of gray, brownish and tank sandstone interbedded with dark, carbonaceous shales and coal beds. Also, deposits of Quaternary alluvial and aeolian sands occur prominently near the surface, especially near streams and washes.

Cretaceous and Tertiary sandstones, as well as Quaternary alluvial deposits serve as the primary aquifers in the San Juan basin (Stone et al., 1983). Within the Menefee Formation, thinner confining units that consist of shale, as well as coal and thick sandstone beds, are present. In general, the water from Cretaceous aquifers is minimal (less than 5 gpm), although moderate quantities (5-25 gpm) may be supplied from aquifers within the Menefee Formation (Stone et al., 1983). Aquifer depths range from very shallow depths to over 6000 feet below ground surface. Groundwater within these aquifers flows toward the nearby La Plata River, which is a tributary of the San Juan River.

The prominent soil type at the proposed site is rockland, which are basically little to no soils that do not show any profile development. Soils that are present are unaltered from their parent rock. Miles of arroyos, washes and intermittent streams exist as part of the drainage network towards the La Plata River (www.emnrd.state.nm.us). These features often cut into soil and other unconsolidated materials, contributing to sedimentation downstream. The sudden influx of water from storm events easily erodes the soils that cover the area and prohibits effective recharge to the underlying aquifers.

Dry and arid weather further prohibit active recharge. The climate of the region is arid, averaging just over 8 inches of rainfall annually. As is typical of the southwestern United States monsoonal weather patterns, most precipitation falls from August through October. The heaviest rainfall occurs in the summer in isolated, intense cloudbursts. November through June is relatively dry. Snow generally falls from December to mid-February and averages less than one-half inch in depth. However, most recharge occurs during the winter months during snowmelt periods from the upper elevations (Western Regional Climate Center www.wrcc.dri.edu).


The predominant vegetation is sagebrush and grasses with a more restricted pinon-juniper association (Dick-Peddie, 1993).


Site Specific Hydrogeology

Depth to groundwater is estimated to be greater than 100 feet. This estimation is based on data from Stone and others, 1983 and depth to groundwater data published on the New Mexico State Engineer's iWaters Database website. Local topography and proximity to surface hydrologic features are also taken into consideration.

Local aquifers include sandstones within the Menefee Formation, which range from shallow depths to over 6000 feet deep in this area (Stone et al., 1983). The site in question is located on a slope approximately 4500 feet away from outcropping sandstones that are over 300 feet higher in elevation. The slope is composed of shale and alluvium which, taken together, are expected to be at least 50 feet thick. The slope represents the southern flank of Purgatory Canyon within the Menefee Formation. The floor of Purgatory Canyon is over 50 feet lower in elevation.

Groundwater data available from the NM State Engineer's iWaters Database for wells near the proposed site are attached. A map showing the location of wells in reference to the proposed pit location is attached. Pinpoints show locations of wells and the labels for each pinpoint indicate depth to groundwater in feet. Wells are clustered near populated areas along the La Plata River east of the proposed site. These sites contain shallow groundwater, but topographic and hydrographic conditions are not representative of the site in question. Many data points exist east of the site and indicate groundwater at 10-180 feet in depth. These groundwater wells are located approximately 100 feet lower in elevation than the proposed site, suggesting groundwater is greater than 100 feet deep at the proposed location.

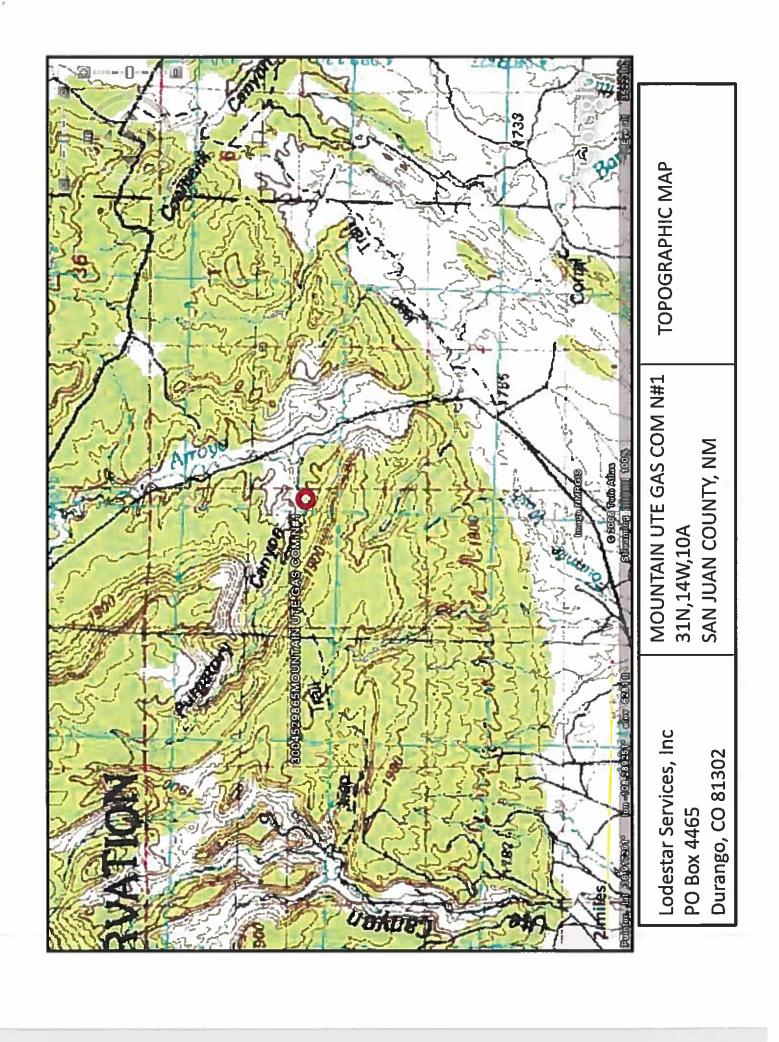

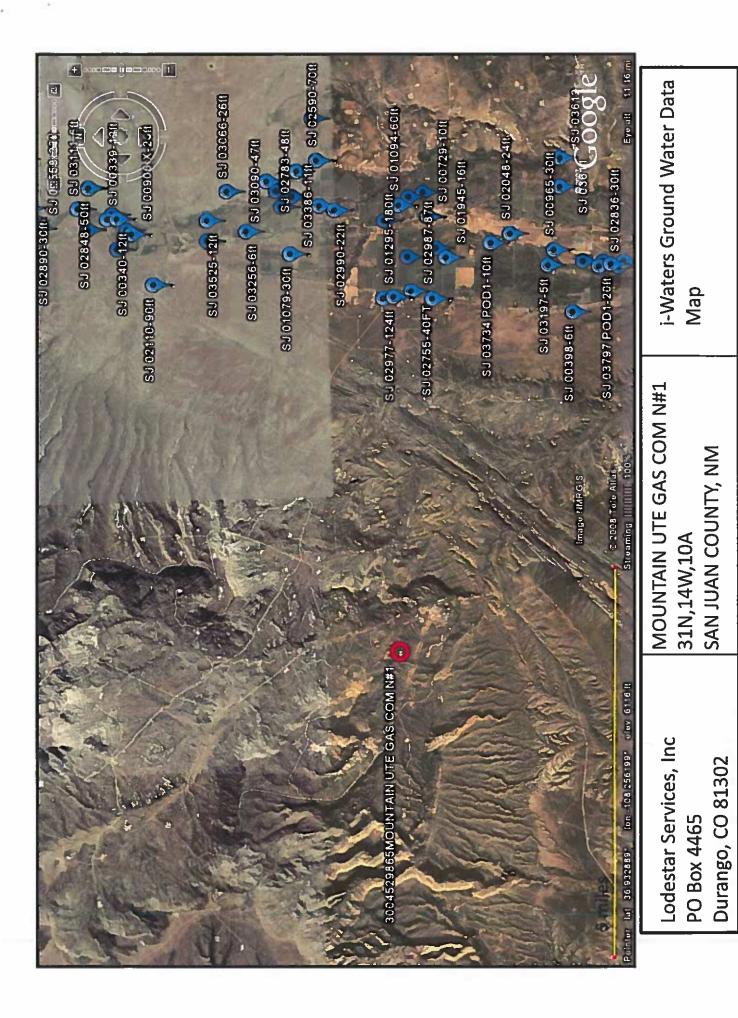

New Mexico Office of the State Engineer POD Reports and Downloads WATER COLUMN REPORT 09/16/2008

<u></u>	arters	are		W 2	1 H	(quarters are 1=NW 2=NB 3=SW 4=SE)			4	4	4	4000
	-	1	7	2	ذ د	ולייפיריבים מדב הדולתבים כה משפדובים ו	:	:	1000	tinda.	40000	(2007 111)
POD Number			Sec	ם ה	7	Zone	×	×	Hell	Water	Column	
SJ 01187 CIW226675	NCE NCE	137	9	때 (1)	÷ Jr				c-1	ıh	(D) =1	
SJ 01187	3000	137		(13	- In				oje Gil	(I)	iii ei	
SJ 01353	32%	33	9	di in						11) 11)		
SJ 01439	150	137	9	11) 11)					10) 10)	10 ()	9	
SJ 02069	100	137	10	CI2					ii)	Y	th Cl	
SJ 01549	32%	137	10						17	(H	th -1	
SJ 02985	1100	3.7	10)	27 14	cı				I'-	ម	CI CI	
SJ 02865	Sign Nige	137	10)	01	61				- 12	el el	(/) 1	
SJ 02558	323	137	10	(1)	- p				- 1 TP	64	***	
SJ 02934	e King	25	10	rit	+1				4 P	eji .+-1	P	
SJ 02890	200	137	10	est.	cı				10	9	ti)	
SJ 02705	SEN	13.3	CI CI	rgt r=t	¢1				c 1 (1)	런	(*) 1	
SJ 02704			CI CI		ci				e	디	(*) ;-1	
SJ 03111	303	3.7	ch ch	F1	- p				មា កៅ	Ψ	(*) -1	
SJ 02848	1869	137	밁	el.	m				909	10	11)	
SJ 00922	200	37	H	त्त्र स्थ	-14				r- Cl	CI FI	10	
X 90600 CS	200	137	CI	(1)					179	ÇÎ	Ů Ø	
53 02918	100	13.7	51	(1)	c s				- 1 10	00	ī.	
SJ 00736		137	E	elle elle					O TP	10) -1	in rei	
SJ 00339	328	137	C 1	rri rri	i i				C) (0)	Ц	99	
SJ 00340	328	3.7	H	eri ep	ന				E) ID	ei	en en	
SJ 02847	NE S	3.0	CI	بال: بالند	-1				100		10 61 61	
SJ 03524	808	33	27	(1)	÷I				en en	6) el	es est	
SJ 03525	323	37	E	11)	è				11	H	ih in	
SJ 03256	30%	13.4	(1) 1(1)	स्त्र स्त्र	сī				i-t Ci	ŧρ	in 1	
SJ 03066	300	137	11)	CI CI	cı				a d ege	()	ed e-f	
SJ 01079	:	23.7	11) (1)	m m					+1	(†) (f)	0	
SJ 01943	328	137	(1)	램					en e	(9)	10	
SJ 03635	NI N	137	(f)	al.	- p				alle e le	(f) (f)	17a	
SJ 02577	XUS	88	11) 11)	<u>دار.</u> دار.					(;) (*)	10) #4	10 +-1	
SJ 03090	32%	3.7	10	;=1 (1)	+-1				d) H)	14	듸	
		137	11)	11)	e-i				en W	11) (M	(-1 (1)	
SJ 02783	323	N 0	(I) (I)	eg (g	- 84				eq W	4) 1 4) 1	च्या -	

New Mexico Office of the State Engineer POD Reports and Downloads


WATER COLUMN REPORT 09/22/2008


	(in feet)																															
	(in																															
	Water	Column	~# ~#	13	ינו טו	m t	Ö	102	99	Les	20	70	e G	CI Q	10	101	ıŋ	13	<u>ო</u>	10	-1	Ü	Œ	<u>თ</u>	in m	טי	90	ന	70	200	Û	90
	Depth	Water	2	ch e-l	11	C)	(3) (1) (1)	단	eji Vit	m	CI	ψĢ	in to	en. H	ŧυ	÷,p	il)	∃€	OH.	11	w	10	c)	w	e	ın	ė	~ P	e)	20	~ pr	Ē
	Depth	Well	*T	e#	i) O	TOO	230	(C)	ĐĐ ĐĐ	000	~h C1	13⊕	10. E1	m	D.T.	20	네. (1	31	en Tr	el Cl	00	eh O	*# II)	40 E	113		(U)	en E>	100	022	eji Cil	
		X																														
		×																														
흱	šť.																															
quarters are 1=NW 2=NE 3=SW 4=SE	(quarters are biggest to smallest)	Zone																														
F	\$	_							_																							
2	st	4	er er	6 :1		(J)	<u>н</u>	т Н	(J) All	e) ~	ო			⊢	- p	~p		ო		-1	(1)	(T)	71° (1)			en H	Н	ന	т т	(r)	m	_
N.	gge	מי	-4	C1	(I)	C-I	eı	(1	CI	-: 80	Н	C1	c)	C1	C)	(I	ന	m	=14	- þ	-10	-1	ന		-1	-1	ന	ന	m)	Œ	-1	,-
H	Ä	Sec	CI CI	g	(f)	m (i)	(7) (5)	G O	iji iji	Œi ⇔	9	ģ	ē		0	0.1	o H	() (-)	Q.	S	្ន	12	in H	듾	g	61 61	01 01	CI	01	61	ල ල	-1
are	are	Rng	Z M	is in	I 3N	33	2	33	S	33	(N)	13N			13N						is m	32	is m					13W	13N	is O	13W	i di
'n	ģ	2	Ä	H	-i	H	H	H	H	H	Ä	ä	Ä	H	Ä	Ä	H	H	H	H	Ä	H	H	H	H	H	H	Ä	H	H	ä	-
Ę	į	LAS	3111	311	311	3111	311	311	3114	3111	3114	311	3111	3111	3117	3117	3111	3113	3111	311	3111	3111	3117	3117	3117	3117	3114	3117	3114	3114	3113	3113
(क्पवर	(क्पाबर	L	(*)		(*)	(0)			(1)	[(1)	(1)	(*) 	(e)	(1)	(4)	(*)	(*)	47	(1)	(1)	(7)		(1)	(1)			(1)	(1)	(*)	(*)	<*)
																						8							1	PCD1		
		Number	0	ខ	و		S	~	S S	7	7	4	8	ტ	2	4	و	2	6		7	03734 PCD1	8	8	2	7	6	7	9	7 P		đ
		Men	259	083	03386	02990	01295	02977	02755	02987	02717	109	00798	68000	01952	01944	02276	01945	072	01950	263	373	02048	96500	00965	03197	182	02737	283	03797	03611	00700
		e e	SJ 02590	Ö	SJ 0.	30 51 51	SJ 0:		5. 0.	3.7 0.73	SJ 02			3.J 0(SJ 0:	SJ 0.		3J 0;	SJ 0(0	SJ 0.			3J 0(SJ 0(SJ 0	3J 0;		Ö	ċ
		젎	ที	Ņ	ľ	เก	ľ	S	M	M	ហ៊	S	เก	vi	Ň	Įv,	S	เงิ	เก	S	Ń	S	เก	M	ľ	S	S	lvī.	เก	S	ល័	Ů,

 \$J
 \$J

 \$J

O C O C O O O C C O M M

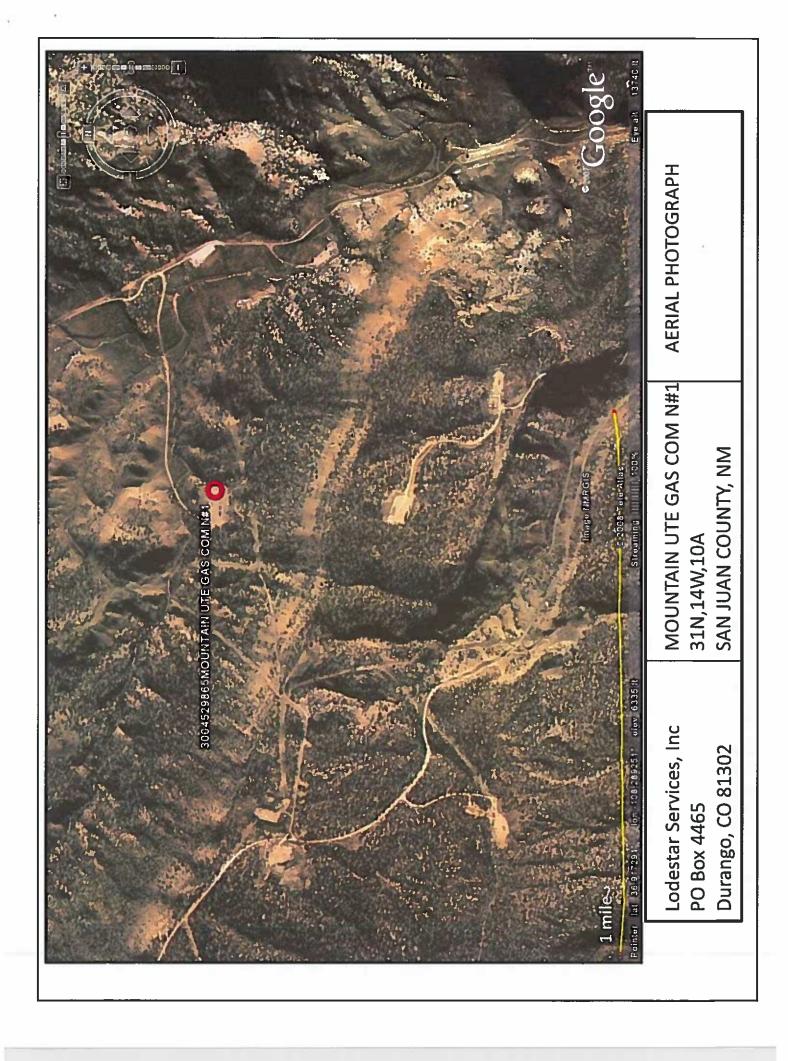

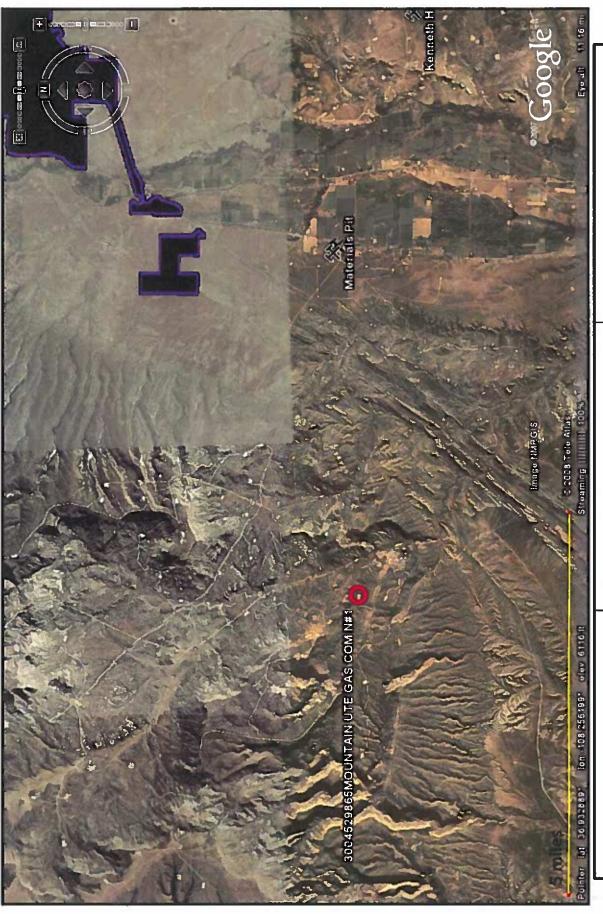

Mines and Quarries Map

Lodestar Services, Inc PO Box 4465 Durango, CO 81302

MOUNTAIN UTE GAS COM N#1 31N,14W,10A SAN JUAN COUNTY, NM

XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Design and Construction Plan For Below-Grade Tanks

In accordance with Rule 19.15.17.11 NMAC the following information describes the design and construction of below-grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below-grade tanks. A separate plan will be submitted for any below-grade tank which does not conform to this plan.


General Plan

- XTO will design and construct below-grade tanks to contain liquids and solids and prevent contamination of fresh water and protect public health and environment.
- XTO will post a well sign, in compliance with 19.15.3.103 NMAC, on the existing well site
 operated by XTO where the existing below-grade tank is located. The sign will list the Operator
 on record as the operator, the location of the well site by unit letter, section, township, range, and
 emergency telephone numbers.
- 3. XTO is requesting approval of an alternative fencing to be used on below-grade tank locations. Below-grade tank locations will be fenced utilizing 48" steel mesh field-fence (hogwire) with pipe railing along the top. A 6' chain link fence will be utilized around the well pad if the well site is within a city limits or ½ mile of a permanent residence, school, hospital, institution or church. Below-grade tanks located within 1000' of a permanent residence, school, hospital, institution or church will be fenced by 6' chain link fence with at least two strands of barbed wire at the top. All gates associated with below-grade tanks will remain closed and locked when responsible individuals are not on site.
- XTO shall construct below-grade tanks with an expanded metal covering or solid vaulted top on the top of the below-grade tank.
- 5. XTO will ensure that below-grade tanks are constructed of materials resistant to the below-grade tank's particular contents and resistant to damage from sunlight. Tanks will be constructed of A36 carbon steel with 3/16" sides and ¼" bottom. (See attached drawing).
- 6. The below-grade tank system will have a properly constructed foundation consisting of a level base free of rocks, debris, sharp edges or irregularities to prevent punctures, cracks or indentations of the liner or tank bottom. Sand bedding (4") will be placed on top of a level foundation to ensure prevention of punctures, cracks or indentations of the liner or tank bottom.
- 7. XTO will construct a berm and/or diversion ditch in a manner that prevents the collection of surface water run-on. Below-grade tanks will be equipped with automatic high level shut-off devices as well as manually operated shut-off valves. (See attached drawing).
- 8. XTO will construct and use below-grade tanks that do not have double walls. The below-grade tank sidewalls will be open for visual inspection for leaks. The sidewalls of the cellar will be constructed with 2" X 12" pine sidewalls and 4" X 4" pine brace posts. The below-grade tank

XTO Energy Inc.
San Juan Basin (Northwest New Mexico)
General Design and Construction Plan
For Below-Grade Tanks
Page 2

bottom will be elevated a minimum of 6" above the underlying ground surface and the belowgrade tank will be underlain with a geomembrane liner to divert leaked liquid to a location that can be visually inspected. (See attached drawing).

- XTO will equip below-grade tanks designed in this manner with a properly functioning automatic high-level shut-off control device and manual controls to prevent overflows. (See attached drawing).
- XTO will demonstrate to the OCD that the geomembrane liner complies with the specifications of Subparagraph (a) of Paragraph (4) of Subsection I of 19.15.17.11 NMAC and obtain approval from OCD prior to the installation of the design. The geomembrane liner shall have a hydraulic conductivity no greater than 1 x 10-9 cm/sec. The geomembrane liner shall be composed of an impervious, synthetic material that is resistant to petroleum hydrocarbons, salts and acidics and alkaline solutions. The liner material shall be resistant to ultraviolet light. Liner compatibility shall comply with EPA SW-846 method 9090A. (See attached drawing).
- 11. The general specifications for design and construction are attached.

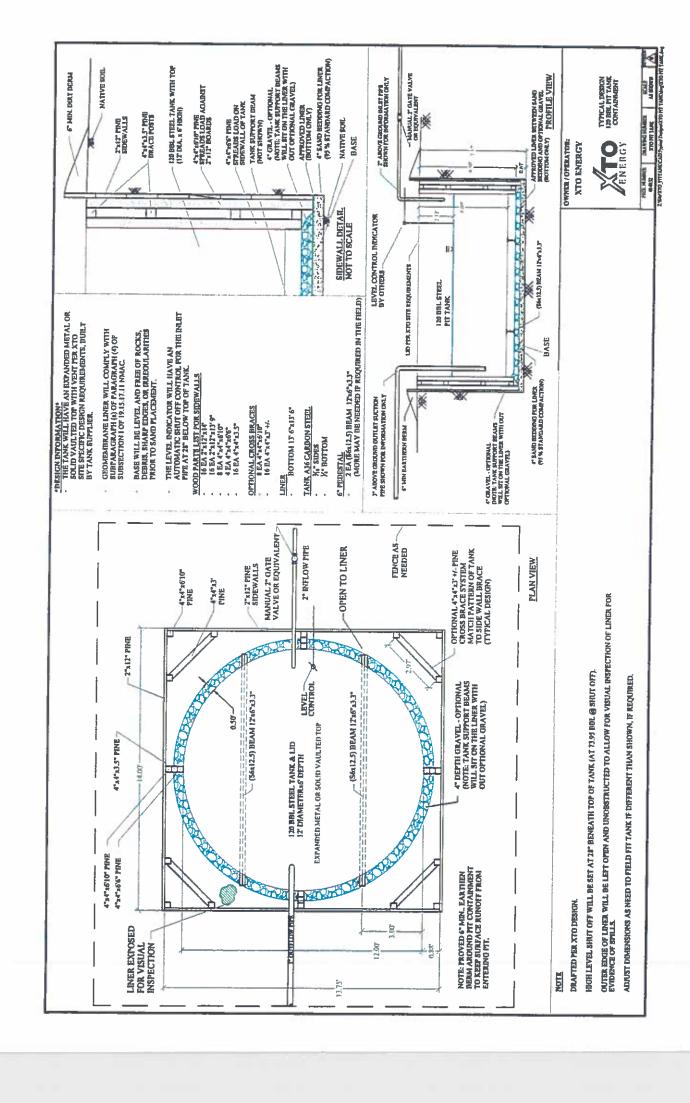

XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Maintenance and Operating Plan For Below-Grade Tanks

In accordance with Rule 19.15.17.12 NMAC the following information describes the operation and maintenance of below-grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below-grade tanks. A separate plan will be submitted for any below-grade tank which does not conform to this plan.

General Plan

- XTO will operate and maintain below-grade tanks to contain liquids and solids, maintain the
 integrity of the liner and secondary containment system, prevent contamination of fresh water and
 protect public health and the environment. Fluid levels will be monitored weekly and high levels
 will be removed as necessary. Monthly inspections will be conducted to monitor integrity of
 below-grade tank systems and below-grade tanks will be equipped with automatic high-level
 shut-off devices.
- 2. XTO will not allow below-grade tanks to overflow and will use berms and/or diversion ditch to prevent surface run on to enter the below-grade tank. Below-grade tanks will be equipped with automatic high-level shut-off control devices as well as manually operated shut-off valves. See attached drawing for vault design and placement of diversion berms and shut-off devices.
- XTO will continuously remove any visible or measurable layer of oil from the fluid surface of below-grade tanks in order to prevent significant accumulation of oil.
 - XTO will inspect the below-grade tank monthly and maintain written records for five years.
 Monthly inspections will consist of documenting the following: (see attached template).

Well Name
API #
Sec., Twn., Rng.
XTO Inspector's name
Inspection date and time
Visible tears in liner
Visible signs of tank overflow
Collection of surface run on
Visible layer of oil
Visible signs of tank leak
Estimated freeboard

- 5. XTO will maintain adequate freeboard to prevent over topping of the below-grade tank. High level shut-off devices control the freeboard at an average of 28" beneath the top of the tank.
- 6. XTO will not discharge into or store any hazardous waste in any below-grade tank.
- If a below-grade tank develops a leak, or if any penetration of a below-grade tank occurs below the liquids surface, XTO will remove all liquids above the damage or leak line within 48 hours,

XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Maintenance and Operating Plan For Below-Grade Tanks Page 2

notify the appropriate division district office within 48 hours of the discovery and repair the damage or replace the below-grade tank. If an existing below-grade tank does not meet current requirements of Paragraphs 1-4 of Subsection I of 19.15.17.11 NMAC the tank will be modified or retrofitted to comply. If compliance can not be achieved XTO will implement the approved closure plan.

		MONT	1LY BELO	MONTHLY BELOW GRADE TANK INSPECTION FORM	INSPECTIO	N FORM		
Well Name:					API No.:			
Legals	Sec		Township:		Range:			
XTO Inspector's	Inspection	Inspection	Any visible liner	Any visible signs of	Collection of surface	Visible laver	Any visible sine	Freehoord
Name	Date	Time	tears (Y/N)	tank overflows (Y/N)	run on (Y/N)	of oil (Y/N)	of a tank leak (Y/N)	Est. (ft)
103								
		:						
Notes:	Provide De	Provide Detailed Description:	otion:					
Misc:								
							:	
	6							

XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Closure Plan For Below-Grade Tanks

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure requirements of below-grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below-grade tanks. A separate plan will be submitted for any below-grade tank which does not conform to this plan.

General Plan

- XTO will close below-grade tanks within the time periods provided in 19.15.17.13 NMAC, or by an earlier date that the division requires because of imminent danger to fresh water, public health or the environment.
- 2. XTO will close a below-grade tank that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC.
- 3. XTO will close a permitted below-grade tank within 60 days of cessation of the below-grade tank's operation or as required by the transitional provisions of Subsection B of 19.15.17.17 NMAC in accordance with a closure plan that the appropriate division district office approves. The closure report will be filed on form C-144.
- 4. XTO will remove liquids and sludge from below-grade tanks prior to implementing a closure method and will dispose of the liquids and sludge in a division-approved facility. Approved facilities and waste streams include:

Envirotech Permit No. NM01-0011 and IEI Permit No. NM 01-0010B
Soil contaminated by exempt petroleum hydrocarbons
Produced sand, pit sludge and contaminated bottoms from storage of exempt wastes

Basin Disposal Permit No. NM01-005 Produced water

- 5. XTO will remove the below-grade tank and dispose of it in a division approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office has approved prior to removal. Any associated liners will be removed, properly cleaned and disposed of per 19.15.9.712 NMAC at San Juan County Landfill. Documentation of the final disposition will be included in the closure report.
- 6. XTO will remove any on-site equipment associated with a below-grade tank unless the equipment is required for some other purpose.
- 7. XTO will test the soils beneath the below-grade tank to determine whether a release has occurred. At a minimum 5 point composite sample will be collected along with individual grab samples from any area that is wet, discolored or showing other evidence of a release. Samples will be

XTO Energy Inc.
San Juan Basin (Northwest New Mexico)
General Closure Plan
For Below-Grade Tanks
Page 2

analyzed for BTEX, TPH and chlorides to demonstrate that the benzene concentration, as determined by EPA SW-846 methods 8021B or 8260B or EPA method that the division approves, does not exceed 0.2 mg/kg; total BTEX concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 50 mg/kg; the TPH concentration, as determined by EPA method 418.1 or other EPA method that the division approves, does not exceed 100mg/kg; and the chloride concentration, as determined by EPA method 300.1 or other EPA method that the division approves, does not exceed 250 mg/kg, or the background concentration, whichever is greater. XTO will notify the division of its results on form C-141.

- If XTO or the division determines that a release has occurred, XTO will comply with 19.15.3.116
 NMAC and 19.15.1.19NMAC as appropriate.
- 9. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Paragraph (4) of Subsection E of 19.15.17.13 NMAC, XTO will backfill the excavation with compacted, non-waste containing, earthen material; construct a division prescribed soil cover; recontour and re-vegetate the site.
- 10. Notice of Closure operations will be given to the Aztec Division District III office between 72 hours and one week prior to the start of closure activities via email or verbally. The notification will include the following:
 - i. Operator's name
 - ii. Well Name and API Number
 - iii. Location by Unit Letter, Section, Township, and Range

The surface owner shall also be notified prior to the implementation of any closure operations of below-grade tanks as per the approved closure plan using certified mail, return receipt requested.

- 11. Re-contouring of location will match fit, shape, line, form and texture of the surrounding area.

 Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be placed in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 12. A minimum of 4 feet of cover shall be achieved and the cover shall include 1 foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. Soil cover will be constructed to the site's existing grade and ponding of water and erosion of the cover material will be prevented with drainage control, natural drainages and silt traps where needed.
- 13. XTO will seed the disturbed areas the first growing season after the operator closes the pit.

 Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will be used on federal lands.

 Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Closure Plan For Below-Grade Tanks Page 3

- 14. All closure activities will include proper documentation and be available for review upon request and will be submitted in closure report form to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on form C-144 and incorporate the following:
 - i. Proof of closure notice to division and surface owner;
 - ii. Details on capping and covering, where applicable;
 - iii Inspection reports;
 - iv. Confirmation sampling analytical results;
 - v Disposal facility name(s) and permit number(s);
 - vi. Soil backfilling and cover installation;
 - vii. Re-vegetation application rates and seeding techniques, (or approved alternative to re-vegetation requirements if applicable);
 - viii. Photo documentation of the site reclamation.