

**OCD - HOBBS**  
**11/03/2020**  
**RECEIVED**

FORM APPROVED  
OMB No. 1004-0137  
Expires: January 31, 2018

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**APPLICATION FOR PERMIT TO DRILL OR REENTER**

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. <b>NMNM122622</b>
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other		6. If Indian, Allottee or Tribe Name
1c. Type of Completion: <input type="checkbox"/> Hydraulic Fracturing <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		7. If Unit or CA Agreement, Name and No.
2. Name of Operator <b>EOG RESOURCES INCORPORATED [7377]</b>		8. Lease Name and Well No. <b>ENDURANCE 36 FED COM [38129]</b> <b>203H</b>
3a. Address <b>1111 BAGBY ST., SKY LOBBY 2, Houston, TX 77002</b>	3b. Phone No. (include area code) <b>(713) 651-7000</b>	9. API Well No. <b>30-025-47964</b>
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface <b>NENW / 1263 FNL / 1775 FWL / LAT 32.003688 / LONG -103.5288758</b> At proposed prod. zone <b>NENW / 100 FNL / 2594 FWL / LAT 32.0213945 / LONG -103.5262282</b>		10. Field and Pool, or Exploratory <b>[98271]</b> <b>PERMIAN/RED HILLS; UPPER BONE SF</b>
14. Distance in miles and direction from nearest town or post office*		11. Sec., T. R. M. or Blk. and Survey or Area <b>SEC 36/T26S/R33E/NMP</b>
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) <b>100 feet</b>		12. County or Parish <b>LEA</b>
16. No of acres in lease <b>1640</b>		13. State <b>NM</b>
17. Spacing Unit dedicated to this well <b>239.96</b>		
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. <b>33 feet</b>		20. BLM/BIA Bond No. in file <b>FED: NM2308</b>
19. Proposed Depth <b>9946 feet / 17454 feet</b>		
21. Elevations (Show whether DF, KDB, RT, GL, etc.) <b>3332 feet</b>	22. Approximate date work will start* <b>12/01/2020</b>	23. Estimated duration <b>25 days</b>
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- |  |   |
|--|---|
| 1. Well plat certified by a registered surveyor.   | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan.  | 5. Operator certification.  |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be requested by the BLM.            |

25. Signature (Electronic Submission)	Name (Printed/Typed) <b>JAYNA HOBBS / Ph: (713) 651-7000</b>	Date <b>05/20/2020</b>
Title <b>Regulatory Specialist</b>		
Approved by (Signature) (Electronic Submission)	Name (Printed/Typed) <b>Cody Layton / Ph: (575) 234-5959</b>	Date <b>09/24/2020</b>
Title <b>Assistant Field Manager Lands &amp; Minerals</b>		
Office <b>Carlsbad Field Office</b>		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.  
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**GCP Rec 11/03/2020**

**SL**

(Continued on page 2)

**APPROVED WITH CONDITIONS**  
**Approval Date: 09/24/2020**

**Kz**  
**11/04/2020**

\*(Instructions on page 2)

## INSTRUCTIONS

**GENERAL:** This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

**ITEM I:** If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

**ITEM 4:** Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

**ITEM 14:** Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the well, and any other required information, should be furnished when required by Federal agency offices.

**ITEMS 15 AND 18:** If well is to be, or has been directionally drilled, give distances for subsurface location of hole in any present or objective productive zone.

**ITEM 22:** Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

**ITEM 24:** If the proposal will involve hydraulic fracturing operations, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

## NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

**AUTHORITY:** 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

**PRINCIPAL PURPOSES:** The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service well or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

**ROUTINE USE:** Information from the record and/or the record will be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

**EFFECT OF NOT PROVIDING INFORMATION:** Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM connects this information to an evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications. Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease. The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

**BURDEN HOURS STATEMENT:** Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Connection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

## Additional Operator Remarks

### Location of Well

0. SHL: NENW / 1263 FNL / 1775 FWL / TWSP: 26S / RANGE: 33E / SECTION: 36 / LAT: 32.003688 / LONG: -103.5288758 ( TVD: 0 feet, MD: 0 feet )

PPP: SENW / 2407 FNL / 2594 FWL / TWSP: 26S / RANGE: 33E / SECTION: 36 / LAT: 32.000536 / LONG: -103.5262337 ( TVD: 9607 feet, MD: 9729 feet )

BHL: NENW / 100 FNL / 2594 FWL / TWSP: 26S / RANGE: 33E / SECTION: 25 / LAT: 32.0213945 / LONG: -103.5262282 ( TVD: 9946 feet, MD: 17454 feet )

### BLM Point of Contact

Name: Sophia Cwiklinski

Title: LIE

Phone: (575) 234-5972

Email: scwiklinski@blm.gov

CONFIDENTIAL

**Review and Appeal Rights**

A person contesting a decision shall request a State Director review. This request must be filed within 20 working days of receipt of the Notice with the appropriate State Director (see 43 CFR 3165.3). The State Director review decision may be appealed to the Interior Board of Land Appeals, 801 North Quincy Street, Suite 300, Arlington, VA 22203 (see 43 CFR 3165.4). Contact the above listed Bureau of Land Management office for further information.

CONFIDENTIAL

# PECOS DISTRICT

## DRILLING CONDITIONS OF APPROVAL

<b>OPERATOR'S NAME:</b>	<b>EOG RESOURCES</b>
<b>LEASE NO.:</b>	<b>NMNM122622</b>
<b>WELL NAME &amp; NO.:</b>	<b>ENDURANCE 36 FED COM 201H – 205H</b>
<b>SURFACE HOLE FOOTAGE:</b>	<b>1907'/N &amp; 1227'/E</b>
<b>BOTTOM HOLE FOOTAGE:</b>	<b>100'/N &amp; 792'/E</b>
<b>LOCATION:</b>	<b>Section 36, T.26 S., R.33 E., NMPM</b>
<b>COUNTY:</b>	<b>Lea County, New Mexico</b>

COA

H2S	<input checked="" type="radio"/> Yes	<input type="radio"/> No	
Potash	<input checked="" type="radio"/> None	<input type="radio"/> Secretary	<input type="radio"/> R-111-P
Cave/Karst Potential	<input checked="" type="radio"/> Low	<input type="radio"/> Medium	<input type="radio"/> High
Cave/Karst Potential	<input type="radio"/> Critical		
Variance	<input type="radio"/> None	<input checked="" type="radio"/> Flex Hose	<input type="radio"/> Other
Wellhead	<input type="radio"/> Conventional	<input checked="" type="radio"/> Multibowl	<input type="radio"/> Both
Other	<input type="checkbox"/> 4 String Area	<input type="checkbox"/> Capitan Reef	<input type="checkbox"/> WIPP
Other	<input type="checkbox"/> Fluid Filled	<input type="checkbox"/> Cement Squeeze	<input type="checkbox"/> Pilot Hole
Special Requirements	<input type="checkbox"/> Water Disposal	<input checked="" type="checkbox"/> COM	<input type="checkbox"/> Unit

### A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H2S) Drilling Plan shall be activated 500 feet prior to drilling into the **Bone Spring** formation. As a result, the Hydrogen Sulfide area must meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

### B. CASING

1. The **13-3/8** inch surface casing shall be set at approximately **950** feet (a minimum of **25 feet (Lea County)** into the Rustler Anhydrite and above the salt) and cemented to the surface.
  - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
  - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8**

**hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)

- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
  - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The minimum required fill of cement behind the **9-5/8** inch intermediate casing is:
- Cement to surface. If cement does not circulate see B.1.a, c-d above.  
**Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.**
3. The minimum required fill of cement behind the **5-1/2** inch production casing is:
- Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

### **C. PRESSURE CONTROL**

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M)** psi.
  - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
  - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
  - c. Manufacturer representative shall install the test plug for the initial BOP test.
  - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
  - e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

## D. SPECIAL REQUIREMENT (S)

### Communitization Agreement

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

**JJP09162020**

## GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,  
(575) 361-2822

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)  
393-3612

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
  - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
  - b. When the operator proposes to set surface casing with Spudder Rig

- Notify the BLM when moving in and removing the Spudder Rig.
  - Notify the BLM when moving in the 2<sup>nd</sup> Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
  - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
  3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

#### A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.



4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

**B. PRESSURE CONTROL**

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
  - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.

- b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
  - c. Manufacturer representative shall install the test plug for the initial BOP test.
  - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
  - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- 5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
  - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
  - b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).
  - c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
  - d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall

have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.

- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

#### C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

#### D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

**EOG RESOURCES, INC.**  
**ENDURANCE 36 FED COM #203H**

**1. GEOLOGIC NAME OF SURFACE FORMATION:**

Permian

**2. ESTIMATED TOPS OF IMPORTANT GEOLOGICAL MARKERS:**

Rustler	794'
Tamarisk Anhydrite	890'
Top of Salt	1,177'
Base of Salt	3,595'
Lamar	5,254'
Bell Canyon	5,296'
Cherry Canyon	6,322'
Brushy Canyon	7,955'
Bone Spring Lime	9,445'
Leonard	9,490'
TD	9,946'

**3. ESTIMATED DEPTHS OF ANTICIPATED FRESH WATER, OIL OR GAS:**

Upper Permian Sands	0- 400'	Fresh Water
Cherry Canyon	6,322'	Oil
Brushy Canyon	7,955'	Oil
Leonard	9,490'	Oil

No other Formations are expected to give up oil, gas or fresh water in measurable quantities. Surface fresh water sands will be protected by setting 13.375" casing at 950' and circulating cement back to surface.

**EOG RESOURCES, INC.**  
**ENDURANCE 36 FED COM #203H**

**4. CASING PROGRAM - NEW**

Hole Size	Interval	Csg OD	Weight	Grade	Conn	DF <sub>min</sub> Collapse	DF <sub>min</sub> Burst	DF <sub>min</sub> Tension
17.5"	0' – 950'	13.375"	54.5#	J-55	STC	1.125	1.25	1.60
12.25"	0' – 4,000'	9.625"	40#	J-55	LTC	1.125	1.25	1.60
12.25"	4,000' – 5,160'	9.625"	40#	HCK-55	LTC	1.125	1.25	1.60
8.75"	0' – 10,388'	5.5"	17#	HCP-110	LTC	1.125	1.25	1.60
8.5"	10,388' – 17,454'	5.5"	17#	HCP-110	LTC	1.125	1.25	1.60

Variance is requested to waive the centralizer requirements for the 9-5/8" FJ casing in the 12-1/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 12-1/4" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive any centralizer requirements for the 5-1/2" FJ casing in the 8-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 8-3/4" hole interval to maximize cement bond and zonal isolation.

**Cementing Program:**

Depth	No. Sacks	Wt. ppg	Yld Ft <sup>3</sup> /sk	Slurry Description
950'	550	13.5	1.73	Lead: Class C + 4.0% Bentonite + 0.5% CaCl <sub>2</sub> + 0.25 lb/sk Cello-Flake (TOC @ Surface)
	180	14.8	1.34	Tail: Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate (TOC @ 750')
5,160'	600	9.0	3.5	Lead: Class C + 10% NaCl + 6% Bentonite Gel + 3% MagOx (TOC @ Surface)
	370	14.4	1.20	Tail: Class C + 10% NaCl + 3% MagOx (TOC @ 4,130')
17,454'	520	11.0	3.21	Lead: Class C + 3% CaCl <sub>2</sub> + 3% Microbond (TOC @ 4,660')
	2,140	14.4	1.2	Tail: Class H + 0.4% Halad-344 + 0.35% HR-601 + 3% Microbond (TOC @ 9,410')

**EOG RESOURCES, INC.**  
**ENDURANCE 36 FED COM #203H**

<b>Additive</b>	<b>Purpose</b>
Bentonite Gel	Lightweight/Lost circulation prevention
Calcium Chloride	Accelerator
Cello-flake	Lost circulation prevention
Sodium Metasilicate	Accelerator
MagOx	Expansive agent
Sodium Chloride	Accelerator
FL-62	Fluid loss control
Halad-344	Fluid loss control
Halad-9	Fluid loss control
HR-601	Retarder
Microbond	Expansive Agent

Note: Cement volumes based on bit size plus at least 25% excess in the open hole plus 10% excess in the cased-hole overlap section.

**5. MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:**

Variance is requested to use a co-flex line between the BOP and choke manifold (instead of using a 4" OD steel line).

The minimum blowout preventer equipment (BOPE) shown in Exhibit #1 will consist of a single ram, mud cross and double ram-type (10,000 psi WP) preventer and an annular preventer (5,000-psi WP). Both units will be hydraulically operated and the ram-type will be equipped with blind rams on bottom and drill pipe rams on top. All BOPE will be tested in accordance with Onshore Oil & Gas order No. 2.

Variance is requested to use a 5,000 psi annular BOP with the 10,000 psi BOP stack.

Before drilling out of the surface casing, the ram-type BOP and accessory equipment will be tested to 10,000/ 250 psig and the annular preventer to 5,000/ 250 psig.

Pipe rams and blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.

A hydraulically operated choke will be installed prior to drilling out of the intermediate casing shoe.

**6. TYPES AND CHARACTERISTICS OF THE PROPOSED MUD SYSTEM:**

During this procedure we plan to use a Closed-Loop System and haul contents to the required disposal.

The applicable depths and properties of the drilling fluid systems are as follows.

**EOG RESOURCES, INC.**  
**ENDURANCE 36 FED COM #203H**

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 – 950'	Fresh - Gel	8.6-8.8	28-34	N/c
950' – 5,160'	Brine	8.6-8.8	28-34	N/c
5,160' – 17,454'	Oil Base	8.8-9.5	58-68	N/c - 6

An electronic pit volume totalizer (PVT) will be utilized on the circulating system, to monitor pit volume, flow rate, pump pressure and stroke rate.

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept at the wellsite at all times.

**7. AUXILIARY WELL CONTROL AND MONITORING EQUIPMENT:**

- (A) A kelly cock will be kept in the drill string at all times.
- (B) A full opening drill pipe-stabbing valve (inside BOP) with proper drill pipe connections will be on the rig floor at all times.
- (C) H<sub>2</sub>S monitoring and detection equipment will be utilized from surface casing point to TD.

**8. LOGGING, TESTING AND CORING PROGRAM:**

Open-hole logs are not planned for this well.

GR–CCL      Will be run in cased hole during completions phase of operations.

**9. ABNORMAL CONDITIONS, PRESSURES, TEMPERATURES AND POTENTIAL HAZARDS:**

The estimated bottom-hole temperature (BHT) at TD is 181 degrees F with an estimated maximum bottom-hole pressure (BHP) at TD of 4,913 psig and a maximum anticipated surface pressure of 2,725 psig (based on 9.5 ppg MW). No hydrogen sulfide or other hazardous gases or fluids have been encountered, reported or are known to exist at this depth in this area. Severe loss circulation is expected from 7,955' to Intermediate casing point.

**EOG RESOURCES, INC.**  
**ENDURANCE 36 FED COM #203H**

**10. ANTICIPATED STARTING DATE AND DURATION OF OPERATIONS:**

The drilling operation should be finished in approximately one month. If the well is productive, an additional 60-90 days will be required for completion and testing before a decision is made to install permanent facilities.

(A) EOG Resources requests the option to contract a Surface Rig to drill, set surface casing, and cement on the subject well. After WOC 8 hours or 500 psi compressive strength (whichever is greater), the Surface Rig will move off so the wellhead can be installed. A welder will cut the casing to the proper height and weld on the wellhead (both "A" and "B" sections). The weld will be tested to 1000 psi. All valves will be closed and a wellhead cap will be installed (diagram attached). If the timing between rigs is such that EOG Resources would not be able to preset the surface, the Primary Rig will MIRU and drill the well in its entirety per the APD.

**11. WELLHEAD:**

A multi-bowl wellhead system will be utilized.

After running the 13-3/8" surface casing, a 13-3/8" BOP/BOPE system with a minimum working pressure of 10,000 psi will be installed on the wellhead system and will be pressure tested to 250 psi low followed by a 10,000 psi pressure test. This pressure test will be repeated at least every 30 days, as per Onshore Order No. 2

The minimum working pressure of the BOP and related BOPE required for drilling below the surface casing shoe shall be 10,000 psi.

The multi-bowl wellhead will be installed by vendor's representative(s). A copy of the installation instructions for the Cameron Multi-Bowl WH system has been sent to the NM BLM office in Carlsbad, NM.

The wellhead will be installed by a third party welder while being monitored by WH vendor's representative.

All BOP equipment will be tested utilizing a conventional test plug. Not a cup or J-packer type.

A solid steel body pack-off will be utilized after running and cementing the intermediate casing. After installation the pack-off and lower flange will be pressure tested to 5000 psi.

Casing strings will be tested as per Onshore Order No. 2 to at least 0.22 psi/ft or 1500 psi, whichever is greater.




EOG RESOURCES, INC.  
ENDURANCE 36 FED COM #203H

1,263' FNL  
1,775' FWL  
Section 36  
T-26-S, R-33-E

Proposed Wellbore

KB: 3,357'  
GL: 3,332'

API: 30-025-\*\*\*\*\*

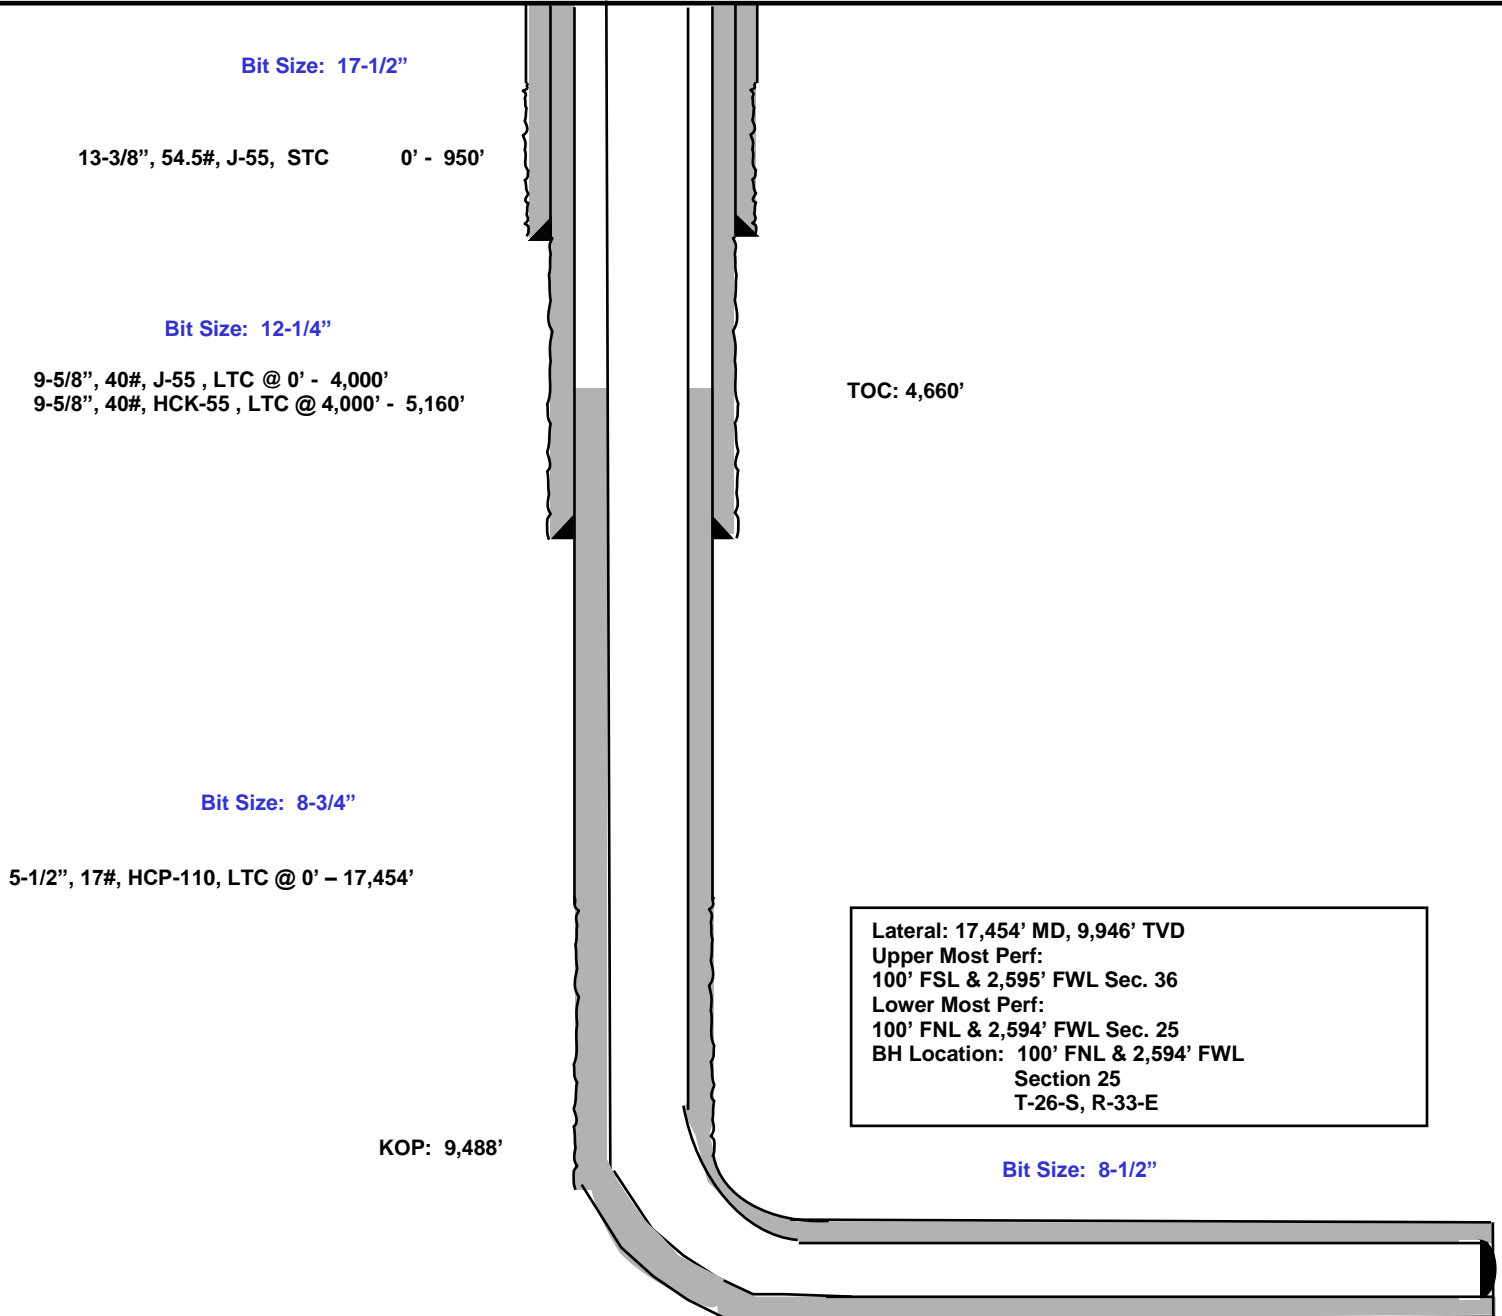



## **EOG Resources - Midland**

**Lea County, NM (NAD 83 NME)**

**Endurance 36 Fed Com**

**#203H**

**OH**

**Plan: Plan #0.1**

## **Standard Planning Report**

**04 May, 2020**

<b>Database:</b>	EDM 5000.14	<b>Local Co-ordinate Reference:</b>	Well #203H
<b>Company:</b>	EOG Resources - Midland	<b>TVD Reference:</b>	KB = 25' @ 3357.0usft
<b>Project:</b>	Lea County, NM (NAD 83 NME)	<b>MD Reference:</b>	KB = 25' @ 3357.0usft
<b>Site:</b>	Endurance 36 Fed Com	<b>North Reference:</b>	Grid
<b>Well:</b>	#203H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	OH		
<b>Design:</b>	Plan #0.1		

<b>Project</b>	Lea County, NM (NAD 83 NME)		
<b>Map System:</b>	US State Plane 1983	<b>System Datum:</b>	Mean Sea Level
<b>Geo Datum:</b>	North American Datum 1983		
<b>Map Zone:</b>	New Mexico Eastern Zone		

Site		Endurance 36 Fed Com			
Site Position:		Northing:	365,373.00 usft	Latitude:	32.0018930°N
From:	Map	Easting:	792,995.00 usft	Longitude:	103.5214990°W
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.43 °

Well	#203H					
Well Position	+N/-S	636.0 usft	Northing:	366,009.00 usft	Latitude:	32.0036883°N
	+E/-W	-2,292.0 usft	Easting:	790,703.00 usft	Longitude:	103.5288770°W
Position Uncertainty		0.0 usft	Wellhead Elevation:		Ground Level:	3,332.0 usft

<b>Wellbore</b>	OH				
<b>Magnetics</b>	<b>Model Name</b>	<b>Sample Date</b>	<b>Declination (°)</b>	<b>Dip Angle (°)</b>	<b>Field Strength (nT)</b>
	IGRF2020	5/4/2020	6.64	59.74	47,484.29596314

<b>Design</b>	Plan #0.1			
<b>Audit Notes:</b>				
<b>Version:</b>	<b>Phase:</b>	PLAN	<b>Tie On Depth:</b>	0.0
<b>Vertical Section:</b>	<b>Depth From (TVD) (usft)</b>	<b>+N/-S (usft)</b>	<b>+E/-W (usft)</b>	<b>Direction (°)</b>
	0.0	0.0	0.0	6.84

<b>Plan Survey Tool Program</b>	<b>Date</b>	5/4/2020		
<b>Depth From (usft)</b>	<b>Depth To (usft)</b>	<b>Survey (Wellbore)</b>	<b>Tool Name</b>	<b>Remarks</b>
1	0.0	17,453.5 Plan #0.1 (OH)	EOG MWD+IFR1	
			MWD + IFR1	

<b>Plan Sections</b>										
<b>Measured Depth (usft)</b>	<b>Inclination (°)</b>	<b>Azimuth (°)</b>	<b>Vertical Depth (usft)</b>	<b>+N/-S (usft)</b>	<b>+E/-W (usft)</b>	<b>Dogleg Rate (°/100usft)</b>	<b>Build Rate (°/100usft)</b>	<b>Turn Rate (°/100usft)</b>	<b>TFO (°)</b>	<b>Target</b>
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
462.3	9.25	145.19	460.3	-30.6	21.3	2.00	2.00	0.00	145.19	
9,025.9	9.25	145.19	8,912.7	-1,160.4	806.7	0.00	0.00	0.00	0.00	
9,488.3	0.00	0.00	9,373.0	-1,191.0	828.0	2.00	-2.00	0.00	180.00	KOP (Endurance 36 F
10,388.3	90.00	359.60	9,946.0	-618.1	824.0	10.00	10.00	-0.04	359.60	
12,272.4	90.00	359.60	9,946.0	1,266.0	811.0	0.00	0.00	0.00	0.00	FPP (Endurance 36 F
17,453.5	90.00	359.56	9,946.0	6,447.0	773.0	0.00	0.00	0.00	-86.91	LTP/PBHL (Enduranc

<b>Database:</b>	EDM 5000.14	<b>Local Co-ordinate Reference:</b>	Well #203H
<b>Company:</b>	EOG Resources - Midland	<b>TVD Reference:</b>	KB = 25' @ 3357.0usft
<b>Project:</b>	Lea County, NM (NAD 83 NME)	<b>MD Reference:</b>	KB = 25' @ 3357.0usft
<b>Site:</b>	Endurance 36 Fed Com	<b>North Reference:</b>	Grid
<b>Well:</b>	#203H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	OH		
<b>Design:</b>	Plan #0.1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	2.00	145.19	100.0	-1.4	1.0	-1.3	2.00	2.00	0.00
200.0	4.00	145.19	199.8	-5.7	4.0	-5.2	2.00	2.00	0.00
300.0	6.00	145.19	299.5	-12.9	9.0	-11.7	2.00	2.00	0.00
400.0	8.00	145.19	398.7	-22.9	15.9	-20.8	2.00	2.00	0.00
462.3	9.25	145.19	460.3	-30.6	21.3	-27.8	2.00	2.00	0.00
500.0	9.25	145.19	497.5	-35.5	24.7	-32.3	0.00	0.00	0.00
600.0	9.25	145.19	596.2	-48.7	33.9	-44.3	0.00	0.00	0.00
700.0	9.25	145.19	694.9	-61.9	43.0	-56.4	0.00	0.00	0.00
800.0	9.25	145.19	793.6	-75.1	52.2	-68.4	0.00	0.00	0.00
900.0	9.25	145.19	892.3	-88.3	61.4	-80.4	0.00	0.00	0.00
1,000.0	9.25	145.19	991.0	-101.5	70.6	-92.4	0.00	0.00	0.00
1,100.0	9.25	145.19	1,089.7	-114.7	79.7	-104.4	0.00	0.00	0.00
1,200.0	9.25	145.19	1,188.4	-127.9	88.9	-116.4	0.00	0.00	0.00
1,300.0	9.25	145.19	1,287.1	-141.1	98.1	-128.4	0.00	0.00	0.00
1,400.0	9.25	145.19	1,385.8	-154.3	107.3	-140.4	0.00	0.00	0.00
1,500.0	9.25	145.19	1,484.5	-167.5	116.4	-152.4	0.00	0.00	0.00
1,600.0	9.25	145.19	1,583.2	-180.7	125.6	-164.4	0.00	0.00	0.00
1,700.0	9.25	145.19	1,681.9	-193.9	134.8	-176.4	0.00	0.00	0.00
1,800.0	9.25	145.19	1,780.6	-207.1	143.9	-188.4	0.00	0.00	0.00
1,900.0	9.25	145.19	1,879.3	-220.2	153.1	-200.5	0.00	0.00	0.00
2,000.0	9.25	145.19	1,978.0	-233.4	162.3	-212.5	0.00	0.00	0.00
2,100.0	9.25	145.19	2,076.7	-246.6	171.5	-224.5	0.00	0.00	0.00
2,200.0	9.25	145.19	2,175.4	-259.8	180.6	-236.5	0.00	0.00	0.00
2,300.0	9.25	145.19	2,274.1	-273.0	189.8	-248.5	0.00	0.00	0.00
2,400.0	9.25	145.19	2,372.8	-286.2	199.0	-260.5	0.00	0.00	0.00
2,500.0	9.25	145.19	2,471.5	-299.4	208.2	-272.5	0.00	0.00	0.00
2,600.0	9.25	145.19	2,570.2	-312.6	217.3	-284.5	0.00	0.00	0.00
2,700.0	9.25	145.19	2,668.9	-325.8	226.5	-296.5	0.00	0.00	0.00
2,800.0	9.25	145.19	2,767.6	-339.0	235.7	-308.5	0.00	0.00	0.00
2,900.0	9.25	145.19	2,866.3	-352.2	244.8	-320.5	0.00	0.00	0.00
3,000.0	9.25	145.19	2,965.0	-365.4	254.0	-332.5	0.00	0.00	0.00
3,100.0	9.25	145.19	3,063.7	-378.6	263.2	-344.5	0.00	0.00	0.00
3,200.0	9.25	145.19	3,162.4	-391.8	272.4	-356.6	0.00	0.00	0.00
3,300.0	9.25	145.19	3,261.1	-405.0	281.5	-368.6	0.00	0.00	0.00
3,400.0	9.25	145.19	3,359.8	-418.2	290.7	-380.6	0.00	0.00	0.00
3,500.0	9.25	145.19	3,458.5	-431.3	299.9	-392.6	0.00	0.00	0.00
3,600.0	9.25	145.19	3,557.2	-444.5	309.1	-404.6	0.00	0.00	0.00
3,700.0	9.25	145.19	3,655.9	-457.7	318.2	-416.6	0.00	0.00	0.00
3,800.0	9.25	145.19	3,754.6	-470.9	327.4	-428.6	0.00	0.00	0.00
3,900.0	9.25	145.19	3,853.3	-484.1	336.6	-440.6	0.00	0.00	0.00
4,000.0	9.25	145.19	3,952.0	-497.3	345.7	-452.6	0.00	0.00	0.00
4,100.0	9.25	145.19	4,050.7	-510.5	354.9	-464.6	0.00	0.00	0.00
4,200.0	9.25	145.19	4,149.4	-523.7	364.1	-476.6	0.00	0.00	0.00
4,300.0	9.25	145.19	4,248.1	-536.9	373.3	-488.6	0.00	0.00	0.00
4,400.0	9.25	145.19	4,346.8	-550.1	382.4	-500.7	0.00	0.00	0.00
4,500.0	9.25	145.19	4,445.5	-563.3	391.6	-512.7	0.00	0.00	0.00
4,600.0	9.25	145.19	4,544.2	-576.5	400.8	-524.7	0.00	0.00	0.00
4,700.0	9.25	145.19	4,642.9	-589.7	410.0	-536.7	0.00	0.00	0.00
4,800.0	9.25	145.19	4,741.6	-602.9	419.1	-548.7	0.00	0.00	0.00
4,900.0	9.25	145.19	4,840.3	-616.1	428.3	-560.7	0.00	0.00	0.00
5,000.0	9.25	145.19	4,939.0	-629.3	437.5	-572.7	0.00	0.00	0.00
5,100.0	9.25	145.19	5,037.7	-642.5	446.6	-584.7	0.00	0.00	0.00
5,200.0	9.25	145.19	5,136.4	-655.6	455.8	-596.7	0.00	0.00	0.00

<b>Database:</b>	EDM 5000.14	<b>Local Co-ordinate Reference:</b>	Well #203H
<b>Company:</b>	EOG Resources - Midland	<b>TVD Reference:</b>	KB = 25' @ 3357.0usft
<b>Project:</b>	Lea County, NM (NAD 83 NME)	<b>MD Reference:</b>	KB = 25' @ 3357.0usft
<b>Site:</b>	Endurance 36 Fed Com	<b>North Reference:</b>	Grid
<b>Well:</b>	#203H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	OH		
<b>Design:</b>	Plan #0.1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,300.0	9.25	145.19	5,235.1	-668.8	465.0	-608.7	0.00	0.00	0.00
5,400.0	9.25	145.19	5,333.8	-682.0	474.2	-620.7	0.00	0.00	0.00
5,500.0	9.25	145.19	5,432.5	-695.2	483.3	-632.7	0.00	0.00	0.00
5,600.0	9.25	145.19	5,531.2	-708.4	492.5	-644.8	0.00	0.00	0.00
5,700.0	9.25	145.19	5,629.9	-721.6	501.7	-656.8	0.00	0.00	0.00
5,800.0	9.25	145.19	5,728.6	-734.8	510.8	-668.8	0.00	0.00	0.00
5,900.0	9.25	145.19	5,827.3	-748.0	520.0	-680.8	0.00	0.00	0.00
6,000.0	9.25	145.19	5,926.0	-761.2	529.2	-692.8	0.00	0.00	0.00
6,100.0	9.25	145.19	6,024.7	-774.4	538.4	-704.8	0.00	0.00	0.00
6,200.0	9.25	145.19	6,123.4	-787.6	547.5	-716.8	0.00	0.00	0.00
6,300.0	9.25	145.19	6,222.1	-800.8	556.7	-728.8	0.00	0.00	0.00
6,400.0	9.25	145.19	6,320.8	-814.0	565.9	-740.8	0.00	0.00	0.00
6,500.0	9.25	145.19	6,419.5	-827.2	575.1	-752.8	0.00	0.00	0.00
6,600.0	9.25	145.19	6,518.2	-840.4	584.2	-764.8	0.00	0.00	0.00
6,700.0	9.25	145.19	6,616.9	-853.6	593.4	-776.8	0.00	0.00	0.00
6,800.0	9.25	145.19	6,715.6	-866.7	602.6	-788.8	0.00	0.00	0.00
6,900.0	9.25	145.19	6,814.3	-879.9	611.7	-800.9	0.00	0.00	0.00
7,000.0	9.25	145.19	6,913.0	-893.1	620.9	-812.9	0.00	0.00	0.00
7,100.0	9.25	145.19	7,011.7	-906.3	630.1	-824.9	0.00	0.00	0.00
7,200.0	9.25	145.19	7,110.4	-919.5	639.3	-836.9	0.00	0.00	0.00
7,300.0	9.25	145.19	7,209.1	-932.7	648.4	-848.9	0.00	0.00	0.00
7,400.0	9.25	145.19	7,307.8	-945.9	657.6	-860.9	0.00	0.00	0.00
7,500.0	9.25	145.19	7,406.5	-959.1	666.8	-872.9	0.00	0.00	0.00
7,600.0	9.25	145.19	7,505.2	-972.3	676.0	-884.9	0.00	0.00	0.00
7,700.0	9.25	145.19	7,603.9	-985.5	685.1	-896.9	0.00	0.00	0.00
7,800.0	9.25	145.19	7,702.6	-998.7	694.3	-908.9	0.00	0.00	0.00
7,900.0	9.25	145.19	7,801.3	-1,011.9	703.5	-920.9	0.00	0.00	0.00
8,000.0	9.25	145.19	7,900.0	-1,025.1	712.6	-932.9	0.00	0.00	0.00
8,100.0	9.25	145.19	7,998.7	-1,038.3	721.8	-945.0	0.00	0.00	0.00
8,200.0	9.25	145.19	8,097.4	-1,051.5	731.0	-957.0	0.00	0.00	0.00
8,300.0	9.25	145.19	8,196.1	-1,064.7	740.2	-969.0	0.00	0.00	0.00
8,400.0	9.25	145.19	8,294.8	-1,077.8	749.3	-981.0	0.00	0.00	0.00
8,500.0	9.25	145.19	8,393.5	-1,091.0	758.5	-993.0	0.00	0.00	0.00
8,600.0	9.25	145.19	8,492.2	-1,104.2	767.7	-1,005.0	0.00	0.00	0.00
8,700.0	9.25	145.19	8,590.9	-1,117.4	776.9	-1,017.0	0.00	0.00	0.00
8,800.0	9.25	145.19	8,689.6	-1,130.6	786.0	-1,029.0	0.00	0.00	0.00
8,900.0	9.25	145.19	8,788.3	-1,143.8	795.2	-1,041.0	0.00	0.00	0.00
9,000.0	9.25	145.19	8,887.0	-1,157.0	804.4	-1,053.0	0.00	0.00	0.00
9,025.9	9.25	145.19	8,912.7	-1,160.4	806.7	-1,056.1	0.00	0.00	0.00
9,100.0	7.77	145.19	8,985.9	-1,169.4	813.0	-1,064.3	2.00	-2.00	0.00
9,200.0	5.77	145.19	9,085.2	-1,179.1	819.7	-1,073.1	2.00	-2.00	0.00
9,300.0	3.77	145.19	9,184.8	-1,185.9	824.5	-1,079.3	2.00	-2.00	0.00
9,400.0	1.77	145.19	9,284.7	-1,189.9	827.2	-1,082.9	2.00	-2.00	0.00
9,488.3	0.00	0.00	9,373.0	-1,191.0	828.0	-1,084.0	2.00	-2.00	0.00
9,500.0	1.17	359.60	9,384.7	-1,190.9	828.0	-1,083.8	10.00	10.00	0.00
9,550.0	6.17	359.60	9,434.6	-1,187.7	828.0	-1,080.7	10.00	10.00	0.00
9,600.0	11.17	359.60	9,484.0	-1,180.1	827.9	-1,073.2	10.00	10.00	0.00
9,650.0	16.17	359.60	9,532.6	-1,168.3	827.8	-1,061.5	10.00	10.00	0.00
9,700.0	21.17	359.60	9,579.9	-1,152.3	827.7	-1,045.6	10.00	10.00	0.00
9,750.0	26.17	359.60	9,625.7	-1,132.3	827.6	-1,025.7	10.00	10.00	0.00
9,800.0	31.17	359.60	9,669.6	-1,108.3	827.4	-1,001.9	10.00	10.00	0.00
9,850.0	36.17	359.60	9,711.2	-1,080.6	827.2	-974.4	10.00	10.00	0.00
9,900.0	41.17	359.60	9,750.2	-1,049.3	827.0	-943.4	10.00	10.00	0.00
9,950.0	46.17	359.60	9,786.3	-1,014.8	826.8	-909.2	10.00	10.00	0.00

<b>Database:</b>	EDM 5000.14	<b>Local Co-ordinate Reference:</b>	Well #203H
<b>Company:</b>	EOG Resources - Midland	<b>TVD Reference:</b>	KB = 25' @ 3357.0usft
<b>Project:</b>	Lea County, NM (NAD 83 NME)	<b>MD Reference:</b>	KB = 25' @ 3357.0usft
<b>Site:</b>	Endurance 36 Fed Com	<b>North Reference:</b>	Grid
<b>Well:</b>	#203H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	OH		
<b>Design:</b>	Plan #0.1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
10,000.0	51.17	359.60	9,819.3	-977.3	826.5	-871.9	10.00	10.00	0.00	
10,050.0	56.17	359.60	9,849.0	-937.0	826.2	-832.0	10.00	10.00	0.00	
10,100.0	61.17	359.60	9,874.9	-894.3	825.9	-789.6	10.00	10.00	0.00	
10,150.0	66.17	359.60	9,897.1	-849.5	825.6	-745.2	10.00	10.00	0.00	
10,200.0	71.17	359.60	9,915.3	-803.0	825.3	-699.0	10.00	10.00	0.00	
10,250.0	76.17	359.60	9,929.3	-755.0	825.0	-651.4	10.00	10.00	0.00	
10,300.0	81.17	359.60	9,939.2	-706.0	824.6	-602.8	10.00	10.00	0.00	
10,350.0	86.17	359.60	9,944.7	-656.3	824.3	-553.5	10.00	10.00	0.00	
10,388.3	90.00	359.60	9,946.0	-618.1	824.0	-515.6	10.00	10.00	0.00	
10,400.0	90.00	359.60	9,946.0	-606.3	824.0	-503.9	0.00	0.00	0.00	
10,500.0	90.00	359.60	9,946.0	-506.4	823.3	-404.7	0.00	0.00	0.00	
10,600.0	90.00	359.60	9,946.0	-406.4	822.6	-305.5	0.00	0.00	0.00	
10,700.0	90.00	359.60	9,946.0	-306.4	821.9	-206.3	0.00	0.00	0.00	
10,800.0	90.00	359.60	9,946.0	-206.4	821.2	-107.1	0.00	0.00	0.00	
10,900.0	90.00	359.60	9,946.0	-106.4	820.5	-7.9	0.00	0.00	0.00	
11,000.0	90.00	359.60	9,946.0	-6.4	819.8	91.3	0.00	0.00	0.00	
11,100.0	90.00	359.60	9,946.0	93.6	819.1	190.5	0.00	0.00	0.00	
11,200.0	90.00	359.60	9,946.0	193.6	818.4	289.7	0.00	0.00	0.00	
11,300.0	90.00	359.60	9,946.0	293.6	817.7	388.9	0.00	0.00	0.00	
11,400.0	90.00	359.60	9,946.0	393.6	817.0	488.1	0.00	0.00	0.00	
11,500.0	90.00	359.60	9,946.0	493.6	816.3	587.3	0.00	0.00	0.00	
11,600.0	90.00	359.60	9,946.0	593.6	815.7	686.5	0.00	0.00	0.00	
11,700.0	90.00	359.60	9,946.0	693.6	815.0	785.7	0.00	0.00	0.00	
11,800.0	90.00	359.60	9,946.0	793.6	814.3	884.9	0.00	0.00	0.00	
11,900.0	90.00	359.60	9,946.0	893.6	813.6	984.1	0.00	0.00	0.00	
12,000.0	90.00	359.60	9,946.0	993.6	812.9	1,083.3	0.00	0.00	0.00	
12,100.0	90.00	359.60	9,946.0	1,093.6	812.2	1,182.5	0.00	0.00	0.00	
12,200.0	90.00	359.60	9,946.0	1,193.6	811.5	1,281.7	0.00	0.00	0.00	
12,272.4	90.00	359.60	9,946.0	1,266.0	811.0	1,353.5	0.00	0.00	0.00	
12,300.0	90.00	359.60	9,946.0	1,293.6	810.8	1,380.9	0.00	0.00	0.00	
12,400.0	90.00	359.60	9,946.0	1,393.6	810.1	1,480.1	0.00	0.00	0.00	
12,500.0	90.00	359.60	9,946.0	1,493.6	809.4	1,579.3	0.00	0.00	0.00	
12,600.0	90.00	359.60	9,946.0	1,593.6	808.7	1,678.5	0.00	0.00	0.00	
12,700.0	90.00	359.60	9,946.0	1,693.6	808.0	1,777.7	0.00	0.00	0.00	
12,800.0	90.00	359.60	9,946.0	1,793.6	807.3	1,876.9	0.00	0.00	0.00	
12,900.0	90.00	359.60	9,946.0	1,893.6	806.6	1,976.2	0.00	0.00	0.00	
13,000.0	90.00	359.60	9,946.0	1,993.6	805.9	2,075.4	0.00	0.00	0.00	
13,100.0	90.00	359.60	9,946.0	2,093.6	805.2	2,174.6	0.00	0.00	0.00	
13,200.0	90.00	359.60	9,946.0	2,193.6	804.5	2,273.8	0.00	0.00	0.00	
13,300.0	90.00	359.59	9,946.0	2,293.6	803.8	2,373.0	0.00	0.00	0.00	
13,400.0	90.00	359.59	9,946.0	2,393.6	803.1	2,472.2	0.00	0.00	0.00	
13,500.0	90.00	359.59	9,946.0	2,493.6	802.4	2,571.4	0.00	0.00	0.00	
13,600.0	90.00	359.59	9,946.0	2,593.6	801.7	2,670.6	0.00	0.00	0.00	
13,700.0	90.00	359.59	9,946.0	2,693.6	801.0	2,769.8	0.00	0.00	0.00	
13,800.0	90.00	359.59	9,946.0	2,793.6	800.2	2,869.0	0.00	0.00	0.00	
13,900.0	90.00	359.59	9,946.0	2,893.6	799.5	2,968.2	0.00	0.00	0.00	
14,000.0	90.00	359.59	9,946.0	2,993.6	798.8	3,067.4	0.00	0.00	0.00	
14,100.0	90.00	359.59	9,946.0	3,093.6	798.1	3,166.6	0.00	0.00	0.00	
14,200.0	90.00	359.59	9,946.0	3,193.6	797.4	3,265.8	0.00	0.00	0.00	
14,300.0	90.00	359.58	9,946.0	3,293.6	796.6	3,365.0	0.00	0.00	0.00	
14,400.0	90.00	359.58	9,946.0	3,393.6	795.9	3,464.2	0.00	0.00	0.00	
14,500.0	90.00	359.58	9,946.0	3,493.5	795.2	3,563.4	0.00	0.00	0.00	
14,600.0	90.00	359.58	9,946.0	3,593.5	794.5	3,662.6	0.00	0.00	0.00	
14,700.0	90.00	359.58	9,946.0	3,693.5	793.7	3,761.8	0.00	0.00	0.00	

<b>Database:</b>	EDM 5000.14	<b>Local Co-ordinate Reference:</b>	Well #203H
<b>Company:</b>	EOG Resources - Midland	<b>TVD Reference:</b>	KB = 25' @ 3357.0usft
<b>Project:</b>	Lea County, NM (NAD 83 NME)	<b>MD Reference:</b>	KB = 25' @ 3357.0usft
<b>Site:</b>	Endurance 36 Fed Com	<b>North Reference:</b>	Grid
<b>Well:</b>	#203H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	OH		
<b>Design:</b>	Plan #0.1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
14,800.0	90.00	359.58	9,946.0	3,793.5	793.0	3,861.0	0.00	0.00	0.00	
14,900.0	90.00	359.58	9,946.0	3,893.5	792.3	3,960.2	0.00	0.00	0.00	
15,000.0	90.00	359.58	9,946.0	3,993.5	791.5	4,059.4	0.00	0.00	0.00	
15,100.0	90.00	359.58	9,946.0	4,093.5	790.8	4,158.6	0.00	0.00	0.00	
15,200.0	90.00	359.58	9,946.0	4,193.5	790.1	4,257.8	0.00	0.00	0.00	
15,300.0	90.00	359.58	9,946.0	4,293.5	789.3	4,357.0	0.00	0.00	0.00	
15,400.0	90.00	359.57	9,946.0	4,393.5	788.6	4,456.2	0.00	0.00	0.00	
15,500.0	90.00	359.57	9,946.0	4,493.5	787.8	4,555.4	0.00	0.00	0.00	
15,600.0	90.00	359.57	9,946.0	4,593.5	787.1	4,654.6	0.00	0.00	0.00	
15,700.0	90.00	359.57	9,946.0	4,693.5	786.3	4,753.8	0.00	0.00	0.00	
15,800.0	90.00	359.57	9,946.0	4,793.5	785.6	4,852.9	0.00	0.00	0.00	
15,900.0	90.00	359.57	9,946.0	4,893.5	784.8	4,952.1	0.00	0.00	0.00	
16,000.0	90.00	359.57	9,946.0	4,993.5	784.1	5,051.3	0.00	0.00	0.00	
16,100.0	90.00	359.57	9,946.0	5,093.5	783.3	5,150.5	0.00	0.00	0.00	
16,200.0	90.00	359.57	9,946.0	5,193.5	782.6	5,249.7	0.00	0.00	0.00	
16,300.0	90.00	359.57	9,946.0	5,293.5	781.8	5,348.9	0.00	0.00	0.00	
16,400.0	90.00	359.57	9,946.0	5,393.5	781.1	5,448.1	0.00	0.00	0.00	
16,500.0	90.00	359.56	9,946.0	5,493.5	780.3	5,547.3	0.00	0.00	0.00	
16,600.0	90.00	359.56	9,946.0	5,593.5	779.6	5,646.5	0.00	0.00	0.00	
16,700.0	90.00	359.56	9,946.0	5,693.5	778.8	5,745.7	0.00	0.00	0.00	
16,800.0	90.00	359.56	9,946.0	5,793.5	778.0	5,844.9	0.00	0.00	0.00	
16,900.0	90.00	359.56	9,946.0	5,893.5	777.3	5,944.1	0.00	0.00	0.00	
17,000.0	90.00	359.56	9,946.0	5,993.5	776.5	6,043.3	0.00	0.00	0.00	
17,100.0	90.00	359.56	9,946.0	6,093.5	775.7	6,142.5	0.00	0.00	0.00	
17,200.0	90.00	359.56	9,946.0	6,193.5	775.0	6,241.7	0.00	0.00	0.00	
17,300.0	90.00	359.56	9,946.0	6,293.5	774.2	6,340.9	0.00	0.00	0.00	
17,400.0	90.00	359.56	9,946.0	6,393.5	773.4	6,440.1	0.00	0.00	0.00	
17,453.5	90.00	359.56	9,946.0	6,447.0	773.0	6,493.2	0.00	0.00	0.00	

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
- hit/miss target									
- Shape									
KOP (Endurance 36 Fec - plan hits target center - Point	0.00	0.00	9,373.0	-1,191.0	828.0	364,818.00	791,531.00	32.0003976°N	103.5262348°W
FTP (Endurance 36 Fed - plan misses target center by 202.9usft at 9960.7usft MD (9793.7 TVD, -1007.0 N, 826.7 E) - Point	0.00	0.00	9,946.0	-1,141.0	828.0	364,868.00	791,531.00	32.0005350°N	103.5262336°W
LTP/PBHL (Endurance 3 - plan hits target center - Point	0.00	0.00	9,946.0	6,447.0	773.0	372,456.00	791,476.00	32.0213935°N	103.5262282°W
FPP (Endurance 36 Fed - plan hits target center - Point	0.00	0.00	9,946.0	1,266.0	811.0	367,275.00	791,514.00	32.0071515°N	103.5262304°W

**EOG RESOURCES, INC.**  
**ENDURANCE 36 FED COM #203H**

## **Hydrogen Sulfide Plan Summary**

- A. All personnel shall receive proper H<sub>2</sub>S training in accordance with Onshore Order III.C.3.a.
- B. Briefing Area: two perpendicular areas will be designated by signs and readily accessible.
- C. Required Emergency Equipment:

- Well control equipment
  - a. Flare line 150' from wellhead to be ignited by flare gun.
  - b. Choke manifold with a remotely operated choke.
  - c. Mud/gas separator

- Protective equipment for essential personnel.

Breathing apparatus:

- a. Rescue Packs (SCBA) — 1 unit shall be placed at each breathing area, 2 shall be stored in the safety trailer.
- b. Work/Escapes packs — 4 packs shall be stored on the rig floor with sufficient air hose not to restrict work activity.
- c. Emergency Escape Packs — 4 packs shall be stored in the doghouse for emergency evacuation.

Auxiliary Rescue Equipment:

- a. Stretcher
- b. Two OSHA full body harness
- c. 100 ft 5/8 inch OSHA approved rope
- d. 1-20# class ABC fire extinguisher

- H<sub>2</sub>S detection and monitoring equipment:

The stationary detector with three sensors will be placed in the upper dog house if equipped, set to visually alarm @ 10 ppm and audible @ 14 ppm. Calibrate a minimum of every 30 days or as needed. The sensors will be placed in the following places: Rig floor / Bell nipple / End of flow line or where well bore fluid is being discharged.

(Gas sample tubes will be stored in the safety trailer)

- Visual warning systems.
  - a. One color code condition sign will be placed at the entrance to the site reflecting the possible conditions at the site.
  - b. A colored condition flag will be on display, reflecting the current condition at the site at the time.
  - c. Two wind socks will be placed in strategic locations, visible from all angles.



**EOG RESOURCES, INC.**  
**ENDURANCE 36 FED COM #203H**

- **Mud program:**  
The mud program has been designed to minimize the volume of H<sub>2</sub>S circulated to surface. The operator will have the necessary mud products to minimize hazards while drilling in H<sub>2</sub>S bearing zones.
- **Metallurgy:**  
All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H<sub>2</sub>S service.
- **Communication:**  
Communication will be via cell phones and land lines where available.

**EOG RESOURCES, INC.  
ENDURANCE 36 FED COM #203H**

**Emergency Assistance Telephone List**

**PUBLIC SAFETY:** **911 or**

Lea County Sheriff's Department (575) 396-3611

Rod Coffman

Fire Department:

Carlsbad (575) 885-3125

Artesia (575) 746-5050

Hospitals:

Carlsbad (575) 887-4121

Artesia (575) 748-3333

Hobbs (575) 392-1979

Dept. of Public Safety/Carlsbad (575) 748-9718

Highway Department (575) 885-3281

New Mexico Oil Conservation (575) 476-3440

U.S. Dept. of Labor (575) 887-1174

**EOG Resources, Inc.**

EOG / Midland Office (432) 686-3600

**Company Drilling Consultants:**

Jett Dueitt Cell (432) 230-4840

Blake Burney

**Drilling Engineer**

Steve Munsell Office (432) 686-3609

Cell (432) 894-1256

**Drilling Manager**

Aj Dach Office (432) 686-3751

Cell (817) 480-1167

**Drilling Superintendent**

Jason Townsend Office (432) 848-9209

Cell (210) 776-5131

**H&P Drilling**

H&P Drilling Office (432) 563-5757

H&P 415 Drilling Rig Rig (432) 230-4840

**Tool Pusher:**

Johnathan Craig Cell (817) 760-6374

Brad Garrett

**Safety**

Brian Chandler (HSE Manager) Office (432) 686-3695

Cell (817) 239-0251

District I  
1625 N. French Dr., Hobbs, NM 88240  
Phone: (575) 393-6161 Fax: (575) 393-0720  
District II  
811 S. First St., Artesia, NM 88210  
Phone: (575) 748-1283 Fax: (575) 748-9720  
District III  
1000 Rio Brazos Road, Aztec, NM 87410  
Phone: (505) 334-6178 Fax: (505) 334-6170  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505  
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico  
Energy, Minerals & Natural Resources  
Department  
OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

FORM C-102

Revised August 1, 2011

Submit one copy to appropriate

District Office

OCD - HOBBS  
11/03/2020  
RECEIVED

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

<sup>1</sup> API Number <b>30-025-47964</b>	<sup>2</sup> Pool Code <b>98271</b>	<sup>3</sup> Pool Name <b>WC-025 G-06 S263325B;UPPER BONE SPRING</b>
<sup>4</sup> Property Code <b>38129</b>	<sup>5</sup> Property Name <b>ENDURANCE 36 FED COM</b>	<sup>6</sup> Well Number <b>203H</b>
<sup>7</sup> OGRID No. <b>7377</b>	<sup>8</sup> Operator Name <b>EOG RESOURCES, INC.</b>	<sup>9</sup> Elevation <b>3332'</b>

<sup>10</sup>Surface Location

UL or lot no. <b>C</b>	Section <b>36</b>	Township <b>26-S</b>	Range <b>33-E</b>	Lot Idn <b>-</b>	Feet from the <b>1263'</b>	North/South line <b>NORTH</b>	Feet from the <b>1775'</b>	East/West line <b>WEST</b>	County <b>LEA</b>
---------------------------	----------------------	-------------------------	----------------------	---------------------	-------------------------------	----------------------------------	-------------------------------	-------------------------------	----------------------

<sup>11</sup>Bottom Hole Location If Different From Surface

UL or lot no. <b>C</b>	Section <b>25</b>	Township <b>26-S</b>	Range <b>33-E</b>	Lot Idn <b>-</b>	Feet from the <b>100'</b>	North/South line <b>NORTH</b>	Feet from the <b>2594'</b>	East/West line <b>WEST</b>	County <b>LEA</b>
---------------------------	----------------------	-------------------------	----------------------	---------------------	------------------------------	----------------------------------	-------------------------------	-------------------------------	----------------------

<sup>12</sup> Dedicated Acres <b>239.96</b>	<sup>13</sup> Joint or Infill	<sup>14</sup> Consolidation Code	<sup>15</sup> Order No.
--	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

<p><sup>16</sup></p> <p><b>LOWER MOST PERF. / BOTTOM HOLE LOCATION</b> NEW MEXICO EAST NAD 1927 X=750288 Y=372400 LAT.: N 32.0212693 LONG.: W 103.5257641 NAD 1983 X=791476 Y=372456 LAT.: N 32.0213945 LONG.: W 103.5262282</p> <p><b>FED PERF. POINT</b> NEW MEXICO EAST NAD 1927 X=750325 Y=367218 LAT.: N 32.0070250 LONG.: W 103.5257688 NAD 1983 X=791514 Y=367275 LAT.: N 32.0071503 LONG.: W 103.5262319</p> <p><b>SURFACE LOCATION</b> NEW MEXICO EAST NAD 1927 X=749515 Y=365952 LAT.: N 32.0035627 LONG.: W 103.5284128 NAD 1983 X=790703 Y=366009 LAT.: N 32.0036880 LONG.: W 103.5288758</p> <p><b>UPPER MOST PERF.</b> NEW MEXICO EAST NAD 1927 X=750343 Y=364812 LAT.: N 32.0004106 LONG.: W 103.5257709 NAD 1983 X=791531 Y=364868 LAT.: N 32.0005360 LONG.: W 103.5262337</p>	<p><sup>17</sup>OPERATOR CERTIFICATION</p> <p>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</p> <p><i>Jayna K. Hobby</i> 5/18/20 Signature Date</p> <p>Jayna K. Hobby Printed Name</p> <p>Jayna_Hobby@eogresources.com E-mail Address</p> <p><sup>18</sup>SURVEYOR CERTIFICATION</p> <p>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true to the best of my belief.</p> <p>10/08/2019 Date of Survey</p> <p><i>Ramon A. Dominguez</i> Signature and Seal of Professional Surveyor</p> <p>NEW MEXICO TEXAS</p> <p>24508 Certificate Number</p>
--	---

Intent ☐ As Drilled ☐

API # **30-025-47964**

Operator Name:	Property Name:	Well Number
----------------	----------------	-------------

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Is this well the defining well for the Horizontal Spacing Unit? ☐

Is this well an infill well? ☐

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number

District I  
1625 N. French Dr., Hobbs, NM 88240  
District II  
811 S. First St., Artesia, NM 88210  
District III  
1000 Rio Brazos Road, Aztec, NM 87410  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals and Natural Resources Department  
Oil Conservation Division  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

Submit Original  
to Appropriate  
District Office

**OCD – HOBBS**  
**11/03/2020**  
**RECEIVED**

**GAS CAPTURE PLAN**

**Lea County, NM**

Date: 5/19/2020

☒ Original

Operator & OGRID No.: EOG Resources, Inc. 7377

☐ Amended - Reason for Amendment: \_\_\_\_\_

This Gas Capture Plan outlines actions to be taken by the Operator to reduce well/production facility flaring/venting for new completion (new drill, recomple to new zone, re-frac) activity.

*Note: Form C-129 must be submitted and approved prior to exceeding 60 days allowed by Rule (Subsection A of 19.15.18.12 NMAC).*

**Well(s)/Production Facility – Name of facility**

The well(s) that will be located at the production facility are shown in the table below.

Well Name	API	Well Location (ULSTR)	Footages	Expected MCF/D	Flared or Vented	Comments
Endurance 36 Fed Com 201H	30-025-*****	1-36-26S-33E	1907' FNL & 1227' FEL	±3500	None Planned	APD Submission
Endurance 36 Fed Com 202H	30-025-*****	1-36-26S-33E	1907' FNL & 1260' FEL	±3500	None Planned	APD Submission
Endurance 36 Fed Com 203H 30-025-47964	30-025-*****	C-36-26S-33E	1263' FNL & 1775' FWL	±3500	None Planned	APD Submission
Endurance 36 Fed Com 204H	30-025-*****	C-36-26S-33E	1263' FNL & 1742' FWL	±3500	None Planned	APD Submission
Endurance 36 Fed Com 205H	30-025-*****	C-36-26S-33E	1263' FNL & 1709' FWL	±3500	None Planned	APD Submission

**Gathering System and Pipeline Notification**

Well(s) will be connected to a production facility after flowback operations are complete, if gas transporter system is in place. The gas produced from production facility is dedicated to **Enlink, MarkWest, Enterprise, Energy Transfer Company & Lucid** and will be connected to **EOG Resources** low/high pressure gathering system located in Lea County, New Mexico. **EOG Resources** provides (periodically) to **Enlink, MarkWest, Enterprise, Energy Transfer Company & Lucid** a drilling, completion and estimated first production date for wells that are scheduled to be drilled in the foreseeable future. In addition, **EOG Resources** and **Enlink, MarkWest, Enterprise, Energy Transfer Company & Lucid** have periodic conference calls to discuss changes to drilling and completion schedules. Gas from these wells will be processed at **Enlink, MarkWest, Enterprise, Energy Transfer Company & Lucid** Processing Plant located in Lea County, New Mexico. The actual flow of the gas will be based on compression operating parameters and gathering system pressures.

**Flowback Strategy**

After the fracture treatment/completion operations, well(s) will be produced to temporary production tanks and gas will be flared or vented. During flowback, the fluids and sand content will be monitored. When the produced fluids contain minimal sand, the wells will be turned to production facilities. Gas sales should start as soon as the wells start flowing through the production facilities, unless there are operational issues on **Enlink, MarkWest, Enterprise, Energy Transfer Company & Lucid** system at that time. Based on current information, it is **EOG Resources**' belief the system can take this gas upon completion of the well(s).

Safety requirements during cleanout operations from the use of underbalanced air cleanout systems may necessitate that sand and non-pipeline quality gas be vented and/or flared rather than sold on a temporary basis.

**Alternatives to Reduce Flaring**

Below are alternatives considered from a conceptual standpoint to reduce the amount of gas flared.

- Power Generation – On lease
  - Only a portion of gas is consumed operating the generator, remainder of gas will be flared
- Compressed Natural Gas – On lease
  - Gas flared would be minimal, but might be uneconomical to operate when gas volume declines
- NGL Removal – On lease
  - Plants are expensive, residue gas is still flared, and uneconomical to operate when gas volume declines