SUBMIT IN (Other inst _cion reverse side) cions on Form approved.

Budget Bureau No. 1004-0136

Expires August 31, 1985

	UNITE	D SLA I	SSIC INTERIOR
DEPART	MENT	OF THE	INTERIOR
		A N 150 N A A N I	ACCMENT

(5. LEASE DESIGNATION AND SERIAL NO.						
	LC 029388	4					
A PDI ICATIO	N FOR PERMIT	TO DRILL DEEP	PEN. OR PLUG	BACK	6. IF INDIAN, ALLOTTES OR TRIBE NAME		
a. TYPE OF WORK	TON TENIVIE				7. UNIT AGREEMENT	W.145	
	ILL X	DEEPEN 🗌	PLUG B	ACK 🗌		NAMB	
b. TYPE OF WELL	A5		SINGLE V MUL	TIPLE	Voluntary 8. FARM OR LEASE NA	AMB	
WELL X	VELL OTHER		ZONE X ZONE				
2. NAME OF OPERATOR					Stetco "10"		
Marathon Oil	Company		RECE	IVED			
D 0 D == 550	Widland TV 707	702			4 10. FIELD AND POOL,	OR WILDCAT	
P U BOX 332,	Midland, TX 797 Report location clearly and	in accordance with any	State requirements.	A . 100	· (Pana	(Comina)	
		^	OCI	24'90 /	Tamano (Bone	BLK.	
2180' FNL &		with fire	_		AND SURVEY OR A	REA	
At proposed prod. so 2180 FNL &		\mathcal{W} .	0,	C. U.	Sec. 10, T-1	8-S. R-31-1	
4. DISTANCE IN MILES	AND DIRECTION FROM NEA	REST TOWN OR POST OFF	ICE.	CERCE	12. COUNTY OR PARIS	H 13. STATE	
	of Loco Hills,				Eddy	NM	
5. DISTANCE FROM PROP	OSED*		NO. OF ACRES IN LEASE		OF ACRES ASSIGNED		
LOCATION TO NEARES	T Line, FT.	1650'	160	40	THIS WELL		
S DISTANCE FROM PRO	POSED LOCATION®		PROPOSED DEPTH	20. ROTA	ARY OR CABLE TOOLS		
TO NEAREST WELL,	OBILLING COMPLETED.	9981	90001	Rot	ary		
	nether DF, RT, GR, etc.)		<u></u>	<u> </u>	22. APPROX. DATE W	ORK WILL STARTS	
3733' GR							
3.		PROPOSED CASING AL	ND CEMENTING PROC	GRAM			
					QUANTITY OF CEM	- XT	
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	935 6	x - circulate		
17-1/2"	13-3/8"	48	750' 2450'		sx - circulate		
11"	8-5/8"	24 & 32	9000'	1500			
7-7/8"	5-1/2"	15.5 & 17	3000	1500		0 +m1	
					ı	Past ID-1 11-2-90	
Propose to d	rill to a TD of	± 9000°.	andanaa ssith r	comlatio	one and hy	11-2-10	
All casing w	ill be run and	cemented in acc	cordance with i	eguiatio	The and of The	~ WOC + TYPI	
ANNYAWAM MAT	hods. ention equipmen						
Blowout prev	ention equipmen Multipoint Sur	face lice Plan a	and Additional	Informat	ion for speci	fic	
		Tace use Train a	ind Madreronar	1			
drilling ope	rations.						
					×0.4	0	
* Distance t	o Stetco "10" F	ederal Well #2				C. T	
" DISTANCE C	o bletco io i					ر ت دے	
					: :	141 17	
					-	<u> </u>	
					- - -	4 1 7	
						F-7-9	
IN ABOVE SPACE DESCRI	BE PROPOSED PROGRAM: If	proposal is to deepen of	r plug back, give data o	n present pro	ductive sone and probl	ed new groductiv	
zone. If proposal is to	drill or deepen direction	ally, give pertinent data	a on subsurface location	s and measur	ed and true vertical der	urus. Give biowou O	
preventer pro gram, if a 24.	ny.					•	
	WF.	,	Drilling Super	intenden	r /s/	15/50	
SIGNED	my	TITLE	DITITIE Suber		DATE 70/		
(This space for Fed	ieral or State office use)						
· •			ADDROVAL DATE				
PERMIT NO.			APPROVAL DATE				
		•	usia di		DATE 16	23 70	
APPROVED BY	DVAT. TP ANY	TITLE _					
CONDITIONS OF APPR	DVAL, IF ANY						

*See Instructions On Reverse Side

SUMBLUL REQUIREMENTS AND

WITCHE STIPULATIONS

State Lease - 4 copies Fee Lease - 3 copies

State of New Mexico margy, Minerale and Natural Resources Depa.

OIL CONSERVATION DIVISION

P.O. Box 2088 Santa Fe, New Mexico 87504-2088

DISTRICT II
P.O. Deswer DD, Artesia, NM \$8210

DISTRICT I P.O. Box 1980, Hobbs, NM 88340

DISTRICT III
1000 Rio Bosco Rd., Autoc, NM 87410

WELL LOCATION AND ACREAGE DEDICATION PLAT

Lie				Lease				Well No.
MARATHON OIL CO.			S	Statco 10 Federal			4	
Letter Section		Towaship	10 Court	Range	East		County	Eddy
G	10		18 South			NMPM		
Footage Location of				165	in.	feet from t	East	line
180 feet f		North Formation	line and	Pool		1000 110000		Dedicated Acreage:
719.5	_	ring Car	honate	Tamano	(Bone Spr	ing)		40 Acres
1 Outline the sc	none dedicated	to the subject	well by colored p	escil or hachure	merits on the pla	t below.		
3. If more than o	ne lease of diff	erent ownership	negwer is "yes"	the well, have the	interest of all o	(both as to workin	dated by com	
If answer is "no	essary.	and tract desc	riptions which ha	ve actually been been consolidate	consolidated. (L	ise reverse side of ization, unitization		ng, or otherwise)
OF USEGL & SOST-OF							OPERAT	OR CERTIFICATION
					 	b	hereby pateined here	certify that the information in true and complete to violege and belief.
				5180'			risted Name S. L. A	tripp
,				20.9	71 9.2 		Drillin Company Maratho	g Superintendent n Oil Company
				97.5	FISSION.		l hereby cert	YOR CERTIFICATION ify that the well location s was platted from field not se made by me or under and that the same is true he best of my knowledge
en منت میں میں م	- 				NO SUR		Signature &	d September 24,19
				NEW NEW	MEXICO WEXTO		Professional	Surveyor Walter T.
	•		1		. I	<i>1</i> 1	/	ROMALD & EIDSON.
	_i							RONALD & EIDSON,

MULTIPOINT SURFACE USE AND OPERA. JNS PLAN

Marathon Oil Company

STETCO "10" #4
2180' FNL & 1650' FEL
Section 10, T-18-S, R-31-E
Eddy County, New Mexico
Lease: LC-029388

This plan is submitted with the Application for Permit to Drill the above described well. The purpose of this plan is to describe the location of the proposed well, the proposed construction activities and operations plan, the magnitude of necessary surface disturbance involved, and the procedure to be followed in rehabilitating the surface after the completion of all operations so that a complete appraisal can be made of the environmental effects associated with the proposed operations.

1. Existing Roads

Exhibit "A" is a portion of a topographic map showing the location of the proposed well as staked. Proceed west from Hobbs, NM, on U.S. Highway 180. Turn west on NM Highway 529. After 31 miles, turn west on U.S. Highway 82 for 1/2 mile to Highway 222. Turn south on Highway 222 for 2 miles to caliche road, NM 249. Go east 1.3 miles. Turn N.E. on dirt road for 1.3 miles; turn west on dirt road for .5 mi., then north .4 mile, then west into location. All existing roads used to access the proposed location shall be maintained in the same or better condition than presently found.

2. Planned Access Roads

A. Length and Width

No access road will be required as the proposed location falls beside an existing road.

B. Surfacing Material

6" of caliche compacted and rolled

C. Maximum Grade

Three Percent (3%)

D. Turnouts

None Required

E. Drainage Design

Natural drainage.

Multipoint Surface ase and Operations Plan Page 2

F. Culverts

None required.

G. Cuts and Fills

None required.

H. Gates, Cattlegaurds and Fences

None Required.

3. Location of Existing Wells

Exhibit "B" is a map showing the location of all the wells within a one mile radius of the proposed well.

4. Location of Existing and Proposed Facilities

- A. Exhibit "C" is a map of the existing roads with the proposed well location.
- B. In the event of a producible oil well, oil will be stored at the battery location on the Stetco "10" #4 pad with production metered at the location. The gas will be piped to existing flow lines in a manner to be determined at a later date.

5. Location and Type of Water Supply

Water will be furnished and trucked by a Contractor.

6. Source of Construction Materials

Caliche for surfacing the drilling pad and access road will be obtained from a pit in the NW/4, SW/4 and NE/4 of the NW quarter section of Section 15, T-18-S, R-31-E. This area has been cleared for construction by the following archaeological clearance numbers, #85-195, #85-345.

7. Methods of Handling Waste Disposal

- A. Drill cuttings will be disposed of in the drilling pits.
- B. Drilling fluids will be vacuumed from the reserve pit and hauled to an approved disposal well. Reserve pit contents will be allowed to dry and pitwalls backfilled. All areas of the pad and reserve pit not necessary to production will be re-contoured. Top soil will be redistributed and reseeded with the recommended seed mixture.

Multipoint Surface use and Operations Plan Page 3

- C. Water produced during tests will be disposed of in the drilling pits and hauled to an approved salt water disposal well.
- D. Current laws and regulations pertaining to the disposal of human waste will be complied with.
- E. Trash, waste paper, garbage, and junk will be stored in a trailer on location and hauled to an approved disposal site.
- F. All trash and debris will be removed from the wellsite within 30 days after finishing drilling and completion operations.

8. Ancillary Facilities

None required.

9. Wellsite Layout

Exhibit "D" shows the relative location of the rig components and reserve pits.

10. Plans for Restoration of Surface

- A. After finishing drilling and completion operations all equipment and other materials not necessary for operations will be removed. Pits will be filled and leveled and the location cleaned of all trash and junk to leave the wellsite in an aesthetically pleasing condition as is possible.
- B. Any unguarded pits containing fluids or trash will be fenced until they are filled or leveled.
- C. After abandonment of well, equipment will be removed, the location will be cleaned, and the pad and access road will be ripped and returned to as near the original appearance as is possible.
- D. In the event of a producer, the land not necessary for production operations will be re-contoured and seeded with the recommended mixture submitted by the BLM.

11. Other Information:

A. Topography

The location is situated on a duned landform.

B. Soil

Typic Torripsamment subgroup.

Multipoint Surface and Operations Plan Page 4

C. Flora and Fauna

The vegetation cover consists of native range grasses with yucca plants, cactus and mesquite. Wild life in the area includes rabbits, dove, quail, and other inhabitants typical of semi-arid climate.

D. Ponds and Streams

Local drainage in this area is internal.

E. Residence and Structures

None nearby.

F. Archaeological, Historical and Cultural Sites

None observed in the area. The Archaeological Inspection Report is being forwarded by Archaeological Consultants, Inc.

G. Land Use

Grazing with hunting in season.

H. Surface Ownership

The proposed wellsite is on land owned by the Federal Government.

12. Operators Representative

Stanley L. Atnipp P. O. Box 552 Midland, TX 79702 (915) 682-1626

13. Certification

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist, that the statements made in this place are, to the best of my knowledge true and correct; and, that the work associated with the operations proposed herein will be performed by Marathon Oil Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved.

Drilling Superintendent

MARATHON OIL COMPANY

STETCO "10" #4 ADDITIONAL INFORMATION Comply with Order 1

In conjunction with Form 9-331C, Application to drill subject well, Marathon Oil Company submits the following items of information in accordance with BLM requirements:

1. Geological Name of Surface Formation

Quaternary Alluvium

2. Estimated Tops of Important Geological Markers

Rustler	805'	Delaware	48651
Base of Salt	1980'	Bone Spring	5645'
Yates	2065'	1st Sand	7620'
Seven Rivers	2455'	2nd Carb	7860'
Oueen	33301	2nd Sand	8150'
Grayburg	38351	3rd Carb	88301
San Andres	4285'	_	

3. Estimated Depths of Anticipated Water, Oil or Gas Bearing Formations

Yates (water) Seven Rivers (water) Queen (water & oil) Grayburg (water & oil) San Andres (water & oil)	2065'	Bone Spring	5645'
	2455'	1st Sand (water & oil)	7620'
	3330'	2nd Carb (water & oil)	7860'
	3835'	2nd Sand (water & oil)	8150'
	4285'	3rd Carb (water & oil)	8830'
Delaware (water & oil)	4865'		

4. Casing and Cementing Program

13-3/8" Surface to 750': Cement to surface with 835 sxs Class "C" with 2% CaCl₂

8-5/8" Intermediate to 2450': Cement to surface with 1100 sxs Modified Lite followed by 250 sxs Class "C" with 2% CaCl₂

2

5-1/2" Production to 9000': Cement to 2200' with 1500 sxs Class "H" PozMix. Stage tool @ ± 7400'

5. Pressure Control Equipment (Exhibit E)

13-3/8" Surface: 13-5/8" 3000 psi working pressure annular preventer tested to 2000 psi

13-5/8" 3000 psi working pressure pipe and blind rams tested to 3000 psi

Additional Information Page 2

8-5/8" Intermediate:

11" 3000 psi working pressure annular preventer tested to 2000 psi

11" 3000 psi working pressure pipe rams and blind rams tested to 3000 psi Choke manifold tested to 3000 psi

6. Proposed Mud Program

0 - 750 Native; Mud Wt: 8.3 - 9.2, Viscosity 28-34 Sec

750 - 2,700 Brine Water; Mud Wt: 9.0 - 10.0, Viscosity 28-32 Sec

2,700 - 7,000 Fresh Water; Mud Wt: 8.6 - 8.8, Viscosity 28-32 Sec

7,000 - 9,000 Fresh Water; Mud Wt: 8.8 - 9.2, Viscosity 32-44 Sec

7. Auxiliary Equipment

A safety valve and subs to fit all strings will be kept on the floor at all times. An upper kelly cock valve will be utilized with the handle available on the rig floor.

8. Testing, Logging, and Coring Programs

A. Coring Program:

None anticipated.

B. Testing Program:

None anticipated.

C. Logging Program:


TD-Surface - GR-DIL, GR-LDT-CNL, TD-TOP of Bone Spring, GR-LSS, NGT, DLL-MSFL.

9. Abnormal Pressures, Temperatures or Potential Hazards


None anticipated


10. Anticipated Starting Date

As soon as possible

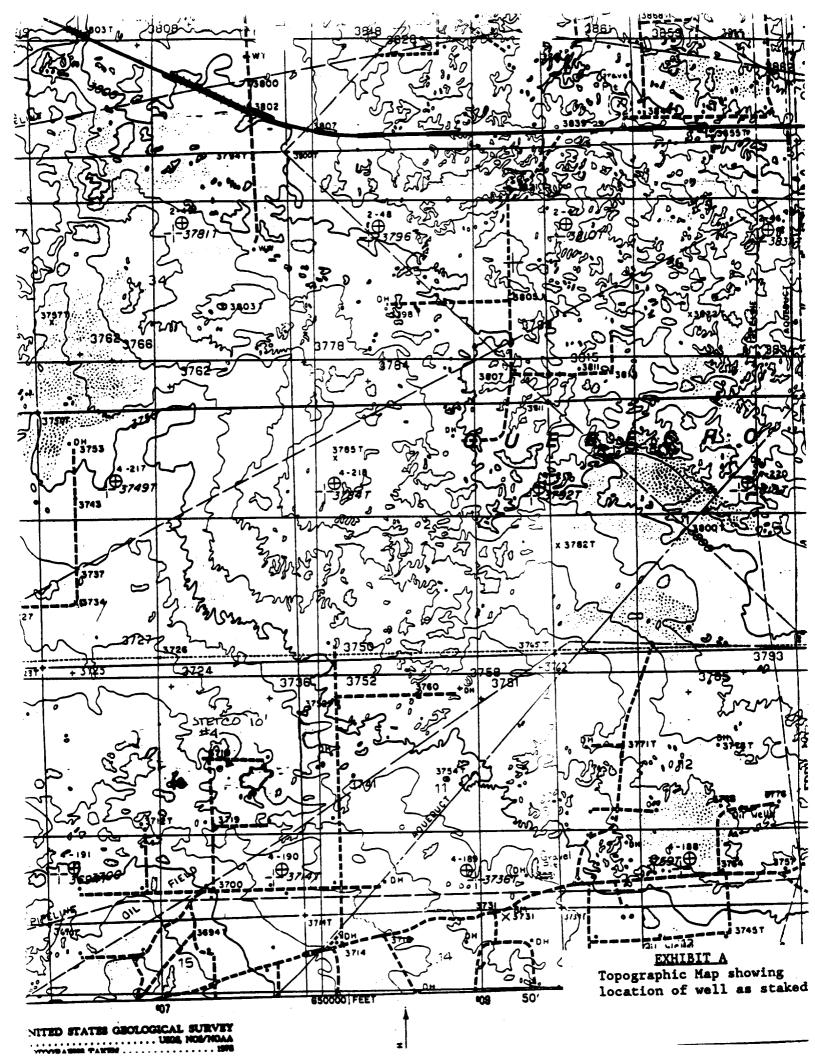

The state of the s	Murchison Clasert S/R	314 677 16 14	1 GdHy 22 11 11 12 12 11 11 12 12 11 11 11 11	<u></u>	_
The profit (Single) errors (Single)	11100 o mily o Romes o 1 33 70 os OH o Stores o 11000	10 to 12 to	10 - May 10	10 mar Postolia 213415	T 17 S
AACa stant on an AACa			(2) 111001 (2) 111001	Trung Septem & Printer	3
20		Programme statement	To the state of th	The reason to 24 % a second	
		GETTY OPER	AND THE REAL PROPERTY.	Martine Physics 200	
Steen 19 Proper Proper 19		6	MAR	, , , , , , , , , , , , , , , , , , ,	
1.00 /ring /ring 29	3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	27 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 1	26 et 100	THE STATE OF THE S	
Alamon and a second a second and a second and a second and a second and a second an		"Lynch"	3	Postali	
Hard Sink V. 1 Toom To Be and or survey of the state of t	regris Dear	(Merelaine) Nates Por	Margin Inc. El morates	Arrest Constant	
ne man	Diser 33		Vetes Merels,ins.	1984	
Toglish & Norman 1 10, 1001.00 1/2 1/2 1/2 1/2 1/2 1/2 1/2 1/2 1/2 1/2	MESA	772 M-186	TAMANO.	(Monutal)	ı
Aller State State State State	POWER 4.5	ru radiaana	And all the second	An Cast State Stein	
(Account of (f) they Count) Marie (A. R.C.) County of the county of		- 100 Aug 100 3 9	6 Maril	veren Grante Veren Grante de Arriva Charles Charles Charles De Charles	i
	March Pan	Marian Marian Marian Marian Marian Marian Marian Alapar G05%	Month Market	2006 2007 Judan	
U.S Store U.S.	10000 + 0 - 1800 - 180 -	Massayagan AS		Value State Value	
Alfred Chem. SHUGA SHUGA ONLSOU PENASCO	UNIT	100 A	115456 15 15 154566 115466 15 15 15 15 15 15 15 15 15 15 15 15 15	2530 2537 p:	
Being de Gebrurth 12	ATTENDED TO THE PARTY OF THE PA	Printing Parks Services (Second Printed)	Puston thin A/C	So hop So large,	
100 d Anto-App. Touses witness & 12 app. 12 ap	A Comment of the Comm	Marine Indian	So. (or year and) Shares WYR. FL. AMRMY.	Sa Ray	
Conserved Tenange Trades States	A Land Town	A/C T	ARC	nine con]
The state of the s		Price Schools Shapers - Marchine	AR Ca (Redisors)	TAYLOR UNIT] .
The second secon	THE REAL PROPERTY.	3 4 A/C 3	Traces + 7.00 S A	Topic State IL Males Replace	1
10-31 Inc. 6-16 Cop 79-6 011307 F		5ulf o-0 °o 914103 -48° u o-0	A.R.Co.	25 A 1 A 1 A 1 A 1 A 1 A 1 A 1 A 1 A 1 A	l L
The Section of Section 19 Section	HUERE D 2 II PRODICE MODULA MODULA MODULA MODULA		Topoge & Anne-Fod" 23 West abblant 16-31 Inc. Spig .	243	1
OZPHEN O AGE TEEN OF THE TEEN	FERTINE.	Location	EXHIBIT B of all wells wi dius of proposed	thin a least the well	5
16 16 17 30 18 50 100 100 100 100 100 100 100 100 100	According to the same of the s			il ine. 1 ap 1 ap 1 ap 1 ap 1 ap 1 ap 1 ap 1 ap	
10 0 0 00 Maria	10 3450 TO 3200	A STATE TO SENSO	ri asi.c	Ham.	i)

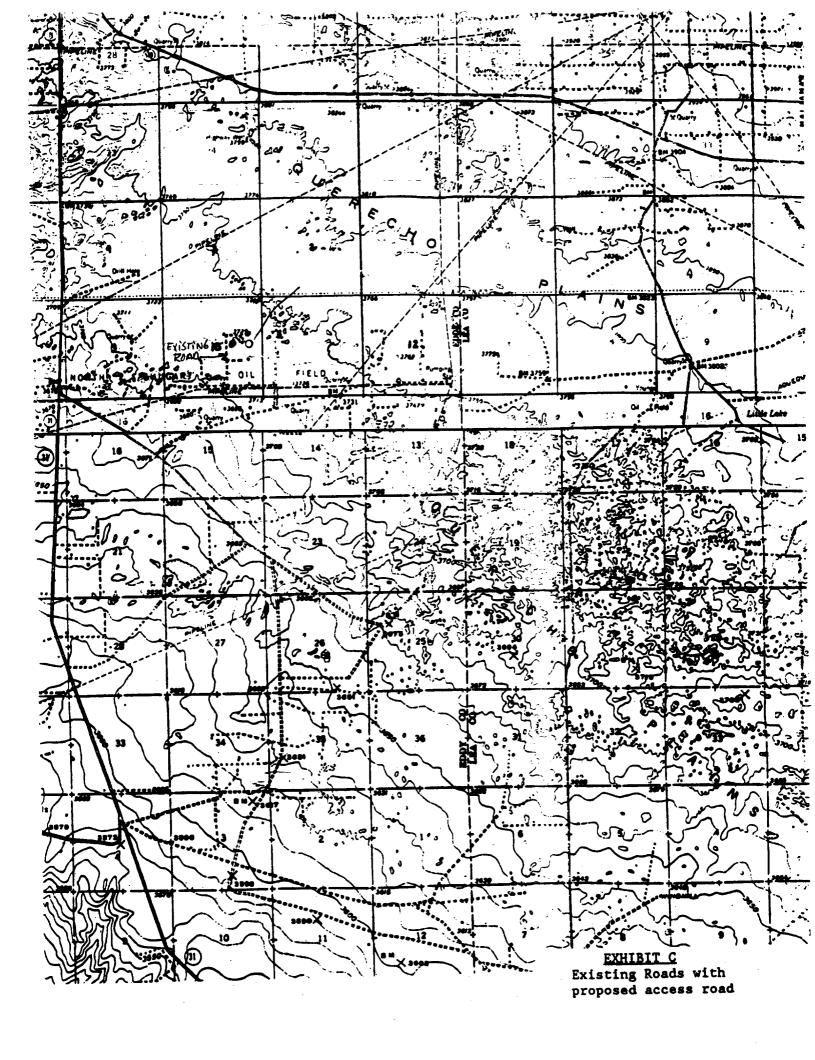

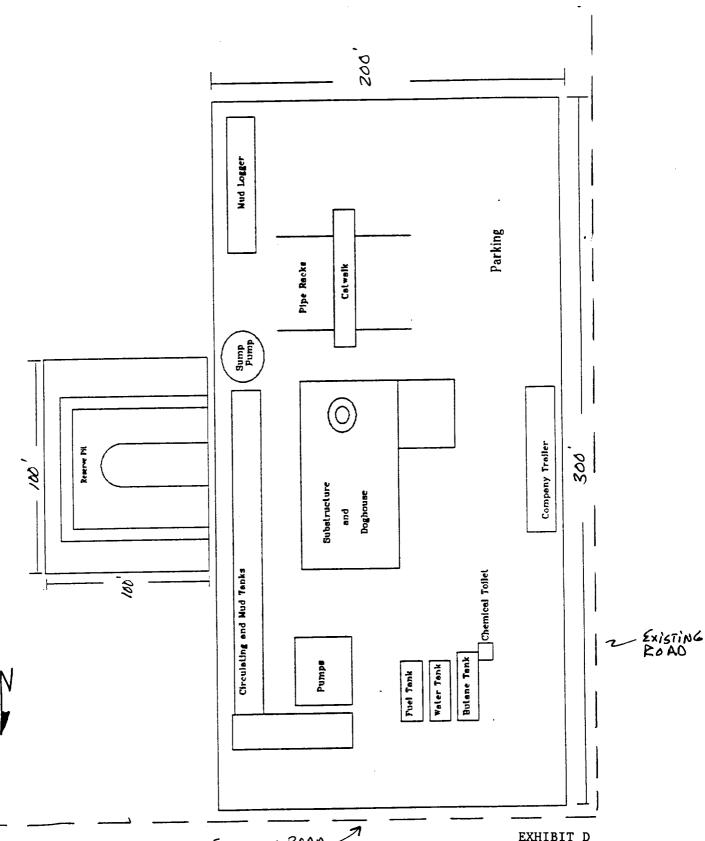

EKISTING ROAD

EXHIBIT D
Relative location of rig components & reserve pit

