Form 3160-3 (August 1999)

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

FORM APPROVED OMB NO. 1004-0136 Expires: November 30, 2000

APPLICATION FOR PERMIT TO DRILI	OR REENTER PEOFIVE	5. Lease Serial		
		- NM 0194		
1a. Type of Work X DRILL REENT	er 2004 1429 - 2 PM	4: 36	lotee or Tribe Name	
1b. Type of Well Oil Well Gas Well Other	Single Zone Multiple Zone		Agreement Name and No.	
2. Name of Operator Energen Resources Corporation	070 raffnington			
3a. Address	3b. Phone No. (include area code	Bloomfie 9. API Well N	eld 3R	
2198 Bloomfield Highway Farmington, New Mexico	, VIV	9. API WEILIN	34532211	
4. Location of Well (Report location clearly and in accordance with any St		1/ 7	ool, or Exploratory	
At surface 685 'FSL 2275 'FEL	AD TO	%∄Basin Fi	ruitland Coal	
At proposed prod. zone	APR 200	11.Sec., T., R.	M., or Blk. and Survey or Area	
	60 00 3 90 00 00		Γ29N,R11W NMPM	
14. Distance in miles and direction from nearest town or post office*	to Alleg	12. Gounty or P		
1 miles northwest of Blo		San/Juan	<u>NM</u>	
	16. No. of Acres in lease	17. Spacing Unit dedic	cated to this well	
property or lease line, ft. 685'	2005 7 5 7		F 140	
(Also to nearest drg. unit line, if any)	280		E 1/2	
18. Distance from proposed location*	19. Proposed Depth	20.BLM/BIA Bond	No. on file	
to nearest well, drilling, completed, applied for, on this lease, ft.				
applied for, on this lease, it. 1150'	2073'			
21. Elevations (Show whether DF, KDB, RT, GL, etc.	22. Approximate date work will start	* 23. Estima	ted duration	
5706	04/01/04		5 days	
			5 days	
	24. Attachments			
The following, completed in accordance with the requirements of Onshore O	il and Gas Order No. 1, shall be attached	to this form:		
Well plat certified by a registered surveyor.	4. Bond to cover the operatio	ns unless covered by	an existing bond on file (see	
2. A Drilling Plan	Item 20 above).	•	· ·	
3. A Surface Use Plan (if the location is on National Forest System Lands,	-	. 44 4		
SUPO shall be filed with the appropriate Forest Service Office).	Such other site specific info authorized officer.	ormation and/or plans	as may be required by the	
				
25. Signuature	Name (Printed/Typed)		Date	
a our homes	Doug Thomas		03/01/04	
Title				
Drilling & Completion Foreman				
Approved by (Signautre)	Name (Printed/Typed)		Date	
			4-14-04	
Title	Office			
ℓ) Λ \wedge				
Application approval does not warrant or certify that the applicant holds ke	gal or equitable title to those rights in the	he subject lease which	h would entitle the applicant to	
conduct operations thereon.		•		
Conditions of approval, if any, are attached.	_			
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a cr States any false, fictitious or fraudulent statements or representations as to an	ime for any person knowlingly and willful ny matter within its jurisdiction.	ly to make to any dep	partment or agency of the United	
*(Instructions on Reverse)			<u> </u>	
*(Instructions on Reverse) HOLD C104 FOR Change in St	. ,	and MC	5	
chara in 8th	atus to Bloom Field #3	uic 100		
HOLD C104 FOR Change In S.				

This action is subject to technical and procedural review pursuant to 43 CFR 3165.8 and appeal pursuant to 43 CFR 3165.4 RIMOCO SUBJECT TO COMPLIANCE WITH ATTACHED SUBJECT TO COMPLIANCE WITH ATTACHED ENERAL FREQUIREMENTS.

District T .PO Box 1980, Hobbs, NM 88241-1980

District II PO Drawer DD, Artesia, NM 88211-0719

District III 1000 Rio Brazos Rd., Aztec, NM 87410

District IV PO Box 2088, Santa Fe. NM 87504-2088

State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION PO Box 2088 Santa Fe. NM 87504-2088

Form C-102 Revised February 21, 1994 Instructions on back

Submit to Appropriate District Office State Lease - 4 Copies Fee Lease - 3 Copies


AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

3045-32211	*Pool Code 71629	POOL Name BASIN FRUITLAND COAL
Property Code		operty Name "Well Number OOMFIELD 3R
'0GRID No. 162928		perator Name *Elevation OURCES CORPORATION 5706
	¹⁰ Surf	ace Location

55. 1505 25056201									
UL or lat no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
0	17	29N	11W		685	SOUTH	2275	EAST	SAN JUAN
	•	11 E	ottom	Hole L	ocation I	f Different	From Surf	ace	
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
	}								
12 Dedicated Acres		2.0.4.000	- //		¹³ Joint or Infill	¹⁴ Consolidation Code	²⁵ Onder No.	h	· • · · · · · · · · · · · · · · · · · ·
	321	0.0 Acre	25 - (6	E/2)		1			

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

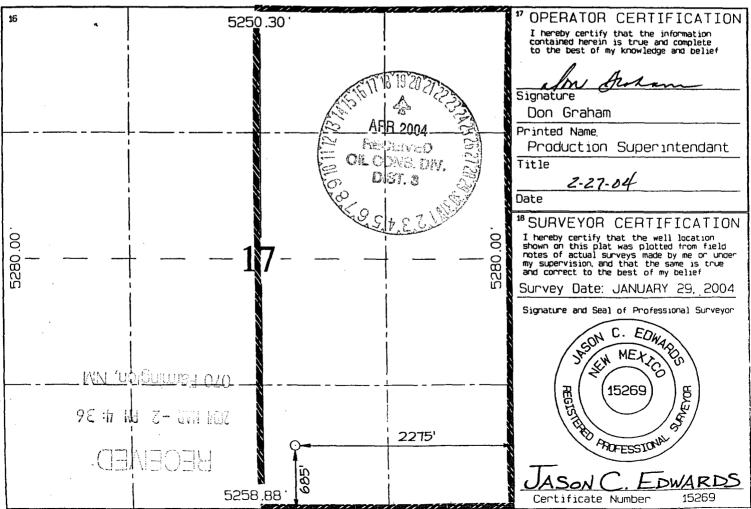

Form 3160-5

UNITED STATES

FORM APPROVED
OMB NO. 1004-0135
Expires January 31, 200-

(September 2001) DEPARTMENT OF THE INTERIOR		OMB NO. 1004-0135 Expires January 31, 2004
BUREAU OF LAND MANAGEMENT		5. Lease Serial No.
SUNDRY NOTICES AND REPORTS ON		IM 019405
Do not use this form for proposals to drill or to abandoned well. Use Form 3160-3 (APD) for su	o re-enter an	5. If Indian, Allottee or Tribe Name
abandoned wen. Ose Form \$100-3 (AFD) for Su	2m# 400 3 AM II: L	
SUBMIT IN TRIPLICATE - Other instructions on	reverse side	7. If Unit or CA/Agreement, Name and/or No
	 	1 NMNM 88304
1. Type of Well Oil Well X Gas Well Other	<u>-</u>	B. Well Name and No.
2. Name of Operator	E 17 18 19 20 E	Bloomfield 3R
•		API Well No.
3a. Address 3b	Phone Not (include aft poods) 505-825-6800 2004	3004532211
	505- <u>\$2</u> 5-6800	Field and Pool, or Exploratory Area
4. Location of Well (Footage, Sec., T., R., M., or Survey Description)	The state of the s	asin Fruitland Coal
685' FSL, 2275' FEL, Sec. 17, T29N, R11W N.M.P.M.	O DIST. 3 DIV.	14. County or Parish, State
		San Juan NM
12. CHECK APPROPRIATE BOX(ES) TO INDICA	- 1/2:12	
	The state of the s	INT, ON OTHER DATA
TYPE OF SUBMISSION	TYPE OF ACTION	
X Notice of Intent	Deepen Production (S	Start/Resume) Water Shut-Off
Alter Casing	Fracture Treat Reclamation	Well Integrity
Subsequent Report Casing Repair	New Construction Recomplete	Other
V Change Plans	Plug and Abandon Temporarily	Abandon Casing change
Final Abandonment Notice Convert to Injection	Plug Back Water Dispos	
	irface locations and measured and true verti d No. on file with BLM/BIA. Required sul multiple completion or recompletion in a ne	cal depths of all pertinent markers and zones beequent reports shall be filed within 30 days we interval, a Form 3160-4 shall be filed once, have been completed, and the operator has 1. ft.)
14. I hereby certify that the foregoing is true and correct Name (Printed/Typed) Roug Thomas THIS SPACE FOR FEDER	Drilling Superinter Date 04/12/04 RAL OR STATE OFFICE USE	ndent
Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warra certify that the applicant holds legal or equitable title to those rights in the subject which would entitle the applicant to conduct operations thereon.	ant or Office lease	

Title 18 U.S.C. Section 1001, and Title 43 U.S.C. Section 1212, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

OPERATIONS PLAN

WELL NAME: Bloomfield #3R

<u>LOCATION:</u> 685' FSL, 2275' FEL, Section 17, T29N, R11, San Juan County, NM FIELD: BASIN FRUITLAND COAL ELEVATION: 5706' GL

FORMATION TOPS:

Nacimiento Surface
Ojo Alamo 578
Kirtland 688
Fruitland 1488

Total Depth 2073

LOGGING PROGRAM:

Open Hole Logs:

Surface to intermediate: None Top of Fruitland to total depth:

Mud Logs:

None

Coring:

None

Natural Gauges:

Every 500' from intermediate TD to total depth

<u>MUD PROGRAM</u>: Fresh water low solids mud from surface to intermediate TD (9.0 PPG). Air/mist from Intermediate casing point to total depth.

CASING PROGRAM:

HOLE SIZE	DEPTH	CSG SIZE	$\overline{\text{WT.}}$	<u>GRADE</u>
8 3/4"	120'	7"	20#	J-55 ST&C
6 1/4"	2073'	4 1/2"	10.5#	J-55 ST&C

TUBING PROGRAM:

2050' 2-3/8" 4.7# J-55

WELLHEAD: 7"x 2000# x 4 1/2" Larkin Fig. 92casing head. 4 1/2" 2000 x 2" tubing head.

BOP SPECIFICATIONS:

An 11" 2000 psi minimum double gate BOP stack (Figure 1) will be used following nipple up of casing head. During air drilling operations, a Shaffer Type 50 or equivalent rotating head will be installed on top of the stack. A 2" nominal, 2000 psi minimum choke manifold will be used. An upper Kelly Cock valve with handle available and drill string valve to fit each drill string will be available on the rig floor during drilling operations.

CEMENTING:

7" surface casing - Cement with 50 sks Class B Cement with ¼# flocele/sk and 2% calcium chloride (59 cu. ft. of slurry, 100% excess to circulate to surface). WOC 12 hrs. Test casing to 600# for 30 minutes.

Texas Pattern Guide Shoe on bottom, with 3 centralizers on first 3 joints.

4 1/2" production casing:

Cement with 220 sks 65/35 Class B Poz with 6% gel, 2% calcium chloride, 10% gilsonite, and ½# flocele/sk. Tail with 100 sks Class B w/2% calcium chloride, 10% gilsonite and ½# flocele/sk. (545 cu. ft. of slurry, 75% excess to circulate to surface). WOC 12 hrs prior to completion. If cement does not circulate, run temperature survey in 8 hrs. to determine TOC.


Cement nose guide shoe on bottom with a self-fill insert float valve on top of shoe joint. 10 bow spring centralizers spaced every 2nd joint off bottom. Two turbolating centralizers at the base of the Ojo Alamo.

OTHER INFORMATION:

- 1) No abnormal temperatures or pressures are anticipated.
- 2) If lost circulation is encountered, sufficient LCM will be added to mud system to maintain well control.
- 3) This gas is dedicated.
- 4) Anticipated pore pressure for the Furitland is 700 psi.

ENERGEN RESOURCES CORPORATION


Mesa Verde / Dakota Well BOP Configuration

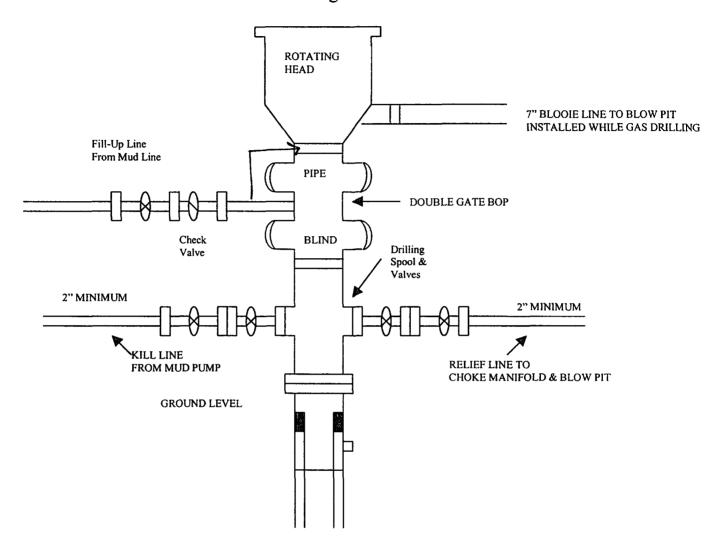

Minimum BOP installation for a Mesaverde well from Surface to Total Depth. 11' Bore, 2000 psi minimum working pressure double Gate BOP to be equipped with blind and pipe rams. A Schaffer Type 50 or equivalent rotating head to be installed on the top of The BOP. All equipment is 2000 psi working pressure or greater.

ENERGEN RESOURCES CORPORATION

Choke Manifold Configuration 2M psi System

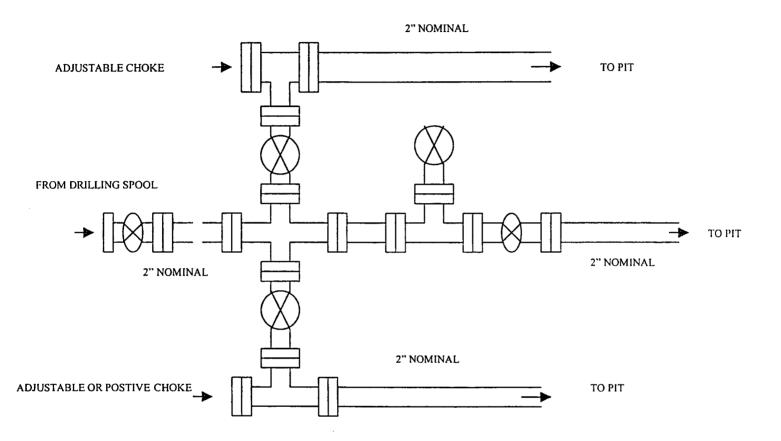

Minimum choke manifold installation from surface to Total Depth. 2" minimum, 2000 psi working pressure equipment with two chokes.

