UNITED STATES DEPARTMENT OF THE INTERIOR

FORM APPROVED OMB No. 1004-0136 Expires November 30, 2000

5. Lease Serial No. NMNM-028226C **BUREAU OF LAND MANAGEMENT** 6. If Indian, Allottee or Tribe Name APPLICATION FOR PERMIT TO DRILL OR REE N/A 7. If Unit or CA Agreement, Name and No. Ja. Type of Work: DRILL ☐ REENTER 8. Lease Name and Well No. Oil Well Gas Well Other Single Zone Multiple Zone Type of Well: J F Bell 5 Name of Operator 9. API Well No. XTO Energy Inc. 30-045-3a. Address 2700 Farmington Ave., Bldg K-1 3b. Phone No. (include area code) 10. Field and Pool, or Exploratory **Basin Fruitland Coal** (505) 324-1090 Farmington, NM 87401 11. Sec., T., R., M., or Blk. and Survey or Area Location of Well (Report location clearly and in accordance with any State requirements.*) 1435' FNL & 770' FEL At surface 10-30n-13w NMPM At proposed prod. zone Same 12. County or Parish 13. State 14. Distance in miles and direction from nearest town or post office* San Juan 5 air miles N of Farmington, NM NM 17. Spacing Unit dedicated to this well Distance from proposed* 16. No. of Acres in lease location to nearest property or lease line, ft. 770' 759.60 E2 (320 acres) (Also to nearest drig. unit line, if any) 20. BLM/BIA Bond No. on file 19. Proposed Depth 18. Distance from proposed location* to nearest well, drilling, completed, 2,388 2,150' BLM nation wide: 57 91 73 applied for, on this lease, ft. 22. Approximate date work will start* 23. Estimated duration 21. Elevations (Show whether DF, KDB, RT, GL, etc.) 2 weeks 5,821' ungraded Upon Approval 24. Attachments The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, shall be attached to this form: 1. Well plat certified by a registered surveyor. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). 2. A Drilling Plan. Operator certification. A Surface Use Plan (if the location is on National Forest System Lands, the Such other site specific information and/or plans as may be required by the SUPO shall be filed with the appropriate Forest Service Office). authorized officer. Comments APD/ROW (GulfTerra) DRILLING OPERATIONS AUTHORIZED ARE This action is subject to technical and SUBJECT TO COMPLIANCE WITH ATTACHED procedural review pursuant to 43 CFR 3165.3 arid appeal pursuant to 43 CFR 3165.4 "GENERAL REQUIREMENTS". cc: BLM (& OCD), Patton 25. Signature Name (Printed/Typed) 4-24-04 **Brian Wood** Title FAX: 505 466-9682 Phone: 505 466-8120 Consultant

Approved by (. Name (Printed/Typed)

Office

Application approval does not warrant or certify the the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon

Conditions of approval, if any, are attached.

Title

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

1625 N. French Dr., Hobbs, N.M. 88240

DISTRICT' 8 1301 W. Grand Ave., Artesia, N.M. 88210

DISTRICT III 1000 Rio Brazos Rd., Aztec, N.M. 87410

State of New Mexico Energy, Minerals & Natural Résources Department

OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-102 Revised June 10, 2003

Submit to Appropriate District Office State Lease - 4 Copies

Fee Lease - 3 Copies

| STRICT IV 120 South St. Fro | oncis Dr., Sa | nta Fe, NM 87 | 7505 | | | | | | | AMEN | DED REPORT |
|--|---------------|--|---------------------------------------|------------------------|-------------------------|---------------------------------------|----------------------|--------------------------------|---------------|-------------|--|
| | | ٧ | VELL LO | OCATIO | N AND AC | REAGE DEDI | CATIO | ON PLA | ΛT | | |
| 2000 API | Number 27 | 297 | 716 | ² Pool Code | | RACINI EDI IIT | | Pool Name | | | |
| Property Co | 3 00 | 201 | 7 71629 BASIN FRUITI | | | | * Well Number | | | | Number |
| 7.2615 | | | J. F. BELL | | | | | | | | 5 |
| 70GRID No. 167067 | | | * Operator Name * XTO ENERGY INC. | | | | | [®] Elevation 5821 | | | |
| | 1 | | | | 10 Surface | · · · · · · · · · · · · · · · · · · · | | | | | |
| UL or lot no. | Section | Township | Range | Lot Idin | Feet from the | North/South line | Feet from the East/W | | East/Wes | line | County |
| H. | 10 | 30-N | 13-W | | 1435 | NORTH | 7 | l | | iT. | SAN JUAN |
| ¹¹ Bottom Hole Location If Different From Surface | | | | | | | | | | | |
| UL or lot no. | Section | Township | Range | Lot Idn | Feet from the | North/South line | Feet fr | rom the | East/Wes | t line | County |
| st Dedicated Acres | | 13 Joint or | Joint or Infill 14 Consolidation Code | | Code | ¹⁰ Order No. | | | 1 | | |
| 320 | | | | | _ | | | | | | |
| | | | | | | ION UNTIL ALL BEEN APPROVE | | | | EN CO | ONSOLIDATED |
| 16 | | | OTR. CORNE 0 3 1/4" (BLM 19 | 3C 2 | 9-34-29 W 612.4' (M) | SEC. CC FD 3 1/ BLM | | i hereby cer | tify that the | information | ERTIFICATION contained herein my invaledge and |
| | W II: 07 | or o | | | MAY 2004 | 770' | (M) E | 7 | 3. | h | lær |
| | 27 MM | 5 | | | | S1872 | 00-4 304.2' | Signature Printed N | | | N WOOD |
| Ĭ | e I | : : | | | | | z 8 | Title | ···- | | SULTANT 14 2004 |
| | | | | 10 | Sec. 27.73 | | | <u> </u> | / | APK. Z | 4, 2004 |

LAT: 36'49'51" N. 1(NAD 27) LONG: 108'11'08" W. (NAD 27)

10

Date QTR. CORNER FD 3 1/4" BC BLM 1952

SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true

NEW MEXIC Date 14827 Certificate Number

XTO Energy Inc.
J F Bell 5
1435' FNL & 770' FEL
Sec. 10, T. 30 N., R. 13 W.
San Juan County, New Mexico

Drilling Program

1. ESTIMATED FORMATION TOPS

| Formation Name | GL Depth | KB Depth | Sub Sea Elevati |
|--------------------|-----------------|----------|-----------------|
| Ojo Alamo Ss | 000' | · 5' | +5,821' |
| Kirtland shale | 121' | 126' | +5,700' |
| Fruitland | 1,451' | 1,456' | +4,370' |
| Pictured Cliffs Ss | 1,876' | 1,881' | +3,945' |
| Lewis Shale | 2,021' | 2,026' | +3,800' |
| Total Depth (TD)* | 2,150' | 2,155' | +3,671' |

^{*} all elevations reflect the ungraded ground level of 5,821'

2. NOTABLE ZONES

| Gas & Oil Zones | Water Zones | <u>Coal Zone</u> |
|-----------------|-------------|------------------|
| Fruitland | Ojo Alamo | Fruitland |
| Pictured Cliffs | Fruitland | |

Water zones will be protected with casing, cement, and weighted mud. Fresh water found while drilling will be recorded. Oil or gas shows will be tested for commercial potential based on the geologist's recommendations.

3. PRESSURE CONTROL

The drilling contract has not yet been awarded, thus the exact BOP system to be used is not yet known. A typical 2,000 psi stack, manifold, and testing procedures are on Page 3.



XTO Energy Inc.
J F Bell 5
1435' FNL & 770' FEL
Sec. 10, T. 30 N., R. 13 W.
San Juan County, New Mexico

4. CASING & CEMENT

| Hole Size | <u>O. D.</u> | Weight (lb/ft) | <u>Grade</u> | e Ag | <u>ge Connectio</u> | n GL Setting De |
|-----------|--------------|----------------|--------------|------|---------------------|-----------------|
| 8-3/4" | 7" | 20 | K-55 | New | ST&C | 160' |
| 6-1/4" | 4-1/2" | 10.5 | K-55 | New | ST&C | 2,150' |

Surface casing will be cemented to the surface with ≈ 50 cubic feet (≈ 43 sacks) Class B + 1/4 lb/sk cello-flake + 2% CaCl₂. Yield = 1.18 cubic feet per sack. Weight = 15.2 pounds per gallon. Volume: \geq 100% excess. A guide shoe and insert float will be used. W. O. C. =12 hours. Surface casing will be tested to 1,500 psi for 30 minutes.

Production casing will be cemented to the surface. Total cement: >437 cubic feet. Volumes are calculated at >100% excess. If cement does not circulate to surface, then a temperature survey will be run to determine the actual cement top as needed. W. O. C. = 12 hours. Test to 2,000 psi.

Lead cement will be ≈ 190 sacks Class B light cement (65% cement/35% Poz with 6% gel) with 5 #/sack gilsonite + 1/4 #/sack Flocele. Yield = 1.99 cu ft/sk. Weight = 12.4 #/gal.

Tail cement will be ≈ 50 sacks 50/50 Class B Poz with 2% gel + 1/4#/sack Flocele + 0.5% Halad-9. Yield = 1.38 cubic feet/sack. Weight = 13.5 #/gallon.


Cement equipment will include a guide shoe, float collar, and 10 centralizers.

5. MUD PROGRAM

| <u>Range</u> | <u>Mud Type</u> | <u>Weight</u> |
|--------------|-----------------|---------------|
| 0' - 160' | Fresh-Spud | 8.4 |
| 160' - TD | LSND | 8.6 |

Lost circulation and absorption material will be on location.



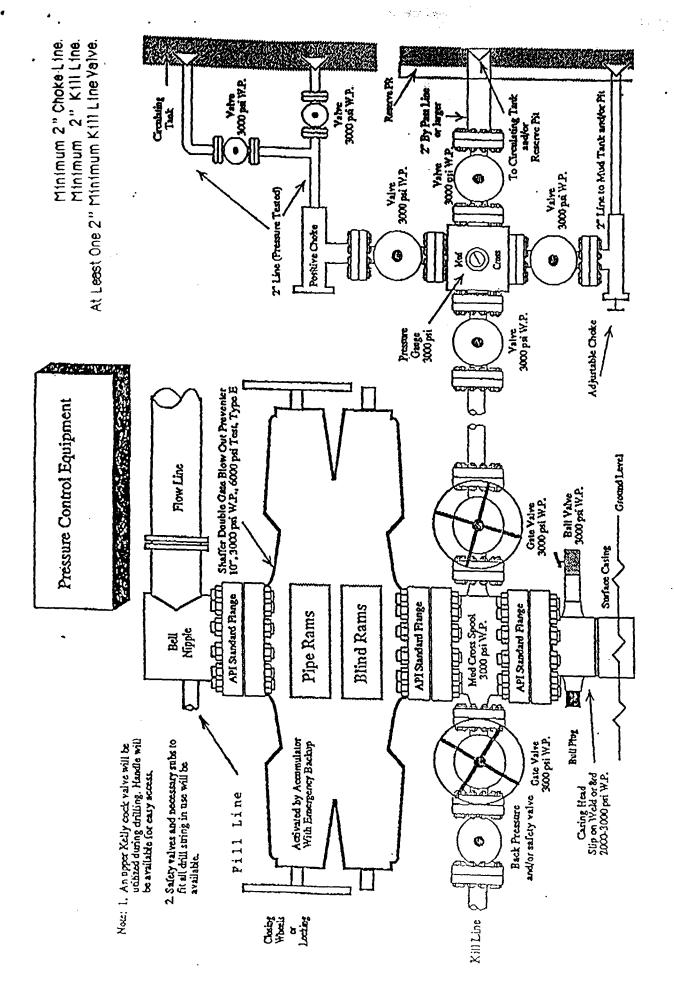

Note: This equipment is designed to meet requirements for a 2-M rating standard per 43 CFR part 3160 (amended). Proper operation and testing of equipment will be caried out per standard. 2,000 psi equipment can be substituted in the drawing to meet minimum requirements per standard.

XTO ENERGY INC. LAT. = 36°49'51" N. J. F. BELL No. 5, 1435' FNL 770' FEL LONG. = 108°11'08" SECTION 10, T30N, R13W, N.M.P.M., SAN JUAN COUNTY, N. M. **NAD 27** GROUND ELEVATION: 5821', DATE: FEBRUARY 19, 2004 CONSTRUCTION ZONE B F 0.2 6 C 0.2 D.H.MARKER AMOCO PROD. – JAMES F. BELL #1 \$ 1012. 1 F 3.4 5 ð. PIT 65' x 45' LAYDOWN N 16'59' E 4 0 Wellhead to Back C 1.3 Wellhead to Front C 0.8 F 2.9 90' 90 REAR 8 <u>_</u> € 5 EXIST. ACCESS C 1.3 ③ A' 9C' (2) C 2.0 Č 1.9 $(240' \times 280') = 1.54 \text{ ACRES}$ 140' x 180' RESERVE PIT DIKE: TO BE 8' ABOVE DEEP SIDE (OVERFLOW - 3' WIDE AND 1' ABOVE SHALLOW SIDE). BLOW PIT: OVERFLOW PIPE HALFWAY BETWEEN TOP AND BOTTOM AND TO EXTEND OVER PLASTIC LINER AND INTO BLOW PIT. Daggett enterprises, Inc. is not liable for underground utilities or pipelines. New Mexico one call to be notified 48 hours prior to excavation or construction. NOTE: ELEV. A-A' 5830 5820 5810 5800 C/L ELEV. B-B' 5830 5820 Box 15068 • Farmington, NM 87401 • (505) 326-1772 • Fax (505) 326-8019 NEW MEXICO L.S. No. 14827 5810 and Oil Fleid Services 5800 ELEV. C-C' C/L 5830 5820 ó

NOTE: CONTRACTOR SHOULD CALL ONE-CALL FOR LOCATION OF ANY MARKED OR UNMARKED BURIED PIPELINES OR CABLES ON WELL PAD AND OR ACCESS ROAD AT LEAST TWO (2) WORKING DAYS PRIOR TO CONSTRUCTION.

5810

5800