PORM APPROVED OMB No. 1004-0136 Expires November 30, 2000 Form 3160-3 (August 1999) UNITED STATES 5. Lease Serial No. DEPARTMENT OF THE INTERIOR NMNM-028226C **BUREAU OF LAND MANAGEMENT** 6. If Indian, Allottee or Tribe Name APPLICATION FOR PERMIT TO DRILL OR REENTER N/A 7. If Unit or CA Agreement, Name and No. 1a. Type of Work: **ORILL** ☐ REENTER 8. Lease Name and Well No. Oil Well Gas Well Other Single Zone ☐ Multiple Zone JFBell 6 2. Name of Operator 9. API Well No. XTO Energy Inc. 30-045-3a. Address 2700 Farmington Ave., Bldg K-1 3b. Phone No. (include area code) 10. Field and Pool, or Exploratory **Basin Fruitland Coal** Farmington, NM 87401 (505) 324-1090 11. Sec., T., R., M., or Blk. and Survey or Area Location of Well (Report location clearly and in accordance with any State requirements.*) 880' FSL & 1020' FEL At surface ho10-30n-13w NMPM At proposed prod. zone Same 12. County or Parish 13. State 14. Distance in miles and direction from nearest town or post office* San Juan NM 5 air miles N of Farmington, NM Distance from proposed* 16. No. of Acres in lease 17. Spacing Unit dedicated to this well location to nearest property or lease line, ft. 880' E2 (320 acres) 759.60 (Also to nearest drig. unit line, if any) 20. BLM/BIA Bond No. on file Distance from proposed location* to nearest well, drilling, completed, 19. Proposed Depth 95'* 2.150 **BLM** nation wide: 57 91 73 applied for, on this lease, ft. 21. Elevations (Show whether DF, KDB, RT, GL, etc.) 22. Approximate date work will start* 23. Estimated duration 2 weeks 5,800' ungraded **Upon Approval** 24. Attachments The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, shall be attached to this form: 1. Well plat certified by a registered surveyor. 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). 2. A Drilling Plan. Operator certification. 3. A Surface Use Plan (if the location is on National Forest System Lands, the Such other site specific information and/or plans as may be required by the SUPO shall be filed with the appropriate Forest Service Office). authorized officer. **Comments** *XTO's J F Bell 1 E (Dakota well) APD/ROW (GulfTerra) DRILLING OPERATIONS AUTHORIZED ARE SUBJECT TO COMPLIANCE WITH ATTACHED 'GENERAL REQUIREMENTS". his action is subject to technical and

procedural review pursuant to 43 CFA 3485. and appeal pursuant to 43 CFR 3185.4

cc: BLM (& OCD), Patton 4-25-04

25. Signature Title

Brian Wood

Name (Printed/Typed)

Consultant Phone: 505 466-8120 FAX: 505 466-9682 Approved by Name (Printed/Typed)

Title Office

Application approval does not warrant or certify the the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

DISTRICT I 1625 N. French Dr., Hobbs, N.M. 88240

DISTRICT II 1301 W. Grand Ave., Artesia, N.M. 88210

DISTRICT III 1000 Rio Brazos Rd., Aztec, N.M. 87410

State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 87505 Form C-102 Revised June 10, 2003

Submit to Appropriate District Office State Lease — 4 Copies

Fee Lease - 3 Copies


DISTRICT IV
1220 South St. Francis Dr., Santa Fe, NM 87505

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

30:045-32328			Pool Code		³ Pool Name				
30:04	515	6360	<u> </u>	529		<u>Basin fruit</u>	LAND COA	<u>\L</u>	
⁴ Property Code			⁶ Property Name				⁰ Well Number		leti Number
77.615			J. F. BELL					6	
OGRID No.		Operator Name					* Elevation		
167067			XTO ENERGY INC.				5800		
					¹⁰ Surface	Location			
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Р.	10	30-N	13-W		880	SOUTH	1020	• EAST •	SAN JUAN
			"Botte	om Hole	Location 1	f Different Fro	om Surface		
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
¹² Dedicated Acre	<u>i </u>	1	15 Joint or Ir	l	¹⁴ Consolidation Co	de	¹⁶ Order No.	1	_L
320)								·

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

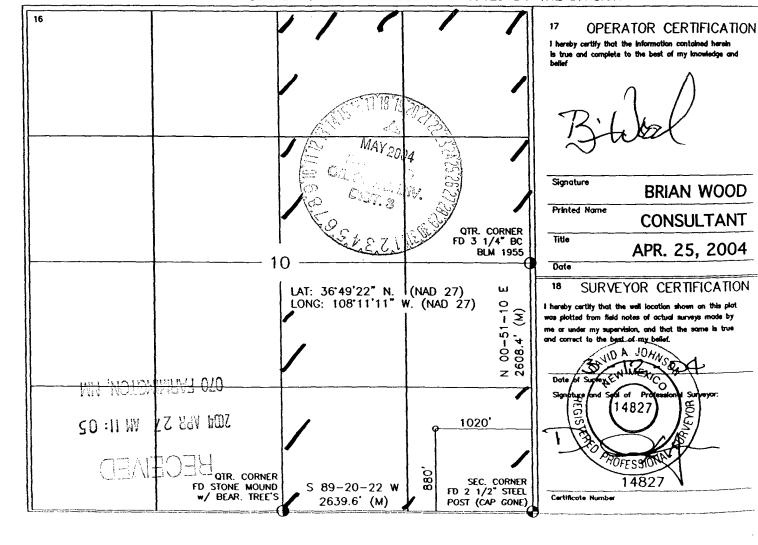

XTO Energy Inc.
J F Bell 6
880' FSL & 1020' FEL
Sec. 10, T. 30 N., R. 13 W.
San Juan County, New Mexico

Drilling Program

1. ESTIMATED FORMATION TOPS

Formation Name	GL Depth	KB Depth	Sub Sea Elevati
Ojo Alamo Ss	000'	5'	+5,800'
Kirtland shale	350'	355'	+5,450'
Fruitland	1,375'	1,380'	+4,425'
Pictured Cliffs Ss	1,805'	1,810'	+3,995'
Lewis Shale	2,000'	2,005'	+3,800'
Total Depth (TD)*	2,150'	2,155'	+3,650'

^{*} all elevations reflect the ungraded ground level of 5,800'

2. NOTABLE ZONES

Gas & Oil Zones	Water Zones	<u>Coal Zone</u>
Fruitland	Ojo Alamo	Fruitland
Pictured Cliffs	Fruitland	

Water zones will be protected with casing, cement, and weighted mud. Fresh water found while drilling will be recorded. Oil or gas shows will be tested for commercial potential based on the geologist's recommendations.

3. PRESSURE CONTROL

The drilling contract has not yet been awarded, thus the exact BOP system to be used is not yet known. A typical 2,000 psi stack, manifold, and testing procedures are on Page 3.



XTO Energy Inc.
J F Bell 6
880' FSL & 1020' FEL
Sec. 10, T. 30 N., R. 13 W.
San Juan County, New Mexico

4. CASING & CEMENT

<u> Hole Size</u>	<u>Q. D.</u>	Weight (lb/ft)	<u>Grade</u>	<u>Age</u>	Connection	GL Setting [<u>)e</u>
8-3/4"	7"	20	K-55 No	ew	ST&C	160'	
6-1/4"	4-1/2"	10.5	K-55 No	ew	ST&C	2,150'	

Surface casing will be cemented to the surface with ≈ 50 cubic feet (≈ 43 sacks) Class B + 1/4 lb/sk cello-flake + 2% CaCl₂. Yield = 1.18 cubic feet per sack. Weight = 15.2 pounds per gallon. Volume: \geq 100% excess. A guide shoe and insert float will be used. W. O. C. =12 hours. Surface casing will be tested to 1,500 psi for 30 minutes.

447

Production casing will be cemented to the surface. Total cement: >437 cubic feet. Volumes are calculated at >100% excess. If cement does not circulate to surface, then a temperature survey will be run to determine the actual cement top as needed. W. O. C. = 12 hours. Test to 2,000 psi.

Lead cement will be ≈ 190 sacks Class B light cement (65% cement/35% Poz with 6% gel) with 5 #/sack gilsonite + 1/4 #/sack Flocele. Yield = 1.99 cu ft/sk. Weight = 12.4 #/gal.

Tail cement will be ≈ 50 sacks 50/50 Class B Poz with 2% gel + 1/4#/sack Flocele + 0.5% Halad-9. Yield = 1.38 cubic feet/sack. Weight = 13.5 #/gallon.


Cement equipment will include a guide shoe, float collar, and 10 centralizers.

5. MUD PROGRAM

<u>Range</u>	<u>Mud Type</u>	<u>Weight</u>
0' - 160'	Fresh-Spud	8.4
160' - TD	LSND	8.6

Lost circulation and absorption material will be on location.



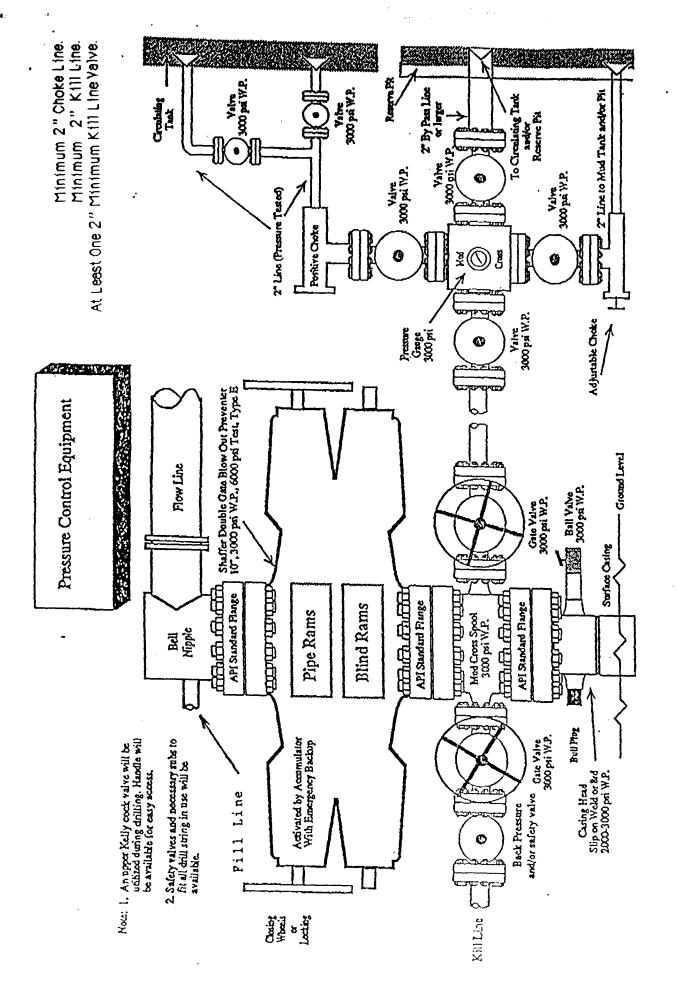

Note: This equipment is designed to meet requirements for a 2-M rating standard per 43 CFR part 3160 (amended). Proper operation and testing of equipment will be caried out per standard. 2,000 psi equipment can be substituted in the drawing to meet minimum requirements per standard.

