Application approval does not warrant or certify the the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

DISTRICT 1 1625 N. French Dr., Hobbs, N.M. 88240

DISTRICT'II 1301 W. Grand Ave., Artesia, N.M. 88210

DISTRICT #1
1000 Rio Brazos Rd., Aztec, N.M. 87410

State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 87505 Form C-102 Revised June 10, 2003

Submit to Appropriate District Office State Lease - 4 Copies

Fee Lease - 3 Copies


☐ AMENDED REPORT

DISTRICT IV 1220 South St. Francis Dr., Santa Fe, NM 87505

## WELL LOCATION AND ACREAGE DEDICATION PLAT

30.045-32327			<sup>1</sup> Pool Code 629 BASIN FRUITI		³Pool Name LAND COAL				
Property Code			<sup>6</sup> Property Name				* Well Number		
2.2615		• J. F. BELL •			5				
7 OCRID No.		*Operator Name					Elevation		
167067			XTO ENERGY INC.				5821		
<sup>10</sup> Surface Location									
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
H.	_10	30-N	13-W	•	1435	NORTH .	770	. EAST.	SAN JUAN
			11 Bott	om Hole	Location	If Different From	om Surface		
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
<sup>12</sup> Dedicated Acres		13 Joint or I	nf#	14 Consolidation Code		<sup>16</sup> Order No.			
320									

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

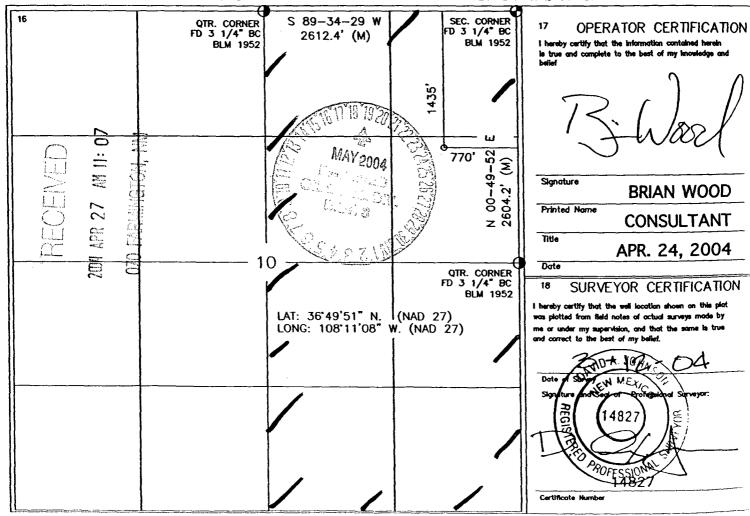

XTO Energy Inc.
J F Bell 5
1435' FNL & 770' FEL
Sec. 10, T. 30 N., R. 13 W.
San Juan County, New Mexico

# **Drilling Program**

## 1. ESTIMATED FORMATION TOPS

Formation Name	GL Depth	KB Depth	Sub Sea Elevati
Ojo Alamo Ss	000'	5'	+5,821'
Kirtland shale	121'	126'	+5,700'
Fruitland	1,451'	1,456'	+4,370'
Pictured Cliffs Ss	1,876'	1,881'	+3,945'
Lewis Shale	2,021'	2,026'	+3,800'
Total Depth (TD)*	2,150'	2,155'	+3,671'

<sup>\*</sup> all elevations reflect the ungraded ground level of 5,821'

## 2. NOTABLE ZONES

Gas & Oil Zones	Water Zones	<u>Coal Zone</u>
Fruitland	Ojo Alamo	Fruitland
Pictured Cliffs	Fruitland	

Water zones will be protected with casing, cement, and weighted mud. Fresh water found while drilling will be recorded. Oil or gas shows will be tested for commercial potential based on the geologist's recommendations.

## 3. PRESSURE CONTROL

The drilling contract has not yet been awarded, thus the exact BOP system to be used is not yet known. A typical 2,000 psi stack, manifold, and testing procedures are on Page 3.



XTO Energy Inc.
J F Bell 5
1435' FNL & 770' FEL
Sec. 10, T. 30 N., R. 13 W.
San Juan County, New Mexico

## 4. CASING & CEMENT

Hole Size	<u> O. D.</u>	Weight (lb/ft)	<u>Grade</u>	<u>Age</u>	<u>Connection</u>	GL Setting De	Ş
8-3/4"	7"	20	K-55 N	ew S	T & C	160'	
6-1/4"	4-1/2"	10.5	K-55 N	ew S	ST&C	2,150'	

Surface casing will be cemented to the surface with  $\approx 50$  cubic feet ( $\approx 43$  sacks) Class B + 1/4 lb/sk cello-flake + 2% CaCl<sub>2</sub>. Yield = 1.18 cubic feet per sack. Weight = 15.2 pounds per gallon. Volume:  $\geq$  100% excess. A guide shoe and insert float will be used. W. O. C. =12 hours. Surface casing will be tested to 1,500 psi for 30 minutes.

Production casing will be cemented to the surface. Total cement: >437 cubic feet. Volumes are calculated at >100% excess. If cement does not circulate to surface, then a temperature survey will be run to determine the actual cement top as needed. W. O. C. = 12 hours. Test to 2,000 psi.

Lead cement will be  $\approx 190$  sacks Class B light cement (65% cement/35% Poz with 6% gel) with 5 #/sack gilsonite + 1/4 #/sack Flocele. Yield = 1.99 cu ft/sk. Weight = 12.4 #/gal.

Tail cement will be  $\approx 50$  sacks 50/50 Class B Poz with 2% gel + 1/4#/sack Flocele + 0.5% Halad-9. Yield = 1.38 cubic feet/sack. Weight = 13.5 #/gallon.


Cement equipment will include a guide shoe, float collar, and 10 centralizers.

#### 5. <u>MUD PROGRAM</u>

<u>Range</u>	<u>Mud Type</u>	<u>Weight</u>
0' - 160'	Fresh-Spud	8.4
160' - TD	LSND	8.6

Lost circulation and absorption material will be on location.



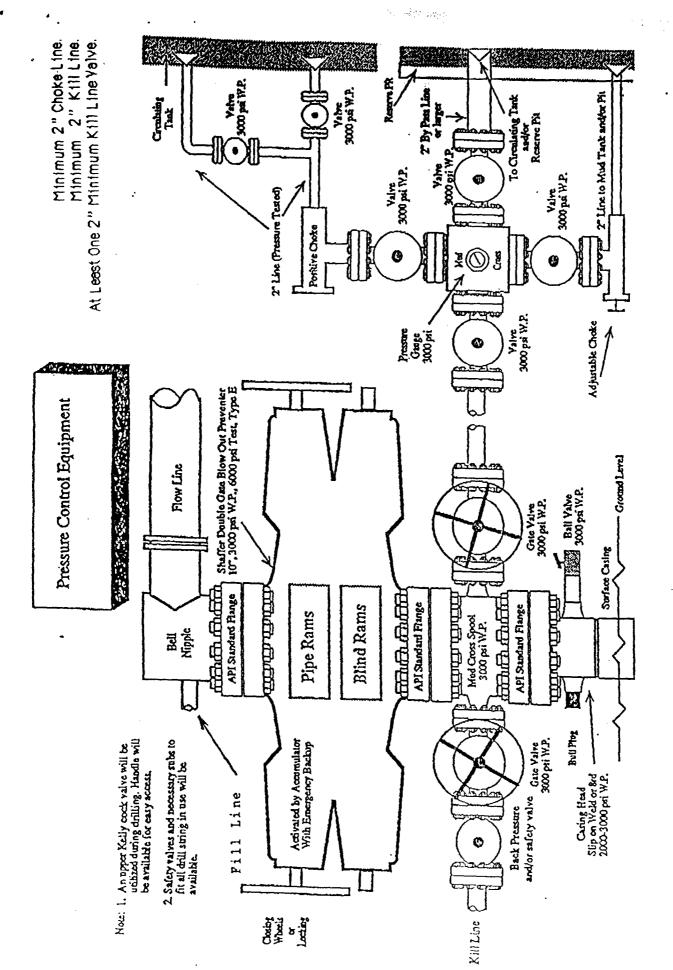

Note: This equipment is designed to meet requirements for a 2-M rating standard per 43 CFR part 3160 (amended). Proper operation and testing of equipment will be caried out per standard. 2,000 psi equipment can be substituted in the drawing to meet minimum requirements per standard.

XTO ENERGY INC. LAT. = 36°49'51" N. 1435' FNL 770' FEL J. F. BELL No. 5, LONG. = 108\*11'08" SECTION 10, T30N, R13W, N.M.P.M., SAN JUAN COUNTY, N. M. GROUND ELEVATION: 5821', DATE: FEBRUARY 19, 2004 **NAD 27** CONSTRUCTION ZONE (5) A F 0.2 6 C 0.2 C D.H.MARKER S 1012 W F 3.4 AMOCO PROD. -JAMES F. BELL #1 107.5 **ਰੈ** Š PIT 65' x 45' LAYDOWN N 16'59' E 4 ① Wellhead to Back C 1.3 Wellhead to Front C 0.8 F 2.9 90' REAR 90 90 \$ € 9 EXIST. ACCESS C 1.3 **③ A**' c' 2 C 2.0 C 1.9  $(240' \times 280') = 1.54 \text{ ACRES}$ 140' x 180' RESERVE PIT DIKE: TO BE 8' ABOVE DEEP SIDE (OVERFLOW - 3' WIDE AND 1' ABOVE SHALLOW SIDE). BLOW PIT: OVERFLOW PIPE HALFWAY BETWEEN TOP AND BOTTOM AND TO EXTEND OVER PLASTIC LINER AND INTO BLOW PIT. DAGGETT ENTERPRISES, INC. IS NOT LIABLE FOR UNDERGROUND UTILITIES OR PIPELINES. NEW MEXICO ONE CALL TO BE NOTIFIED 48 HOURS PRIOR TO EXCAVATION OR CONSTRUCTION. NOTE: ELEV. A-A 5830 5820 5810 5800 C/L ELEV. B-B' 5830 5820 Surveying and Oil Fleid Service-P. O. Box 15068 • Famington, NM 87401 Phore (505) 126-1772 • Far (505) 126-6019 NEW MEXICO L.S. No. 14827 5810 5800 C/L ELEV. C-C' 5830 Daggett 5820 5810 5800 CONTRACTOR SHOULD CALL ONE-CALL FOR LOCATION OF ANY MARKED OR UNMARKED BURIED PIPELINES OR CABLES ON WELL PAD AND OR ACCESS ROAD AT LEAST TWO (2) WORKING DAYS PRIOR TO CONSTRUCTION.