


submitted in lieu of Form 3160-5

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Sundry Notices and Reports on Wells

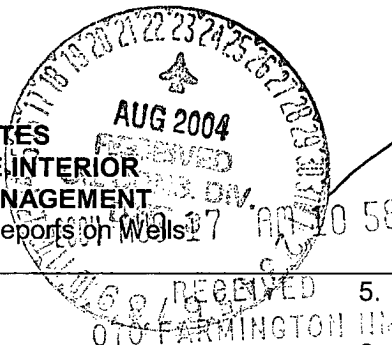

8

1. Type of Well
Oil Well

2. Name of Operator
Playa Minerals & Energy, c/o NMOCD, Aztec District Office

3. Address & Phone No. of Operator
1000 Rio Brazos Road, Aztec, NM 87410 505-334-6178

4. Location of Well, Footage, Sec., T, R, M
1650' FNL & 1825' FWL, Section 14, T31N, R17W

5. Lease Number
14-20-603-2022
6. If Indian, All. or
Tribe Name
Navajo
7. Unit Agreement Name
Horseshoe Gallup Unit
8. Well Name & Number
HSGU #71
9. API Well No.
30-045-13182
10. Field and Pool
Horseshoe Gallup
11. County & State
San Juan County, NM

12. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OTHER DATA

Type of Submission

☐ Notice of Intent

☒ Subsequent Report

☐ Final Abandonment

Type of Action

☒ Abandonment

☐ Recompletion

☐ Plugging Back

☐ Casing Repair

☐ Altering Casing

☐ Other -

☐ Change of Plans

☐ New Construction

☐ Non-Routine Fracturing

☐ Water Shut off

☐ Conversion to Injection

13. Describe Proposed or Completed Operations

A-Plus Well Service Plugged and Abandoned the above well NMSA 1978, Section 13-1-127, Contract Number: 41-521-0700028. Purchase Document: 04-199-000747.

6/24/04 MOL and RU. NU BOP with companion flange and tubing head. Shut in well.

6/25/04 NU BOP, test. Relief line to steel pit. No tubing in well. Tally and PU A+ workstring and round-trip 5-1/2" casing scraper to 994'. TIH with tubing and set 5-1/2" DHS cement retainer at 994'. Sting out of retainer. Establish circulation and circulate well clean with 25 bbls of water. Pressure test casing to 500# for 5 minutes, held OK. Sting into retainer. Attempt to pump below CR, pressured to 1500#. Stung out and back in. Pressured up to 1500#, unable to pump below CR. Plug #1 with CR at 994', spot 39 sxs Type III cement (51 cf) inside casing above CR up to 618' to isolate the Gallup interval. Perforate 2 squeeze holes at 155'. Establish circulation out bradenhead and then pump 6 bbls of water to circulate BH annulus clean. Plug #2 with 49 sxs Type III cement (65 cf) pump down 5-1/2" casing from 155' to surface, circulate good cement out bradenhead. ND BOP. Dig out and cut off wellhead. Found cement down 15' in casing and down 8' in annulus. Mix 12 sxs cement to fill casing and annulus and then install P&A marker.

SIGNATURE William F. Clark Contractor
William F. Clark

July 15, 2004

(This space for Federal or State Office use)

APPROVED BY _____ Title _____

CONDITION OF APPROVAL, if any:

ACCEPTED FOR RECORD
Date _____

AUG 19 2004

OPERATOR

FARMINGTON FIELD OFFICE
BY SM