<u>District I</u> 1625 N. French Cr., Hobbs, NM 88240 District II
100 Rio Brazos Road, Aztec, NM 87410 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For drilling and production facilities, submit to appropriate NMOCD District Office.
For downstream facilities, submit to Santa Fe


Form C-144

June 1, 2004

office

Pit or Below-Gra	de Tank Registration or Clos	sure (
Is pit or below-grade tan	k covered by a "general plan"? Yes X	
Type of action: Registration of a pit o	r below-grade tank \(\bigcap\) Closure of a pit or below-	grade tank 🗵 🔑 💝
)perator: _PEOPLES ENERGY PRODUCTION-TEXAS, LP Telephone: 71.	3-890-3651 e-mail address: dsumrall@pec	orp.com
Address: 909 Fannin Suite 1300 Houston, Tx. 77010		
acility or well name: GARDNER C 5A API #: 30-045-32054 L	J/L or Qtr/Qtr SW/SE Sec26 T32N R <u>9W</u>	
County: San Juan Latitude 36°57'00" Longitude 107°44'47" NA		State Private Indian Of SIN SA
<u>'it</u>	Below-grade tank	
<u>ype:</u> Drilling ⊠ Production □ Disposal □	Volume:bbl Type of fluid:	
Workover ☐ Emergency ☐	Construction material:	<u> </u>
ined 🛮 Unlined 🗀	Double-walled, with leak detection? Yes 🔲 If	not, explain why not.
iner type: Synthetic M Thickness8mil Clay [
it Volume 1100 bbl		
	Less than 50 feet	(20 points)
Depth to ground water (vertical distance from bottom of pit to seasonal high	50 feet or more, but less than 100 feet	(10 points)
vater elevation of ground water.)	100 feet or more X	(0 points)
	Yes	(20 points)
Vellhead protection area: (Less than 200 feet from a private domestic	No X	(0 points)
vater source, or less than 1000 feet from all other water sources.)	NO A	(o points)
Distance to surface water: (horizontal distance to all wetlands, playas,	Less than 200 feet	(20 points)
rigation canals, ditches, and perennial and ephemeral watercourses.)	200 feet or more, but less than 1000 feet	(10 points)
rigation damins, dicords, and percinital and opinional water-oursess,	1000 feet or more X	(0 points)
	Ranking Score (Total Points)	0 Points
If this is a pit closure: (1) attach a diagram of the facility showing the pit's	relationship to other equipment and tanks. (2) Ind	ligate dismosal logation: (shook the ensite her if
	• • • • • • • • • • • • • • • • • • • •	•
your are burying in place) onsite \(\square\) offsite \(\square\) If offsite, name of facility	,	
remediation start date and end date. (4) Groundwater encountered: No 🗵 \	· · · · · · · · · · · · · · · · · · ·	tt. and attach sample results. (5)
Attach soil sample results and a diagram of sample locations and excavation	S	
Additional Comments:		·
·		·
•		
I hereby certify that the information above is true and complete to the best o been/will be constructed or closed according to NMOCD guidelines, Date:		
	2 Signature	Turk
Your certification and NMOCD approval of this application/closure does no	t relieve the operator of liability should the content	
otherwise endanger public health or the environment. Nor does it relieve the regulations.		
Approval:	10	7 /
Approval: DEPUTY OIL & GAS INSTECTOR, DIST. #3	Signature Signature	Date: SEP - 2 2004
	h/	

SW/SE S26, T32N, R9W 665 FSL & 1655' FEL PEOPLES ENERGY PRODUCTION **ELEVATION 6544**' **GARDNER C 5A**

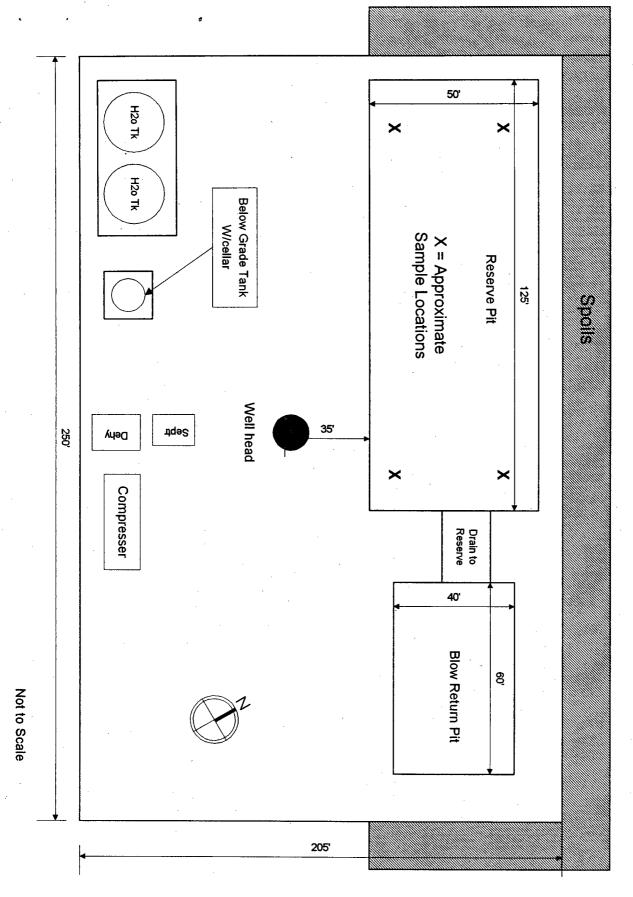

PEOPLES ENERGY PROD. – TX, LP DISCRIPTION OF REMEDIAL ACTION TO CLOSE RESERVE PIT.

Well Name: Gardner C 5A

Location of Well: SW/SE S26, T32N, R9W (O) 665' FSL & 1655' FEL

Lease Serial No.: NM013642

API Well No. 30-045-32054

Remedial Action;

• Sample and analyze reserve pit. (See attached ENVIROTECH lab results.)

- Cut 8 mil liner off at mud line.
- Fill in reserve pit with on site spoils free of trash and other materials.
- Back fill pit in 3' lifts. Walk down each lift with dozer or loader.
- The reserve pit will be backfilled, leveled and contoured so as to prevent any materials from being carried into the watershed. Upon the completion of backfilling, the area will be reseeded with the appropriate seed mixture as specified by the BLM. The seed mix for this project is above 10" of precipitation.
- All trash including pit liner will be hauled away to an approved landfill.

Remediation date: 9/1/04 thru 9/30/04



EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Client:	Peoples Energy	Project #:	04042-003
Sample ID:	Gardner C5A @ 8'	Date Reported:	08-22-04
Laboratory Number:	30156	Date Sampled:	08-18-04
Chain of Custody No:	12716	Date Received:	08-18-04
Sample Matrix:	Mud	Date Extracted:	08-21-04
Preservative:	Cool	Date Analyzed:	08-21-04
Condition:	Cool and Intact	Analysis Requested:	8015 TPH

Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)
Gasoline Range (C5 - C10)	ND	0.2
Diesel Range (C10 - C28)	ND	0.1
Total Petroleum Hydrocarbons	ND	0.2

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments:

Arkansas Loop.

Alexa C. Ogferman

Review Walter



TRACE METAL ANALYSIS

Client:	Peoples Energy	Project #:	04042-003
Sample ID:	Gardner C5A @ 8'	Date Reported:	08-22-04
Laboratory Number:	30156	Date Sampled:	08-18-04
Chain of Custody:	12716	Date Received:	08-18-04
Sample Matrix:	Mud	Date Analyzed:	08-22-04
Preservative:	Cool	Date Digested:	08-21-04
Condition:	Cool & Intact	Analysis Needed:	RCRA Metals

Concentration (mg/Kg)	Det. Limit (mg/Kg)	TCLP Regulatory Level (mg/Kg)
	,	
0.004	0.001	5.0
0.170	0.001	100
ND	0.001	1.0
0.001	0.001	5.0
0.001	0.001	5.0
ND	0.001	0.2
0.001	0.001	1.0
ND	0.001	5.0
	(mg/Kg) 0.004 0.170 ND 0.001 0.001 ND 0.001	Concentration (mg/Kg) Limit (mg/Kg) 0.004 0.001 0.170 0.001 ND 0.001 0.001 0.001 0.001 0.001 ND 0.001 ND 0.001 0.001 0.001 0.001 0.001 0.001 0.001

ND - Parameter not detected at the stated detection limit.

References:

Method 3050B, Acid Digestion of Sediments, Sludges and Soils.

SW-846, USEPA, December 1996.

Method 6010B, Analysis of Metals by Inductively Coupled Plasma Atomic Emmision

Spectroscopy, SW-846, USEPA, December 1996.

Note:

Regulatory Limits based on 40 CFR part 261 subpart C

section 261.24, August 24, 1998.

Comments:

Arkansas Loop.

Analyst

Mistine m Walters



EC, SAR, ESP, CI Analysis

•	•	•	4
Client:	Peoples Energy	Project #:	04042-003
Sample ID:	Gardner C5A @ 8'	Date Reported:	08-22-04
Laboratory Number:	30 156	Date Sampled:	08-18-04
Chain of Custody:	127 16	Date Received:	08-18-04
Sample Matrix:	Mud	Date Extracted:	08-21-04
Preservative:	Cool	Date Analyzed:	08-22-04
Condition:	Cool & Intact		

Analytical				
	Parameter	Result	Units	ļ

Conductivity @ 25° C	9.42	mmhos/cm
Calcium	45.6	mg/Kg
Magnesium	<0.01	mg/Kg
Sodium	915	mg/Kg
Sodium Absorption Ratio (SAR)	37.2	ratio
Exchangeable Sodium Percent (ESP)	34.7	percent
Chloride	386	mg/Kg

Reference:

U.S.E.P.A., 600/4-79-020, "Methods for Chemical Analysis of Water and Wastes", 1983.

Comments:

Arkansas Loop.

Analyst C. Ceferrina

Misteren Walles
Review