


30-045-32310



Scientific
Drilling

Directional Survey Certification

RE: XTO Energy Inc. Operator
Stanolind Gas Com "D" #3 Well Name & No.
San Juan County, NM Location
41DMP0704302 SDI Job No.



I, Judi Moore, having personal knowledge of all the facts, hereby
certify that the attached directional survey run from a measured depth of 235 feet to a
measured depth of 1785 feet is true and correct as determined from all available records.

Judi Moore
Signature

Well Planner
Title

Scientific Drilling International
Company


State of : Wyoming }
County of : Natrona } ss


On this 31st day of August, 2004, before me personally appeared
Judi Moore to me known as the person described in and who executed the foregoing
instrument and acknowledged that (s)he executed the same as his/her free act and deed.

Seal

Jennifer Whitehead
Notary Public

June 1, 2008
My Commission Expires





Scientific Drilling
Rocky Mountain Operations

DIRECTIONAL SURVEY REPORT

Prepared For

**XTO ENERGY INC.
Stanolind Gas Com "D" #3
San Juan County, NM**

***Prepared By:
Judi Moore, Well Planner
Scientific Drilling International
Rocky Mountain District***



Scientific Drilling International
7237 W. Barton Rd., Casper, WY 82604
P.O. Box 1600, Mills, WY 82644
(307) 472-6621
judim@sdicasper.com



Scientific Drilling
Rocky Mountain Operations

Field: San Juan County, NM
Site: Stanolind Gas Com "D" #3
Well: #3
Wellpath: OH
Survey: Survey #1

XTO Energy Inc.

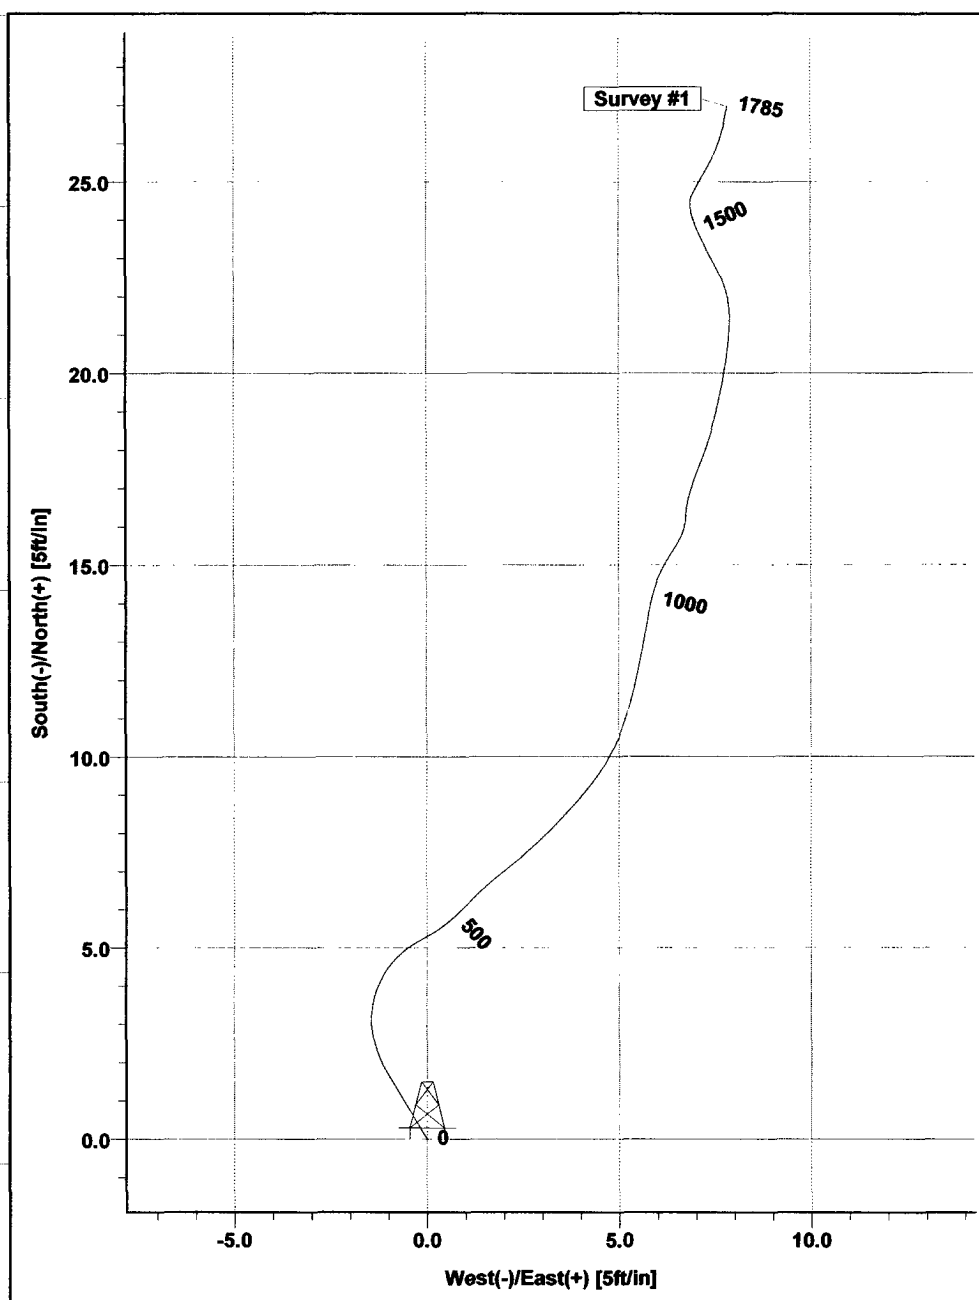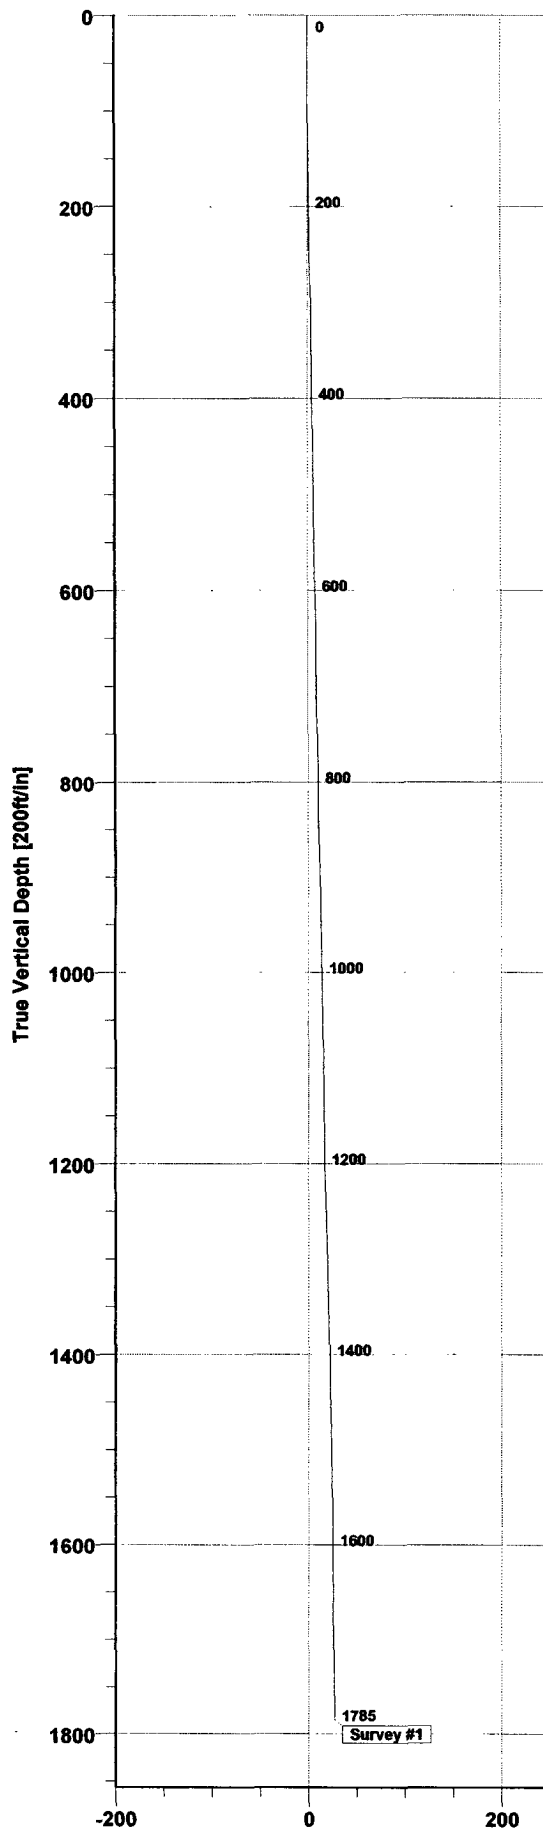

Survey: Survey #1 (#3/OH)	
Created By: Judi Moore	Date: 08/31/2004
BOTTOM HOLE CLOSURE	
28.09 ft. 16.19° Azimuth	

Scientific Drilling

Survey Completion Report

Company: XTO Energy Inc. Field: San Juan County, NM Site: Stanolind Gas Com "D" #3 Well: #3 Wellpath: OH	Date: 08/31/2004 Co-ordinate(NE) Reference: Site: Stanolind Gas Com "D" #3 Vertical (TVD) Reference: SITE 0.0 Section (VS) Reference: Well (0.00N,0.00E,0.00Azi) Survey Calculation Method: Minimum Curvature	Page: 1 Db: Sybase
---	--	-------------------------------------

Survey: Survey #1	Start Date: 07/31/2004
Company: Scientific Drilling	Engineer: B.Bayer/Eiserman
Tool: MWD;	Tied-to: From Surface

Field: San Juan County, NM

Map System: US State Plane Coordinate System 1927 Geo Datum: NAD27 (Clarke 1866) Sys Datum: Mean Sea Level	Map Zone: New Mexico, Western Zone Coordinate System: Site Centre Geomagnetic Model: igrf2000
---	--

Site: Stanolind Gas Com "D" #3
 SHL SEC.17,T32N,R12W 665'FSL & 1800'FWL

Site Position:	Northing:	ft	Latitude:	
From: Lease Line	Easting:	ft	Longitude:	
Position Uncertainty:	0.00 ft		North Reference:	True
Ground Level:	0.00 ft		Grid Convergence:	-0.17 deg

Well: #3	Slot Name:
Well Position:	
+N/-S 0.00 ft	Latitude: 36 58 48.904 N
+E/-W 0.00 ft	Longitude: 108 7 7.202 W
Position Uncertainty: 0.00 ft	

Wellpath: OH	Drilled From: Surface
Current Datum: SITE	Tie-on Depth: 0.00 ft
Magnetic Data: 06/29/2004	Above System Datum: Mean Sea Level
Field Strength: 51700 nT	Declination: 11.16 deg
Vertical Section: Depth From (TVD)	Mag Dip Angle: 63.82 deg
ft	+N/-S
	+E/-W
	ft
	Direction
	deg
1850.00	0.00
	0.00
	0.00

Survey

Meas Depth ft	Inclination deg	Azimuth deg	TVD ft	Vert Sect ft	N/S ft	E/W ft	DLS deg/100ft	CLen ft	CLSD ft	CLSA deg
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
235.00	1.00	328.90	234.99	1.76	1.76	-1.06	0.43	235.00	2.05	328.90
295.00	1.10	351.10	294.98	2.77	2.77	-1.42	0.69	60.00	3.12	332.91
355.00	1.10	19.50	354.97	3.89	3.89	-1.32	0.90	60.00	4.10	341.29
455.00	1.14	63.20	454.95	5.24	5.24	-0.11	0.83	100.00	5.24	358.83
515.00	1.30	43.70	514.94	6.00	6.00	0.90	0.74	60.00	6.07	8.49
575.00	1.30	52.10	574.92	6.91	6.91	1.90	0.32	60.00	7.17	15.40
635.00	1.20	45.80	634.91	7.77	7.77	2.89	0.28	60.00	8.29	20.42
716.00	1.00	40.80	715.89	8.89	8.89	3.96	0.27	81.00	9.73	24.01
816.00	0.90	26.20	815.88	10.26	10.26	4.88	0.26	100.00	11.36	25.43
916.00	1.40	12.00	915.86	12.16	12.16	5.48	0.57	100.00	13.33	24.26
976.00	1.32	8.90	975.84	13.56	13.56	5.74	0.18	60.00	14.72	22.94
1036.00	0.80	22.70	1035.83	14.63	14.63	6.01	0.96	60.00	15.81	22.32
1097.00	0.97	33.60	1096.82	15.45	15.45	6.46	0.39	61.00	16.74	22.68
1158.00	0.70	0.10	1157.82	16.25	16.25	6.74	0.90	61.00	17.59	22.53
1238.00	1.30	22.70	1237.81	17.58	17.58	7.09	0.88	80.00	18.95	21.98
1318.00	1.90	10.60	1317.77	19.72	19.72	7.69	0.86	80.00	21.16	21.30
1398.00	1.00	354.70	1397.75	21.72	21.72	7.87	1.22	80.00	23.10	19.91
1458.00	1.30	331.40	1457.74	22.84	22.84	7.49	0.92	60.00	24.03	18.17
1519.00	0.97	338.80	1518.72	23.92	23.92	6.97	0.59	61.00	24.92	16.25
1579.00	0.50	24.80	1578.72	24.64	24.64	6.90	1.20	60.00	25.58	15.65
1661.00	0.62	31.50	1660.72	25.34	25.34	7.28	0.17	82.00	26.37	16.04
1785.00	1.00	10.50	1784.70	26.98	26.98	7.83	0.38	124.00	28.09	16.19