


## BLOWOUT PREVENTER ARRANGEMENT


3M System per Onshore Oil and Gas Order No. 2 utilizing 3M and 5M Rated Equipment

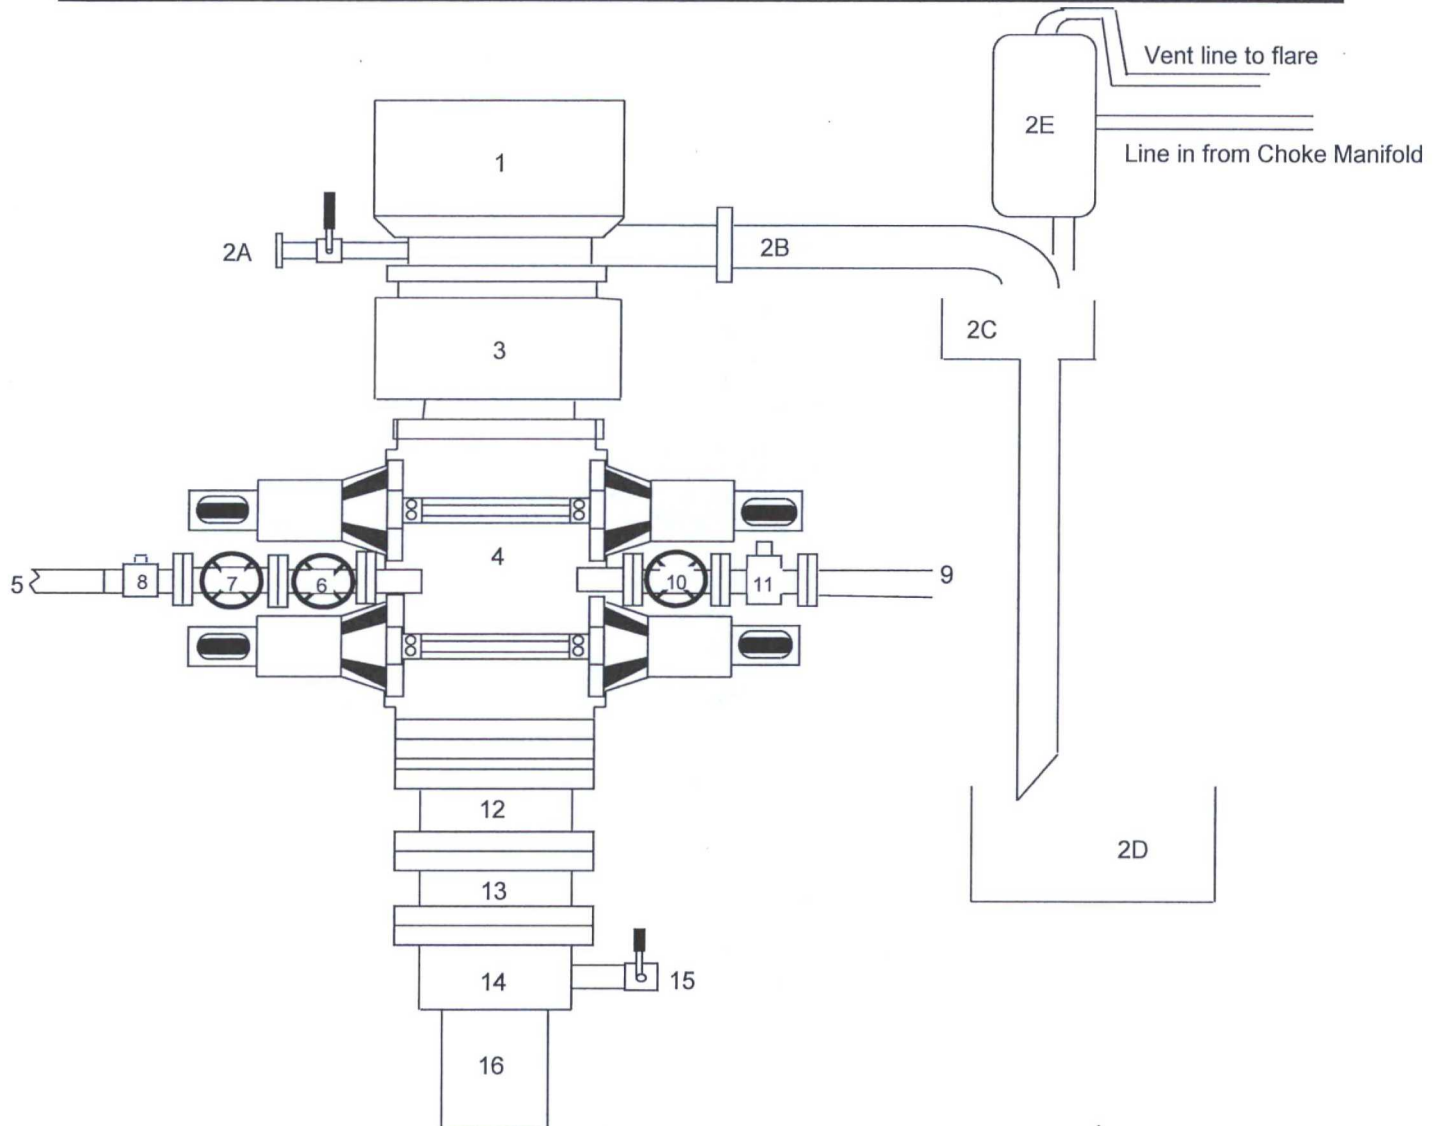

Item	Description
1	Rotating Head (11")
2A	Fill up Line and Valve
2B	Flow Line (8")
2C	Shale Shakers and Solids Settling Tank
2D	Cuttings Bins for Zero Discharge
2E	Rental Mud Gas Separator with vent line to flare and return line to mud system
3	Annular BOP (11", 3M)
4	Double Ram (11", 3M, equipped with Blind Rams and Pipe Rams)
5	Kill Line (2" flexible hose, 3000 psi WP)
6	Kill Line Valve, Inner (2-1/16", 3000 psi WP)
7	Kill Line Valve, Outer (2-1/16", 3000 psi WP)
8	Kill Line Check Valve (2-1/16", 3000 psi WP)
9	Straight Choke Line (3" 3000 psi WP)
10	Choke Line Valve, Inner (3-1/8", 3000 psi WP)
11	Choke Line Valve, Outer, (Hydraulically operated, 3-1/8", 3000 psi WP)
12	Spacer Spool (11" 3M x 3M)
13	Adapter Flange (11" 3M x 5M)
14	Casing Head (11" 5M)
15	Ball Valve and Threaded Nipple on Casing Head Outlet, (2", 5M)
16	Surface Casing

## CHOKE MANIFOLD ARRANGEMENT

3M System per Onshore Oil and Gas Order No. 2 utilizing 3M and 5M Equipment

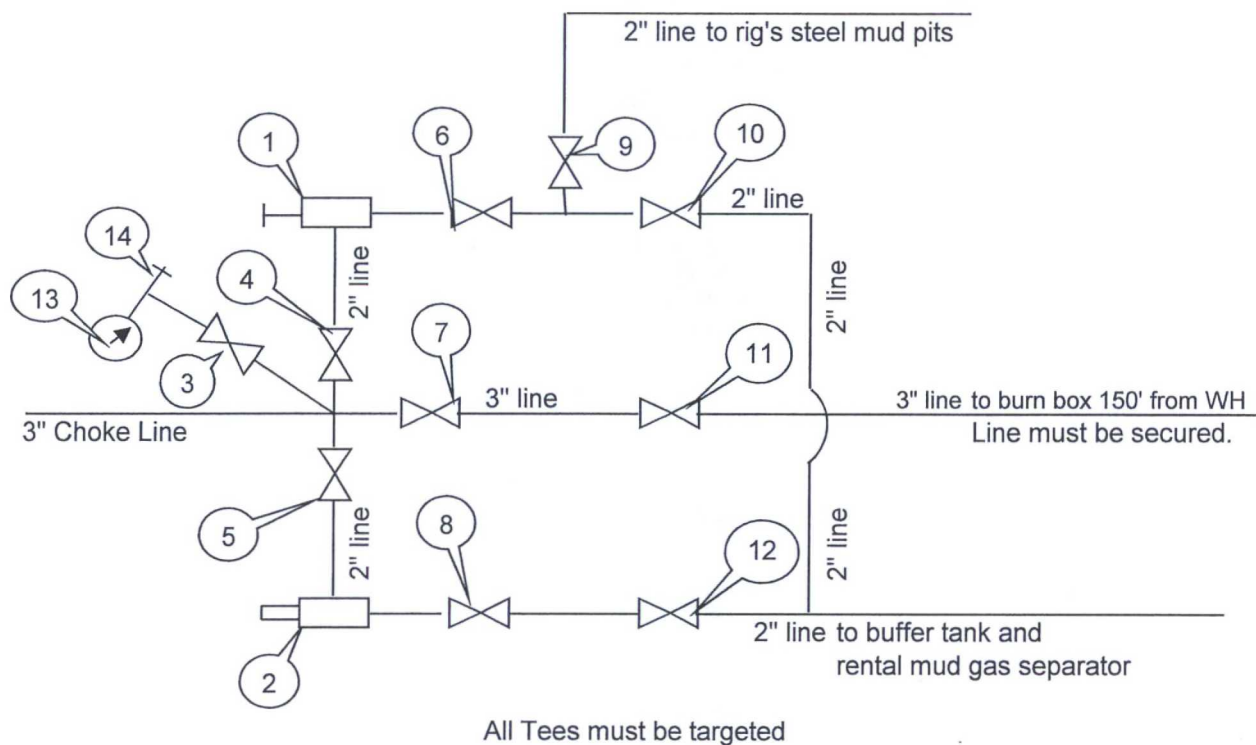

Item	Description
1	Manual Adjustable Choke, 2-1/16", 5M
2	Remote-Controlled Hydraulically-Operated Adjustable Choke, 2-1/16", 10M
3	Gate Valve, 2-1/16" 5M
4	Gate Valve, 2-1/16" 5M
5	Gate Valve, 2-1/16" 5M
6	Gate Valve, 2-1/16" 5M
7	Gate Valve, 3-1/8" 3M
8	Gate Valve, 2-1/16" 5M
9	Gate Valve, 2-1/16" 5M
10	Gate Valve, 2-1/16" 5M
11	Gate Valve, 3-1/8" 3M
12	Gate Valve, 2-1/16" 5M
13	Pressure Gauge
14	2" hammer union tie-in point for BOP Tester

We will test each valve to 3000 psi from the upstream side.

Submitted by:

Cord Denton

Drilling Engineer, Mid-Continent Business Unit, ConocoPhillips Company

Date: 27-April-2015

## **Request for Variance**

### **ConocoPhillips Company**

Lease Number: NM LC 031621B

Well: SEMU #184

Location: Sec. 15, T20S, R37E

Date: 10/16/2013

### **Request:**

ConocoPhillips Company respectfully requests a variance to install a flexible choke line instead of a straight choke line prescribed in the Onshore Order No. 2, III.A.2.b Minimum standards and enforcement provisions for choke manifold equipment. This request is made under the provision of Onshore Order No. 2, IV Variances from Minimum Standard. The rig to be used to drill this well is equipped with a flexible choke line if the requested variance is approved and determined that the proposed alternative meets the objectives of the applicable minimum standards.

### **Justifications:**

The applicability of the flexible choke line will reduce the number of target tees required to make up from the choke valve to the choke manifold. This configuration will facilitate ease of rig up and BOPE Testing.

### **Attachments:**

- Attachment # 1 Specification from Manufacturer
- Attachment # 2 Mill & Test Certification from Manufacturer

### **Contact Information:**

Program prepared by:

James Chen

Drilling Engineer, ConocoPhillips Company

Phone (832) 486-2184

Cell (832) 768-1647

Date: 26 September 2012



### Reliance Eliminator Choke & Kill

This hose can be used as a choke hose which connects the BOP stack to the bleed-off manifold or a kill hose which connects the mud stand pipe to the BOP kill valve.

The Reliance Eliminator Choke & Kill hose contains a specially bonded compounded cover that replaces rubber covered Asbestos, Fibreglass and other fire retardant materials which are prone to damage. This high cut and gouge resistant cover overcomes costly repairs and downtime associated with older designs.

The Reliance Eliminator Choke & Kill hose has been verified by an independent engineer to meet and exceed EUB Directive 36 (700°C for 5 minutes).

Nom. ID		Nom OD		Weight		Min Bend Radius		Max WP	
in.	mm.	in.	mm	lb/ft	kg/m	in.	mm.	psi	Mpa
3	76.2	5.11	129.79	14.5	21.46	48	1219.2	5000	34.47
3-1/2	88.9	5.79	147.06	20.14	29.80	54	1371.6	5000	34.47

#### Fittings

RC4X5055  
RC3X5055  
RC4X5575

#### Flanges

R35 - 3-1/8 5000# API Type 6B  
R31 - 3-1/8 3000# API Type 6B

#### Hammer Unions

All Union Configurations

#### Other

LP Threaded Connection  
Graylock  
Custom Ends



**RELIANCE**

Industrial Products USA, Ltd.

2030 E. 8th Street, Suite B • Greeley, CO 80631


Ph: (970) 346-3751 • Fax: (970) 353-3168 • Toll Free: (866) 771-9739

**T E S T   C E R T I F I C A T E**

Customer: PRECISION DRILLING  
P.O. #: RIG 822  
Invoice #: 27792  
Material: 3 1/2" FIREGUARD  
Description: 3 1/2" X 10'  
Coupling 1: 3 1/2" FLANGE R31  
" Serial:  
" Quality:  
Coupling 2: 3 1/2" FLOATING R31  
" Serial:  
" Quality:  
Working Pressure: 3000  
Test Pressure: 7500  
Duration (mins): 10

Cert No.: 27792

Date: 9/21/2012

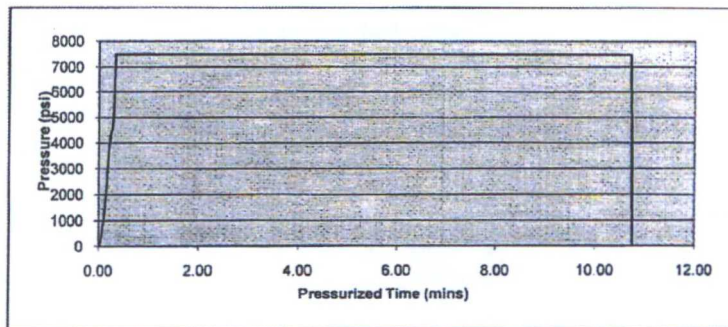

Conducted By: FLORES M.

Test Technician

- ☒ Acceptable  
☐ Not Acceptable

## Closed Loop System Design, Operating and Maintenance, and Closure Plan

ConocoPhillips Company  
Well: SEMU 184  
Location: Section 15, T20S, R37E  
Date: 6/16/2015

ConocoPhillips proposes the following plan for design, operating and maintenance, and closure of our proposed closed loop system for the above named well:

1. We propose to use a closed loop system with steel pits, haul-off bins, and frac tanks for containing all cuttings, solids, mud, water, brine, and liquids. We will not dig a pit, use a drying pad, build an earthen pit above ground level, nor dispose of or bury any waste on location.

All drilling waste and all drilling fluids (fresh water, brine, mud, cuttings, drill solids, cement returns, and any other liquid or solid that may be involved) will be contained on location in the rig's steel pits or in haul-off bins or frac tanks as needed. The intent is as follows:

- We propose to use the rig's steel pits for containing and maintaining the drilling fluids.
- **We propose to remove cuttings and drilled solids from the mud by using solids control equipment and to contain such cuttings and drilled solids on location in haul-off bins.**
- We propose that any excess water that may need to be stored on location will be stored in tanks.

**The closed loop system components will be inspected daily during each tour and any necessary repairs will be made immediately. Any leak in the system will be repaired immediately, any spilled liquids and/or solids will be cleaned immediately, and the area where any such spill occurred will be remediated immediately.**

2. Cuttings and solids will be removed from the location in haul-off bins by an authorized contractor and disposed of at an authorized facility. For this well, we propose the following disposal facility:

R-360 Inc.  
4507 West Carlsbad Hwy, Hobbs, NM 88240,  
P.O. Box 388; Hobbs, New Mexico 88241  
Phone Number: 575.393.1079

The physical address for the plant where the disposal facility is located is Highway 62/180 at mile marker 66 (33 miles East of Hobbs, NM and 32 miles West of Carlsbad, NM).

The Permit Number for R-360 is NM1-006.

A photograph showing the type of haul-off bins that will be used is attached.


3. Mud will be transported by vacuum truck and disposed of at R-360 Inc. at the facility described above.
4. Fresh Water and Brine will be hauled off by vacuum truck and disposed of at an authorized salt water disposal well. We propose the following for disposal of fresh water and brine as needed:
  - Nabors Well Services Company, 3221 NW County Rd, Hobbs, NM 88240; P.O. Box 5208 Hobbs, NM, 88241, Phone Number: 575.392.2577; Permit SWD 092.
  - Basic Energy Services, 2404 W Texas Ave, Eunice, NM 88231; P.O. Box 1869, Eunice, NM 88231 Phone Number: 575.394.2545, Facility located at Hwy 18, Mile Marker 19; Eunice, NM.
  - C & C Transport, LLC, P.O. Box 1352, Hobbs, NM 88241 Phone Number: 575.393.0422
  - Sundance Services, Inc., P.O. Box 1737 Eunice, NM 88231 Phone Number: 575.394.2511




# SPECIFICATIONS

FLOOR: 3/16" PL one piece  
 CROSS MEMBER: 3 x 4.1 channel 16" on center  
 WALLS: 3/16" PL solid welded with tubing top, inside liner hooks  
 DOOR: 3/16" PL with tubing frame  
 FRONT: 3/16" PL slant formed  
 PICK UP: Standard cable with 2" x 6" x 1/4" rails, gusset at each crossmember  
 WHEELS: 10 DIA x 9 long with rease fittings  
 DOOR LATCH: 3 Independent ratchet binders with chains, vertical second latch  
 GASKETS: Extruded rubber seal with metal retainers  
 WELDS: All welds continuous except substructure crossmembers  
 FINISH: Coated inside and out with direct to metal, rust inhibiting acrylic enamel color coat  
 HYDROTESTING: Full capacity static test  
 DIMENSIONS: 22'-11" long (21'-8" inside), 99" wide (88" inside), see drawing for height  
 OPTIONS: Steel grit blast and special paint, Ampliroll, Heil and Dino pickup  
 ROOF: 3/16" PL roof panels with tubing and channel support frame  
 LIDS: (2) 68" x 90" metal rolling lids spring loaded, self raising  
 ROLLERS: 4" V-groove rollers with delrin bearings and grease fittings  
 OPENING: (2) 60" x 82" openings with 8" divider centered on container  
 LATCH: (2) independent ratchet binders with chains per lid  
 GASKETS: Extruded rubber seal with metal retainers

## Heavy Duty Split Metal Rolling Lid

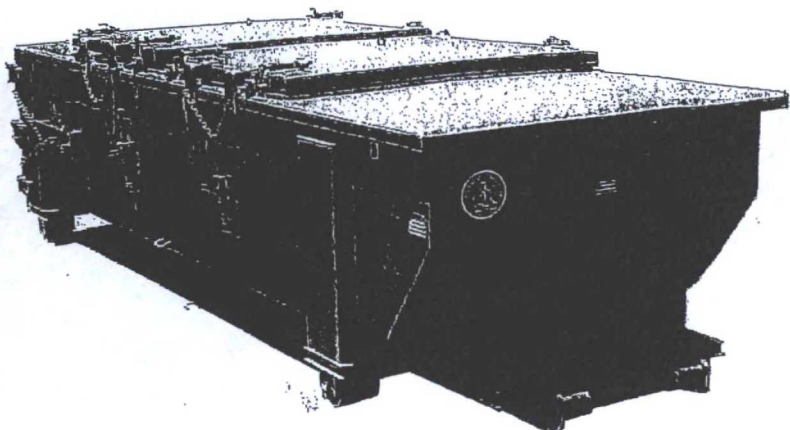

CONT.	A	B
20 YD	41	53
25 YD	53	65
30 YD	65	77

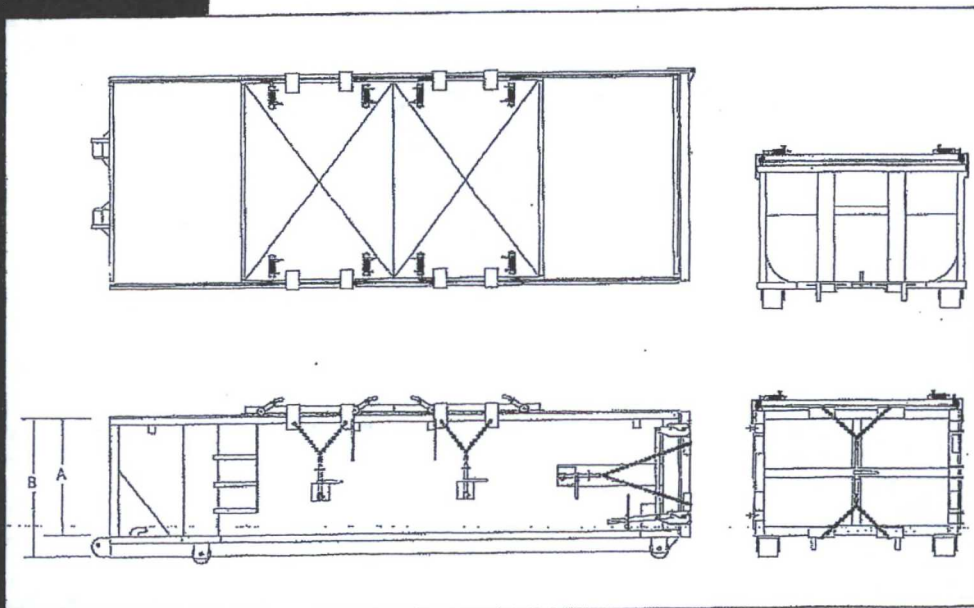

# ConocoPhillips

## Location Schematic and Rig Layout for Closed Loop System

(PICTURE NOT TO SCALE)

NOTE: There are two muster areas (primary & secondary) depending on the prevailing wind direction. The muster area that is furthest upwind/crosswind will be the designated area for briefing and assessing the situation. In the situation that a full evacuation is deemed necessary, all personnel will exit the location on the main access road. Otherwise, if the main access road is blocked off, they will exit on the secondary road or walk off road in the upwind/crosswind direction.

