<u>District I</u> 1625 N French Dr , Hobbs, NM 88240 1301 W Grand Avenue, Artesia, NM 88210 District III
1000 Rio Brazos Road, Aztec, NM 87410 1220 S St Francis Dr , Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

7			$\overline{}$	_
Ĺ	O ?	\supset	0	1

Alternative Method:

Pit, Closed-Loop System, Below-Grade Tank, or											
Proposed Alternative Method Permit or Closure Plan Application											
Type of action: Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Modification to an existing permit Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system,											
below-grade tank, or proposed alternative method											
Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request											
ease be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the vironment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.											
perator:Williams Operating Co, LLC OGRID #: 120782											
Address. PO Box 640 / 721 S Main Aztec, NM 87410											
Facility or well name: Cox Canyon #001B											
API Number:3004530791OCD Permit Number:											
U/L or Qtr/Qtr L Section 16 Township 32N Range 11W County San Juan											
Center of Proposed Design. Latitude <u>36.98200</u> Longitude <u>-108.00047</u> NAD: ☐1927 ☐ 1983											
Surface Owner: 🛮 Federal 🖾 State 🗌 Private 🔲 Trıbal Trust or Indian Allotment											
Pit: Subsection F or G of 19.15 17 11 NMAC											
Temporary. Drilling Workover											
Temporary. ☐ Drilling ☐ Workover ☐ Permanent ☐ Emergency ☐ Cavitation ☐ P&A ☐ Lined ☐ Unlined Liner type: Thicknessmil ☐ LLDPE ☐ HDPE ☐ PVC ☐ OtherRECEIVED											
□ Lined □ Unlined Liner type. Thicknessmil □ LLDPE □ HDPE □ PVC □ Other RECEIVED											
□ String-Reinforced □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □											
Pit: Subsection F or G of 19.15 17 11 NMAC Pit: Subsection F or G of 19.15 17 11 NMAC Permanent Drilling Workover Permanent Emergency Cavitation P&A Lined Unlined Liner type: Thickness mil LLDPE HDPE PVC Other String-Reinforced Liner Seams: Welded Factory Other Volume: bbl L x W XD OIL CONS. DIV. DIST. 3											
Closed-loop System: Subsection H of 19.15.17.11 NMAC											
Closed-loop System: Subsection H of 19.15.17.11 NMAC Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permitted notice of intent)											
Drying Pad Above Ground Steel Tanks Haul-off Bins Other											
Lined Unlined Liner type: Thicknessmil LLDPE HDPE PVC Other											
Liner Seams: Welded Factory Other											
Below-grade tank: Subsection I of 19 15 17.11 NMAC											
Volume: 120 bbl Type of fluid: Produced Water Tank Construction material. Double wall, double bottom, Steel											
Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off											
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☐ Other											
Liner type: Thicknessmil											

Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval

<u> </u>	
Fencing: Subsection D of 19.15 17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet Alternate. Please specify	hospital,
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen □ Netting □ Other □ Monthly inspections (If netting or screening is not physically feasible)	
Signs: Subsection C of 19.15 17.11 NMAC ☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers ☐ Signed in compliance with 19.15.3.103 NMAC	
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15 17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s). Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau consideration of approval. Exception(s) Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	office for
10. Siting Criteria (regarding permitting): 19.15.17 10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the approfice or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of a Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to dry above-grade tanks associated with a closed-loop system.	ppriate district pproval.
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - 1WATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☑ No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map, Visual inspection (certification) of the proposed site	☐ Yes ⊠ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site, Aerial photo; Satellite image	☐ Yes ⊠ No ☐ NA
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No ☑ NA
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ⊠ No
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☒ No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☑ No
 Within an unstable area. Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	☐ Yes ☑ No
Within a 100-year floodplain FEMA map	☐ Yes ☑ No

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15 17 9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.										
Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC										
☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15 17.12 NMAC ☐ Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19 15.17.13 NMAC	ince Plan - based upon the appropriate requirements of 19.15 17.12 NMAC									
nd 19 15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number										
12. Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17 9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are										
attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15 17 9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15 17 10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC										
Operating and Maintenance Plan - based upon the appropriate requirements of 19 15 17 12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 15 17.9 NMAC and 19.15.17.13 NMAC										
Previously Approved Design (attach copy of design) API Number.										
Previously Approved Operating and Maintenance Plan API Number (Applies only to closed-loop system that use										
above ground steel tanks or haul-off bins and propose to implement waste removal for closure)										
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are										
attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17 9 NMAC										
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment										
Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC										
Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19 15 17 11 NMAC										
☐ Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Quality Control/Quality Assurance Construction and Installation Plan										
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC										
Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan										
☐ Emergency Response Plan ☐ Oil Field Waste Stream Characterization										
☐ Monitoring and Inspection Plan										
☐ Erosion Control Plan ☐ Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17 9 NMAC and 19.15.17.13 NMAC										
Proposed Closure: 19 15 17 13 NMAC										
Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.										
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative										
Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only)										
On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial										
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)										
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.										
Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC										
 ☐ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17 13 NMAC ☐ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) 										
 Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC ⊠ Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 15 17.13 NMAC 										
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC										

Waste Rémoval Closure For Closed-loop Systems That Utilize Above Ground Ste Instructions: Please indentify the facility or facilities for the disposal of liquids, dril		
facilities are required.	ing jiutus unu urtii cuttings. Ose uttuchment ij n	tore than two
•	sposal Facility Permit Number	
	sposal Facility Permit Number.	
Will any of the proposed closed-loop system operations and associated activities occur Yes (If yes, please provide the information below) No		rice and operations?
Required for impacted areas which will not be used for future service and operations Soil Backfill and Cover Design Specifications based upon the appropriate reduced Re-vegetation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection	f 19.15.17 13 NMAC	
17. Siting Criteria (regarding on-site closure methods only): 19 15.17 10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the clo provided below. Requests regarding changes to certain siting criteria may require a considered an exception which must be submitted to the Santa Fe Environmental Bi demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for	dministrative approval from the appropriate distr ureau office for consideration of approval. Justi	ict office or may be
Ground water is less than 50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data of	otained from nearby wells	☐ Yes ☐ No ☑ NA
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search, USGS, Data of	otained from nearby wells	☐ Yes ☐ No 図 NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data of	otained from nearby wells	☐ Yes ☐ No ☑ NA
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significance (measured from the ordinary high-water mark). - Topographic map, Visual inspection (certification) of the proposed site	cant watercourse or lakebed, sınkhole, or playa	☐ Yes ⊠ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in Visual inspection (certification) of the proposed site; Aerial photo; Satellite in		☐ Yes ☒ No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less th watering purposes, or within 1000 horizontal feet of any other fresh water well or spring - NM Office of the State Engineer - iWATERS database; Visual inspection (cer	ng, in existence at the time of initial application	☐ Yes ☑ No
Within incorporated municipal boundaries or within a defined municipal fresh water valopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval	-	☐ Yes ☒ No
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visual in	rispection (certification) of the proposed site	☐ Yes ☒ No
Within the area overlying a subsurface mine - Written confirmation or verification or map from the NM EMNRD-Mining and	d Mineral Division	☐ Yes ⊠ No
Within an unstable area - Engineering measures incorporated into the design; NM Bureau of Geology & Society, Topographic map	Mineral Resources; USGS; NM Geological	☐ Yes ☑ No
Within a 100-year floodplain FEMA map		☐ Yes ⊠ No
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the feby a check mark in the box, that the documents are attached. Sting Criteria Compliance Demonstrations - based upon the appropriate requirements of Surface Owner Notice - based upon the appropriate requirements of Surface Owner Notice - based upon the appropriate requirements of Surface Owner Notice - based upon the appropriate of Surface Owner Notice - based upon the appropriate of Surface Owner Notice - based upon the appropriate of a drying pade of Construction/Design Plan of Temporary Pit (for in-place burial of a drying pade of Protocols and Procedures - based upon the appropriate requirements of 19.15.11 of Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection of Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill of Soil Cover Design - based upon the appropriate requirements of Subsection I of Site Reclamation Plan - based upon the appropriate requirements of Subsection I of Site Reclamation Plan - based upon the appropriate requirements of Subsection	ements of 19.15.17.10 NMAC absection F of 19.15.17.13 NMAC operate requirements of 19.15.17.11 NMAC a- based upon the appropriate requirements of 19.17.13 NMAC ements of Subsection F of 19.15 17.13 NMAC besection F of 19.15.17.13 NMAC cuttings or in case on-site closure standards cannot 19.15.17.13 NMAC f 19.15.17.13 NMAC	15.17.11 NMAC

Operator Application Certification:	-
I hereby certify that the information submitted with this application is true, a	occurate and complete to the best of my knowledge and belief
Name (Print) Michael K Lane	Title. Sr. EH & S Specialist
Signature:	Date: 7/9/2010
e-mail address: myke.lane@williams.com	Telephone: 505-634-4219
20. OCD Approval: ☐ Permit Application (including closure plan) ☐ Closure	, , ,
OCD Representative Signature:	Approval Date: 2/7/11
Title:	OCD Permit Number:
Closure Report (required within 60 days of closure completion): Subsections: Operators are required to obtain an approved closure plan parties to the division within 60 days section of the form until an approved closure plan has been obtained and the	rior to implementing any closure activities and submitting the closure report. s of the completion of the closure activities. Please do not complete this
22.	
Closure Method:	Iternative Closure Method Waste Removal (Closed-loop systems only)
Closure Report Regarding Waste Removal Closure For Closed-loop Syst	tems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: , drilling fluids and drill cuttings were disposed. Use attachment if more than
two facilities were utilized.	and the second s
Disposal Facility Name:	Disposal Facility Permit Number.
Disposal Facility Name:	Disposal Facility Permit Number:
Were the closed-loop system operations and associated activities performed of Yes (If yes, please demonstrate compliance to the items below) \(\subseteq \ N \)	
Required for impacted areas which will not be used for future service and op	erations
☐ Site Reclamation (Photo Documentation) ☐ Soil Backfilling and Cover Installation	
Re-vegetation Application Rates and Seeding Technique	
24.	
Closure Report Attachment Checklist: Instructions: Each of the following	ng items must be attached to the closure report. Please indicate, by a check
mark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division)	
Proof of Deed Notice (required for on-site closure)	
☐ Plot Plan (for on-site closures and temporary pits)	
Confirmation Sampling Analytical Results (if applicable))
☐ Waste Material Sampling Analytical Results (required for on-site closs ☐ Disposal Facility Name and Permit Number	ure)
Soil Backfilling and Cover Installation	
Re-vegetation Application Rates and Seeding Technique	
Site Reclamation (Photo Documentation) On-site Closure Location. LatitudeLo	ongitude NAD: □1927 □ 1983
25.	
Operator Closure Certification:	
I hereby certify that the information and attachments submitted with this clos belief. I also certify that the closure complies with all applicable closure requ	sure report is true, accurate and complete to the best of my knowledge and uirements and conditions specified in the approved closure plan.
Name (Print):	
Signature:	Date:
e-mail address.	Telephone:

Cistrict I PO Box 1980, Hobbs, NM 88241-1980

District II PO Drawer DD, Antesia, NM 88211-0719

District III '000 Rio Brazos Rd. Aztec, NM 87410

Oistrict IV PO Box 2088, Santa Fe, NM 87504-2088

API Number

State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION PO Box 2088 Santa Fe, NM 87504-2088

*Pool Code

Form C-102
Revised February 21, 1994
Instructions on back
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies


Pool Name

AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

· `		•			}		1 001 11011	~		,	
30-04 Property	5-3	lesaverde /	Basin	Basin Dakota							
*Property	Code				Well Number						
1703					COX CA	NOVN		1B			
'OGAID N	1 0				*Operator	Name			*Elevation		
12078	2			WILLIA	MS PRODU	CTION COMPA	NY			6871 ·	
				10	Surface	Location		***************************************			
UL or lot no	Section	Township	Range	Lot Ion	Feet from the	North/South line	Feet from the	East/Ne	st line	County	
L	16	32N	11W		1600	SOUTH	WE	ST	SAN JUAN		
		¹¹ Bo	ttom	Hole L	ocation I	f Different	From Surf	асе			
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/Ne	st line	County	
										}	
12 Dedicated Acres		13 Joant or Infal	1 ^M Cons	olidation Code	¹⁵ Order No.		L	.l		.1	
			}				•				
L		<u> </u>			L						

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

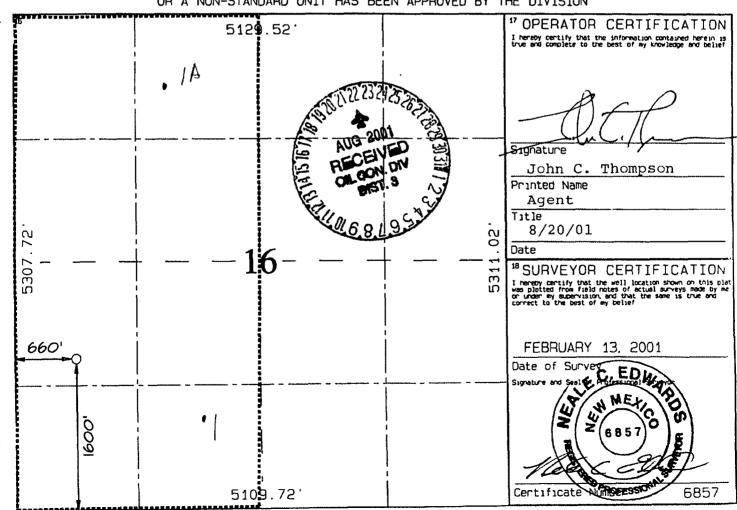


Williams Production Co., LLC San Juan Basin: New Mexico Assets

Production Pit: Buried Double-Wall Steel Tank
Design and Construction Plan

In accordance with Rule 19.15.17 NMAC, the following plan describes the general design and construction (D&C) of production pits using buried double-wall steel tanks on Williams Production Co, LLC (WPX) locations in the San Juan Basin of New Mexico. For those production pits which do not conform to this standard plan, a separate well-specific D&C plan will be developed and utilized.

General Plan Requirements:

- 1. WPX will design and construct a production pit to contain liquids associated with the dehydration and compression of produced natural gas, which will prevent contamination of fresh water resources and protect public health and the environment.
- 2. The pit will be located as close as possible to the well and associated production/process equipment to minimize surface disturbance. Prior to excavation for the pit, topsoil will be stripped and stockpiled on the well location.
- 3. The excavation will have a firm compacted bottom and sidewalls that are stable for the soil conditions.
- 4. The BGT will be placed in the excavation such that there is a minimum 12 inch free board between the surrounding soils and the tank top. Backfilled soils will be carefully compacted to avoid damaging the tank.
- 5. The buried BGT will be constructed of steel with double-walls and double-bottom, welded following appropriate API and industry codes, coated with an epoxy based paint, covered with a steel #9 mesh screen, and equipped with an EFM to monitor high liquid levels and automatically shut off liquid discharges.
- 6. A solid riser pipe will be installed to allow withdrawal of liquids by suction. The riser will draw from the bottom of the BGT, capped when not in use and sloped to the pit to allow drainage of liquids not collected during withdrawal operations.
- 7. A solid riser pipe will be installed between the interstitial space of the double-walls to allow monthly inspection to determine tank integrity.
- 8. The BGT will be protected from run-on by the construction of a compacted earthen berm.
- 9. Fencing will be constructed to protect livestock/wildlife as specified by the federal Surface Management Agency or, if not federal land/minerals, NMOCD rule 17 requirements.
- 10. WPX will post a well sign in accordance with the federal Surface Management Agency and rule 19.15.3.103.

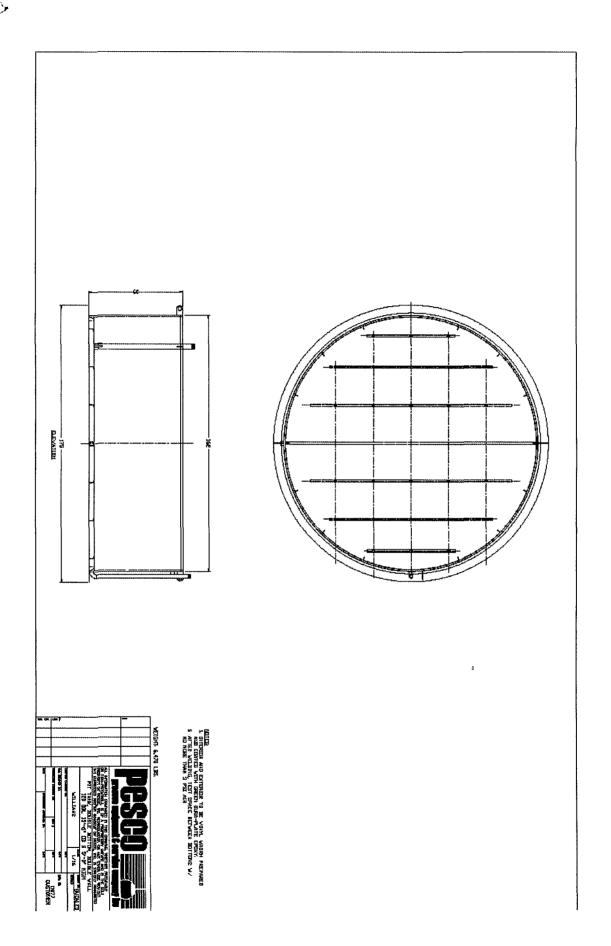

Williams Production Co., LLC San Juan Basin: New Mexico Assets

Production Pit: Buried Double-Wall Steel Tank Operations and Maintenance Plan

In accordance with Rule 19.15.17 NMAC, the following plan describes the general operations and maintenance (O&M)of production pits using subgrade tanks on Williams Production Co, LLC (WPX) locations in the San Juan Basin of New Mexico. For those production pits which do not conform to this standard O&M plan, a separate well specific O&M plan will be developed and utilized.

- 1. WPX will only allow produced liquids meeting the RCRA exemption for O&G wastes to be stored in the SGT. WPX will not discharge or store any hazardous waste as defined under RCRA 40CFR 261 and 19.15.1.7.W(3) NMAC in any temporary pit.
- 2. Produced water will be disposed by evaporation or transport any of the following NMOCD approved facilities depending on the well location: Basin Disposal, Inc in Bloomfield, New Mexico (Permit # NM-01-005), Williams Rosa SWD#1 (Permit # SWD-916), Williams Rosa #94 (Permit # SWD-758), Burlington Resources Jillson SWD#1 (Permit #R10168A), or other NMOCD approved water disposal facilities.
- WPX shall maintain sufficient freeboard for to prevent overtopping. Discharges to the pit
 will be shutoff automatically if the high-level alarm is triggered from the EFM or manually if
 the EFM is not functional.
- 4. Any oil or hydrocarbon collecting on the pit will be removed. Saleable condensate will be returned to the sales tank. Slop oil from compression will be recycled with Safety Kleen, Farmington, NM or Hydropure, Aztec, NM (No Permit Required).
- 5. If the tank integrity is compromised:
 - a. All discharges will be shut off to the pit.
 - All liquids will be removed as soon as possible but no more that within 24 hours of discovery
 - c. WPX will notify and report to NMOCD as follows:
 - i. If the release is less than 25 bbls, the Aztec District Office by phone or email within 48-hours of discovery and repair.
 - ii. If the release is suspected to be greater than 25 bbls, the Aztec District Office and the Environmental Bureau Chief by phone for immediate verbal notification pursuant to 19.15.3.116.B (1)(d).
 - d. Written Spill/Release reports will be submitted on Form C-141 per 19.15.3.116.C NMAC within 15 days to the Aztec District Office.
- 6. Berms around the perimeter of the pit shall be maintained as protection from run-on.
- 7. WPX will inspect the SGT pit monthly. Electronic copies of the inspections will be kept at the WPX San Juan Basin office for a minimum of five years following completion. Copies of the inspections will be available to NMOCD upon request.

Williams Production Co., LLC San Juan Basin: New Mexico Assets

Production Pit: Buried Double-Wall Steel Tank Closure Plan

In accordance with Rule 19.15.17.13 NMAC, the following plan describes the general closure requirements of below-grade tanks (BGT) on Williams Production Co, LLC (WPX) locations in the San Juan Basin of New Mexico. This is WPX's standard closure procedure for all BGTs regulated under Rule 19.15.17 NMAC and operated by WPX. For those closures which do not conform to this standard closure plan, a separate well/pit specific closure plan will be developed and utilized.

Closure Conditions and Timina:

Pursuant to 19.15.17.13 (A) NMAC, WPX will initiate closure of any BGT should any one of these conditions occur:

- The Division requires closure because of imminent danger to fresh water, public health or the environment.
- The integrity of the BGT fails. Notification will be within 48 hours to the Division and closure will be schedule as specified in 19.15.17.12 (A)(5) NMAC.
- WPX chooses to take the BGT out-of-service due to operational needs. Closure under these conditions will be closed within 60 days of cessation of the BGT's operation.
- BGTs installed prior to June 16, 2008 that do not meet the requirements under 19.15.17.11.1(6) NMAC and WPX chooses not to retrofit or upgrade. Closure under these conditions will be completed within five years (by June 16, 2013).

General Plan Requirements:

- Prior to initiating any BGT Closure except in the case of an emergency, WPX will review County Tax Records for the current surface owner of record. The surface owner of record will be notified of the intent to close the BGT by certified mail and a copy of this notification will be included in the closure report. In the case of an emergency, the surface owner of record will be notified as soon as practical.
- 2. Notice of Closure will be given to the Aztec District office between 72 hours and one week of the scheduled closure via email or phone. The notification of closure will include the following:
 - a. Operators Name (WPX)
 - b. Well Name and API Number
 - c. Location (USTR)
- 3. All piping will be rerouted to an alternative produced water storage/disposal location (e.g. surface tanks, temporary frac tank, ...). The well will be temporarily shut in until the rerouting is completed.
- 4. All produced water will be removed from the BGT following discharge-pipe rerouting. Produced water will be disposed at one of the following NMOCD approved facilities depending on the proximity of the BGT site: Rosa Unit SWD #1 (Order: SWD-916, API. 30-039-27055), Rosa Unit #94 (Order: SWD-3RP-1003-0, API: 30-039-23035), Jillson Fed. SWD #001 (Order: R10168/R10168A, API: 30-039-25465), Middle Mesa SWD #001 (Order: SWD-350-0, API: 30-045-27004) and/or Basin Disposal (Permit: NM-01-0005).
- 5 Solids and sludges will be shoveled and /or vacuumed out for disposal at Envirotech (Permit Number NM-01-0011).
- 6. WPX will obtain prior approval from NMOCD to dispose, recycle, reuse, or reclaim the BGT and provide documentation of the disposition of the BGT in the closure report. Steel materials will be recycled or reused as approved by the Division. Fiberglass tanks will be empty, cut up or shredded, and EPA cleaned for disposal as solid waste. Liners materials will be cleaned without soils or contaminated material for disposal as solid waste. Fiberglass tanks and liner materials will meet the conditions of paragraph 1 subsection D of 19.15.9.712 NMAC. Disposal will be at a licensed disposal facility, presently San Juan Regional Landfill operated by Waste Management under NMED Permit SWM-052426.
- 7. Any equipment associated with the BGT that is no longer required for some other purpose, following the closure will be removed from the location.

8. Following removal of the tank and any liner material, a five-point composite sample will be taken of the excavation and tested per 19.15.17.13(E)(4) NMAC as identified in Table 1 Grab samples will be collected from any area that is wet, discolored or showing other evidence of a release. Results will be reported to the Division following receipt from the lab on Form C-141.

Table 1: Closure Criteria for BGTs

Components	Testing Methods	Closure Limits (mg/Kg)
Benzene	EPA SW-846 Method 8021B or 8260B	0.2
BTEX	EPA SW-846 Method 8021B or 8260B	50
TPH	EPA SW-846 Method 418.1(1)	100
Chlorides	EPA SW-846 Method 300.1(1)	250 ⁽²⁾

- (1) Method modified for solid waste.
- $^{(2)}$ If background concentration of Chlorides greater than 250 mg/Kg, then higher concentration will be used for closure.
- 9. If the Division and/or WPX determine there is a release, WPX will comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC.
- 10. Upon completion of the tank removal, the excavation will be backfilled with non-waste earthen material compacted and covered with a minimum of one foot of top soil or background thickness whichever is greater and to existing grade. The surface will be recontoured to match the native grade and prevent ponding.
- 11. For those portions of the former pit area no longer required for production activities, WPX will seed the disturbed areas the first growing season after the pit is covered. Seeding will be accomplished via drilling on the contour whenever practical, or by other Division-approved methods. Vegetative cover will equal 70% of the native perennial vegetative cover (unimpacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintained that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs. Note: If a surface owner agreement requires reseeding or other surface restoration that do not meet the re-vegetation requirements of 19.15.17.13.I NMAC then WPX will submit the proposed alternative with written documentation that the surface owner agrees to the alternative, for Division approval.
- 12. For those portions of the former pit area required for production activities, reseeding will be done at well abandonment, and following the procedure noted above.

Closure Report:

All closure activities will include proper documentation and will be submitted to OCD within 60 days of the BGT closure on a Closure Report using Division Form C-144. The Report will include the following:

- Proof of Closure Notice (surface owner & NMOCD)
- Backfilling & Cover Installation
- Site Diagram with coordinates
- Available Inspection reports

- Confirmation Sampling Analytical Results
- Disposal Facility Name(s) and Permit Number(s)
- Application Rate & Seeding techniques
- Photo Documentation of Reclamation

Hydrogeological Report Williams Production Company, LLC Cox Canyon #001B

Regional Hydrological Context

Referenced Well Location:

The referenced well and pit is located on New Mexico State land within Farmington Field Office (FFO) jurisdiction in San Juan County, New Mexico. This site is positioned in the northeastern portion of the San Juan Basin, an asymmetrical syncline that extends from northwestern New Mexico into southwestern Colorado (Carson National Forest DEIS, 2007). Elevation of the referenced well is approximately 6871 feet MSL.

General Regional Groundwater Description:

As a portion of the San Juan Basin, the FFO region is underlain by sandstone aquifers of the Colorado Plateau. The primary aquifer of potential concern at this location is the Unita-Animas Aquifer, composed primarily of Lower Tertiary rocks in the San Juan Basin. The aquifer consists of the San Jose Formation; the underlying Animas formation and its lateral equivalent, the Nacimiento formation; and the Ojo Alamo Sandstone. The thickness of the Unita-Animas aquifer generally increases toward the central part of the basin. In the northeastern part of the San Juan Basin, the maximum thickness of the aquifer is approximately 3500 feet (USGS, 2001). This aquifer contains fresh to moderately saline water.

Groundwater generally flows toward the San Juan River and it tributaries, where it becomes alluvial groundwater or is discharged to stream flow. Additional information regarding the Hydrogeologic setting can be found in the provided references.

Site Specific Information:

Surface Hydrology: The pit is located on a broad fairly level area mid-slope on the

west out-fall of Lone Tree Mountain. Drainage is to the west

into Farmington Glade, and into the San Juan River.

1st Water Bearing Formation:

Formation Thickness: Underlying Formation:

Depth to Groundwater:

San Jose, Tertiary

Approximately 1,900 ft. Nacimiento, Tertiary

Depth to groundwater is greater than 100 feet bgs. Within a one-

mile radius of this location, there were no 1WATERS wells with recorded water depth information. However, cathodic data associated with the Cox Canyon #001B wellsite and drilled in Jan. 2003 shows a depth to moisture at 280 feet (see Siting

Criteria Map I for details).

References:

Allen, Erin. Undated. Colorado Plateau Aquifers.

http://academic.emporia.edu/schulmem/hydro/TERM%20PROJECTS/2007/Allen/Aquifer.html.

New Mexico Energy, Minerals and Natural Resources Department, Division of Mining and Minerals. Database. 2009. Internet accessed February 2009.

New Mexico Office of the State Engineer. July, 2010. iWaters database. Internet accessed July, 2010.

New Mexico WQCC. 2005. State of New Mexico Water Quality Act and the Water Control Commission Regulations.

United States Department of Agriculture, Forest Service. 2008. Final Environmental Impact Statement for Surface Management of Gas Leasing and Development. Jicarilla Ranger District, Carson National Forest, Rio Arriba County, New Mexico.

United States Department of the Interior Bureau of Land Management. 2003. Final Farmington Resource Management Plan and Final Environmental Impact Statement. Farmington Field Office, Farmington, New Mexico.

United States Geological Survey. 2001. Ground Water Atlas of the United States: Arizona, Colorado, New Mexico and Utah. USGS Publication HA 730-C; http://capp.water.usgs.gov.



New Mexico Office of the State Engineer Water Column/Average Depth to Water

(quarters are 1=NW 2=NE 3=SW 4=SE)

			(4,000.00			•				,				
			(quarte	FS B	re s	m	allest	o larg	est)	(NAD83 UTA	i in meters)		(In feet)	
τ	Sub			Q	O	Q						Depth	Depth Wa	iter
POD Number	basın	Use	County	64	16	4	Sec	Tws	Rng	. X	Y	-	WaterCol	
SJ 90017		סאו	SJ			2	24	3 2N	11W	238546	40960521	105		
SJ 00020		нот	SJ			3	29	32N	11W	231467	40938771	588		
SJ 00021		ИОТ	SJ			3	23	32N	11W	236177	40953041	585		
SJ 00026		סאו	SJ			2	33	32N	11W	233717	4092955'	321		
SJ 01327		STK	SJ	3	2	2	23	32N	11W	237092	40961871	90	50	40
SJ 01380		STK	SJ		2	2	19	32N	11W	230954	4096508	180	155	25
SJ 03865		STK	SJ	2	3	4	20	32N	1 1W	232217	4095306	200		
										Aver	age Depth to	Water:	102 feet	
			•								Minimum	Depth:	50 feet	:
											Maximum	Depth:	155 feet	:

Record Count: 7

PLSS Search:

Township, 32N Range: 11W

*UTM location was derived from PLSS - see Help


The data is furnished by the NMOSE/ISC and is accepted by the recipient with the expressed understanding that the OSE/ISC make no warranties, expressed or implied, concerning the accuracy, completeness, reliability, usability, or suitability for any particular purpose of the data

6/30/10 3.49 PM


Page 1 of 1

WATER COLUMN/ AVERAGE DEPTH TO WATER


Siting Criteria Map I
Water Wells, Cathodic Wells, & Springs
Williams Production Company. LLC
Cox Canyon #001B
T32N, R11W, Section 16 NMPM
San Juan County, New Mexico

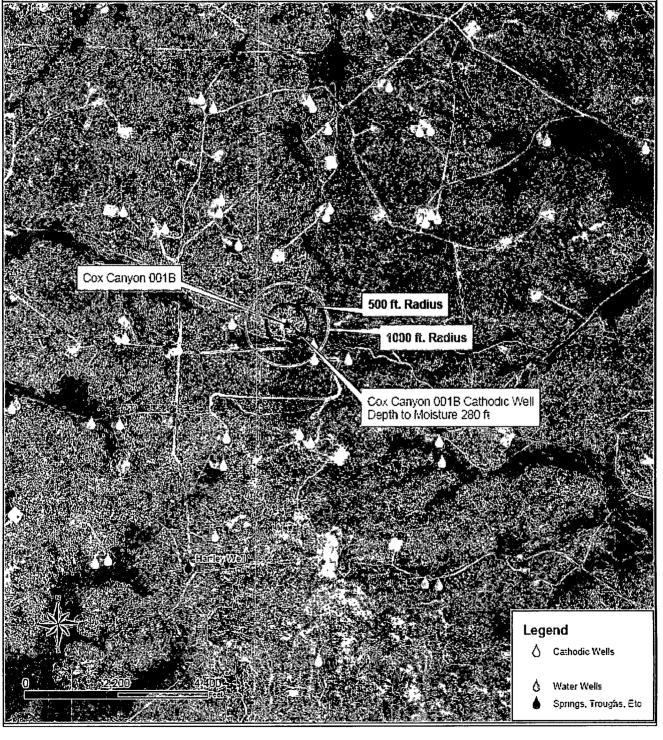

Siting Criteria Map II
Topographic Features
Williams Production Company, LLC
Cox Canyon #001B
T32N, R11W, Section 16 NMPM
San Juan County, New Mexico

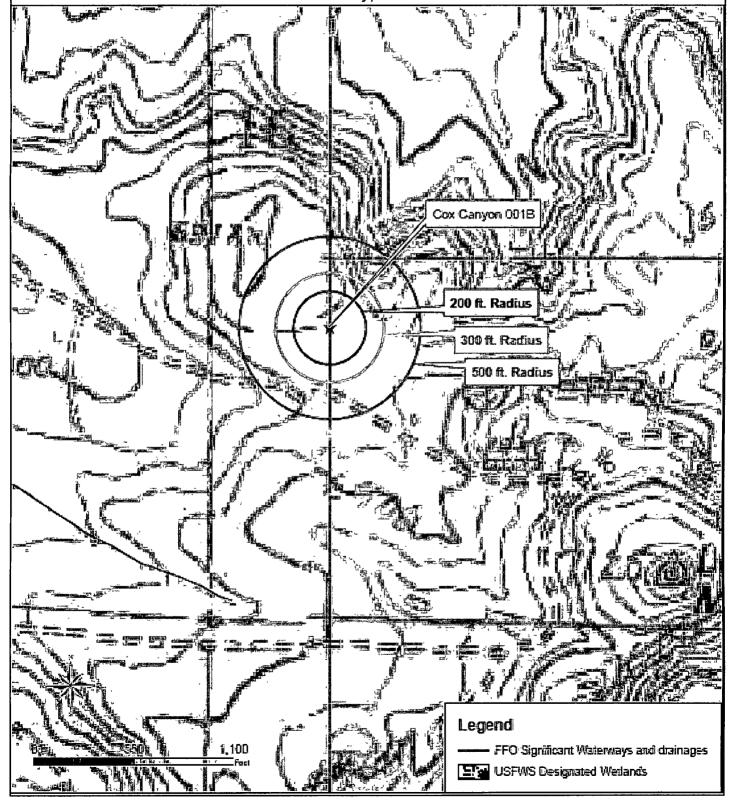

MMQonline Public Version

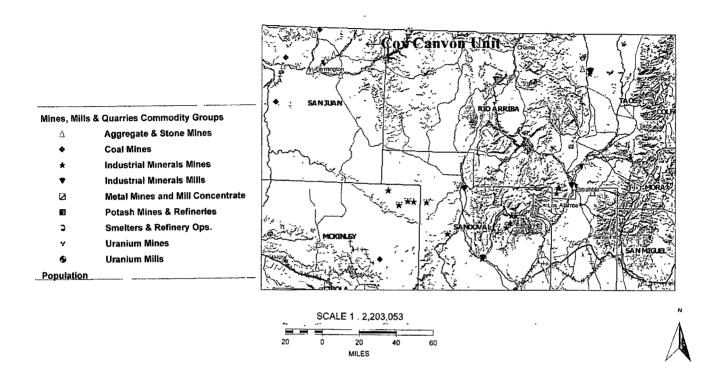

FEMA Map - 100-Year Floodplain:

According to FEMA records, this site is not located in a 100-year floodplain (see attached FEMA map).

Siting Criteria Compliance Demonstrations:

The Cox Canyon 001B well is not located in an unstable area. The location is not situated over a mine or a steep slope. Excavated pit material will not be located within 300 feet of a continuously flowing water course or within 200 feet of any other significant water course, lakebed, sinkhole, or playa lake (see Siting Criteria Map II). The site is not within 500 feet of any reported riparian areas or wetlands (see attached USFWS wetland map); within 500 feet of any private, domestic fresh water well or spring; or within 1000 feet of any other fresh water well or spring (see Siting Criteria Map I). The pit will not be within any incorporated municipal boundaries or defined municipal freshwater well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. The location of the proposed pit is not within 300 feet of any permanent residence, school, hospital, institution, or church.

Page 17 of 18



