

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

HOBBS OGD

OCT 20 2017

RECEIVED

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-03398
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>		5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
2. Name of Operator FORTY ACRES ENERGY, LLC		6. State Oil & Gas Lease No. B-1327
3. Address of Operator 11777B Katy Freeway, Suite #305, Houston, TX 77079		7. Lease Name or Unit Agreement Name MEXICO "W"
4. Well Location Unit Letter Q : 2173 feet from the South line and 330 feet from the East line Section 2 Township 21S Range 35E NMPM County Lea		8. Well Number 3
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3582' DF		9. OGRID Number 371416
		10. Pool name or Wildcat EUMONT; Yates-Seven Rivers-Queen (Oil)

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐
CLOSED-LOOP SYSTEM ☐
OTHER: Deepen well within Eumont Pool, run casing, and stimulate ☒

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Deepen well within the Yates-Seven Rivers-Queen reservoir from 3915' to 4215'.
Run 4" casing to TD. Cement to surface.
Perforate and frac with 40,000# sand,

Spud Date:

est: 11/6/2017

Rig Release Date:

est: 11/10/2017

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

Jessica LaMarro

TITLE

Geologist

DATE

10/16/2017

Type or print name

Jessica LaMarro

E-mail address:

jessica@faenergyus.com

PHONE:

832-706-0051

For State Use Only

APPROVED BY:

[Signature]

TITLE

Petroleum Engineer

DATE

10/20/17

Conditions of Approval (if any):

Mexico W #3

2713' FSL, 330' FEL, Sec 2

T21S, R35E Lea Co., NM

Eumont Field completion Date: 12/29/1954

API # 30 025 03398

Status: Active


8-5/8" @ 330'
Cmt w/ 300 sx,

Activity:

- 12-29-1954: initial completion. Perf interval 3880'-3909'
- 10-01-1981: acid and sand frac
- 05-07-2001: repair tubing leak
- 09-26-2006: ran bailer and swivel

Current
9/20/2016

5-1/2" @ 3915', cmt w/ 300 sxs

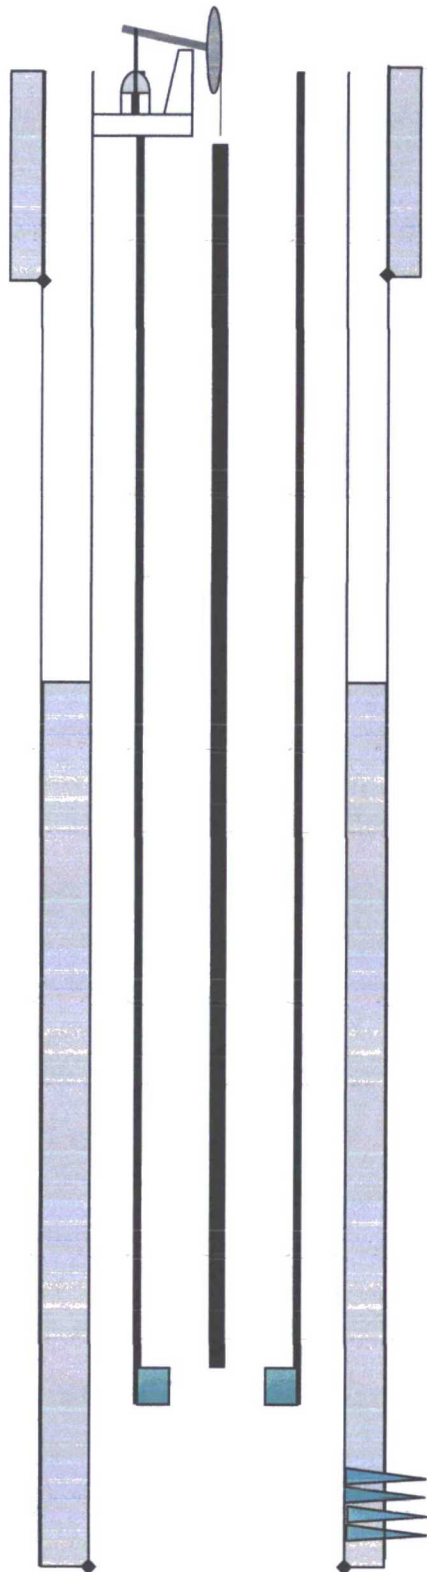

Mexico W #3

2713' FSL, 330' FEL, Sec 2

T21S, R35E Lea Co., NM

Eumont Field completion Date: 12/29/1954

API # 30 025 03398

Status: Active

8-5/8" @ 330'
Cmt w/ 300 sx,

Activity:

- 12-29-1954: initial completion. Perf interval 3880'-3909'
- 10-01-1981: acid and sand frac
- 05-07-2001: repair tubing leak
- 09-26-2006: ran bailer and swivel

5-1/2" @ 3915', cmt w/ 300 sxs

4" @ 4215', circulate cement to surface

Proposed

