District I
1625 N. French Dr , Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S St Francis Dr , Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

8549

Proposed Alternative Method Permit or Closure Plan Application

Type of action:

Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method

Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method

Modification to an existing permit

Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system,

below-grade tank, or proposed alternative method

Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request

Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.

i.
Operator:Fuller Production, Inc. OGRID #:151182
Address:P. O. Box 11327 Midland, Tx 79702
Facility or well name: _Harris #1
API Number:30-045-10264OCD Permit Number:
U/L or Qtr/Qtr _ N Section28 Township31N Range13W County:SAN JUAN
Center of Proposed Design: Latitude36 ⁰ 51' 57.59864" N Longitude108 ⁰ 12' 49.40354" W NAD: □1927 ☑ 1983
Surface Owner: Federal State Private Tribal Trust or Indian Allotment
2. 2910117272
Pit: Subsection F or G of 19.15.17.11 NMAC
Temporary: Drilling Workover
Surface Owner:
□ Lined □ Unlined Liner type: Thicknessmil □ LLDPE □ HDPE □ PVC □ Other
String-Reinforced OIL CONS. DIV. DIST. 3
☐ String-Reinforced Liner Seams: ☐ Welded ☐ Factory ☐ Other Volume: bbl Dimensions: L x W x D x D x D x D x D
1 " The state of t
Closed-loop System: Subsection H of 19.15.17.11 NMAC
Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent)
☐ Drying Pad ☐ Above Ground Steel Tanks ☐ Haul-off Bins ☐ Other
☐ Lined ☐ Unlined Liner type: Thicknessmil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other
Liner Seams: Welded Factory Other
4.
■ Below-grade tank: Subsection I of 19.15.17.11 NMAC
Volume:95bbl Type of fluid:Water
Tank Construction material:Steel
Secondary containment with leak detection Uisible sidewalls, liner, 6-inch lift and automatic overflow shut-off
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☒ Other _Rectangular steel double bottom with leak detection and expanded metal
covering
Liner type: Thicknessmil
5.
Alternative Method:

Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration	n or approvai.
Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hinstitution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet Alternate. Please specify3' Field Fencing with one strand of barbed wire	hospital,
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting OtherExpanded metal covering tank top Monthly inspections (If netting or screening is not physically feasible)	
8. Signs: Subsection C of 19.15.17.11 NMAC □ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers □ Signed in compliance with 19.15.3.103 NMAC	
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau of consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	office for
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate of fice or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying above-grade tanks associated with a closed-loop system.	priate district pproval.
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	⊠ Yes □ No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☑ No ☐ NA
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☑ No ☐ NA
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ⊠ No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ⊠ No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ☒ No
Within a 100-year floodplain	

- FEMA map						
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC						
Previously Approved Design (attach copy of design) API Number: or Permit Number:						
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC						
Previously Approved Design (attach copy of design) API Number:						
Previously Approved Operating and Maintenance Plan API Number:(Applies only to closed-loop system that use above ground steel tanks or haul-off bins and propose to implement waste removal for closure)						
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assersment - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan						
 □ Emergency Response Plan □ Oil Field Waste Stream Characterization □ Monitoring and Inspection Plan □ Erosion Control Plan □ Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC 						
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.						
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)						
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. □ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC □ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC □ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) □ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC □ Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC						

Site Reclamation Plan - based upon the appropriate requirements of Subsection C	3 of 19.15.17.13 NMAC								
16.									
Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Stee Instructions: Please indentify the facility or facilities for the disposal of liquids, drill facilities are required.									
•	sposal Facility Permit Number:								
Disposal Facility Name: Disposal Facility Permit Number:									
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future service and operations? Yes (If yes, please provide the information below) No									
Required for impacted areas which will not be used for future service and operations Soil Backfill and Cover Design Specifications based upon the appropriate req Re-vegetation Plan - based upon the appropriate requirements of Subsection I of Site Reclamation Plan - based upon the appropriate requirements of Subsection I	uirements of Subsection H of 19.15.17.13 NMAC 19.15.17.13 NMAC								
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the clos provided below. Requests regarding changes to certain siting criteria may require acconsidered an exception which must be submitted to the Santa Fe Environmental Budemonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for g	lministrative approval from the appropriate distri reau office for consideration of approval. Justif.	ict office or may be							
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data ob	stained from nearby wells	☐ Yes ☐ No ☐ NA							
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells									
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells									
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site									
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image									
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site									
Within incorporated municipal boundaries or within a defined municipal fresh water w adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval o	_	☐ Yes ☐ No							
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site									
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD-Mining and	d Mineral Division	☐ Yes ☐ No							
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Society; Topographic map	Mineral Resources; USGS; NM Geological	☐ Yes ☐ No							
Within a 100-year floodplain. - FEMA map		☐ Yes ☐ No							
18. On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the fo	ollowing items must be attached to the closure plant	m. Please indicate							
 by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate require Proof of Surface Owner Notice - based upon the appropriate requirements of Su Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) 	ements of 19.15.17.10 NMAC bsection F of 19.15.17.13 NMAC opriate requirements of 19.15.17.11 NMAC - based upon the appropriate requirements of 19.1								
Protocols and Procedures - based upon the appropriate requirements of 19.15.17	.13 INMAC								

☐ Confirmation Sampling Plan (if applicable) - based upon the appropriate rec ☐ Waste Material Sampling Plan - based upon the appropriate requirements of ☐ Disposal Facility Name and Permit Number (for liquids, drilling fluids and ☐ Soil Cover Design - based upon the appropriate requirements of Subsection ☐ Re-vegetation Plan - based upon the appropriate requirements of Subsection ☐ Site Reclamation Plan - based upon the appropriate requirements of Subsection	Subsection F of 19.15.17.13 NMAC drill cuttings or in case on-site closure standards cannot be achieved) H of 19.15.17.13 NMAC I of 19.15.17.13 NMAC
Operator Application Certification: I hereby certify that the information submitted with this application is true, accura	ate and complete to the best of my knowledge and belief.
Name (Print): Powhatay French Title: Vice.	
Signature:	Date: 3-8-11
e-mail address: Telephone: 4	32-683-5661
OCD Approval: ☐ Permit Application (including closure plan) ☐ Closure Pl	an (only) OCD Conditions (see attachment)
OCD Representative Signature: Branslan Douell.	Approval Date: <u>4-18-//</u>
Title: Enviro/spec	OCD Permit Number:
Closure Report (required within 60 days of closure completion): Subsection Instructions: Operators are required to obtain an approved closure plan prior to The closure report is required to be submitted to the division within 60 days of the section of the form until an approved closure plan has been obtained and the closure plan has been obtained.	o implementing any closure activities and submitting the closure report. The completion of the closure activities. Please do not complete this
	Closure Completion Date:
22. Closure Method: Waste Excavation and Removal ☐ On-Site Closure Method ☐ Alterna ☐ If different from approved plan, please explain.	tive Closure Method Waste Removal (Closed-loop systems only)
23. Closure Report Regarding Waste Removal Closure For Closed-loop Systems Instructions: Please indentify the facility or facilities for where the liquids, drill two facilities were utilized.	
Disposal Facility Name:	Disposal Facility Permit Number:
Disposal Facility Name:	Disposal Facility Permit Number:
Were the closed-loop system operations and associated activities performed on or ☐ Yes (If yes, please demonstrate compliance to the items below) ☐ No	
Required for impacted areas which will not be used for future service and operati Site Reclamation (Photo Documentation) Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique	ons:
Closure Report Attachment Checklist: Instructions: Each of the following ite mark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division) Proof of Deed Notice (required for on-site closure) Plot Plan (for on-site closures and temporary pits) Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (required for on-site closure) Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation) On-site Closure Location: Latitude	

Operator Closure Certification:	•
	nents submitted with this closure report is true, accurate and complete to the best of my knowledge and vith all applicable closure requirements and conditions specified in the approved closure plan.
Name (Print):	Title:
Signature:	Date:
e-mail address:	Telephone:

Page 6 of 6

NUMBER OF LOPIE	BRECEIV	ED		
DIS	TRIBUTIO) N		
SANTA FF		Γ		
FILE				
U.8 G.9				
LAND OFFICE		T		
THANSPORTER	OIL			
THANK UNIER	QA5	ł	L	
PRORATION OFF				

NEW MEXICO OIL CONSERVATION COMMISSION

FORM C-128 Revised 5/1/57

.8 G.9 AND OFFICE		SEE INSTRUCTIONS		_		ì
RANSPORTER DAS		ZEE INSTRUCTIONS	FOR COMPLETING	, 11113 7 ORM ON 11	HE REVERSE S	,
Abort			SECTION A			
Operator	OIL COMPANY		Lease	erris		Well No.
Jnit Letter	Section 28	Township 31 NORTH	Range 13 WEST	County SA	.N JUAN	
Actual Footage Lo	feet from the	SOUTH line and	1600	feet from the	ST 1	ine
Fround Level Elev 5628.		rmation KOTA	Pool WILDCAT		Dedic	ated Acreage: 20 Acres
who has the rig another. (65— !. If the answer to wise? YES	ght to drill into and -3-29 (e) NMSA 193 o question one is ''	no," have the interests answer is "yes," Type	l and to appropriate of all the owners b of Consolidation _	e the production eith	her for himself or	for himself and
. If the answer to	o question two is "	no," list all the owners			101	Pri
- · · · · · · · · · · · · · · · · · · ·			Land De	escription	/ K[
					Alle	-111
		SECTION B			ON	2 1980
					in SECTION A.	thet the information those is true and com- trof my knowledge and 3. Sindel ident Company
1600	Ò.06.	28			shown on the pla plotted from fiel surveys made by supervision, and and correct to the and belief. Date Surveyed 8 Augus	t that the same is true the best of my knowledge st 1960 essional Englheer
0 330 660 9	990 1320 1650 19	90 Z310 2640 200	00 1500 1000	2 500 0	James F	C. Leese 1463



New Mexico Office of the State Engineer Water Column/Average Depth to Water

(quarters are 1=NW 2=NE 3=SW 4=SE)

Program, and a 1.5 page of the control of the contr		(quarters are smallest to largest)				est) ((NAD83 UTN) (In feet)					
Togal Zaal	Sub	i etc	Q	Q	Q					C	epth D	epth W	ater
POD Number	basin Use C	ounty	64	16	4	Sec	Tws	Rng	X	Ϋ́	Well W	/aterCo	lumn
SJ 02294	DOM	SJ	3	2	4	28	31N	13W	214344	4085070*	42	15	27
SJ 02724	DOM	SJ	3	2	4	28	31N	13W	214344	4085070*	40	5	35
SJ 02766	DOM	SJ	4	4	4	28	31N	13W	214524	4084663*	50	12	38
SJ 02811	DOM	SJ	1	4	4	28	31N	13W	214324	4084863*	50	2	48
SJ 03730 POD1	DOM	SJ	1	3	4	28	31N	13W	213918	4084882*	190	70	120
									Average Depth to Water:				et
									Minimum Depth:				et
								Maximum Depth:				70 fee	et


Record Count: 5


PLSS Search:

Section(s): 28

Township: 31N

Range: 13W

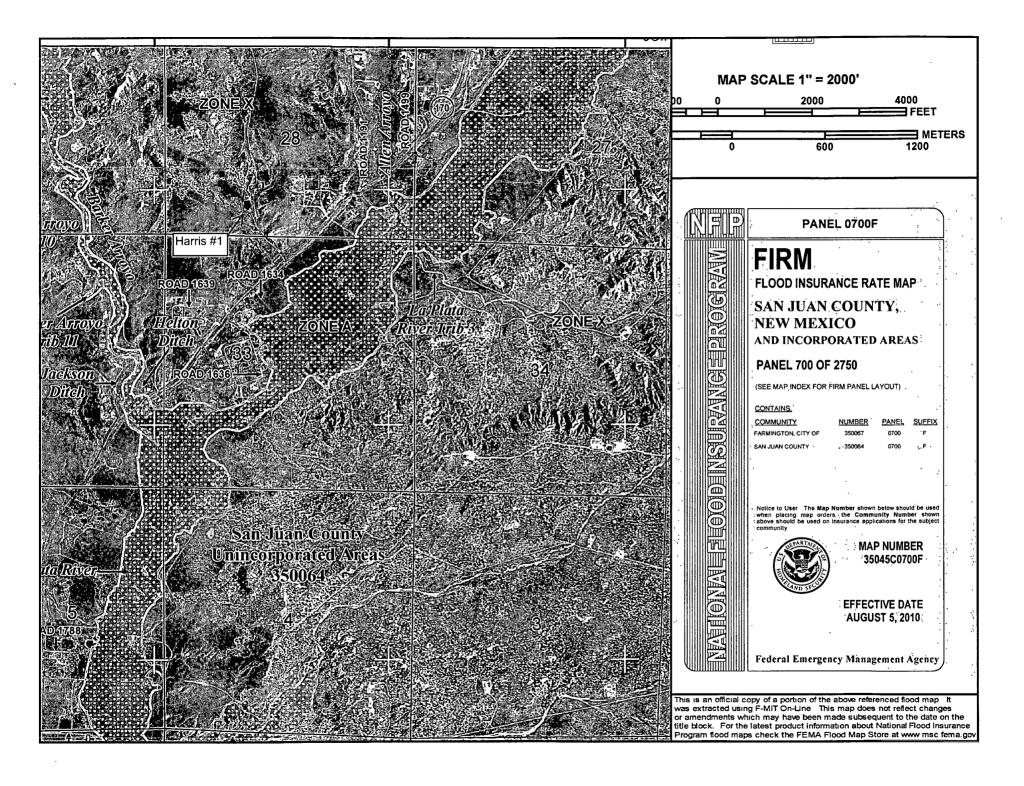


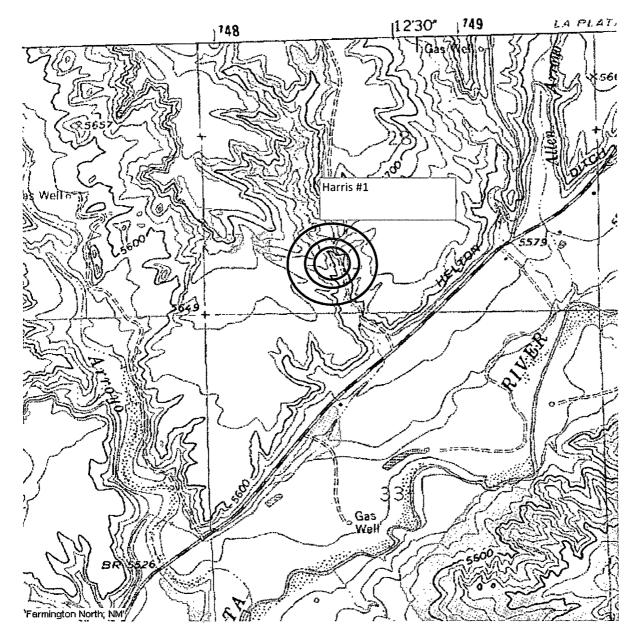

Scale: 1" = 500'


Circle Radii = 200', 300', & 500'

Harris #1
API #: 30-045-10264
Sec 28-T31N-R13W

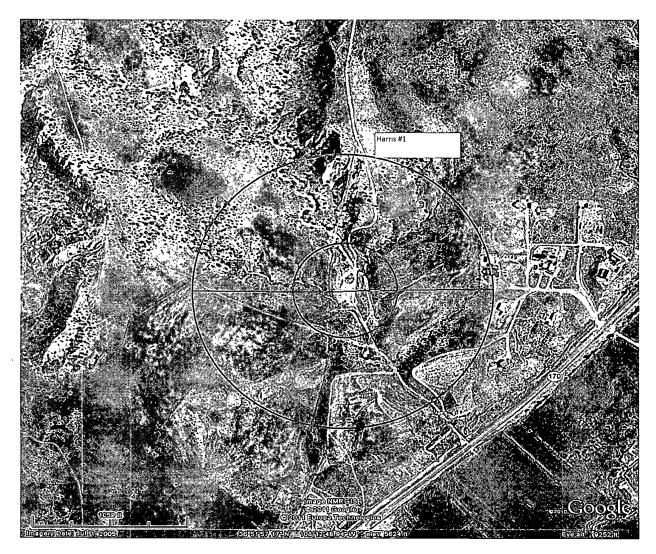

Circle Radii 300' & 1,000'

Harris #1 API #: 30-045-10264 Sec 28-T31N-R13W

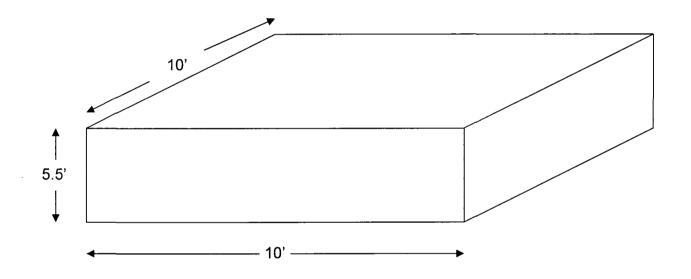

Harris #1

10' x 10' x 5.5' 95 bbl Rectangular Steel Tank Double Bottom with Leak Detection and Expanded Metal Covering 02/07/2011

Siting Criteria Compliance Demonstrations

The Harris #1 well is not located in an unstable area. The location is not over a mine but is near the side of a hilll. The location of the excavated pit material is not within 300' of any continuously flowing watercourse or within 200' of any other water course.

Fuller Production, Inc. San Juan Basin Below Grade Tank Design and Construction

In accordance with Rule 19.15.17 NMAC the following describes the as-built construction of the Below Grade Tank for the FULLER PRODUCTION, INC. below grade tank on the Harris #1 well located in the SESW, "N" of Sec 28, T31N, 13W.

As-built Installation:

- 1. The existing tank pit consists of an approximate 12 ft by 5 ft earth walled hole into which a 10 ft by 10 ft by 5.5 ft deep, steel, single walled, 45 bbl tank with leak detection is placed.
- 2. The tank walls are closed.
- 3. There is an expanded metal covering on the top of the below grade tank.
- 4. A general location sign is displayed on site.
- 5. The pit tank is fenced with 3 ft field fencing and one strand of barbed wire.
- 6. The dehydrator has an abandoned 16 ft X 16 ft ground pit approximately 50 ft away. 6 ft from the dehydrator is an abandoned overflow pit which is silted over with possibly a 55 gal drum buried there.

Fuller Production, Inc. San Juan Basin Below Grade Tank Maintenance and Operating Plan

In accordance with Rule 19.15.17 NMAC the following describes the below grade tank operation and maintenance plan for the FULLER PETROLEUM Harris #1 well located in the SESW, "N" of Sec 28, T31N, 13W.

General Plan:

- 1. FULLER PETROLEUM shall operate and maintain the below grade tank to contain liquids and solids and prevent contamination of fresh water to protect the public health and environment.
- 2. FULLER PETROLEUM shall not allow a below grade tank to overflow or allow surface water run-on to enter the below grade tank.
- 3. FULLER PETROLEUM shall continuously remove any visible or measurable layer of oil from the fluid surface of a below grade tank in an effort to prevent significant accumulation of oil over time.
- 4. FULLER PETROLEUM shall inspect the below grade tank monthly and maintain a written record of each inspection for five years.
- 5. FULLER PETROLEUM shall maintain adequate freeboard to prevent overtopping of the below grade tank.

Fuller Production, Inc. San Juan Basin Closure Plan

In accordance with Rule 19.15.17.1 NMAC the following procedure describes the closure plan for the FULLER PRODUCTION, INC. below grade tank on the Harris #1 well located in the "N", SESW of Sec 28, T31N, 13W.


Closure Requirements:

- 1. FULLER PRODUCTION, INC. shall close the below grade tank within the time periods provided in 19.15.17.13 NMAC or by an earlier date that the division requires because of imminent danger to fresh water, public health, or the environment.
- 2. FULLER PRODUCTION, INC. shall close an existing below grade tank that does not meet the requirements of Paragraph (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008 if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC.
- 3. FULLER PRODUCTION, INC. shall close a permitted below grade tank within 60 days of cessation of the below ground tank's operation or as required by the transitional provisions of Subsection B of 19.15.17.17 NMAC in accordance with a closure plan that the appropriate division district office approves. The closure report will be filed on C-144.
- 4. All liquids will be removed from the temporary permit prior to closure and the liquids disposed of in a division approved facility.
- 5. FULLER PRODUCTION, INC. shall remove the below grade tank and dispose of it in a division approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves.
- 6. FULLER PRODUCTION, INC. will remove any on-site equipment associated with the below grade tank unless the equipment is required for some other purpose.
- 7. FULLER PRODUCTION, INC. shall test the soils beneath the below grade tank to determine whether a release has occurred. FULLER PRODUCTION, INC. shall collect a five point composite sample and individual grab samples from any area that is wet, discolored, or showing other evidence of a release. The samples will be analyzed for BTEX, TPH, and chlorides to demonstrate that the benzene concentration as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not

exceed 50 mg/kg; the TPH concentration as determined by EPA method 418.1 or other EPA method that the division approves does not exceed 100 mg/kg; and the chloride concentration as determined by EPA method 300.1 or other EPA method that the division approves does not exceed 250 mg/kg or the background concentration, whichever is greater. FULLER PRODUCTION, INC. shall notify the division of its results on form C-141.

- 8. If FULLER PRODUCTION, INC. or the division determines that a release has occurred, then Fuller FULLER PRODUCTION, INC. shall comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC as appropriate.
- 9. If contamination is confirmed by field sampling. FULLER PRODUCTION, INC. will follow the Guidelines For Remediation Of Leaks, Spills, and Releases NMOCD August 1993 when remediating identified contaminants.
- 10. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Paragraph (4) of Subsection E of 19.15.17.13 NMAC, then FULLER PRODUCTION, INC. shall backfill the excavation with compacted, non-waste containing, earthen material; construct a division-prescribed soil cover; re-contour, and revegetate the site.
- 11. Notice of closure will be given to the Aztec Division office between 72 hours and one week of closure via email or verbally. The notification of closure will include the following:
 - · Operator's name
 - · Location by Unit Letter, Section Township, and Range.
 - · Well name and API number
- 12. All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of the blow grade tank. The closure report will be filed on C-144 and incorporate the following:
 - · Details on capping and covering where applicable
 - · Inspection reports
 - · Sampling results
- 13. The site will be re-contoured to match the surrounding area. Natural drainages will be unimpeded and erosion control will be utilized where necessary.
- 14. FULLER PRODUCTION, INC. shall seed the disturbed areas the first growing season with a division approved seed mixture after pit closure. Seeding will be accomplished by drilling on the contour whenever possible or by other division approved methods. Repeat seeding or planting will be continued until successful vegetative growth occurs.

- 15. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the thickness of the topsoil native to the area, whichever is greater.
- 16. The surface owner shall be notified of FULLER PRODUCTION, INC.'s closing of the below grade tank as per the approved closure plan using certified mail with return receipt requested.

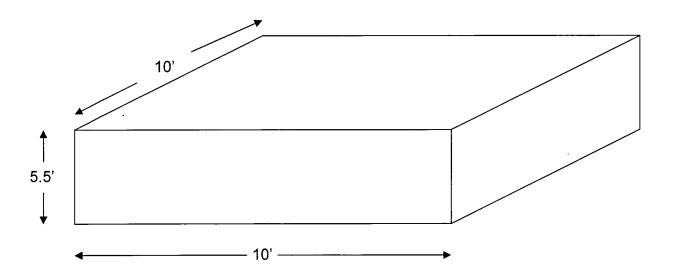

Harris #1

10' x 10' x 5.5' 95 bbl Rectangular Steel Tank Double Bottom with Leak Detection and Expanded Metal Covering 02/07/2011

Powell, Brandon, EMNRD

From: Sent: Scott King [sking@frenchoiltx.com] Tuesday, April 19, 2011 2:59 PM

To:

Powell, Brandon, EMNRD

Subject:

Below Grade Tanks

Brandon-

Per our telephone conversation, we would like to convert the C-144 from a permit to a closure plan only. Thank you for your time and attention in this matter.

Thanks

Scott King (432) 683-5661

This email has been scanned by the MessageLabs Email Security System. For more information please visit http://www.messagelabs.com/email