Form C-144 Revised June 6, 2013

OCD Received

District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 S. First St., Artesia, NM 88210 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office. For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

12577 39-20078	Pit, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application	OCD Re 011 1-16-15
	Type of action: Below grade tank registration Permit of a pit or proposed alternative method	

Closure of a pit, below-grade tank, or proposed alternative method Modification to an existing permit/or registration Closure plan only submitted for an existing permitted or non-permitted pit, below-grade tank, or proposed alternative method

Instructions: Please submit one application (Form C-144) per individual pit, below-grade tank or alternative request

Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.

Operator: Burlington Resources Oil & Gas Company LP OGRID #: 14538	-
Address: PO BOX 4289, Farmington, NM 87499	
Facility or well name: San Juan 28-4 Unit 30	
API Number: 30-039-20078 OCD Permit Number:	9
U/L or Qtr/Qtr G (SWNE) Section 31 Township 28N Range 4W County: Rio Ariba	
Center of Proposed Design: Latitude <u>36.61924000 •N</u> Longitude <u>-107.28871000 •W</u> NAD: ⊠1927 □ 1983	
Surface Owner: ☐ Federal ☐ State ☐ Private ☐ Tribal Trust or Indian Allotment ☐ OCD NAD83	
2. N 36.6192600 W 107.2886600 ☐ Pit: Subsection F, G or J of 19.15.17.11 NMAC	
Temporary: Drilling Workover	
Permanent Emergency Cavitation P&A Multi-Well Fluid Management Low Chloride Drilling Fluid yes no	
Lined Unlined Liner type: Thicknessmil LLDPE HDPE PVC Other	
String-Reinforced	
Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x D	
Effect Sealing. In French In the Sealing In the Sea	
3. □ Below-grade tank: Subsection I of 19.15.17.11 NMAC Volume: 120	t a
☐ Secondary containment with leak detection ☐ Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off ☐ BGT did not have	/e
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☐ Other	,
Liner type: Thickness 45 mil HDPE PVC Other LLDPE Closure Plan P	ior
to Closure.	
Alternative Method:	
Atternative Method.	
Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approximately a	roval.
Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approximation of a	
Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approximately approximately subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church)	
Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approximately subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital,	

6. Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other	
☐ Monthly inspections (If netting or screening is not physically feasible)	
 Signs: Subsection C of 19.15.17.11 NMAC □ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers □ Signed in compliance with 19.15.16.8 NMAC 	
Variances and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Variance(s): Requests must be submitted to the appropriate division district for consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	
9. Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Siting criteria does not apply to drying pads or above-grade tanks.	table source
General siting	
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank. - □ NM Office of the State Engineer - iWATERS database search; □ USGS; ☑ Data obtained from nearby wells	☐ Yes ☒ No ☐ NA
Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within the area overlying a subsurface mine. (Does not apply to below grade tanks) - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
 Within an unstable area. (Does not apply to below grade tanks) Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	☐ Yes ☐ No
Within a 100-year floodplain. (Does not apply to below grade tanks) - FEMA map	☐ Yes ☐ No
Below Grade Tanks	
Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☒ No
Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☒ No
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)	
Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No

Within 100 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pit Non-low chloride drilling fluid	
Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Permanent Pit or Multi-Well Fluid Management Pit	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the do attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.1 Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:	9 NMAC 1.15.17.9 NMAC
Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the deattached. Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC A List of wells with approved application for permit to drill associated with the pit. Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 1 and 19.15.17.13 NMAC Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:	9.15.17.9 NMAC

Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the	locuments are
attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan	
☐ Erosion Control Plan ☐ Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC	
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Multi-well Factorial Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method	luid Management Pit
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be closure plan. Please indicate, by a check mark in the box, that the documents are attached. ☐ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC ☐ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC ☐ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) ☐ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC ☐ Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC ☐ Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sor provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. 19.15.17.10 NMAC for guidance.	erce material are Please refer to
Ground water is less than 25 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Yes No
Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	
Written confirmation or verification from the municipality; Written approval obtained from the municipality	Yes No
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	

adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ☐ No
Within a 100-year floodplain FEMA map	☐ Yes ☐ No
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure possible value of the following items must be attached to the closure possible value of the following items must be attached to the closure possible value of the following items must be attached to the closure possible value of the following items must be attached to the closure possible value of the following items must be attached to the closure possible value of the following items must be attached to the closure possible value of the following possible value of 19.15.17.10 NMAC Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards can Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	7.11 NMAC 2.15.17.11 NMAC
17. Operator Application Certification:	36 Sc
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and be	
Name (Print): Title:	
Signature: Date:	
Signature: Date:	
e-mail address: Telephone:	
e-mail address: Telephone:	
e-mail address: Telephone:	see front page
e-mail address:	see front page
e-mail address:	see front page
e-mail address:	see front page Feb 04, 2015 ng the closure report.
e-mail address: Telephone:	see front page Feb 04, 2015 ng the closure report. not complete this
e-mail address:	see front page Feb 04, 2015 ng the closure report. not complete this -loop systems only) indicate, by a check

22. Operator Closure Certification:	
I hereby certify that the information and attachments submitted with this closur belief. I also certify that the closure complies with all applicable closure requires.	re report is true, accurate and complete to the best of my knowledge and rements and conditions specified in the approved closure plan.
Name (Print): Kenny Davis	Title: Staff Regulatory Technician
Signature:	Date:12/2/14
e-mail address: kenny.r.davis@conocophillips.com	Telephone: <u>505-599-4045</u>

Burlington Resources Oil Gas Company, LP San Juan Basin Below Grade Tank Closure Report

Lease Name: San Juan 28-4 Unit 30

API No.: 30-039-20078

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure of the below-grade tank referenced above. All proper documentation regarding closure activities is being included with the C-144.

General Plan:

- 1. BR shall close a below-grade tank within 60 days of cessation of operations per Subsection G.4 of 19.15.17.13 NMAC. This will include a) below-grade tanks that do not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC within five years, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC; b) an earlier date that the division requires because of imminent danger to fresh water, public health or the environment. For any closure, BR will file the C144 Closure Report as required.
- 2. The below-grade tank referenced above was permitted and closed within 60 days of cessation of the below-grade tanks operation.
- 3. BR shall remove liquids and sludge from a below-grade tank prior to implementing a closure method and shall dispose of the liquids and sludge in a division-approved facility. The facilities to be used will be Basin Disposal (Permit #NM-01-005), JFJ Landfarm % Industrial Ecosystem Inc. (Permit # NM-01-0010B) and Envirotech Land Farm (Permit #NM-01-011). The liner after being cleaned well (Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC) will be disposed of at the San Juan County Regional Landfill located on CR 3100.
 - All recovered liquids were disposed of at Basin Disposal (Permit #NM-01-005) and any sludge or soil required to be removed to facilitate closure was hauled to Envirotech Land Farm (Permit #NM-01-011) and JFJ Landfarm % IEI (Permit #NM-01-0010B). The liner was cleaned per Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC was disposed of at the San Juan County Regional Landfill located on CR 3100.
- 4. BR Will receive prior approval to remove the below-grade tank and dispose of it in a division-approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves.
 - The below-grade tank was disposed of in a division-approved manner.
- 5. If there is any on-site equipment associated with a below-grade tank, then BR shall remove the equipment, unless the equipment is required for some other purpose.
 - All on-site equipment associated with the below-grade tank was removed.
- 6. BR will test the soils beneath the below-grade tank to determine whether a release has occurred. COPC shall collect, at a minimum, a five point, composite sample; collect individual grab samples from any area that is wet, discolored or showing other evidence of a release; and analyzed for the constituents listed in Table I of 19.15.17.13 NMAC. COPC shall notify the division of its results on form C-141.

7. A five point composite sample was taken of the below-grade tank using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached).

Components	Tests Method	Limit (mg/kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	100
Chlorides	EPA 300.1	250

8. If BR or the division determines that a release has occurred, then BR shall comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC, as appropriate.

A release was not determined for the above referenced well.

If the sampling program demonstrates that a release has not occurred or that any release does not exceed the
concentrations specified in Table I of 19.15.17.13 NMAC, then BR shall backfill the excavation with compacted,
non-waste containing, earthen material; construct a division-prescribed soil cover; recontour and re-vegetate the
site.

The below-grade tank area passed all requirements of Paragraph (4) of Subsection E of 19.15.17.13 NMAC and was backfilled with compacted, non-waste containing, earthen material.

- 10. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.

Notification is missing due to employee turnovers. ConocoPhillips has reviewed our internal processes and has updated them to include the required 72 hour notification.

11. The surface owner shall be notified of BR's closing of the below-grade tank 72 hours, but not more than one week, prior to closure as per the approved closure plan via certified mail, return receipt requested.

The closure process notification to the landowner not found. COPC was not aware that the original notification sent at the time of Permitting was not the only closure notification required.

ConocoPhillips has reviewed our internal processes and has updated them to include the required 72 hour notification.

12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The below-grade tank area was re-contoured to match fit, shape, line, form and texture of the surrounding area. Re-shaping, including drainage control, to prevent ponding and erosion. Natural drainages were unimpeded and water bars and/or silt traps were placed in areas where needed to prevent erosion on a large scale. Final recontour has a uniform appearance with smooth surface, fitting the natural landscape.

13. BR Shall seed the disturbed areas the first favorable growing season following closure of a below-grade tank. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved

methods. BLM stipulated seed mixes will used on federally regulated lands and division-approved seed mixtures (administratively approved if required) will be utilized on all State or private lands. A uniform vegetative cover has been established that reflects a life-form ratio of plus or minus fifty percent (50%) of pre- disturbance levels and a total percent plant cover of at least seventy percent (70%) of pre-disturbance levels, excluding noxious weeds. If alternate seed mix is required by the state, private owner or tribe, it will be implemented with administrative approval if needed. COPC will repeat seeding or planting will be continued until successful vegetative growth occurs.

Provision 13 was accomplished through complying with BLM seeding requirements as allowed by the BLM/OCD MOU.

14. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material, with chloride concentrations less than 600 mg/kg as analyzed by EPA Method 300.0, to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.

The below-grade tank area was backfilled and more than four feet of cover was achieved and the cover included one foot of suitable material to establish vegetation at the site.

- 15. All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on C-144 and incorporate the following:
 - Soil Backfilling and Cover Installation (See Report)
 - Re-vegetation application rates and seeding techniques (See Report)
 - Photo documentation of the site reclamation (Included as an attachment)
 - Confirmation Sampling Results (Included as an attachment)
 - Proof of closure notice (Included as an attachment)

Closure Documentation was not submitted within the 60 day requirement due to employee turnovers. ConocoPhillips has reviewed our internal processes and has updated them to ensure closure documentation is submitted with the 60 day time frame.

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 Form C-141 Revised October 10, 2003

Submit 2 Copies to appropriate
District Office in accordance
with Rule 116 on back
side of form

			Rele	ase Notific	ation	and Co	rrective A	ction		
					(OPERAT	OR		Initia	l Report Final Report
	mpany Burlin					Contact Kei				
	11 East 30 th St,			0 6			lo.(505) 599-40	145		
Facility Nar	ne: San Juan	28-4 Uni	t 30		F	acility Typ	e: Gas Well			
Surface Ow	ner Federal			Mineral C	wner Fe	ederal			Lease N	lo.SF-079732
				LOCA	ATION	OF REI	LEASE			
Unit Letter	Section To	ownship	Range	Feet from the	North/S	South Line	Feet from the	Figure and the same	est Line	County
G	31	28N	4W	1565	North		1830	East		Rio Arriba
				Latitude36.61	924000	Longitud	e <u>-107.2887100</u>	0		
				NAT	TURE (OF RELI	EASE			
Type of Rele	ase BGT Closu	ure Summa	ry			Volume of	Release N/A		W. Access to the second	Recovered N/A
	lease: NONE						lour of Occurrence	ce N/A	Date and	Hour of Discovery N/A
Was Immedi	ate Notice Give	en?	Von E	No ⊠ Not R	equired	If YES, To N/A	Whom?			
		Ц	i es	NO M NOUK	equired	Date and H	Ious M/A			
By Whom?	N/A course Reached	10					olume Impacting	the Water	rcourse.	
was a water		11	☐ Yes	No No		N/A				
If a Waterco	urse was Impact	ted Descri	be Fully.	k						
N/A	urse was impae									
200000000000000000000000000000000000000										
Describe Ca	use of Problem	and Remed	dial Actio	n Taken.*						3
N/A										
Describe Ar	ea Affected and	l Cleanup A	Action Ta	ken.*						
BGT Closu	re: NO RELE	ASE FOU	ND UPO	N REMOVAL						
							1 11 11	1	ورمد خصائد الت	rought to NIMOCD rules and
I hereby cer	tify that the info	ormation g	iven abov	e is true and com	plete to the	he best of my	knowledge and	understar	ons for re	rsuant to NMOCD rules and leases which may endanger
public healt	h or the environ	ment The	accentan	ce of a C-141 ret	port by the	e NMOCD n	narked as "Final l	Report' d	oes not re	heve the operator of hability
منوماه ادامينا	amorations how	a failed to	adequatel	v investigate and	remediate	e contaminat	ion that pose a th	reat to gr	ound wat	er, surface water, numan nearm
or the envir	onment. In addi	ition, NMO	OCD acce	ptance of a C-14	1 report d	oes not relie	ve the operator of	f responsi	bility for	compliance with any other
federal, stat	e, or local laws	and/or reg	ulations.				OIL CON	JSERV	ATION	I DIVISION
		7/		<i></i>			OIL COL	(DLIC)	711101	V DI VIBIOIT
Signature:										
Dulated Man	Name Day	l				Approved by	y District Superv	isor:		
Printed Nar	ne: Kenny Dav	15							KW0 45 KW2	121.6
Title: Staff	Regulatory Tec	chnician				Approval D	ate:		Expiration	n Date:
E-mail Add	ress: Kenny.r.da	lavis@cond	ocophillip	s.com		Conditions	of Approval:			Attached
				16						
Date: 12/	2/14 Phone: (5	002) 277-4(J4J							

* Attach Additional Sheets If Necessary





December 30, 2013

Lindsay Dumas ConocoPhillips San Juan Business Unit Office 214-07 5525 Hwy 64 Farmington, New Mexico 87401 www.animasenvironmental.com

624 E. Comanche Farmington, NM 87401 505-564-2281

> Durango, Colorado 970-403-3274

Via electronic mail to: <u>SJBUE-Team@ConocoPhillips.com</u>

RE:

Below Grade Tank Closure Report

San Juan 28-4 #30

Rio Arriba County, New Mexico

Dear Ms. Dumas:

Animas Environmental Services, LLC (AES) is pleased to provide the final report associated with the below grade tank (BGT) closure at ConocoPhillips (CoP) San Juan 28-4 #30, located in Rio Arriba County, New Mexico. Tank removal had been completed by CoP contractors prior to AES' arrival at the location.

1.0 Site Information

1.1 Location

Site Name - San Juan 28-4 #30

Legal Description - SW¼ NE¼, Section 31, T28N, R4W, Rio Arriba County, New Mexico Well Latitude/Longitude - N36.61941 and W107.28889, respectively BGT Latitude/Longitude - N36.61926 and W107.28866, respectively Land Jurisdiction - U.S. Forest Service (USFS)

Figure 1 - Topographic Site Location Map

Figure 2 - Aerial Site Map, November 2013

1.2 NMOCD Ranking

In accordance with the New Mexico Oil Conservation Division (NMOCD) *Guidelines for Remediation of Leaks, Spills, and Releases* (August 1993), the location was given a ranking score of 0 based on the following factors:

Lindsay Dumas San Juan 28-4 #30 BGT Closure Report December 30, 2013 Page 2 of 5

- Depth to Groundwater: Based on the elevation differential between the location and the nearest surface water, AES personnel estimated that depth groundwater is greater than 100 feet below ground surface (bgs). (0 points)
- Wellhead Protection Area: The location is not within a wellhead protection area.
 (0 points)
- Distance to Surface Water Body: An unnamed wash which discharges to the wash in Muñoz Canyon and ultimately to the San Juan River is located approximately 1,650 feet west of the location. (0 points)

1.3 BGT Closure Assessment

AES was initially contacted by Fred Martinez, CoP representative, on November 12, 2013, and on the same day, Deborah Watson and Heather Woods of AES mobilized to the location. AES personnel collected six soil samples from below the BGT liner. Four samples were collected from the perimeter of the BGT footprint, one sample was collected from the center of the BGT footprint, and one sample was composited from the four perimeter samples and one center sample.

2.0 Soil Sampling

On November 12, 2013, AES personnel conducted field screening and collected five soil samples (S-1 through S-5) and one 5-point composite (SC-1) from below the BGT. Soil samples were collected from approximately 0.5 feet below the former BGT for field screening of volatile organic compounds (VOCs) and total petroleum hydrocarbon (TPH). Soil sample SC-1 was field screened for VOCs and chloride and was submitted for confirmation laboratory analysis. Soil sample locations are included on Figure 2.

2.1 Field Screening

2.1.1 Volatile Organic Compounds

A portion of each sample was utilized for field screening of VOC vapors with a photo-ionization detector (PID) organic vapor meter (OVM). Before beginning field screening, the PID-OVM was first calibrated with 100 parts per million (ppm) isobutylene gas.

2.1.2 Total Petroleum Hydrocarbons

Soil samples were also analyzed in the field for TPH per USEPA Method 418.1 using a Buck Scientific Model HC-404 Total Hydrocarbon Analyzer Infrared Spectrometer (Buck). A 3-point calibration was completed prior to conducting soil analyses. Field analytical protocol followed AES's Standard Operating Procedure: Field Analysis Total Petroleum Hydrocarbons per EPA Method 418.1.

2.1.3 Chlorides

Soil sample SC-1 was field screened for chlorides using Chloride Drop Count Titration with silver nitrate. Sampling and analysis methods followed procedures provided by Hach Company.

2.2 Laboratory Analyses

The composite soil sample SC-1 collected for laboratory analysis was placed into a new, clean, laboratory-supplied container, which was then labeled, placed on ice, and logged onto a sample chain of custody record. The sample was maintained on ice until delivery to the analytical laboratory, Hall Environmental Analysis Laboratory (Hall), in Albuquerque, New Mexico. Soil sample SC-1 was laboratory analyzed for:

- Benzene, toluene, ethylbenzene, and xylene (BTEX) per U.S. Environmental Protection Agency (USEPA) Method 8021B;
- TPH for gasoline range organics (GRO) and diesel range organics (DRO) per USEPA Method 8015D; and
- Chloride per USEPA Method 300.0.

2.3 Field and Laboratory Analytical Results

Field screening readings for VOCs via OVM ranged from 1.0 ppm in S-4 up to 7.2 ppm in S-5. Field TPH concentrations ranged from 92.7 mg/kg in S-3 up to 587 mg/kg in S-5. The field chloride concentration in SC-1 was 60 mg/kg. Field screening results are summarized in Table 1 and presented on Figure 2. The AES Field Screening Report is attached.

Table 1. Soil Field Screening VOCs, TPH, and Chloride Results San Juan 28-4 #30 BGT Closure, November 2013

Sample ID	Date Sampled	Depth below BGT (ft)	VOCs OVM Reading (ppm)	Field TPH (mg/kg)	Field Chlorides (mg/kg)
NMOCD Action	Level (NMAC 19.	15.17.13E)	-	100	250
S-1	11/12/13	0.5	1.6	156	NA
S-2	11/12/13	0.5	2.7	132	NA
S-3	11/12/13	0.5	1.7	92.7	NA
S-4	11/12/13	0.5	1.0	228	NA
S-5	11/12/13	0.5	7.2	587	NA
SC-1	11/12/13	0.5	3.8	NA	60

NA - Not Analyzed

Laboratory analytical results reported benzene and total BTEX concentrations in SC-1 as less than 0.050 mg/kg and 0.25 mg/kg, respectively. TPH concentrations as GRO and DRO were reported at less than 5.0 mg/kg and at 110 mg/kg, respectively. The laboratory chloride concentration was reported at 31 mg/kg. Laboratory analytical results are summarized in Table 2 and included on Figure 2. The laboratory analytical report is attached.

Table 2. Soil Laboratory Analytical Results
San Juan 28-4 #30 BGT Closure. November 2013

Sample ID	Date Sampled	Depth (ft)	Benzene (mg/kg)	Total BTEX (mg/kg)	TPH- GRO (mg/kg)	TPH- DRO (mg/kg)	Chlorides (mg/kg)
	NMOCD Acti (NMAC 19.15		0.2/10*	50	100/5	5,000*	250
SC-1	11/12/13	0.5	<0.50	<2.5	<5.0	110	31

^{*}Action level determined by the NMOCD ranking score per NMOCD Guidelines for Remediation of Leaks, Spills, and Releases (August 1993)

3.0 Conclusions and Recommendations

3.1 BGT Closure

NMOCD action levels for BGT closures are specified in New Mexico Administrative Code (NMAC) 19.15.17.13E. Field TPH concentrations exceeded the NMOCD action level of 100 mg/kg in four samples, with the highest concentration reported in S-5 with 587 mg/kg. Laboratory analytical results for TPH (as GRO/DRO) in SC-1 were reported above the NMOCD action level of 100 mg/kg with 110 mg/kg. Benzene and total BTEX concentrations in SC-1 were below the NMOCD action levels of 0.2 mg/kg and 50 mg/kg, respectively. Chloride concentrations in SC-1 were below the NMOCD action level of 250 mg/kg. Based on field screening and laboratory analytical results on November 12, 2013, a release is confirmed at the San Juan 28-4 #30.

3.2 Release Confirmation

Action levels for releases are determined by the NMOCD ranking score per *NMOCD Guidelines for Remediation of Leaks, Spills, and Releases* (August 1993), and the site was assigned a rank of 0. Benzene and total BTEX concentrations in SC-1 were below the NMOCD action levels of 10 mg/kg and 50 mg/kg, respectively. TPH concentrations as GRO/DRO in SC-1 were reported below the NMOCD action level of 5,000 mg/kg. Soil laboratory analyses showed that benzene, total BTEX, TPH and chloride concentrations were below the NMOCD action levels for SC-1. Release notification should follow the

Lindsay Dumas San Juan 28-4 #30 BGT Closure Report December 30, 2013 Page 5 of 5

protocols outlined in NMAC 19.15.29 and 30. No further work is recommended for the San Juan 28-4 #30 BGT release.

If you have any questions about this report or site conditions, please do not hesitate to contact Deborah Watson at (505) 564-2281.

Sincerely,

David J. Reese

Environmental Scientist

David of Rem


Elizabeth McNally, P.E.


Elizabeth V McNolly

Attachments:

Figure 1. Topographic Site Location Map Figure 2. Aerial Site Map, November 2013 AES Field Screening Report 111213 Hall Analytical Report 1311503

R:\Animas 2000\Dropbox\2013 Projects\ConocoPhillips\SJ 28-4 #30\San Juan 28-4 #30 BGT Closure Report 123013.docx

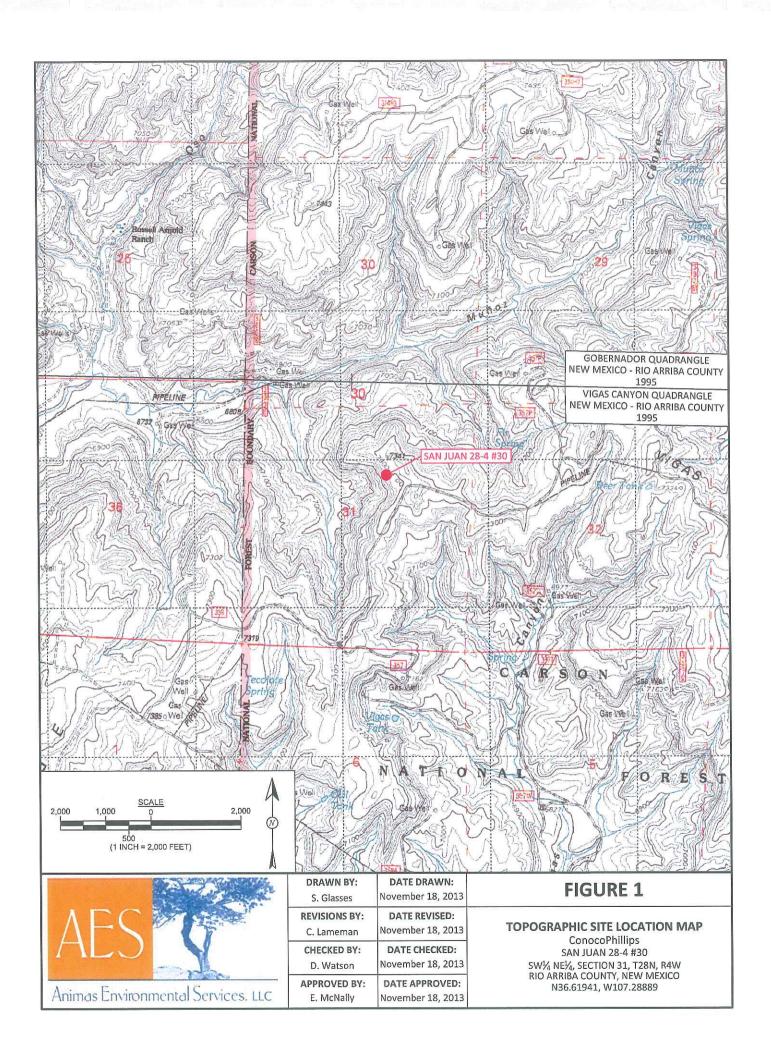

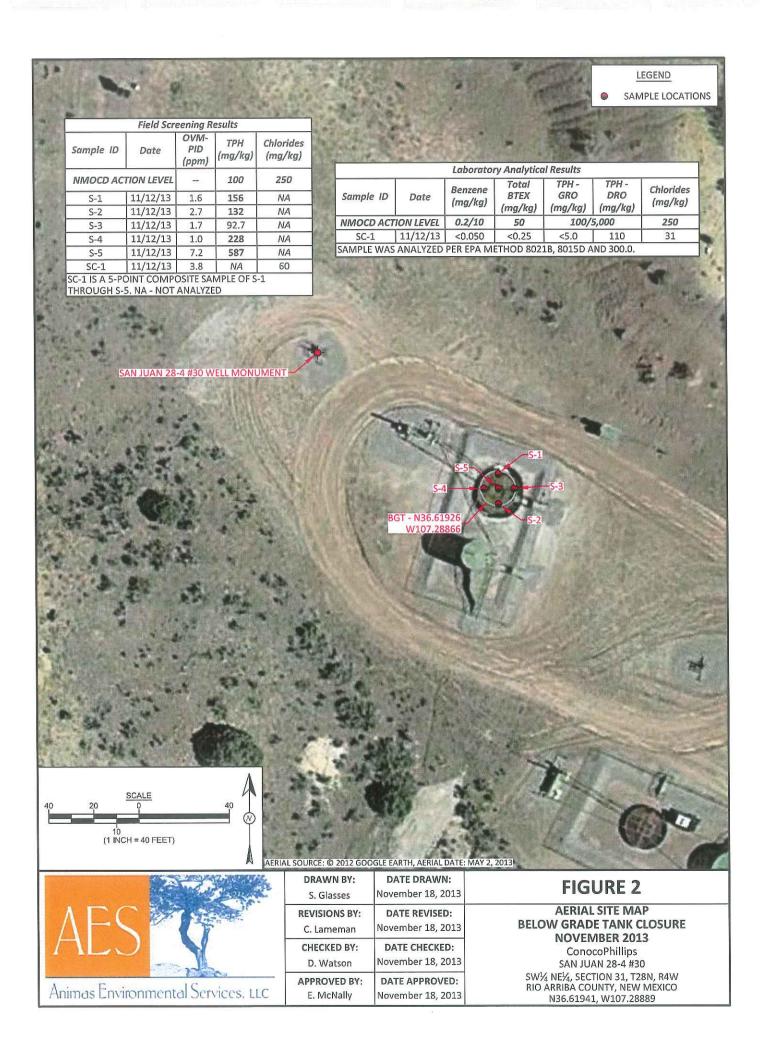

AES Field Screening Report

Client: ConocoPhillips

Project Location: San Juan 28-4 #30

624 E. Comanche Farmington, NM 87401 505-564-2281

Durango, Colorado 970-405-3084

Animas Environmental Services, LLC

www.animasenvironmental.com

Date: 11/12/2013

Matrix: Soil

		Time of			Field	Field TPH				TPH
	Collection	Sample	Sample	OVM	Chloride	Analysis	Field TPH*	TPH PQL		Analysts
Sample ID	Date	Collection	Location	(bpm)	(mg/kg)	Time	(mg/kg)	(mg/kg)	DF	Initials
S-1	11/12/2013	15:05	North	1.6	NA	15:52	156	20.0	1	DAW
S-2	11/12/2013	15:08	South	2.7	NA	15:54	132	20.0	1	DAW
S-3	11/12/2013	15:10	East	1.7	NA	15:56	92.7	20.0	П	DAW
S-4	11/12/2013	15:12	West	1.0	NA	15:58	228	20.0	П	DAW
S-5	S-5 11/12/2013	15:15	Center	7.2	NA	16:00	587	20.0	1	DAW
SC-1	11/12/2013	15:20	Composite	NA	09		Not /	Not Analyzed for TPH.	H.	

Field Chloride - Quantab Chloride Titrators or Drop Count Titration with

Silver Nitrate

Total Petroleum Hydrocarbons - USEPA 418.1

Analyst: Number With

*Field TPH concentrations recorded may be below PQL.

Dilution Factor Not Analyzed NA

Not Detected at the Reporting Limit

ND

Practical Quantitation Limit PQL



Hall Environmental Analysis Laboratory 4901 Hawkins NE Albuquerque, NM 87109 TEL: 505-345-3975 FAX: 505-345-4107 Website: www.hallenvironmental.com

November 15, 2013

Debbie Watson Animas Environmental 624 East Comanche Farmington, NM 87401 TEL: (505) 486-4071

FAX

RE: CoP San Juan 28-4 #30

OrderNo.: 1311503

Dear Debbie Watson:

Hall Environmental Analysis Laboratory received 1 sample(s) on 11/13/2013 for the analyses presented in the following report.

These were analyzed according to EPA procedures or equivalent. To access our accredited tests please go to www.hallenvironmental.com or the state specific web sites. In order to properly interpret your results it is imperative that you review this report in its entirety. See the sample checklist and/or the Chain of Custody for information regarding the sample receipt temperature and preservation. Data qualifiers or a narrative will be provided if the sample analysis or analytical quality control parameters require a flag. When necessary, data qualifers are provided on both the sample analysis report and the QC summary report, both sections should be reviewed. All samples are reported, as received, unless otherwise indicated. Lab measurement of analytes considered field parameters that require analysis within 15 minutes of sampling such as pH and residual chlorine are qualified as being analyzed outside of the recommended holding time.

Please don't hesitate to contact HEAL for any additional information or clarifications.

ADHS Cert #AZ0682 -- NMED-DWB Cert #NM9425 -- NMED-Micro Cert #NM0190

Sincerely,

Andy Freeman

Laboratory Manager

andyl

4901 Hawkins NE

Albuquerque, NM 87109

Analytical Report Lab Order 1311503

Date Reported: 11/15/2013

Hall Environmental Analysis Laboratory, Inc.

CLIENT: Animas Environmental

CoP San Juan 28-4 #30 Project:

1311503-001 Lab ID:

Client Sample ID: SC-1

Collection Date: 11/12/2013 3:20:00 PM

Received Date: 11/13/2013 9:47:00 AM

Analyses	Result	RL Qu	al Units	DF	Date Analyzed	Batch
EPA METHOD 8015D: DIESEL RANG	E ORGANICS				Anal	yst: BCN
Diesel Range Organics (DRO)	110	9.9	mg/Kg	1	11/13/2013 12:07:19	PM 10315
Surr: DNOP	96.3	66-131	%REC	1	11/13/2013 12:07:19	PM 10315
EPA METHOD 8015D: GASOLINE RA	NGE				Anal	yst: NSB
Gasoline Range Organics (GRO)	ND	5.0	mg/Kg	1	11/13/2013 12:29:45	5 PM R14768
Surr: BFB	103	74.5-129	%REC	1	11/13/2013 12:29:45	5 PM R14768
EPA METHOD 8021B: VOLATILES					Anal	yst: NSB
Benzene	ND	0.050	mg/Kg	1	11/13/2013 12:29:4	5 PM R14768
Toluene	ND	0.050	mg/Kg	1	11/13/2013 12:29:45	5 PM R14768
Ethylbenzene	ND	0.050	mg/Kg	1	11/13/2013 12:29:45	5 PM R14768
Xylenes, Total	ND	0.10	mg/Kg	1	11/13/2013 12:29:45	5 PM R14768
Surr: 4-Bromofluorobenzene	114	80-120	%REC	1	11/13/2013 12:29:4	5 PM R14768
EPA METHOD 300.0: ANIONS					Ana	yst: JRR
Chloride	31	30	mg/Kg	20	11/13/2013 12:30:1	5 PM 10324

Matrix: SOIL

Refer to the QC Summary report and sample login checklist for flagged QC data and preservation information.

Qualifiers:

- Value exceeds Maximum Contaminant Level.
- Value above quantitation range E
- Analyte detected below quantitation limits
- RSD is greater than RSDlimit 0
- RPD outside accepted recovery limits
- Spike Recovery outside accepted recovery limits
- Analyte detected in the associated Method Blank
- Holding times for preparation or analysis exceeded H
- Not Detected at the Reporting Limit ND

- Not Detected at the Reporting Limit Page 1 of 5 Sample pH greater than 2 for VOA and TOC only.
- RL Reporting Detection Limit

QC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#:

1311503

15-Nov-13

Client:

Animas Environmental

Project:

CoP San Juan 28-4 #30

Sample ID MB-10324

SampType: MBLK

TestCode: EPA Method 300.0: Anions

Client ID: PBS

Batch ID: 10324

RunNo: 14791

SPK value SPK Ref Val %REC LowLimit

Prep Date: 11/13/2013

Analysis Date: 11/13/2013

SeqNo: 426109

HighLimit

Units: mg/Kg

%RPD **RPDLimit**

RPDLimit

Qual

Qual

Analyte Chloride

1.5

Sample ID LCS-10324

SampType: LCS Batch ID: 10324 TestCode: EPA Method 300.0: Anions

RunNo: 14791

%RPD

Prep Date: 11/13/2013

Client ID: LCSS

SeqNo: 426111

Analysis Date: 11/13/2013

Units: mg/Kg HighLimit

Analyte Result PQL SPK value SPK Ref Val %REC LowLimit Chloride 15.00

Qualifiers:

Value exceeds Maximum Contaminant Level.

Value above quantitation range

Analyte detected below quantitation limits J

0 RSD is greater than RSDlimit

RPD outside accepted recovery limits R

Spike Recovery outside accepted recovery limits

В Analyte detected in the associated Method Blank

Holding times for preparation or analysis exceeded Η

Not Detected at the Reporting Limit

P Sample pH greater than 2 for VOA and TOC only.

Reporting Detection Limit RL

Page 2 of 5

QC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

39

4.3

10

50.00

5.000

WO#:

1311503

15-Nov-13

Client:

Animas Environmental

Project:

Diesel Range Organics (DRO)

Surr: DNOP

CoP San Juan 28-4 #30

Sample ID MB-10315	SampType: N	TestCode: EPA Method 8015D: Diesel Range Organics							
Client ID: PBS	Batch ID: 1	0315	R	unNo: 14	1753				
Prep Date: 11/13/2013	Analysis Date:	11/13/2013	S	eqNo: 42	24980	Units: mg/K	g		
Analyte	Result PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Diesel Range Organics (DRO)	ND 10)							
Surr: DNOP	8.6	10.00		85.9	66	131			
Sample ID LCS-10315	SampType: L	cs	Test	Code: El	A Method	8015D: Diese	I Range C	Organics	
Client ID: LCSS	Batch ID: 1	0315	R	unNo: 1	4753				
Prep Date: 11/13/2013	Analysis Date:	11/13/2013	S	eqNo: 4	25003	Units: mg/K	g		
Analyte	Result PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual

78.9

85.7

62.1

66

127

131

Qualifiers:

- * Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- J Analyte detected below quantitation limits
- O RSD is greater than RSDlimit
- R RPD outside accepted recovery limits
- S Spike Recovery outside accepted recovery limits
- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- P Sample pH greater than 2 for VOA and TOC only.
- RL Reporting Detection Limit

Page 3 of 5

OC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#:

1311503

15-Nov-13

Client:

Animas Environmental

Project:

CoP San Juan 28-4 #30

Sample	ID	MB-10303	MK	
--------	----	----------	----	--

SampType: MBLK

TestCode: EPA Method 8015D: Gasoline Range

Client ID:

PBS

Batch ID: R14768

RunNo: 14768

Prep Date:

Analysis Date: 11/13/2013

SeqNo: 425628

Analyte

Result ND 5.0 SPK value SPK Ref Val %REC LowLimit

Units: mg/Kg HighLimit

RPDLimit

Qual

Gasoline Range Organics (GRO) Surr: BFB

910

1000

91.5 74.5 129

%RPD

Sample ID LCS-10303 MK

SampType: LCS

TestCode: EPA Method 8015D: Gasoline Range

Client ID: LCSS

Batch ID: R14768 Analysis Date: 11/13/2013

RunNo: 14768 SeaNo: 425629

Units: mg/Kg

Prep Date: Analyte

Result

PQL SPK value SPK Ref Val

%REC LowLimit 102 74.5 HighLimit %RPD Qual

Gasoline Range Organics (GRO)

970

25 5.0 25.00 1000

96.9 74.5 126

RPDLimit

Surr: BFB

SampType: MBLK Batch ID: 10303

TestCode: EPA Method 8015D: Gasoline Range RunNo: 14768

129

Units: %REC

Analyte

Client ID:

Analysis Date: 11/13/2013

SeqNo: 425633

%RPD

Surr: BFB

SPK value SPK Ref Val %REC

LowLimit 91.5

HighLimit

129

RPDLimit

Qual

Sample ID LCS-10303

LCSS

11/12/2013

Sample ID MB-10303

Prep Date: 11/12/2013

PBS

SampType: LCS

Batch ID: 10303

TestCode: EPA Method 8015D: Gasoline Range

RunNo: 14768

SeqNo: 425634

96.9

129

Units: %REC

Analyte Surr: BFB

Client ID:

Prep Date:

Analysis Date: 11/13/2013 Result

970

910

SPK value SPK Ref Val 1000

1000

%REC

LowLimit

74.5

%RPD HighLimit

RPDLimit

Qual

Qualifiers:

- Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- Analyte detected below quantitation limits 0 RSD is greater than RSDlimit
- RPD outside accepted recovery limits R S Spike Recovery outside accepted recovery limits
- Analyte detected in the associated Method Blank В
- Holding times for preparation or analysis exceeded H Not Detected at the Reporting Limit ND
- Sample pH greater than 2 for VOA and TOC only.
- Reporting Detection Limit

Page 4 of 5

QC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#:

1311503

15-Nov-13

Client:

Animas Environmental

Project:	CoP San	Juan 28-4	#30								
Sample ID	MB-10303 MK	SampType: MBLK			TestCode: EPA Method 8021B: Volatiles						
Client ID:	PBS	Batch ID: R14768		R	unNo: 14	4768					
Prep Date:		Analysis D	ate: 11	/13/2013	S	eqNo: 42	25652	Units: mg/K	g		
Analyte		Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene		ND	0.050								
Toluene		ND	0.050								
Ethylbenzene		ND	0.050								
Xylenes, Total		ND	0.10								
Surr: 4-Brom	ofluorobenzene	1.1		1.000		109	80	120			
Sample ID	LCS-10303 MK	SampT	ype: LC	S	Tes	Code: El	PA Method	8021B: Volat	iles		
Client ID:	LCSS	Batch	1D: R1	4768	F	tunNo: 1	4768				
Prep Date:		Analysis D	ate: 11	/13/2013	S	SeqNo: 4	25653	Units: mg/K	(g		
Analyte		Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene		0.97	0.050	1.000	0	97.2	80	120			
Toluene		1.0	0.050	1.000	0	99.9	80	120			
Ethylbenzene		1.0	0.050	1.000	0	101	80	120			
Xylenes, Total		3.1	0.10	3.000	0	102	80	120			
Surr: 4-Brom	ofluorobenzene	1.2		1.000		115	80	120			
Sample ID	MB-10303	SampT	ype: ME	3LK	Tes	tCode: E	PA Method	8021B: Volat	tiles		
Client ID:	PBS	Batch	n ID: 10	303	F	RunNo: 1	4768				
Prep Date:	11/12/2013	Analysis D)ate: 1	1/13/2013	5	SeqNo: 4	25656	Units: %RE	С		
Analyte		Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Surr: 4-Brom	nofluorobenzene	1.1		1.000		109	80	120			
Sample ID	LCS-10303	SampT	ype: LC	s	Tes	tCode: E	PA Method	8021B: Vola	tiles		
Client ID:	LCSS	Batcl	n ID: 10	303	F	RunNo: 1	4768				
Prep Date:	11/12/2013	Analysis D	Date: 1	1/13/2013	Ş	SeqNo: 4	25657	Units: %RE	С		
Analyte		Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Surr: 4-Bron	nofluorobenzene	1.2		1.000		115	80	120			

Qualifiers:

- Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- J Analyte detected below quantitation limits
- 0 RSD is greater than RSDlimit
- R RPD outside accepted recovery limits
- Spike Recovery outside accepted recovery limits
- В Analyte detected in the associated Method Blank
- Holding times for preparation or analysis exceeded H
- ND Not Detected at the Reporting Limit

Page 5 of 5

- Sample pH greater than 2 for VOA and TOC only.
- Reporting Detection Limit RL



Hall Environmental Analysis Laboratory 4901 Hawkins NE Albuquerque, NM 87109 TEL: 505-345-3975 FAX: 505-345-4107

Sample Log-In Check List

Website: www.hallenvironmental.com RcptNo: 1 Work Order Number: 1311503 Client Name: Animas Environmental Received by/date: anne Il-11/13/2013 9:47:00 AM Logged By: Anne Thorne an Ilm 11/13/2013 Completed By: **Anne Thorne** Reviewed By: IO Chain of Custody Yes No 🗆 Not Present 1. Custody seals intact on sample bottles? No 🗆 1 Not Present Yes 2. Is Chain of Custody complete? 3. How was the sample delivered? Courier Log In No 🗆 NA 🗌 Yes V 4. Was an attempt made to cool the samples? NA \square No 🗌 5. Were all samples received at a temperature of >0° C to 6.0°C Yes V No 🗆 Yes 🗸 6. Sample(s) in proper container(s)? V Yes 7. Sufficient sample volume for indicated test(s)? 1 No 🗌 8. Are samples (except VOA and ONG) properly preserved? NA \square Yes No V 9. Was preservative added to bottles? No VOA Vials No 🗆 Yes 10. VOA vials have zero headspace? No 🗸 11. Were any sample containers received broken? # of preserved bottles checked No for pH: V 12. Does paperwork match bottle labels? (<2 or >12 unless noted) (Note discrepancies on chain of custody) Adjusted? V No 🗆 13. Are matrices correctly identified on Chain of Custody? No Yes 🗸 14. Is it clear what analyses were requested? Yes 🗸 No 🗌 Checked by: 15. Were all holding times able to be met? (If no, notify customer for authorization.) Special Handling (if applicable) NA 🗸 Yes 🗆 No 🗆 16. Was client notified of all discrepancies with this order? Person Notified: Date eMail Phone Fax In Person By Whom: Regarding: Client Instructions: 17. Additional remarks: 18. Cooler Information Cooler No. Temp C Condition Seal Intact | Seal No. | Seal Date | Signed By Good 1.0 Yes

HALL ENVIRONMENTAL ANALYSIS LABORATORY www.hallenvironmental.com www.hallenvironmental.com 4901 Hawkins NE - Albuquerque, NM 87109 Tel. 505-345-3975 Fax 505-345-4107 Analysis Request	3TEX + MTBE + TPH (Gas only) 3TEX + MTBE + TPH (Gas only) 4TPH (Method 418.1) 5DB (Method 504.1) 4DB (Method 504.1) 5DB (Method 504.1) 6DB (Date Time Remarks: Bul 1º Cource I will pe fevari. Date Time Renarks: Bul 1º Cource I will pe fevari. Date Time Rea: 24 (up.: Pevale Fevari. 13 CALT Act Cale Cloo ordered by: Fresher Markner. This serves as notice of this possibility. Any sub-contracted data will be clearly notated on the analytical report.
Turn-Around Time: Standard Rush Suns day Project Name: Cop SanJuan 28-4 #30 Project #:	Adson D Watson Interature: C.C. Preservative FEMENTO Type Type	Wash feet weell Col	w Walter M 13 Nor accharged laboraphies.
Client: ANIWAS ENVIVONMENTAL Severes LLC Mailing Address: 624 E Comanche Farmington N.M. 87401	trix Other	1-12-13 1520 Sail SC-1	Date: Time: Relinquished by: 13 13 L2S Which Wath 13 13 L4S Whith Malle.

