Form C-144 Revised June 6, 2013

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 8750

State of New Mexico
Energy Minerals and Natural Resources
Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe. NM 87505

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office.

For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

1220 S. St. Francis Dr., S	anta Fe, NM 87505	Santa Fe, NM 87505	to the appropriate NMOCD District Office.
12582 39-07263	Proposed Altern	Pit, Below-Grade Tank, or native Method Permit or Closure	OCD Received Plan Application 1-16-15
Typ or p	oe of action:    Below g   Permit o   Closure   Modification   Closure   Droposed alternative metho	rade tank registration  of a pit or proposed alternative method  of a pit, below-grade tank, or proposed alternation to an existing permit/or registration  plan only submitted for an existing permitted	native method  I or non-permitted pit, below-grade tank,
	10 March 1 M	1: dto	alt in pollution of surface water, ground water or the e governmental authority's rules, regulations or ordinances.
1. Operator: ConocoPl	nillins Company	OGRID #: 217	7817
		M 87499	
API Number: 30-0	39-07263	OCD Permit Number:	
U/L or Otr/Otr A (1	NENE) Section 36 Town	nship <u>28N</u> Range <u>7W</u> County: <u>Rio Arriba</u>	and the state of t
Center of Proposed D	Design: Latitude 36.62205300	NLongitude107.51932700wW_	NAD: ⊠1927 □ 1983
Surface Owner: X F	ederal  State Private	Tribal Trust or Indian Allotment	
Temporary: Drill Permanent En Lined Unline String-Reinforce	nergency	P&A	Low Chloride Drilling Fluid ☐ yes ☐ no  Other  _bbl Dimensions: L x W x D
3.	k: Subsection I of 19.15.17	7.11 NMAC	
	120 bbl Type		
	naterial: Metal		
☐ Secondary conta	ninment with leak detection	☑ Visible sidewalls, liner, 6-inch lift and automat	tic overflow shut-off
☐ Visible sidewall	s and liner   Visible sidew	valls only  Other	
Liner type: Thickne	ss <u>45</u>	mil HDPE PVC Other LLDPE	<u> </u>
4.  Alternative Me Submittal of an exce	thod: eption request is required. Ex	xceptions must be submitted to the Santa Fe Envir	onmental Bureau office for consideration of approval.
5.  Fencing: Subsection  Chain link, six f institution or churc.	on D of 19.15.17.11 NMAC (a eet in height, two strands of b	Applies to permanent pits, temporary pits, and below arbed wire at top (Required if located within 1000 evenly spaced between one and four feet	ow-grade tanks)

Alternate. Please specify

6.  Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)  □ Screen □ Netting □ Other	
Monthly inspections (If netting or screening is not physically feasible)	
7.  Signs: Subsection C of 19.15.17.11 NMAC  ☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers  ☐ Signed in compliance with 19.15.16.8 NMAC	
Variances and Exceptions:  Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.  Please check a box if one or more of the following is requested, if not leave blank:  Variance(s): Requests must be submitted to the appropriate division district for consideration of approval.  Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	
9. Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Siting criteria does not apply to drying pads or above-grade tanks.	table source
General siting	
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank.  - □ NM Office of the State Engineer - iWATERS database search; □ USGS; ☑ Data obtained from nearby wells	☐ Yes ☑ No ☐ NA
Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☑ NA
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks)  - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within the area overlying a subsurface mine. (Does not apply to below grade tanks)  - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
Within an unstable area. (Does not apply to below grade tanks)  - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ☐ No
Within a 100-year floodplain. (Does not apply to below grade tanks)  - FEMA map	Yes No
Below Grade Tanks	
Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No
Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;  NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☑ No
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)	
Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.)  - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes No
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	
Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application.  NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No

Within 100 feet of a wetland.  - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pit Non-low chloride drilling fluid	
Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application;  - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet of a wetland.  - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Permanent Pit or Multi-Well Fluid Management Pit	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
<ul> <li>Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.</li> <li>Visual inspection (certification) of the proposed site; Aerial photo; Satellite image</li> </ul>	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application.  - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 500 feet of a wetland.  - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the deattached.    Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC   Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.10 Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC   Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC   Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC   Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 and 19.15.17.13 NMAC   Previously Approved Design (attach copy of design)   API Number: or Permit Number:	9 NMAC 9.15.17.9 NMAC
11.  Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC	
Instructions: Each of the following items must be attached to the application. Please matchet, by a check mark in the box, that the attached.  Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC A List of wells with approved application for permit to drill associated with the pit. Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 1 and 19.15.17.13 NMAC Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC	19.15.17.9 NMAC
☐ Previously Approved Design (attach copy of design) API Number: or Permit Number:	

<sup>2.</sup> Permanent Pi's Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the doc	cuments are
<ul> <li>httached.</li> <li>Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC</li> <li>Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC</li> <li>Climatological Factors Assessment</li> </ul>	
Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC  Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC	
Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan	
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC  Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC  Nuisance or Hazardous Odors, including H <sub>2</sub> S, Prevention Plan	
☐ Emergency Response Plan ☐ Oil Field Waste Stream Characterization	
<ul> <li>☐ Monitoring and Inspection Plan</li> <li>☐ Erosion Control Plan</li> <li>☐ Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC</li> </ul>	
13.	
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.	. 13.6
Type: ☐ Drilling ☐ Workover ☐ Emergency ☐ Cavitation ☐ P&A ☐ Permanent Pit ☒ Below-grade Tank ☐ Multi-well Flui☐ Alternative  Proposed Closure Method: ☒ Waste Excavation and Removal	id Management Pit
<ul> <li>☐ Waste Removal (Closed-loop systems only)</li> <li>☐ On-site Closure Method (Only for temporary pits and closed-loop systems)</li> </ul>	
☐ In-place Burial ☐ On-site Trench Burial ☐ Alternative Closure Method	
14.  Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be at closure plan. Please indicate, by a check mark in the box, that the documents are attached.  □ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC  □ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC  □ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)  □ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC  □ Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	ttached to the
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. Plants 17.10 NMAC for guidance.	ce material are lease refer to
19.15.17.10 NMAC for guidance.  Ground water is less than 25 feet below the bottom of the buried waste.	☐ Yes ☐ No
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	□ NA □ Yes □ No
Ground water is between 25-50 feet below the bottom of the buried waste  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	□ NA
Ground water is more than 100 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application.  - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	Yes No
Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	

adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within the area overlying a subsurface mine.  - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
Within an unstable area.  - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological	
- Engineering measures incorporated into the design, NW Bureau of Geology & Wilhelm Resources, 95 95, 4 9 Society; Topographic map	☐ Yes ☐ No
Within a 100-year floodplain FEMA map	☐ Yes ☐ No
16. On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure	plan. Please indicate,
by a check mark in the box, that the documents are attached.  Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC  Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC  Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 19.15.1  Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC  Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC  Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC  Waste Material Sampling Plan - based upon the appropriate requirements of 19.15.17.13 NMAC  Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards ca Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC  Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC  Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	17.11 NMAC 9.15.17.11 NMAC
17. Operator Application Certification:	
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and be	belief.
Name (Print): Title:	
Signature: Date:	
Signature	
e-mail address: Telephone:	
e-mail address: Telephone:	
e-mail address: Telephone:	Feb 24, 2015
e-mail address: Telephone:  18.  OCD Approval:  Permit Application (including closure plan)  Closure Plan (only)  OCD Conditions (see attachment)	
e-mail address:	Feb 24, 2015  tting the closure report.
e-mail address:	Feb 24, 2015  tting the closure report. o not complete this
e-mail address:	Feb 24, 2015  tting the closure report. not complete this

22.	
Operator Closure Certification:  I hereby certify that the information and attachments submitted with this closure.	report is true, accurate and complete to the best of my knowledge and
I hereby certify that the information and attachments submitted with this crossic belief. I also certify that the closure complies with all applicable closure required.	rements and conditions specified in the approved closure plan.
Name (Print): Kenny Davis	Title: Staff Regulatory Technician
Signature:	Date: <u>12/3/14</u>
e-mail address: kenny.r.davis@conocophillips.com	Telephone:505-599-4045

# ConocoPhillips Company San Juan Basin Below Grade Tank Closure Report

Lease Name: SJ 28-7 Unit 11

API No.: 3003907263

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure of the below-grade tank referenced above. All proper documentation regarding closure activities is being included with the C-144.

### General Plan:

- 1. COPC shall close a below-grade tank within 60 days of cessation of operations per Subsection G.4 of 19.15.17.13 NMAC. This will include a) below-grade tanks that do not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC; b) an earlier date that the division requires because of imminent danger to fresh water, public health or the environment. For any closure, BR will file the C144 Closure Report as required.
- 2. The below-grade tank referenced above was permitted and closed within 60 days of cessation of the below-grade tanks operation.
- 3. COPC shall remove liquids and sludge from a below-grade tank prior to implementing a closure method and shall dispose of the liquids and sludge in a division-approved facility. The facilities to be used will be Basin Disposal (Permit #NM-01-005), JFJ Landfarm % Industrial Ecosystem Inc. (Permit # NM-01-0010B) and Envirotech Land Farm (Permit #NM-01-011). The liner after being cleaned well (Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC) will be disposed of at the San Juan County Regional Landfill located on CR 3100.

All recovered liquids were disposed of at Basin Disposal (Permit #NM-01-005) and any sludge or soil required to be removed to facilitate closure was hauled to Envirotech Land Farm (Permit #NM-01-011) and JFJ Landfarm % IEI (Permit #NM-01-0010B). The liner was cleaned per Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC was disposed of at the San Juan County Regional Landfill located on CR 3100.

4. COPC Will receive prior approval to remove the below-grade tank and dispose of it in a division-approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves.

The below-grade tank was disposed of in a division-approved manner.

5. If there is any on-site equipment associated with a below-grade tank, then COPC shall remove the equipment, unless the equipment is required for some other purpose.

All on-site equipment associated with the below-grade tank was removed.

6. COPC will test the soils beneath the below-grade tank to determine whether a release has occurred. COPC shall collect, at a minimum, a five point, composite sample; collect individual grab samples from any area that is wet, discolored or showing other evidence of a release; and analyzed for the constituents listed in Table I of 19.15.17.13 NMAC. COPC shall notify the division of its results on form C-141.



7. A five point composite sample was taken of the below-grade tank using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached).

Components	Tests Method	Limit (mg/kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	100
Chlorides	EPA 300.1	250

 If COPC or the division determines that a release has occurred, then COPC shall comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC, as appropriate.

A release was not determined for the above referenced well.

If the sampling program demonstrates that a release has not occurred or that any release does not exceed the
concentrations specified in Table I of 19.15.17.13 NMAC, then COPC shall backfill the excavation with compacted,
non-waste containing, earthen material; construct a division-prescribed soil cover; recontour and re-vegetate the
site.

The below-grade tank area passed all requirements of Paragraph (4) of Subsection E of 19.15.17.13 NMAC and was backfilled with compacted, non-waste containing, earthen material.

- 10. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email or verbally. The notification of closure will include the following:
  - i. Operator's name
  - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.

Notification is missing due to employee turnovers. ConocoPhillips has reviewed our internal processes and has updated them to include the required 72 hour notification.

11. The surface owner shall be notified of COPC's closing of the below-grade tank 72 hours, but not more than one week, prior to closure as per the approved closure plan via certified mail, return receipt requested.

The closure process notification to the landowner not found. COPC was not aware that the original notification sent at the time of Permitting was not the only closure notification required.

ConocoPhillips has reviewed our internal processes and has updated them to include the required 72 hour notification.

12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The below-grade tank area was re-contoured to match fit, shape, line, form and texture of the surrounding area. Re-shaping, including drainage control, to prevent ponding and erosion. Natural drainages were unimpeded and water bars and/or silt traps were placed in areas where needed to prevent erosion on a large scale. Final recontour has a uniform appearance with smooth surface, fitting the natural landscape.

13. COPC Shall seed the disturbed areas the first favorable growing season following closure of a below-grade tank. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved

methods. BLM stipulated seed mixes will used on federally regulated lands and division-approved seed mixtures (administratively approved if required) will be utilized on all State or private lands. A uniform vegetative cover has been established that reflects a life-form ratio of plus or minus fifty percent (50%) of pre- disturbance levels and a total percent plant cover of at least seventy percent (70%) of pre-disturbance levels, excluding noxious weeds. If alternate seed mix is required by the state, private owner or tribe, it will be implemented with administrative approval if needed. COPC will repeat seeding or planting will be continued until successful vegetative growth occurs.

Provision 13 was accomplished through complying with BLM seeding requirements as allowed by the BLM/OCD MOU.

14. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material, with chloride concentrations less than 600 mg/kg as analyzed by EPA Method 300.0, to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.

The below-grade tank area was backfilled and more than four feet of cover was achieved and the cover included one foot of suitable material to establish vegetation at the site.

- 15. All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on C-144 and incorporate the following:
  - Soil Backfilling and Cover Installation (See Report)
  - Re-vegetation application rates and seeding techniques (See Report)
  - Photo documentation of the site reclamation (Included as an attachment)
  - Confirmation Sampling Results (Included as an attachment)
  - Proof of closure notice (Included as an attachment)

Closure Documentation was not submitted within the 60 day requirement due to employee turnovers. ConocoPhillips has reviewed our internal processes and has updated them to ensure closure documentation is submitted with the 60 day time frame.



May 3, 2013

Lisa Hunter
ConocoPhillips
San Juan Business Unit
Office 214-04
5525 Hwy 64
Farmington, New Mexico 87401

www.animasenvironmental.com

624 E. Comanche Farmington, NM 87401 505-564-2281

> Durango, Colorado 970-403-3084

RE: Below Grade Tank Closure Report

San Juan 28-7 #11
Rio Arriba County, New Mexico

Dear Ms. Hunter:

Animas Environmental Services, LLC (AES) is pleased to provide the final report associated with the below grade tank (BGT) closure at ConocoPhillips (CoP) San Juan 28-7 #11, located in Rio Arriba County, New Mexico. Tank removal had been completed by CoP contractors prior to AES' arrival at the location.

## 1.0 Site Information

### 1.1 Location

Site Name – San Juan 28-7 #11

Legal Description – NW¼ NE¼, Section 36, T28N, R7W, Rio Arriba County, New Mexico Well Latitude/Longitude – N36.62208 and W107.51995, respectively BGT Latitude/Longitude – N36.62202 and W107.51970, respectively Land Jurisdiction – Bureau of Land Management (BLM)

Figure 1. Topographic Site Location Map Figure 2. Aerial Site Map, March 2013

# 1.2 NMOCD Ranking

Prior to site work, the New Mexico Oil Conservation Division (NMOCD) database was reviewed, and no ranking information was located. The New Mexico Office of the State Engineer (NMOSE) database was reviewed for nearby water wells, and no registered water wells were reported to be located within 1,000 feet of the location. Additionally, Google Earth and the New Mexico Tech Petroleum Recovery Research Center online mapping tool (<a href="http://ford.nmt.edu/react/project.html">http://ford.nmt.edu/react/project.html</a>) were accessed to aid in the identification of downgradient surface water.

Once on site, AES personnel further assessed the ranking using topographical interpretation, Global Positioning System (GPS) elevation readings, and visual reconnaissance. AES personnel concluded that depth to groundwater at the site was greater than 100 feet below ground surface (bgs). An unnamed wash which discharges to Carrizo Creek, is located approximately 185 feet south of the location. Based on this information, the location was assessed a ranking score of 20.

# 1.3 BGT Closure Assessment

AES was initially contacted by Danny Rudder, CoP representative, on March 25, 2013, and on March 26, 2013, Deborah Watson and Corwin Lamemon of AES mobilized to the location. AES personnel collected six soil samples from below the BGT liner. Four samples were collected from the perimeter of the BGT footprint, one sample was collected from the center of the BGT footprint, and one sample was composited from the four perimeter samples and one center sample.

# 2.0 Soil Sampling

On March 26, AES personnel conducted field screening and collected five soil samples (S-1 through S-5) and one 5-point composite (SC-1) from below the BGT. Soil samples were collected from approximately 0.5 feet below the former BGT for field screening of volatile organic compounds (VOCs) and total petroleum hydrocarbon (TPH). Soil sample SC-1 was field screened for VOCs and chloride and was submitted for confirmation laboratory analysis. Soil sample locations are included on Figure 2.

# 2.1 Field Screening

2.1.1 Volatile Organic Compounds

A portion of each sample was utilized for field screening of VOC vapors with a photo-ionization detector (PID) organic vapor meter (OVM). Before beginning field screening, the PID-OVM was first calibrated with 100 parts per million (ppm) isobutylene gas.

2.1.2 Total Petroleum Hydrocarbons

Soil samples were also analyzed in the field for TPH per USEPA Method 418.1 using a Buck Scientific Model HC-404 Total Hydrocarbon Analyzer Infrared Spectrometer (Buck). A 3-point calibration was completed prior to conducting soil analyses. Field analytical protocol followed AES's Standard Operating Procedure: Field Analysis Total Petroleum Hydrocarbons per EPA Method 418.1.

## 2.1.3 Chlorides

Soil sample SC-1 was field screened for chlorides using Chloride Drop Count Titration with silver nitrate. Sampling and analysis methods followed procedures provided by Hach Company.

# 2.2 Laboratory Analyses

The composite soil sample SC-1 collected for laboratory analysis was placed into a new, clean, laboratory-supplied container, which was then labeled, placed on ice, and logged onto a sample chain of custody record. The sample was maintained on ice until delivery to the analytical laboratory, Hall Environmental Analysis Laboratory (Hall), in Albuquerque, New Mexico. Soil sample SC-1 was laboratory analyzed for:

- Benzene, toluene, ethylbenzene, and xylene (BTEX) per U.S. Environmental Protection Agency (USEPA) Method 8021B; and
- Chloride per USEPA Method 300.0.

# 2.3 Field and Laboratory Analytical Results

Field screening readings for VOCs via OVM ranged from 5.5 ppm in S-4 up to 8.6 ppm in S-1. Field TPH concentrations were less than 20.0 mg/kg in all samples (S-1 through S-5). The field chloride concentration in SC-1 was 60 mg/kg. Field screening results are summarized in Table 1 and presented on Figure 2. The AES Field Screening Report is attached.

Table 1. Soil Field Screening VOCs, TPH, and Chloride Results
San Juan 28-7 #11 BGT Closure, March 2013

Sample ID	Date Sampled	Depth below BGT (ft)	VOCs OVM Reading (ppm)	Field TPH (mg/kg)	Field Chlorides (mg/kg)
	Level (NMAC 19.	15.17.13E)		100	250
S-1	03/26/13	0.5	8.6	<20.0	NA
S-2	03/26/13	0.5	7.2	<20.0	NA
S-3	03/26/13	0.5	5.7	<20.0	NA
S-4	03/26/13	0.5	5.5	<20.0	NA
S-5	03/26/13	0.5	6.0	<20.0	NA
SC-1	03/26/13	0.5	6.5	NA	60

NA - not analyzed

Laboratory analytical results reported benzene and total BTEX concentrations in SC-1 as less than 0.050 mg/kg and 0.25 mg/kg, respectively. The laboratory chloride concentration was reported below the laboratory detection limit of 30 mg/kg. Laboratory analytical results are summarized in Table 2 and included on Figure 2. Laboratory analytical reports are attached.

Table 2. Soil Laboratory Analytical Results
San Juan 28-7 #11 BGT Closure, March 2013

Sample ID	Date Sampled	Depth (ft)	Benzene (mg/kg)	Total BTEX (mg/kg)	TPH- GRO (mg/kg)	TPH- DRO (mg/kg)	Chlorides (mg/kg)
NMOCD Action	Level (NMAC 19.15	.17.13E)	0.2	50	1	00	250
SC-1	03/26/13	0.5	<0.050	<0.25	NA	NA	<30

NA - not analyzed

# 3.0 Conclusions and Recommendations

NMOCD action levels for BGT closures are specified in New Mexico Administrative Code (NMAC) 19.15.17.13E. Field TPH concentrations were below the NMOCD action level of 100 mg/kg, with concentrations reported at less than 20.0 mg/kg in all samples. Benzene and total BTEX concentrations in SC-1 were below the NMOCD action levels of 0.2 mg/kg and 50 mg/kg, respectively. Chloride concentrations in SC-1 were below the NMOCD action level of 250 mg/kg. Based on field screening and laboratory analytical results for benzene, total BTEX, TPH, and chlorides, no further work is recommended at the San Juan 28-7 #11.

If you have any questions about this report or site conditions, please do not hesitate to contact Deborah Watson at (505) 564-2281.

Sincerely,

Stephanie Lynn

**Environmental Engineer** 

Atephanicolyn

Lisa Hunter San Juan 28-7 #11 BGT Closure Report May 3, 2013 Page 5 of 5


Elizabeth V MiNdly

Elizabeth McNally, P.E.

## Attachments:

Figure 1. Topographic Site Location Map Figure 2. Aerial Site Map, March 2013 AES Field Screening Report 032613 Hall Analytical Report 1303A36

R:\Animas 2000\Dropbox\2013 Projects\ConocoPhillips\SJ 28-7 #11\San Juan 28-7 #11 BGT Closure Report 050313.docx

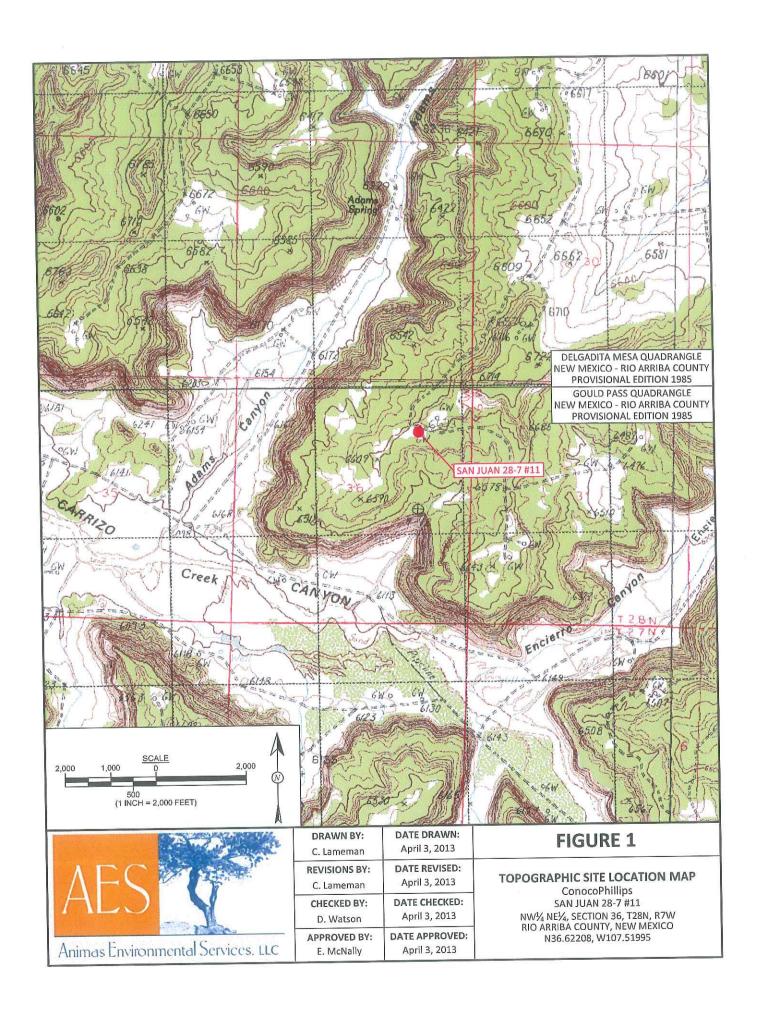

LEGEND


SAMPLE LOCATIONS

	Field Scre		esuits	
Sample ID	Date	OVM- PID (ppm)	TPH (mg/kg)	Chlorides (mg/kg)
NMOCD AC	TION LEVEL		100	250
S-1	3/26/13	8.6	<20.0	NA
S-2	3/26/13	7.2	<20.0	NA
S-3	3/26/13	5.7	<20.0	NA
S-4	3/26/13	5.5	<20.0	NA
S-5	3/26/13	6.0	<20.0	NA
SC-1	3/26/13	6.5	NA	60

		Laborato	ry Analytica	al Results		
Sample ID	Date	Benzene (mg/kg)	Total BTEX (mg/kg)	TPH - GRO (mg/kg)	TPH - DRO (mg/kg)	Chlorides (mg/kg)
NMOCD ACTION LEVEL		0.2	50	100		250
SC-1	1/1/13	<0.050	<0.25	NA	NA	<30

SAN JUAN 28-7 #11 WELL MONUMENT





AERIAL SOURCE: © 2012 MICROSOFT CORPORATION - AVAILABLE EXCLUSIVELY BY DIGITALGLOBE

$\Lambda$	FC		THE RES	E.
$\vdash \vdash$	L	)		
		H-T-S	1700	

Ī	DRAWN BY:	DATE DRAWN:
	C. Lameman	April 3, 2013
	REVISIONS BY: C. Lameman	DATE REVISED: April 3, 2013
	CHECKED BY: D. Watson	DATE CHECKED: April 3, 2013
	APPROVED BY: E. McNally	DATE APPROVED: April 3, 2013

# AERIAL SITE MAP BELOW GRADE TANK CLOSURE MARCH 2013 ConocoPhillips

FIGURE 2

ConocoPhillips
SAN JUAN 28-7 #11
NW¼ NE¼, SECTION 36, T28N, R7W
RIO ARRIBA COUNTY, NEW MEXICO
N36.62208, W107.51995

# **AES Field Screening Report**

Client: ConocoPhillips


Animas Environmental Services. LLC

www.animasenvironmental.com

624 E. Comanche Farmington, NM 87401

505-564-2281

Project Location: San Juan 28-7 #11

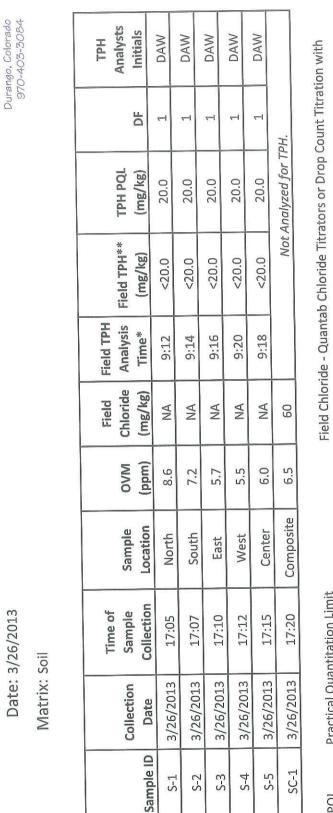

Practical Quantitation Limit PQL

SC-1

5-3 **S-4** S-5

S-1 **S-2**  Not Detected at the Reporting Limit 2

Not Analyzed MA Dilution Factor

\*Field screening was completed on March 27, 2013.

\*\*Field TPH concentrations recorded may be below PQL.

Analyst:

Total Petroleum Hydrocarbons - USEPA 418.1

Silver Nitrate



Hall Environmental Analysis Laboratory
4901 Hawkins NE
Albuquerque, NM 87109
TEL: 505-345-3975 FAX: 505-345-4107
Website: www.hallenvironmental.com

March 28, 2013

FAX

Debbie Watson
Animas Environmental Services
624 East Comanche
Farmington, NM 87401
TEL: (505) 486-4071

RE: COP San Juan 28-7 #11

OrderNo.: 1303A36

Dear Debbie Watson:

Hall Environmental Analysis Laboratory received 1 sample(s) on 3/27/2013 for the analyses presented in the following report.

These were analyzed according to EPA procedures or equivalent. To access our accredited tests please go to <a href="www.hallenvironmental.com">www.hallenvironmental.com</a> or the state specific web sites. See the sample checklist and/or the Chain of Custody for information regarding the sample receipt temperature and preservation. Data qualifiers or a narrative will be provided if the sample analysis or analytical quality control parameters require a flag. All samples are reported as received unless otherwise indicated. Lab measurement of analytes considered field parameters that require analysis within 15 minutes of sampling such as pH and residual chlorine are qualified as being analyzed outside of the recommended holding time.

Please don't hesitate to contact HEAL for any additional information or clarifications.

Sincerely,

Andy Freeman

Laboratory Manager

Only

4901 Hawkins NE

Albuquerque, NM 87109

Date Reported: 3/28/2013

# Hall Environmental Analysis Laboratory, Inc.

**CLIENT:** Animas Environmental Services

COP San Juan 28-7 #11 Project:

1303A36-001 Lab ID:

Client Sample ID: SC-1

Collection Date: 3/26/2013 5:20:00 PM

Received Date: 3/27/2013 9:55:00 AM Matrix: MEOH (SOIL)

Analyses	Result	RL Qu	al Units	DF	Date Analyzed
EPA METHOD 8021B: VOLATILES					Analyst: NSB
Benzene	ND	0.050	mg/Kg	1	3/27/2013 12:06:06 PM
Toluene	ND	0.050	mg/Kg	1	3/27/2013 12:06:06 PM
Ethylbenzene	ND	0.050	mg/Kg	1	3/27/2013 12:06:06 PM
Xylenes, Total	ND	0.10	mg/Kg	1	3/27/2013 12:06:06 PM
Surr: 4-Bromofluorobenzene	97.9	80-120	%REC	1	3/27/2013 12:06:06 PM
EPA METHOD 300.0: ANIONS					Analyst: JRR
	MD	30	mg/Kg	20	3/27/2013 11:43:49 AM
Chloride	ND	30	mg/Ng	20	0.2.7.20.0011.10110.111

### Qualifiers:

- Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- Analyte detected below quantitation limits J
- Sample pH greater than 2 P
- Reporting Detection Limit

- Analyte detected in the associated Method Blank
- Holding times for preparation or analysis exceeded H
- ND Not Detected at the Reporting Limit
  - RPD outside accepted recovery limits
  - Spike Recovery outside accepted recovery limits

# **OC SUMMARY REPORT**

# Hall Environmental Analysis Laboratory, Inc.

WO#:

1303A36

28-Mar-13

Client:

Animas Environmental Services

Project:

COP San Juan 28-7 #11

Sample	ID	MB-6687

SampType: MBLK

TestCode: EPA Method 300.0: Anions

Client ID:

PBS

Batch ID: 6687

RunNo: 9467

3/27/2013 Prep Date:

Analysis Date: 3/27/2013

SeqNo: 270247

Units: mg/Kg

Analyte

PQL Result

SPK value SPK Ref Val %REC LowLimit

HighLimit

**RPDLimit** Qual

Chloride

1.5 ND

Sample ID LCS-6687

SampType: LCS Batch ID: 6687

RunNo: 9467

TestCode: EPA Method 300.0: Anions

LowLimit

Client ID: LCSS

Units: mg/Kg

Prep Date: 3/27/2013

Analysis Date: 3/27/2013

SeqNo: 270248 %REC

Analyte

SPK value SPK Ref Val PQL Result

%RPD

%RPD

Qual

Chloride

1.5 16

0 104 HighLimit 110 **RPDLimit** 

Sample ID 1303998-001AMS

SampType: MS

TestCode: EPA Method 300.0: Anions RunNo: 9467

Client ID: Prep Date:

BatchQC

Batch ID: 6687

Units: mg/Kg

3/27/2013

Analysis Date: 3/27/2013

SeqNo: 270252

Analyte

PQL Result

Chloride

16

SPK value SPK Ref Val

15.00

%REC LowLimit 110

0

HighLimit 117 %RPD **RPDLimit** 

Qual

Sample ID 1303998-001AMSD

SampType: MSD

TestCode: EPA Method 300.0: Anions

Client ID: Prep Date:

BatchQC 3/27/2013

Batch ID: 6687 Analysis Date: 3/27/2013

15

RunNo: 9467 SegNo: 270253

Units: mg/Kg

%RPD

Qual

PQL

SPK value SPK Ref Val %REC LowLimit HighLimit

6.37

**RPDLimit** 

Analyte Chloride

Result 15 15

15.00

15.00

103

64.4

64.4

117

Qualifiers:

Value exceeds Maximum Contaminant Level.

Value above quantitation range Е

Analyte detected below quantitation limits J

Sample pH greater than 2 P Reporting Detection Limit RL

Analyte detected in the associated Method Blank

Holding times for preparation or analysis exceeded Η

Not Detected at the Reporting Limit ND RPD outside accepted recovery limits R

Spike Recovery outside accepted recovery limits

Page 2 of 3

# QC SUMMARY REPORT

# Hall Environmental Analysis Laboratory, Inc.

WO#:

1303A36

28-Mar-13

Client:

Animas Environmental Services

0.98

1.0

3.1

1.1

0.050

0.050

0.10

1.000

1.000

3.000

1.000

Project:

Toluene

Ethylbenzene

Xylenes, Total

Surr: 4-Bromofluorobenzene

COP San Juan 28-7 #11

Toject.									
Sample ID MB-6664	SampType: M	BLK	Test	Code: EF	PA Method	8021B: Volati	iles		
Client ID: PBS	Batch ID: R	9453	F	RunNo: 94	453				
Prep Date: 3/26/2013	Analysis Date: 3	/27/2013	5	SeqNo: 2	70496	Units: mg/K	g		
Analyte	Result PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	ND 0.050	)							
Toluene	ND 0.050	)							
Ethylbenzene	ND 0.050	)							
Xylenes, Total	ND 0.10	)			DECEM-				
Surr: 4-Bromofluorobenzene	1.0	1.000		100	80	120			
Sample ID LCS-6664 SampType: LCS TestCode: EPA Method 8021B: Volatiles									
Client ID: LCSS	Batch ID: F	3453	I	RunNo: 9	453				
Prep Date: 3/26/2013	Analysis Date:	3/27/2013		SeqNo: 2	70497	Units: mg/k	(g		
Analyte	Result PQL	. SPK value	SPK Ref Val	%REC		HighLimit	%RPD	RPDLimit	Qual
Benzene	0.95 0.05	0 1.000	0	95.0	80	120			

0

0

0

## Qualifiers:

Value exceeds Maximum Contaminant Level. \*

Value above quantitation range E

Analyte detected below quantitation limits J

Sample pH greater than 2 P

Reporting Detection Limit

Analyte detected in the associated Method Blank В

Holding times for preparation or analysis exceeded H

80

80

80

80

98.4

99.9

105

107

120

120

120

120

Not Detected at the Reporting Limit

RPD outside accepted recovery limits R

Spike Recovery outside accepted recovery limits

Page 3 of 3



Hall Environmental Analysis Laboratory 4901 Hawkins NE Albuquerque, NM 87105

TEL: 505-345-3975 FAX: 505-345-410; Website: www.hallenvironmental.com

# Sample Log-In Check List

Client Name: Animas Environmental Work Order Number	r: 1303A36		RcptNo: 1	
Received by/date: All and 13			The state of the s	2 1 12
Logged By: Lindsay Mangin 3/27/2013 9:55:00 AM	n de			
Completed By: Lindsay Mangin 3/27/2013 10:10:12 A	AM X			
Reviewed By: MA 03/27/13	De			
Chain of Custody	IV . TETT			
Custody seals intact on sample bottles?	Yes 🗆	No 🗆	Not Present	
2. Is Chain of Custody complete?	Yes 🗹	No 🗆	Not Present	
3. How was the sample delivered?	Courier			
Log In				
Was an attempt made to cool the samples?	Yes 🗹	No 🗆	NA 🗆	
T. Was an attempt made to cool the samples.				
5. Were all samples received at a temperature of >0° C to 6.0°C	Yes 🗹	No 🗆	NA 🗆	
6. Sample(s) in proper container(s)?	Yes 🗹	No 🗆		
7. Sufficient sample volume for indicated test(s)?	Yes 🗹	No 🗆		
Are samples (except VOA and ONG) properly preserved?	Yes 🗹	No 🗆		
9. Was preservative added to bottles?	Yes 🗆	No 🗹	NA 🗆	
10.VOA vials have zero headspace?	Yes 🗆	No 🗆	No VOA Vials	
11. Were any sample containers received broken?	Yes	No 🗹	W	
11. Word dily dample definance			# of preserved bottles checked	
12. Does paperwork match bottle labels?	Yes 🗹	No 🗆	for pH: (<2 o	>12 unless note
(Note discrepancies on chain of custody)	Yes 🗹	No 🗆	Adjusted?	
<ul><li>13. Are matrices correctly identified on Chain of Custody?</li><li>14. Is it clear what analyses were requested?</li></ul>	Yes 🗹	No 🗆		
15. Were all holding times able to be met?	Yes 🗹	No 🗆	Checked by:	ACID CONTRACTOR
(If no, notify customer for authorization.)				
Special Handling (if applicable)				
16. Was client notified of all discrepancies with this order?	Yes	No 🗆	NA ☑	
Person Notified: Date	e:	3 (3)		
By Whom: Via:	eMail	Phone Fax	☐ In Person	100 EW
Regarding:	. marana 25 rahama ayar		to the terms to be	
Client Instructions:			4 - 42 <u>1 - 9 - 9 - 9 - 9 - 9 - 9 - 9 - 9 - 9 - </u>	
17. Additional remarks:				
18 Cooler Information				
Cooler No Temp ºC Condition Seal Intact Seal No	Seal Date	Signed By		
18. Cooler Information	Seal Date	Signed By	}	

C	ביות ביות	of-Cu	Chain-of-Custody Record	Tum-Around	nd Time:				I		L	>	S.	2	Σ	HALL ENVIRONMENTAL	3	
Client:	Ania	100	Anima Francisco mandal	Standard		KRUSH Same day		Ш	4	K	7	SI	1	00	O. N.	ANALYSIS LABORATORY	ON	>
	Ch Ch	SAVICES	es UC	Project Name:		二 7 7			3	ww.h	www.hallenvironmental.com	ironm	ental	COT.	_			
Mailing	Address:	Mailing Address: (024)	E Consude	CoP Sanduan		78-1-11	4	4901 Hawkins NE - Albuquerque, NM 87109	awkin	S NE	- Alb	ndne	rque,	Z ;	8710	စ္		
1	Rimundan	nalan	N.O.	Project #:				Tel. 50	505-345-3975	-397	Anal	Fax 505-345-4107 Analysis Request	05-30 Reguir	St ta	2			
Phone #:	# 500	ال (آم	564 2281							H		(1		-				
email or Fax#:	Fax#:	inc.		Project Manager:	ger.		2011			- (	,	os'	s,g		_			
QA/QC F	QA/QC Package:		□ I evel 4 (Full Validation)	A	Walson					SIVIS		<sup>5</sup> ,PO <sub>4</sub>	35 PC			0		
Accreditation NEL AP	tation	□ Other	91	Sampler: D	Walson Tres	No. Section 1	- 1						08 \ sə			กอานอา		/IA no V
□ EDD (Type)	(Type)			Sample Tem	anioda(the.						1.000		ticid			w		, 30
Date	Time	Matrix	Sample Request ID		Preservative Type	ON AVE	BTEX +	BTEX + M	ijəM) HqT	EDB (Met	8) s'HA9 8 ARDR	7) anoinA	8081 Pes	V) 80628	9S) 0728	300.00		Air Bubb
2	1.20m		1-70	Medel	MOST COLD	1001	-	-							1	X		
5-26-15		2011	- 00	)			7.4	_					10 mg		1	-		
														1	+	+	_	
															1	+	1	1
								-			+				$\top$	+	-	
												-		1	+	+	-	
											+				$\Box$	*	$\vdash$	
								+		1						+	+	
								+			+				$\Box$		$\vdash$	$\Box$
											-	_6				-		
Date:	Time:	Religquished by:	ished by:	Received by:	beb	3/57/(3	Remark			方の	Pull to Consolhullys	SEE	الم الم	~ S.	20 3	Superisor. Sheldon Montaya.	Me	Rapu
Date: 2	E III		- A	Received by:	1920	Date Time	act c	act-code: TIIO	J.F.	0		25.0	user in ordered by	3	Ã	ordered by: Danny Rudder	Per	3
The last	If necessary	y, Samples submitte	If necessary, samples submitted to Hall Environmental may be subconficulted to	be subconfracted to other	accredited laborate	This serves	his possib	lity. Any	sub-cor	fracted	data will	be clea	arly note	nted on	the ar	salytical n	aport	

District I 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

Surface Owner Federal

Section

36

Township

28N

Range

**7W** 

Unit Letter

A

# State of New Mexico Energy Minerals and Natural Resources

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

Revised October 10, 2003

Form C-141

Submit 2 Copies to appropriate District Office in accordance with Rule 116 on back side of form

### Release Notification and Corrective Action Final Report **OPERATOR** Initial Report Name of Company ConocoPhillips Contact Kenny Davis Address 3401 East 30th St, Farmington, NM Telephone No.(505) 599-4045 Facility Type: Gas Well Facility Name: San Juan 28-7 Unit 11 Lease No. SF-079294 Mineral Owner Federal

### North/South Line Feet from the East/WestLine County Feet from the 1100 North 1190 East Rio Arriba

Latitude36 62205300 Langitude-107.51932700

LOCATION OF RELEASE

Lantude Joseph Longitude 107151552700								
NATURE	OF RELEASE							
Type of Release BGT Closure Summary	Volume of Release N/A	Volume Rec						
Source of Release: NONE	Date and Hour of Occurrence N/A	Date and Ho	our of Discovery N/A					
Was Immediate Notice Given?	If YES, To Whom?							
☐ Yes ☐ No ☒ Not Required	N/A							
By Whom? N/A	Date and Hour N/A							
Was a Watercourse Reached?	course Reached? If YES, Volume Impacting the Watercourse.							
N/A ☐ Yes ☒ No	N/A							
If a Watercourse was Impacted, Describe Fully.*								
N/A								
Describe Cause of Problem and Remedial Action Taken.*								
N/A								
Describe Area Affected and Cleanup Action Taken.*								
BGT Closure: NO RELEASE FOUND UPON REMOVAL								
n		9 99	NI (OCD 1 1					
I hereby certify that the information given above is true and complete to the best of my knowledge and understand that pursuant to NMOCD rules and								
regulations all operators are required to report and/or file certain release notifications and perform corrective actions for releases which may endanger								
public health or the environment. The acceptance of a C-141 report by the NMOCD marked as "Final Report" does not relieve the operator of liability								
should their operations have failed to adequately investigate and remediate contamination that pose a threat to ground water, surface water, human health or the environment. In addition, NMOCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other								
federal, state, or local laws and/or regulations.								
rederal, state, of local laws and/of regulations.	OIL CONSER'	VATIONI	MOISION					
	OIL CONSER	VAHONI	DI VIBIOIN					
Signature:								
Oightuit.	Approved by District Supervisor:							
Printed Name: Kenny Davis	Approved by District Supervisor.							
	*							
Title: Staff Regulatory Technician	Approval Date:	Expiration D	ate:					
E mail Address Vennyr davis@coneconhilling.com	Conditions of Approval:							
E-mail Address: Kenny.r.davis@conocophillips.com	Conditions of Approvai.		Attached					
Date: 12/3/14 Phone: (505) 599-4045								
Date. 12/3/17 1 Hone. (303) 337-7073								

\* Attach Additional Sheets If Necessary







