District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr.

Form C-144 Revised June 6, 2013

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office.

For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

1220 S. St. Francis Dr., Santa Fe, NM 87505 Santa Fe, NM 87505 **RECEIVED** 12613 Pit, Below-Grade Tank, or By OCD at 11:09 am, Jan 27, 2015 39-27719 Proposed Alternative Method Permit or Closure Plan Application Type of action: Below grade tank registration Permit of a pit or proposed alternative method Closure of a pit, below-grade tank, or proposed alternative method Modification to an existing permit/or registration Closure plan only submitted for an existing permitted or non-permitted pit, below-grade tank, or proposed alternative method Instructions: Please submit one application (Form C-144) per individual pit, below-grade tank or alternative request Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances. Operator: Burlington Resources Oil & Gas Company LP OGRID #: 14538 PO BOX 4289, Farmington, NM 87499 Facility or well name: San Juan 30-5 Unit 490S API Number: 30-039-27719 OCD Permit Number: ____ U/L or Qtr/Qtr O (SWSE) Section 25 Township 30N Range 6W County: Rio Ariba Center of Proposed Design: Latitude 36.77866000 °N Longitude _-107.41228000 °W NAD: ☑1927 ☐ 1983 Surface Owner:

☐ Federal ☐ State ☐ Private ☐ Tribal Trust or Indian Allotment OCD NAD83 36.77871 107.41307 Pit: Subsection F, G or J of 19.15.17.11 NMAC Closed Prior to Closure Plan Approval. Temporary: Drilling Workover Permanent Emergency Cavitation P&A Multi-Well Fluid Management Low Chloride Drilling Fluid yes no ☐ Lined ☐ Unlined Liner type: Thickness mil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other ☐ String-Reinforced Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x D ■ Below-grade tank: Subsection I of 19.15.17.11 NMAC Volume: 120 bbl Type of fluid: Produced Water Tank Construction material: Metal ☐ Secondary containment with leak detection ☐ Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off ☐ Visible sidewalls and liner ☐ Visible sidewalls only ☐ Other Liner type: Thickness ______45 ___mil ☐ HDPE ☐ PVC ☒ Other LLDPE Alternative Method: Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church)



☐ Alternate. Please specify

Four foot height, four strands of barbed wire evenly spaced between one and four feet

Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)				
☐ Screen ☐ Netting ☐ Other				
☐ Monthly inspections (If netting or screening is not physically feasible)				
7. Signs: Subsection C of 19.15.17.11 NMAC ☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers ☐ Signed in compliance with 19.15.16.8 NMAC				
Variances and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Variance(s): Requests must be submitted to the appropriate division district for consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.				
9. Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Siting criteria does not apply to drying pads or above-grade tanks.	otable source			
General siting				
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank. - □ NM Office of the State Engineer - iWATERS database search; □ USGS; ☑ Data obtained from nearby wells	☐ Yes ☒ No ☐ NA			
Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☑ NA			
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No			
Within the area overlying a subsurface mine. (Does not apply to below grade tanks) - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No			
 Within an unstable area. (Does not apply to below grade tanks) Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	☐ Yes ☐ No			
Within a 100-year floodplain. (Does not apply to below grade tanks) - FEMA map	☐ Yes ☐ No			
Below Grade Tanks				
Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No			
Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No			
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)				
Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No			
Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial application.	☐ Yes ☐ No			
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image				
Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No			

Within 100 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pit Non-low chloride drilling fluid	
Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Permanent Pit or Multi-Well Fluid Management Pit	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 Naturations: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the do attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19. and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number: or Permit Number:	O NMAC 15.17.9 NMAC
II.	
Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the do attached. Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC A List of wells with approved application for permit to drill associated with the pit. Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 and 19.15.17.13 NMAC Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:	9.15.17.9 NMAC

12.	
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the a	locuments are
Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC	
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Multi-well Flands Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method	luid Management Pit
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be a closure plan. Please indicate, by a check mark in the box, that the documents are attached. □ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC □ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC □ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) □ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC □ Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC □ Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	
15. Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sour provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. I 19.15.17.10 NMAC for guidance.	
Ground water is less than 25 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Yes No
Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	

- Written confirmation or verification from the municipality; Written approval ob	tained from the municipality	☐ Yes ☐ No			
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD-Mining and	☐ Yes ☐ No				
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map					
Within a 100-year floodplain FEMA map		Yes No			
16. On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 19.15.17.11 NMAC Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved) Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC					
Operator Application Certification: I hereby certify that the information submitted with this application is true, accurate and	l complete to the best of my knowledge and bel	ief.			
Name (Print):	Title:				
Signature:	Date:				
e-mail address:	Telephone:				
18. OCD Approval: Permit Application (including closure plan) X Closure Plan (or	Telephone:				
OCD Approval: Permit Application (including closure plan) Closure Plan (or OCD Representative Signature:	Telephone:				
OCD Approval: Permit Application (including closure plan) Closure Plan (or OCD Representative Signature: Title: Environmental Specialst OCI 19. Closure Report (required within 60 days of closure completion): 19.15.17.13 NMA Instructions: Operators are required to obtain an approved closure plan prior to imp The closure report is required to be submitted to the division within 60 days of the consection of the form until an approved closure plan has been obtained and the closure	Telephone:	Mar 30, 2015 The closure report.			
OCD Approval: Permit Application (including closure plan) Closure Plan (or OCD Representative Signature: Title: Environmental Specialst OCI 19. Closure Report (required within 60 days of closure completion): 19.15.17.13 NMA Instructions: Operators are required to obtain an approved closure plan prior to imp The closure report is required to be submitted to the division within 60 days of the consection of the form until an approved closure plan has been obtained and the closure 20. Closure Method:	Telephone: OCD Conditions (see attachment) Approval Date: OPErmit Number: Columnting any closure activities and submitting appletion of the closure activities. Please do not activities have been completed.	Mar 30, 2015 The closure report. It complete this			

22.		
Operator Closure Certification:		
I hereby certify that the information and attachments submitted with this closur	re report is true, accurate and complete to the best of my knowledge and	
belief. I also certify that the closure complies with all applicable closure require	rements and conditions specified in the approved closure plan.	
	Tivi 0, 000	
Name (Print): Kenny Davis	Title: Staff Regulatory Technician	
	7.00	
Signature:	Date: 12/2/14	
e-mail address: <u>kenny.r.davis@conocophillips.com</u>	Telephone: <u>505-599-4045</u>	

Burlington Resources Oil Gas Company, LP San Juan Basin Below Grade Tank Closure Report

Lease Name: San Juan 30- Unit 490S

API No.: 30-039-27719

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure of the below-grade tank referenced above. All proper documentation regarding closure activities is being included with the C-144.

General Plan:

- 1. BR shall close a below-grade tank within 60 days of cessation of operations per Subsection G.4 of 19.15.17.13 NMAC. This will include a) below-grade tanks that do not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC; b) an earlier date that the division requires because of imminent danger to fresh water, public health or the environment. For any closure, BR will file the C144 Closure Report as required.
- 2. The below-grade tank referenced above was permitted and closed within 60 days of cessation of the below-grade tanks operation.
- 3. BR shall remove liquids and sludge from a below-grade tank prior to implementing a closure method and shall dispose of the liquids and sludge in a division-approved facility. The facilities to be used will be Basin Disposal (Permit #NM-01-005), JFJ Landfarm % Industrial Ecosystem Inc. (Permit # NM-01-0010B) and Envirotech Land Farm (Permit #NM-01-011). The liner after being cleaned well (Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC) will be disposed of at the San Juan County Regional Landfill located on CR 3100.

All recovered liquids were disposed of at Basin Disposal (Permit #NM-01-005) and any sludge or soil required to be removed to facilitate closure was hauled to Envirotech Land Farm (Permit #NM-01-011) and JFJ Landfarm % IEI (Permit #NM-01-0010B). The liner was cleaned per Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC was disposed of at the San Juan County Regional Landfill located on CR 3100.

4. BR Will receive prior approval to remove the below-grade tank and dispose of it in a division-approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves.

The below-grade tank was disposed of in a division-approved manner.

5. If there is any on-site equipment associated with a below-grade tank, then BR shall remove the equipment, unless the equipment is required for some other purpose.

All on-site equipment associated with the below-grade tank was removed.

6. BR will test the soils beneath the below-grade tank to determine whether a release has occurred. COPC shall collect, at a minimum, a five point, composite sample; collect individual grab samples from any area that is wet, discolored or showing other evidence of a release; and analyzed for the constituents listed in Table I of 19.15.17.13 NMAC. COPC shall notify the division of its results on form C-141.

7. A five point composite sample was taken of the below-grade tank using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached).

Components	Tests Method	Limit (mg/kg)	
Benzene	EPA SW-846 8021B or 8260B	0.2	
BTEX	EPA SW-846 8021B or 8260B	50	
TPH			
Chlorides	EPA 300.1	250	

8. If BR or the division determines that a release has occurred, then BR shall comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC, as appropriate.

A release was not determined for the above referenced well.

If the sampling program demonstrates that a release has not occurred or that any release does not exceed the
concentrations specified in Table I of 19.15.17.13 NMAC, then BR shall backfill the excavation with compacted,
non-waste containing, earthen material; construct a division-prescribed soil cover; recontour and re-vegetate the
site.

The below-grade tank area passed all requirements of Paragraph (4) of Subsection E of 19.15.17.13 NMAC and was backfilled with compacted, non-waste containing, earthen material.

- 10. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.

Notification is missing due to employee turnovers. ConocoPhillips has reviewed our internal processes and has updated them to include the required 72 hour notification.

11. The surface owner shall be notified of BR's closing of the below-grade tank 72 hours, but not more than one week, prior to closure as per the approved closure plan via certified mail, return receipt requested.

The closure process notification to the landowner not found. COPC was not aware that the original notification sent at the time of Permitting was not the only closure notification required.

ConocoPhillips has reviewed our internal processes and has updated them to include the required 72 hour notification.

12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The below-grade tank area was re-contoured to match fit, shape, line, form and texture of the surrounding area. Re-shaping, including drainage control, to prevent ponding and erosion. Natural drainages were unimpeded and water bars and/or silt traps were placed in areas where needed to prevent erosion on a large scale. Final recontour has a uniform appearance with smooth surface, fitting the natural landscape.

13. BR Shall seed the disturbed areas the first favorable growing season following closure of a below-grade tank. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved

methods. BLM stipulated seed mixes will used on federally regulated lands and division-approved seed mixtures (administratively approved if required) will be utilized on all State or private lands. A uniform vegetative cover has been established that reflects a life-form ratio of plus or minus fifty percent (50%) of pre- disturbance levels and a total percent plant cover of at least seventy percent (70%) of pre-disturbance levels, excluding noxious weeds. If alternate seed mix is required by the state, private owner or tribe, it will be implemented with administrative approval if needed. COPC will repeat seeding or planting will be continued until successful vegetative growth occurs.

Provision 13 was accomplished through complying with BLM seeding requirements as allowed by the BLM/OCD MOU.

14. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material, with chloride concentrations less than 600 mg/kg as analyzed by EPA Method 300.0, to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.

The below-grade tank area was backfilled and more than four feet of cover was achieved and the cover included one foot of suitable material to establish vegetation at the site.

- 15. All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on C-144 and incorporate the following:
 - Soil Backfilling and Cover Installation (See Report)
 - Re-vegetation application rates and seeding techniques (See Report)
 - Photo documentation of the site reclamation (Included as an attachment)
 - Confirmation Sampling Results (Included as an attachment)
 - Proof of closure notice (Included as an attachment)

Closure Documentation was not submitted within the 60 day requirement due to employee turnovers. ConocoPhillips has reviewed our internal processes and has updated them to ensure closure documentation is submitted with the 60 day time frame.

AES

Animas Environmental Services, LLC

July 2, 2013

Crystal Tafoya ConocoPhillips San Juan Business Unit Office 214-05 5525 Hwy 64 Farmington, New Mexico 87401 www.animasenvironmental.com

624 E. Comanche Farmington, NM 87401 505-564-2281

> Durango, Colorado 970-403-3084

Via electronic mail to: SJBUE-Team@ConocoPhillips.com

RE: Below Grade Tank Closure Report

San Juan 30-6 #490S

Rio Arriba County, New Mexico

Dear Ms. Tafoya:

Animas Environmental Services, LLC (AES) is pleased to provide the final report associated with the below grade tank (BGT) closure at ConocoPhillips (CoP) San Juan 30-6 #490S, located in Rio Arriba County, New Mexico. Tank removal had been completed by CoP contractors prior to AES' arrival at the location.

1.0 Site Information

1.1 Location

Site Name - San Juan 30-6 #490S

Legal Description – SW¼ SE¼, Section 25, T30N, R6W, Rio Arriba County, New Mexico Well Latitude/Longitude – N36.77884 and W107.41287, respectively BGT Latitude/Longitude – N36.77871 and W107.41307, respectively Land Jurisdiction – Bureau of Land Management (BLM)

Figure 1. Topographic Site Location Map

Figure 2. Aerial Site Map, May 2013

1.2 NMOCD Ranking

Prior to site work, the New Mexico Oil Conservation Division (NMOCD) database was reviewed, and a cathodic report dated May 1991 for the San Juan 30-6 #103A, located 1,000 feet northwest of the location, reported the depth to groundwater as 120 feet below ground surface (bgs). The New Mexico Office of the State Engineer (NMOSE) database was reviewed for nearby water wells, and no registered water wells were

reported to be located within 1,000 feet of the location. Additionally, Google Earth and the New Mexico Tech Petroleum Recovery Research Center online mapping tool (http://ford.nmt.edu/react/project.html) were accessed to aid in the identification of downgradient surface water.

Once on site, AES personnel further assessed the ranking using topographical interpretation, Global Positioning System (GPS) elevation readings, and visual reconnaissance. AES personnel concluded that depth to groundwater at the site was greater than 100 feet bgs. An unnamed wash which discharges to La Jara Canyon is located approximately 500 feet west-northwest of the location. Based on this information, the location was assessed a ranking score of 10.

1.3 BGT Closure Assessment

AES was initially contacted by Freddie Martinez, CoP representative, on May 8, 2013, and on May 9, 2013, Heather Woods and Jesse Christopherson of AES mobilized to the location. AES personnel collected six soil samples from below the BGT liner. Four samples were collected from the perimeter of the BGT footprint, one sample was collected from the center of the BGT footprint, and one sample was composited from the four perimeter samples and one center sample.

2.0 Soil Sampling

On May 9, 2013, AES personnel conducted field screening and collected five soil samples (S-1 through S-5) and one 5-point composite (SC-1) from below the BGT. Soil samples were collected from approximately 0.5 feet below the former BGT for field screening of volatile organic compounds (VOCs) and total petroleum hydrocarbon (TPH). Soil sample SC-1 was field screened for VOCs and chloride and was submitted for confirmation laboratory analysis. Soil sample locations are included on Figure 2.

2.1 Field Screening

2.1.1 Volatile Organic Compounds

A portion of each sample was utilized for field screening of VOC vapors with a photo-ionization detector (PID) organic vapor meter (OVM). Before beginning field screening, the PID-OVM was first calibrated with 100 parts per million (ppm) isobutylene gas.

2.1.2 Total Petroleum Hydrocarbons

Soil samples were also analyzed in the field for TPH per USEPA Method 418.1 using a Buck Scientific Model HC-404 Total Hydrocarbon Analyzer Infrared Spectrometer (Buck). A 3-point calibration was completed prior to conducting soil analyses. Field analytical

protocol followed AES's Standard Operating Procedure: Field Analysis Total Petroleum Hydrocarbons per EPA Method 418.1.

2.1.3 Chlorides

Soil sample SC-1 was field screened for chlorides using Chloride Drop Count Titration with silver nitrate. Sampling and analysis methods followed procedures provided by Hach Company.

2.2 Laboratory Analyses

The composite soil sample SC-1 collected for laboratory analysis was placed into a new, clean, laboratory-supplied container, which was then labeled, placed on ice, and logged onto a sample chain of custody record. The sample was maintained on ice until delivery to the analytical laboratory, Hall Environmental Analysis Laboratory (Hall), in Albuquerque, New Mexico. Soil sample SC-1 was laboratory analyzed for:

- Benzene, toluene, ethylbenzene, and xylene (BTEX) per U.S. Environmental Protection Agency (USEPA) Method 8260B; and
- Chloride per USEPA Method 300.0.

2.3 Field and Laboratory Analytical Results

Field screening readings for VOCs via OVM ranged from 0.1 ppm in S-2, S-3, and SC-1 up to 0.4 ppm in S-4 and S-5. Field TPH concentrations were less than 20.0 mg/kg in each sample (S-1 through S-5). The field chloride concentration in SC-1 was 60 mg/kg. Field screening results are summarized in Table 1 and presented on Figure 2. The AES Field Screening Report is attached.

Table 1. Soil Field Screening VOCs, TPH, and Chloride Results

Sample ID	Date Sampled	Depth below BGT (ft)	VOCs OVM Reading (ppm)	Field TPH (mg/kg)	Field Chlorides (mg/kg)
NMOCD Action L	evel (NMAC 19.1	15.17.13E)	an an	100	250
S-1	5/9/13	0.5	0.2	<20.0	NA
S-2	5/9/13	0.5	0.1	<20.0	NA
S-3	5/9/13	0.5	0.1	<20.0	NA
S-4	5/9/13	0.5	0.4	<20.0	NA
S-5	5/9/13	0.5	0.4	<20.0	NA
SC-1	5/9/13	0.5	0.1	NA	60

NA - not analyzed

Laboratory analytical results reported benzene and total BTEX concentrations in SC-1 as less than 0.050 mg/kg and 0.25 mg/kg, respectively. The laboratory chloride concentration was reported below the laboratory detection limit of 30 mg/kg. Laboratory analytical results are summarized in Table 2 and included on Figure 2. Laboratory analytical reports are attached.

Table 2. Soil Laboratory Analytical Results
San Juan 30-6 #490S BGT Closure, May 2013

Sample ID	Date Sampled	Depth (ft)	Benzene (mg/kg)	Total BTEX (mg/kg)	TPH- GRO (mg/kg)	TPH- DRO (mg/kg)	Chlorides (mg/kg)
NMOCD Action	Level (NMAC 19.15	.17.13E)	0.2	50	1	00	250
SC-1	5/9/13	0.5	<0.050	<0.25	NA	NA	<30

NA - not analyzed

3.0 Conclusions and Recommendations

NMOCD action levels for BGT closures are specified in New Mexico Administrative Code (NMAC) 19.15.17.13E. Field TPH concentrations were below the NMOCD action level of 100 mg/kg, with concentrations reported as less than 20.0 mg/kg in each sample (S-1 through S-5). Benzene and total BTEX concentrations in SC-1 were below the NMOCD action levels of 0.2 mg/kg and 50 mg/kg, respectively. Chloride concentrations in SC-1 were below the NMOCD action level of 250 mg/kg. Based on field screening and laboratory analytical results for benzene, total BTEX, TPH, and chlorides, no further work is recommended at the San Juan 30-6 #490S.

If you have any questions about this report or site conditions, please do not hesitate to contact Deborah Watson at (505) 564-2281.

Sincerely,

Landrea Cupps

Environmental Scientist

Landrea R. Cupps

Crystal Tafoya San Juan 30-6 #490S BGT Closure Report July 2, 2013 Page 5 of 5


Elizabeth V MeNelly

Elizabeth McNally, P.E.

Attachments:

Figure 1. Topographic Site Location Map Figure 2. Aerial Site Map, May 2013 AES Field Screening Report 050913 Hall Analytical Report 1305412

R:\Animas 2000\Dropbox\2013 Projects\ConocoPhillips\SJ 30-6 #490S\CoP San Juan 30-6 #490S BGT Closure Report 070213.docx

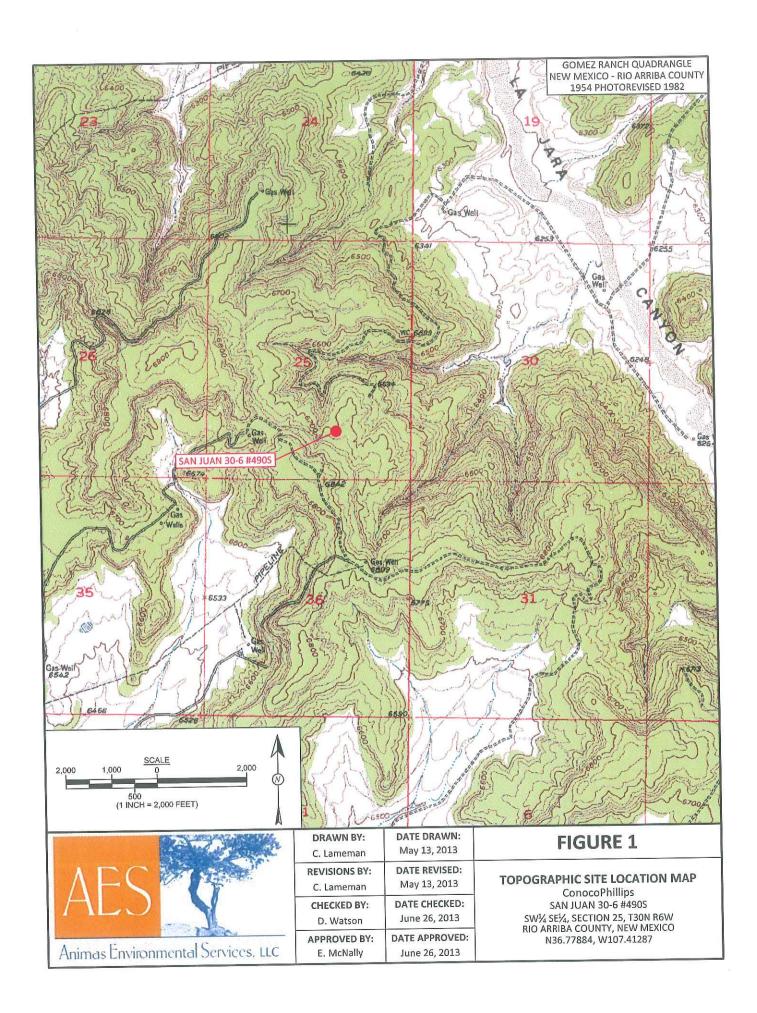



SAMPLE LOCATIONS


	Field Scre	ening R	esults	
Sample ID	Date	OVM- PID (ppm)	TPH (mg/kg)	Chlorides (mg/kg)
NMOCD ACTION LEVEL		(##)	100	250
S-1	5/9/13	0.2	<20.0	NA
S-2	5/9/13	0.1	<20.0	NA
S-3	5/9/13	0.1	<20.0	NA
S-4	5/9/13	0.4	<20.0	NA
S-5	5/9/13	0.4	<20.0	NA
SC-1	5/9/13	0.1	NA	60

SC-1 IS A 5-POINT COMPOSITE SAMPLE OF S-1 THROUGH S-5. NA - NOT ANALYZED

		Laborato	ry Analytica	l Results		
Sample ID	Date	Benzene (mg/kg)	Total BTEX (mg/kg)	TPH - GRO (mg/kg)	TPH - DRO (mg/kg)	Chlorides (mg/kg)
NMOCD ACT	TION LEVEL	0.2	50	10	00	250
SC-1	5/9/13	<0.050	<0.25	NA	NA	<30

-SAN JUAN 30-6 #490S WELL MONUMENT





AERIAL SOURCE: © 2012 MICROSOFT CORPORATION - AVAILABLE EXCLUSIVELY BY DIGITALGLOBE

		OF STREET
ΛF	112	E.
HL		
	- make	

1	DRAWN BY:	DATE DRAWN:
	C. Lameman	May 13, 2013
	REVISIONS BY:	DATE REVISED:
	C. Lameman	May 13, 2013
ſ	CHECKED BY:	DATE CHECKED:
	D. Watson	June 26, 2013
	APPROVED BY:	DATE APPROVED:
1	E. McNally	June 26, 2013

FIGURE 2

AERIAL SITE MAP
BELOW GRADE TANK CLOSURE
MAY 2013
ConocoPhillips

SAN JUAN 30-6 #490S SW¼ SE¼, SECTION 25, T30N R6W RIO ARRIBA COUNTY, NEW MEXICO N36.77884, W107.41287

Page 1

Client: ConocoPhillips

Project Location: San Juan 30-6 #490S

Date: 5/9/2013

Matrix: Soil



Animas Environmental Services, LLC

www.animasenvironmental.com

624 E. Comanche Farmington, NM 87401 505-564-2281

Durango, Colorado 970-403-3084

-	/sts	als	3	X	A .	*		>	3		
TPH	Analysts	Initials	HMW	UNANA	ALL	MMH		MMH	MMM	INI	
		DF	Т	7	-1	Н		H	~	-1	эH.
	TPH PQL	(mg/kg)	20.0	0	70.07	20.0		20.0	0	70.0	Not Analyzed for TPH.
	Field TPH*	(mg/kg)	<20.0		<20.0	<20.0		<20.0	0	<20.0	Not,
Field TPH	Analysis	Time	10:07		10:10	10:13	1	10:16		10:19	
Field	Chloride	(mg/kg)	AN		NA	ΔN	5	AN		NA	09
	OVM	(mdd)	0.2	1	0.1	0	T.O	0.4		0.4	0.1
	Sample	Location	North		South	+ + - -	Edst	West		Center	Composite
Time of	Sample	Collection	0.16	OT'A	9.17	. 0	9:18	9.19	1	9:20	9-22
	مونئورام			5/9/2013	5/9/2013	0.00/0/0	5/9/2013	5/0/2013	2/2/2017	5/9/2013	5/0/2013
		Olohamo	Sample	S-1	6.2	7	S-3	1/3	4-0	2-5	1, 7,

Total Petroleum Hydrocarbons - USEPA 418.1 Silver Nitrate

Not Detected at the Reporting Limit Practical Quantitation Limit

> PQL S

Dilution Factor AN

Not Analyzed

*Field TPH concentrations recorded may be below PQL.

Analyst:

Field Chloride - Quantab Chloride Titrators or Drop Count Titration with

Report Finalized: 05/09/13



Hall Environmental Analysis Laboratory 4901 Hawkins NE Albuquerque, NM 87109 TEL: 505-345-3975 FAX: 505-345-4107 Website: www.hallenvironmental.com

May 14, 2013

Debbie Watson

Animas Environmental 624 East Comanche Farmington, NM 87401

TEL: (505) 486-4071

FAX

RE: CoP San Juan 30-6 #490S

OrderNo.: 1305412

Dear Debbie Watson:

Hall Environmental Analysis Laboratory received 1 sample(s) on 5/10/2013 for the analyses presented in the following report.

These were analyzed according to EPA procedures or equivalent. To access our accredited tests please go to www.hallenvironmental.com or the state specific web sites. See the sample checklist and/or the Chain of Custody for information regarding the sample receipt temperature and preservation. Data qualifiers or a narrative will be provided if the sample analysis or analytical quality control parameters require a flag. All samples are reported as received unless otherwise indicated. Lab measurement of analytes considered field parameters that require analysis within 15 minutes of sampling such as pH and residual chlorine are qualified as being analyzed outside of the recommended holding time.

Please don't hesitate to contact HEAL for any additional information or clarifications.

Sincerely,

Andy Freeman

Laboratory Manager

Only

4901 Hawkins NE

Albuquerque, NM 87109

Analytical Report Lab Order 1305412

Date Reported: 5/14/2013

Hall Environmental Analysis Laboratory, Inc.

CLIENT: Animas Environmental

CoP San Juan 30-6 #490S

Lab ID: 1305412-001

Client Sample ID: SC-1

Collection Date: 5/9/2013 9:22:00 AM

Matrix: MEOH (SOIL) Received Date: 5/10/2013 10:00:00 AM

Analyses	Result	Result RL Qual Units		DF	Date Analyzed		
EPA METHOD 300.0: ANIONS					Analyst: JRR		
	ND	30	mg/Kg	20	5/10/2013 1:12:57 PM		
Chloride			99		Analyst: RAA		
EPA METHOD 8260B: VOLATILES	SHORT LIST				NO AND GOVERNMENT OF THE PROPERTY OF THE PROPE		
Benzene	ND	0.050	mg/Kg	1	5/10/2013 1:40:34 PM		
Toluene	ND	0.050	mg/Kg	1	5/10/2013 1:40:34 PM		
	ND	0.050	mg/Kg	1	5/10/2013 1:40:34 PM		
Ethylbenzene	ND	0.10	mg/Kg	1	5/10/2013 1:40:34 PM		
Xylenes, Total	85.7	70-130	%REC	1	5/10/2013 1:40:34 PM		
Surr: 1,2-Dichloroethane-d4	87.5	70-130	%REC	1	5/10/2013 1:40:34 PM		
Surr: 4-Bromofluorobenzene		A(00) 0(0)	%REC	1	5/10/2013 1:40:34 PM		
Surr: Dibromofluoromethane	92.0	70-130		1	5/10/2013 1:40:34 PM		
Surr: Toluene-d8	96.5	70-130	%REC		5/10/2013 1.40.34 FW		

Refer to the QC Summary report and sample login checklist for flagged QC data and preservation information.

Qualifiers:

- Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH greater than 2
- RL Reporting Detection Limit

- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit Page 1 of 4
- R RPD outside accepted recovery limits
- S Spike Recovery outside accepted recovery limits

OC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#:

1305412

14-May-13

Client:

Animas Environmental

Project:

CoP San Juan 30-6 #490S

Sample ID 1305367-001AMS

SampType: MS

TestCode: EPA Method 300.0: Anions

LowLimit

LowLimit

64.4

64.4

BatchQC Client ID:

Batch ID: 7384

RunNo: 10562

5/10/2013 Prep Date:

Analysis Date: 5/10/2013

7.5

SegNo: 298384

Units: mg/Kg

Analyte

Result PQL

SPK value SPK Ref Val

%REC LowLimit HighLimit 117

RPDLimit

Qual

Chloride

SampType: MSD

TestCode: EPA Method 300.0: Anions

%RPD

Sample ID 1305367-001AMSD

Client ID: BatchQC

Batch ID: 7384

RunNo: 10562

Prep Date:

Analysis Date: 5/10/2013

13

44

SeqNo: 298385

Units: mg/Kg

5/10/2013

PQL

7.5

%REC

Analyte

Result

SPK value SPK Ref Val

15.00

15.00

15.00

15.00

HighLimit

RPDLimit

Qual 20

Chloride

SampType: MS

TestCode: EPA Method 300.0: Anions

2.14

%RPD

Client ID:

Sample ID 1305413-001AMS BatchQC

Sample ID 1305413-001AMSD

5/10/2013

5/10/2013

Batch ID: 7384

RunNo: 10562

Units: mg/Kg

117

Prep Date:

Analysis Date: 5/10/2013

SeqNo: 298401

%RPD **RPDLimit**

Analyte

Result

PQL 30

SPK value SPK Ref Val %REC HighLimit

Qual

Chloride

SampType: MSD

TestCode: EPA Method 300.0: Anions

65.0

Client ID: BatchQC Batch ID: 7384

RunNo: 10562

RPDLimit Qual

Analyte

Analysis Date: 5/10/2013

SeqNo: 298402

Units: mg/Kg

%RPD

Chloride

Prep Date:

Result

45

PQL

%REC SPK value SPK Ref Val

34.12

34.12

75.8

64.4

LowLimit

117

HighLimit 3.65

20

Qualifiers:

Value exceeds Maximum Contaminant Level.

Value above quantitation range Е

Reporting Detection Limit

Analyte detected below quantitation limits J

Sample pH greater than 2 P

Η

Analyte detected in the associated Method Blank В Holding times for preparation or analysis exceeded

Not Detected at the Reporting Limit ND

RPD outside accepted recovery limits R

Spike Recovery outside accepted recovery limits

Page 2 of 4

QC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#:

1305412

14-May-13

CI	iont.	
	nent:	

Animas Environmental

Project:

CoP San Juan 30-6 #490S

roject: Cor San 5	uan 50-0 n	1505									
Sample ID mb-7366	SampTy	pe: MB	LK	TestCode: EPA Method 8260B: Volatiles Short List							
Client ID: PBS	Batch	ID: R10	546	RunNo: 10546							
Prep Date: 5/9/2013	Analysis Da	ate: 5/1	0/2013	S	eqNo: 29	8232	Units: mg/Kg				
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual	
Benzene	ND	0.050									
oluene	ND	0.050									
Ethylbenzene	ND	0.050									
(ylenes, Total	ND	0.10									
Surr: 1,2-Dichloroethane-d4	0.42		0.5000		84.2	70	130				
Surr: 4-Bromofluorobenzene	0.44		0.5000		88.2	70	130				
Surr: Dibromofluoromethane	0.46		0.5000		91.3	70	130				
Surr: Toluene-d8	0.49		0.5000		97.5	70	130				
Sample ID Ics-7366	SampT	ype: LC	S	TestCode: EPA Method 8260B: Volatiles Short List							
Client ID: LCSS	Batch ID: R10546				RunNo: 1	0546					
Prep Date: 5/9/2013	Analysis D	ate: 5/	10/2013	8	SeqNo: 2	98233	Units: mg/l	(g			
Analyte	Result	PQL		SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual	
Benzene	0.94	0.050	1.000	0	93.5	70	130				
Toluene	1.0	0.050	1.000	0	104	80	120				
Surr: 1,2-Dichloroethane-d4	0.43		0.5000		86.2	70	130				
Surr: 4-Bromofluorobenzene	0.44		0.5000		87.8	70	130				
Surr: Dibromofluoromethane	0.45		0.5000		90.5	70	130				
Surr: Toluene-d8	0.48		0.5000		95.5	70	130				
Sample ID 1305408-001AMS	Samp	Гуре: М	S	TestCode: EPA Method 8260B: Volatiles Short List							
Client ID: BatchQC	Batc	h ID: R	10546	RunNo: 10546							
Prep Date:	Analysis I	Date: 5	/10/2013	;	SeqNo: 2	298234	Units: mg/	Kg			
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual	
Benzene	0.91	0.050	1.000	0.01652	89.0	67.5	124				
Toluene	0.92	0.050	1.000	0	92.1	55.8					
Surr: 1,2-Dichloroethane-d4	0.43		0.5000		86.9	70	130				
Surr: 4-Bromofluorobenzene	0.48		0.5000		95.0	70	130				
Surr: Dibromofluoromethane	0.46		0.5000		91.8	70	130				
Surr: Toluene-d8	0.42		0.5000		84.5	70	130				
Sample ID 1305408-001AMS	SD Samp	Type: M	SD	TestCode: EPA Method 8260B: Volatiles Short List							
Client ID: BatchQC		ch ID: R	10546	RunNo: 10546							
1							1.1-14	11/			

Qualifiers:

Prep Date:

Analyte

Benzene

Toluene

* Value exceeds Maximum Contaminant Level.

Analysis Date: 5/10/2013

Result

0.90

88.0

0.44

PQL

0.050

0.050

SPK value SPK Ref Val

1.000

1.000

0.5000

0.01652

0

- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH greater than 2

Surr: 1,2-Dichloroethane-d4

RL Reporting Detection Limit

- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded

Spike Recovery outside accepted recovery limits

LowLimit

67.5

55.8

70

Units: mg/Kg

124

142

130

HighLimit

%RPD

0.698

4.85

0

ND Not Detected at the Reporting Limit

SeqNo: 298235

%REC

88.3

87.8

87.2

- R RPD outside accepted recovery limits
- Page 3 of 4

RPDLimit

20

20

0

Qual

QC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#:

1305412

14-May-13

Client:

Animas Environmental

Project:

CoP San Juan 30-6 #490S

TestCode: EPA Method 8260B: Volatiles Short List

Client ID: BatchQC

Sample ID 1305408-001AMSD

Batch ID: R10546

RunNo: 10546

Pren Date:

Analysis Date: 5/10/2013

SampType: MSD

italiito. 10010

SeqNo: 298235 Units: mg/Kg

Prep Date.	/ Illalyolo L										
Analyta	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual	
Analyte		1 000			98.0	70	130	0	0		
Surr: 4-Bromofluorobenzene	0.49		0.5000					0	0		
Surr: Dibromofluoromethane	0.46		0.5000		91.4	70	130	U	U		
	0.40		0.5000		84.3	70	130	0	0		
Surr: Toluene-d8	0.42		0.0000		31.0						

Qualifiers:

* Value exceeds Maximum Contaminant Level.

E Value above quantitation range

J Analyte detected below quantitation limits

P Sample pH greater than 2

RL Reporting Detection Limit

B Analyte detected in the associated Method Blank

H Holding times for preparation or analysis exceeded

ND Not Detected at the Reporting Limit

R RPD outside accepted recovery limits

S Spike Recovery outside accepted recovery limits

Page 4 of 4



Hall Environmental Analysis Laboratory 4901 Hawkins NE Albuquerque, NM 87105 TEL: 505-345-3975 FAX: 505-345-4107

Website: www.hallenvironmental.com

Sample Log-In Check List

RcptNo: 1 Work Order Number: 1305412 Animas Environmental Client Name: Received by/date: 5/10/2013 10:00:00 AM Michelle Garcla Logged By: 5/10/2013 10:22:06 AM Completed By: Michelle Garcia Reviewed By: Chain of Custody Not Present No 🔲 Yes 1. Custody seals intact on sample bottles? No 🗆 Not Present Yes 🗸 2. Is Chain of Custody complete? Courier 3. How was the sample delivered? Log In No 🗆 NA Yes V 4. Was an attempt made to cool the samples? NA 🗆 No 🗆 Were all samples received at a temperature of >0° C to 6.0°C No 🗆 Yes V 6. Sample(s) in proper container(s)? No 🗌 Yes V 7. Sufficient sample volume for indicated test(s)? No 🗆 Yes V 8. Are samples (except VOA and ONG) properly preserved? NA No V Yes 9. Was preservative added to bottles? No VOA Vials No Yes 10.VOA vials have zero headspace? No 🗸 Yes 🗆 11. Were any sample containers received broken? # of preserved bottles checked No 🗌 for pH: Yes V 12. Does paperwork match bottle labels? (<2 or >12 unless noted) (Note discrepancies on chain of custody) Adjusted? No Yes V 13. Are matrices correctly identified on Chain of Custody? No 🗆 Yes 🗸 14. Is it clear what analyses were requested? Checked by No 🗆 Yes V 15. Were all holding times able to be met? (If no, notify customer for authorization.) Special Handling (if applicable) No 🗆 NA V Yes 16. Was client notified of all discrepancies with this order? Däte: Person Notified: eMall Phone Fax In Person By Whom: Regarding: Client Instructions: 17. Additional remarks: 18. Cooler Information Condition Seal Intact | Seal No | Seal Date | Signed By Cooler No Temp °C Good Yes 1.0

Hall Environmental Analysis Laboratory, Inc.

Date Reported:

CLIENT: Animas Environmental

Project: CoP San Juan 30-6 #490S

Lab ID: 1305412-001

Client Sample ID: SC-1

Collection Date: 5/9/2013 9:22:00 AM

Matrix: MEOH (SOIL) Received Date: 5/10/2013 10:00:00 AM

Analyses	Result	RL Qu	al Units	DF	Date Analyzed
EPA METHOD 8260B: VOLATILES	SHORT LIST				Analyst: RAA
Control of the Contro	ND	0.050	mg/Kg	1	5/10/2013 1:40:34 PM
Benzene	ND	0.050	mg/Kg	1	5/10/2013 1:40:34 PM
Toluene	ND	0.050	mg/Kg	1	5/10/2013 1:40:34 PM
Ethylbenzene	ND	0.10	mg/Kg	1	5/10/2013 1:40:34 PM
Xylenes, Total Surr: 1,2-Dichloroethane-d4	85.7	70-130	%REC	1	5/10/2013 1:40:34 PM
Surr: 4-Bromofluorobenzene	87.5	70-130	%REC	1	5/10/2013 1:40:34 PM
Surr: Dibromofluoromethane	92.0	70-130	%REC	1	5/10/2013 1:40:34 PM
Surr: Toluene-d8	96.5	70-130	%REC	1	5/10/2013 1:40:34 PM

Chloride less than 30mg/kg

Qualifiers:

Value exceeds Maximum Contaminant Level.

E Vitu above o janti tioniral se

J A salyte o ta ned be own quar itation li nits

N

S male pour terri an 24

RL Reporting Detection Limit

Analyte detected in the associated Method Blank

Ho ling it es r progration or analysis exceeded

Not etect do the Reporting Limit

Spike Recovery outside accepted recovery limits 1 of 0

Davis, Kenny R

From:

hwoods <hwoods@animasenvironmental.com>

Sent:

Thursday, May 09, 2013 10:41 AM

To:

SJBU E-Team

Cc:

Tafoya, Crystal; dywatson@animasenvironmental.com

Subject:

[EXTERNAL]Field Results for the San Juan 30-6 #490S BGT Closure

Field results for the San Juan 30-6 #490S BGT closure are as follows:

S-1 OVM 0.2 ppm TPH <20.0 mg/kg

S-2 OVM 0.1 ppm TPH <20.0 mg/kg

S-3 OVM 0.1 ppm TPH <20.0 mg/kg

S-4 OVM 0.4 ppm TPH <20.0 mg/kg

S-5 OVM 0.4 ppm TPH <20.0 mg/kg

Field chloride concentration for composite sample SC-1 was 60 mg/kg. SC-1 will be submitted to the laboratory for 8021(BTEX) and 300.0 (chloride).

Many Thanks, Heather Animas Environmental

Sent from my Verizon Wireless 4G LTE Smartphone

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 Form C-141 Revised October 10, 2003

Submit 2 Copies to appropriate District Office in accordance with Rule 116 on back side of form

Release Notification and Corrective Action

									Final Report					
Name of Co	mpany Burlingt		Contact Kenny Davis											
Address 340	1 East 30th St, F		Telephone No.(505) 599-4045											
Facility Nan	ne: San Juan 30	F	acility Type											
Surface Own	nou Fodovol	wner Fe	ederal			Lease N	lo.SF-0787	741						
Surface Own	ici Federai						TE A CIE							
						OF REI	Feet from the	Fact/W	/estLine	County				
Unit Letter	Section Town		ange 6W	Feet from the 920	South	South Line	1495	East	Rio Arriba					
0	25 30	UIN .	A. C.	5,75,20	Longitud	e <u>-107.4122800</u>	0							
	NATURE OF RELEASE													
Type of Rele	ase BGT Closure	Summary		. 12.2		Volume of	Release N/A			Recovered N				
Source of Re	lease: NONE	Duilling				Date and H	lour of Occurrence	ce N/A	Date and	Hour of Dis	scovery	N/A		
	ate Notice Given?					If YES, To	Whom?					N.		
,, 552 253333		□ Y	es \square	No 🛛 Not R	equired	N/A								
By Whom?	V/A					Date and F	Iour N/A							
Was a Water	course Reached?		-			7,0	olume Impacting	the Wate	ercourse.					
N/	A	Ŀ	」 Yes	⊠ No		N/A								
If a Waterco	urse was Impacted	l, Describe	Fully.*											
N/A														
W												1		
Describe Ca	use of Problem an	d Remedia	d Actio	n Taken.*										
N/A														
Describe Ar	ea Affected and C	leanup Act	tion Tal	cen.*										
BGT Closu	ire: NO RELEAS	SE FOUNI	D UPO	NREMOVAL										
							4 4 4	damate	ad that no	raught to NI	MOCD	rules and		
I hereby cer	tify that the informall operators are re	nation give	en abov	e is true and com	plete to the	he best of my	y knowledge and	undersu ective ac	ma mai pu tions for re	eleases which	h may	endanger		
	L	/ TI	~ ~ ~ ~ + ~ ~	on of o C 1/11 rat	port by th	e NAME III	narked as Final	REDOIL	does nor re	THE VE THE OF	orator t	or maoning		
4 11 1		the state of	agreetal	r investigate and	remediat	e contamina	non mai dose a u	mean to s	aroung war	ci, surrace	ruce, ii	CHITCHI II CONT.		
or the envir	operations have it onment. In addition	on. NMOC	D acce	ptance of a C-14	1 report d	loes not relie	ve the operator o	f respon	sibility for	compliance	with a	ny other		
federal, stat	e, or local laws an	d/or regula	ations.											
	2//			\			OIL COI	NSER'	VATIOI	DIVIS	NU.			
6: 1	1272	-)										
Signature: Approved by District Supervisor:														
Printed Nar	ne: Kenny Davis	Approved o	j District Super.	10011										
						Euripotion Date:								
Title: Staff	Regulatory Techi	nician				Approval Date:			Expiration Date:					
E mail Ada	lress: Kenny.r.dav	is@conoco	ophillin	s.com		Conditions	of Approval:			Attach	ed \square			
						Conditions of Approval:								
Date: 12/	2/14 Phone: (505	5) 599-404:	5											

^{*} Attach Additional Sheets If Necessary

SAN JUAN 30-6 UNIT 4905



