District I
1625 N. French Dr., 140bbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources
Department
Oil Conservation Division

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 Form C-144 Revised June 6, 2013

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office.
For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

 12760		Pir	t, Below-Grad	e Tank. or		RECEIVED
45-26476	Dropos				re Plan Application	By OCD 3-4-15
	Type of action: or proposed altern	☐ Below grade tank ☐ Permit of a pit or ☑ Closure of a pit, l ☐ Modification to a ☐ Closure plan only	c registration proposed alternative below-grade tank, on an existing permit/on y submitted for an e	e method r proposed alto registration xisting permitt		
S	Instructions: Pleas	e submit one applications the	on (Form C=144) per	ould operations r	esult in pollution of surface water	er, ground water or the
rease de advised environment. No	r does approval relieve t	he operator of its respon	sibility to comply with	any other applica	ble governmental authority's rul	es, regulations or ordinances
1.	E I D	7	OGE	PID #: 1453	8	
55					0	
Facility or wel	name: <u>Murphy E 3</u>		OCD Permit Number	<u> </u>		
API Number:	3004526476	notion 22 Townsh	in 30N / Range	11W Count	y: <u>San Juan</u>	· · · · · · · · · · · · · · · · · · ·
U/L or Qtr/Qtr	_I (NESE) So	26 7695000 -N	Longitude -107	99023000 •W	, <u>star vaan.</u> NAD: ⊠1927 □ 1983	
Center of Prop	osed Design: Latitude	_30.7083000 <u>"N</u>	Longitude107	OCD NA	D 83 36.765517 107	99041
20	section F, G or J of 19			Closed Pr	ior to Closure Plan a	oproval
Permanent	☐ Emergency ☐ Ca	vitation 🗌 P&A 🔲 I	Multi-Well Fluid Man	agement	Low Chloride Drilling Fl	
☐ Lined ☐	Unlined Liner type:	Thickness	mil 🗌 LLDPE 🔲 1	HDPE PVC	Other	
String-Rei						
Liner Seams:	☐ Welded ☐ Factor	y 🗌 Other	V	olume:	bbl Dimensions: L	_ x W x D
Volume: Tank Constru ☐ Secondar ☐ Visible s	120 ction material: y containment with leadidewalls and liner	Metal k detection ⊠ Visible Visible sidewalls only	Produced Water	ch lift and autor	natic overflow shut-off PE	
4.						
Alternati					N or grander days	
Submittal of	an exception request is	required. Exceptions	must be submitted to t	he Santa Fe Env	rironmental Bureau office for o	onsideration of approval.

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)	
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, linstitution or church)	nospital,
Four foot height, four strands of barbed wire evenly spaced between one and four feet	
Alternate. Please specify	
6.	
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)	
Screen Netting Other_	
Monthly inspections (If netting or screening is not physically feasible)	
7. Signs: Subsection C of 19.15.17.11 NMAC	
12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers	
Signed in compliance with 19.15.16.8 NMAC	
8. Variances and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.	
Please check a box if one or more of the following is requested, if not leave blank:	
 □ Variance(s): Requests must be submitted to the appropriate division district for consideration of approval. □ Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. 	
9. Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Siting criteria does not apply to drying pads or above-grade tanks.	otable source
General siting	
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank. - □ NM Office of the State Engineer - iWATERS database search; □ USGS; ☑ Data obtained from nearby wells	☐ Yes ☒ No ☐ NA
Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within the area overlying a subsurface mine. (Does not apply to below grade tanks) - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
 Within an unstable area. (Does not apply to below grade tanks) Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	☐ Yes ☐ No
Within a 100-year floodplain. (Does not apply to below grade tanks) - FEMA map	☐ Yes ☐ No
Below Grade Tanks	
Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☒ No
Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☑ No
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)	
Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No

Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial	☐ Yes ☐ No
application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	
Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	Yes No
Within 100 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pit Non-low chloride drilling fluid	
Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Permanent Pit or Multi-Well Fluid Management Pit	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 Natural Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the do attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:	O NMAC 15.17.9 NMAC
Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the do	ncuments are
mistractions: Each of the following items must be attached to the approximant. Please inactive, by a check mark in the box, that the attached. Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC A List of wells with approved application for permit to drill associated with the pit. Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 and 19.15.17.13 NMAC Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:	9.15.17.9 NMAC
— second selbearing winds. (minus sala) as agricon)	

12. <u>Permanent Pits Permit Application Checklist</u> : Subsection B of 19.15.17.9 NMAC <i>Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the a</i>	locuments are
Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC	
13. Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Multi-well Fl	uid Management Pit
☐ Alternative Proposed Closure Method: ☐ Waste Excavation and Removal ☐ Waste Removal (Closed-loop systems only) ☐ On-site Closure Method (Only for temporary pits and closed-loop systems) ☐ In-place Burial ☐ On-site Trench Burial ☐ Alternative Closure Method	
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be a closure plan. Please indicate, by a check mark in the box, that the documents are attached. □ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC □ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC □ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) □ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC □ Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC □ Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	attached to the
15. Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sour provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. P 19.15.17.10 NMAC for guidance.	
Ground water is less than 25 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	

adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	Yes No
 Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	☐ Yes ☐ No
Within a 100-year floodplain FEMA map	☐ Yes ☐ No
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 19.15.17. Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cann Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	.11 NMAC 15.17.11 NMAC
Operator Application Certification: I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and believed.	ief.
Name (Print):	
Signature: Date:	
Digitative	
e-mail address:	
e-mail address:	
e-mail address:	
e-mail address: Telephone:	Apr 24, 2015
e-mail address: Telephone:	Apr 24, 2015 g the closure report. t complete this

22. Operator Closure Certification:	
I hereby certify that the information and attachments submitted with this closure belief. I also certify that the closure complies with all applicable closure requires	
Name (Print): Kenny Davis	Title: Staff Regulatory Technician
Signature:	Date: <u>12/3/14</u>
e-mail address: kenny.r.davis@conocophillips.com	Telephone: 505-599-4045

Burlington Resources Oil Gas Company, LP San Juan Basin Below Grade Tank Closure Report

Lease Name: Murphy E5 API No.: 3004526476

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure of the below-grade tank referenced above. All proper documentation regarding closure activities is being included with the C-144.

General Plan:

- 1. BR shall close a below-grade tank within 60 days of cessation of operations per Subsection G.4 of 19.15.17.13 NMAC. This will include a) below-grade tanks that do not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC within five years, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC; b) an earlier date that the division requires because of imminent danger to fresh water, public health or the environment. For any closure, BR will file the C144 Closure Report as required.
- 2. The below-grade tank referenced above was permitted and closed within 60 days of cessation of the below-grade tanks operation.
- 3. BR shall remove liquids and sludge from a below-grade tank prior to implementing a closure method and shall dispose of the liquids and sludge in a division-approved facility. The facilities to be used will be Basin Disposal (Permit #NM-01-005), JFJ Landfarm % Industrial Ecosystem Inc. (Permit # NM-01-0010B) and Envirotech Land Farm (Permit #NM-01-011). The liner after being cleaned well (Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC) will be disposed of at the San Juan County Regional Landfill located on CR 3100.
 - All recovered liquids were disposed of at Basin Disposal (Permit #NM-01-005) and any sludge or soil required to be removed to facilitate closure was hauled to Envirotech Land Farm (Permit #NM-01-011) and JFJ Landfarm % IEI (Permit #NM-01-0010B). The liner was cleaned per Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC was disposed of at the San Juan County Regional Landfill located on CR 3100.
- 4. BR Will receive prior approval to remove the below-grade tank and dispose of it in a division-approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves.
 - The below-grade tank was disposed of in a division-approved manner.
- 5. If there is any on-site equipment associated with a below-grade tank, then BR shall remove the equipment, unless the equipment is required for some other purpose.
 - All on-site equipment associated with the below-grade tank was removed.
- 6. BR will test the soils beneath the below-grade tank to determine whether a release has occurred. COPC shall collect, at a minimum, a five point, composite sample; collect individual grab samples from any area that is wet, discolored or showing other evidence of a release; and analyzed for the constituents listed in Table I of 19.15.17.13 NMAC. COPC shall notify the division of its results on form C-141.

7. A five point composite sample was taken of the below-grade tank using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached).

Components	Tests Method	Limit (mg/kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	100
Chlorides	EPA 300.1	250

8. If BR or the division determines that a release has occurred, then BR shall comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC, as appropriate.

A release was not determined for the above referenced well.

If the sampling program demonstrates that a release has not occurred or that any release does not exceed the
concentrations specified in Table I of 19.15.17.13 NMAC, then BR shall backfill the excavation with compacted,
non-waste containing, earthen material; construct a division-prescribed soil cover; recontour and re-vegetate the
site.

The below-grade tank area passed all requirements of Paragraph (4) of Subsection E of 19.15.17.13 NMAC and was backfilled with compacted, non-waste containing, earthen material.

- 10. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.

Notification is missing due to employee turnovers. ConocoPhillips has reviewed our internal processes and has updated them to include the required 72 hour notification.

11. The surface owner shall be notified of BR's closing of the below-grade tank 72 hours, but not more than one week, prior to closure as per the approved closure plan via certified mail, return receipt requested.

The closure process notification to the landowner not found. COPC was not aware that the original notification sent at the time of Permitting was not the only closure notification required.

ConocoPhillips has reviewed our internal processes and has updated them to include the required 72 hour notification.

12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The below-grade tank area was re-contoured to match fit, shape, line, form and texture of the surrounding area. Re-shaping, including drainage control, to prevent ponding and erosion. Natural drainages were unimpeded and water bars and/or silt traps were placed in areas where needed to prevent erosion on a large scale. Final recontour has a uniform appearance with smooth surface, fitting the natural landscape.

13. BR Shall seed the disturbed areas the first favorable growing season following closure of a below-grade tank. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved

methods. BLM stipulated seed mixes will used on federally regulated lands and division-approved seed mixtures (administratively approved if required) will be utilized on all State or private lands. A uniform vegetative cover has been established that reflects a life-form ratio of plus or minus fifty percent (50%) of pre- disturbance levels and a total percent plant cover of at least seventy percent (70%) of pre-disturbance levels, excluding noxious weeds. If alternate seed mix is required by the state, private owner or tribe, it will be implemented with administrative approval if needed. COPC will repeat seeding or planting will be continued until successful vegetative growth occurs.

Provision 13 was accomplished through complying with BLM seeding requirements as allowed by the BLM/OCD MOU.

14. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material, with chloride concentrations less than 600 mg/kg as analyzed by EPA Method 300.0, to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.

The below-grade tank area was backfilled and more than four feet of cover was achieved and the cover included one foot of suitable material to establish vegetation at the site.

- 15. All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on C-144 and incorporate the following:
 - Soil Backfilling and Cover Installation (See Report)
 - Re-vegetation application rates and seeding techniques (See Report)
 - Photo documentation of the site reclamation (Included as an attachment)
 - Confirmation Sampling Results (Included as an attachment)
 - Proof of closure notice (Included as an attachment)

Closure Documentation was not submitted within the 60 day requirement due to employee turnovers. ConocoPhillips has reviewed our internal processes and has updated them to ensure closure documentation is submitted with the 60 day time frame.



December 10, 2012

Crystal Tafoya ConocoPhillips San Juan Business Unit Office 214-5 5525 Hwy 64 Farmington, New Mexico 87401 624 E. Comanche

Farmington, NM 87401 505-564-2281

> Durango, Colorado 970-403-3274

Below Grade Tank Closure Report

Murphy E #5

San Juan County, New Mexico

Dear Ms. Tafoya:

RE:

Animas Environmental Services, LLC (AES) is pleased to provide the final report associated with the below grade tank (BGT) closure at ConocoPhillips (CoP) Murphy E #5, located in San Juan County, New Mexico. Tank removal had been completed by CoP contractors prior to AES' arrival at the location.

1.0 Site Information

1.1 Location

Site Name – Murphy E #5

Legal Description – NE¼ SE¼, Section 33, T30N, R11W, San Juan County, New Mexico

Well Latitude/Longitude – N36.76567 and W107.99039, respectively

BGT Latitude/Longitude – N36.76557 and W107.99043, respectively

Land Jurisdiction – Bureau of Land Management (BLM)

Figure 1. Topographic Site Location Map

Figure 2. Aerial Site Map, October 2012

1.2 NMOCD Ranking

Prior to site work, the New Mexico Oil Conservation Division (NMOCD) database was reviewed, and a C-144 form dated March 2008 for the Murphy E #5 well reported the depth to groundwater as greater than 100 feet below ground surface (bgs). The New Mexico Office of the State Engineer (NMOSE) database was reviewed for nearby water wells, and no registered water wells were reported to be located within 1,000 feet of the location. Additionally, Google Earth and the New Mexico Tech Petroleum Recovery

Crystal Tafoya Murphy E #5 BGT Closure Report December 10, 2012 Page 2of 5

Research Center online mapping tool (http://ford.nmt.edu/react/project.html) were accessed to aid in the identification of downgradient surface water.

Once on site, AES personnel further assessed the ranking using topographical interpretation, Global Positioning System (GPS) elevation readings, and visual reconnaissance. AES personnel concluded that depth to groundwater at the site was greater than 100 feet bgs. The wash in Ruins Canyon is located approximately 750 feet northwest of the location. Based on this information, the location was assessed a ranking score of 10.

1.3 BGT Closure Assessment

AES was initially contacted by Jess Henson, CoP representative, on October 9, 2012, and on October 10, 2012, Corwin Lameman and Zach Trujillo of AES mobilized to the location. AES personnel collected six soil samples from below the BGT liner. Four samples were collected from the perimeter of the BGT footprint, one sample was collected from the center of the BGT footprint, and one sample was composited from the four perimeter samples and one center sample.

2.0 Soil Sampling

On October 10, 2012, AES personnel conducted field screening and collected five soil samples (S-1 through S-5) and one 5-point composite (SC-1) from below the BGT. Soil samples were collected from approximately 0.5 feet below the former BGT for field screening of volatile organic compounds (VOCs) and total petroleum hydrocarbons (TPH). Soil sample SC-1 was field screened for chlorides and submitted for confirmation laboratory analysis. Soil sample locations are included on Figure 2.

2.1 Field Screening

2.1.1 Volatile Organic Compounds

A portion of each sample was utilized for field screening of VOC vapors with a photo-ionization detector (PID) organic vapor meter (OVM). Before beginning field screening, the PID-OVM was first calibrated with 100 parts per million (ppm) isobutylene gas.

2.1.2 Total Petroleum Hydrocarbons

Soil samples were also analyzed in the field for TPH per USEPA Method 418.1 using a Buck Scientific Model HC-404 Total Hydrocarbon Analyzer Infrared Spectrometer (Buck). A 3-point calibration was completed prior to conducting soil analyses. Field analytical protocol followed AES's Standard Operating Procedure: Field Analysis Total Petroleum Hydrocarbons per EPA Method 418.1.

2.1.3 Chlorides

Soil sample SC-1 was field screened for chlorides using Chloride Drop Count Titration with silver nitrate. Sampling and analysis methods followed procedures provided by Hach Company.

22 Laboratory Analyses

The composite soil sample SC-1 collected for laboratory analysis was placed into a new, clean, laboratory-supplied container, which was then labeled, placed on ice, and logged onto a sample chain of custody record. The sample was maintained on ice until delivery to the analytical laboratory, Hall Environmental Analysis Laboratory (Hall), in Albuquerque, New Mexico. Soil sample SC-1 was laboratory analyzed for:

- Benzene, toluene, ethylbenzene, and xylene (BTEX) per U.S. Environmental Protection Agency (USEPA) Method 8021B;
- Chloride per USEPA Method 300.0.

23 Field and Laboratory Analytical Results

Field screening readings for VOCs via OVM ranged from 1.2 ppm in S-2 up to 4.3 ppm in S-3. Field TPH concentrations ranged from 38.4 mg/kg in S-2 and S-4 up to 50.7 mg/kg in S-1. The field chloride concentration in SC-1 was 40 mg/kg. Field screening results are summarized in Table 1 and presented on Figure 2. The AES Field Screening Report is attached.

Table 1. Soil Field Screening VOCs, TPH, and Chloride Results
Murphy E #5 BGT Closure, October 2012

	Date	Depth below	VOCs OVM Reading	Field TPH	Field Chlorides
Sample ID	Sampled	BGT (ft)	(ppm)	(mg/kg)	(mg/kg)
NMOCD Action I	evel (NMAC 19.	15.17.13E)		100	250
S-1	10/10/12	0.5	3.7	50.7	NA
S-2	10/10/12	0.5	1.2	38.4	NA
S-3	10/10/12	0.5	4.3	42.5	NA
S-4	10/10/12	0.5	3.6	38.4	NA
S-5	10/10/12	0.5	2.1	39.8	NA
SC-1	10/10/12	0.5	2.6	NA	40

NA - Not Analyzed

Laboratory analytical results reported benzene and total BTEX concentrations in SC-1 as less than 0.050 mg/kg and 0.25 mg/kg, respectively. The laboratory chloride concentration was 52 mg/kg. Laboratory analytical results are summarized in Table 2 and included on Figure 2. Laboratory analytical reports are attached.

Table 2. Soil Laboratory Analytical Results
Murphy E #5 BGT Closure, October 2012

Sample ID	Date Sampled	Dept h (ft)	Benzene (mg/kg)	BTEX (mg/kg)	TPH-GRO (mg/kg)	TPH-DRO (mg/kg)	Chlorides (mg/kg)
NN	10CD Action Level	(NMAC	0.2	50	10	00	250
SC-1	10/10/12	0.5	<0.050	<0.25	NA	NA	52

NA - Not Analyzed

3.0 Conclusions and Recommendations

NMOCD action levels for BGT closures are specified in New Mexico Administrative Code (NMAC) 19.15.17.13E. Benzene and total BTEX concentrations in SC-1 were below the NMOCD action levels 0.2 mg/kg and 50 mg/kg, respectively. Field TPH concentrations were below the NMOCD action level of 100 mg/kg in each sample (S-1 through S-5). The chloride concentration in SC-1 was below the NMOCD action level of 250 mg/kg. Based on field screening and laboratory analytical results for benzene, BTEX, TPH, and chlorides, no further work is recommended.

If you have any questions about this report or site conditions, please do not hesitate to contact Deborah Watson at (505) 564-2281.

Sincerely,

Corwin Lameman Geologist Intern

Elizabeth V MirNdly


Crystal Tafoya Murphy E #5 BGT Closure Report December 10, 2012 Page 5of 5


Elizabeth McNally, P.E.

Attachments:

Figure 1. Topographic Site Location Map Figure 2. Aerial Site Map, October 2012 AES Field Screening Report 101012 Hall Analytical Report 1210588

R:\Animas 2000\Dropbox\2012 December 2012 (Former Trial File)\ConocoPhillips\Murphy E #5\Murphy E #5\Murphy E #5 BGT Closure Report 121012.docx

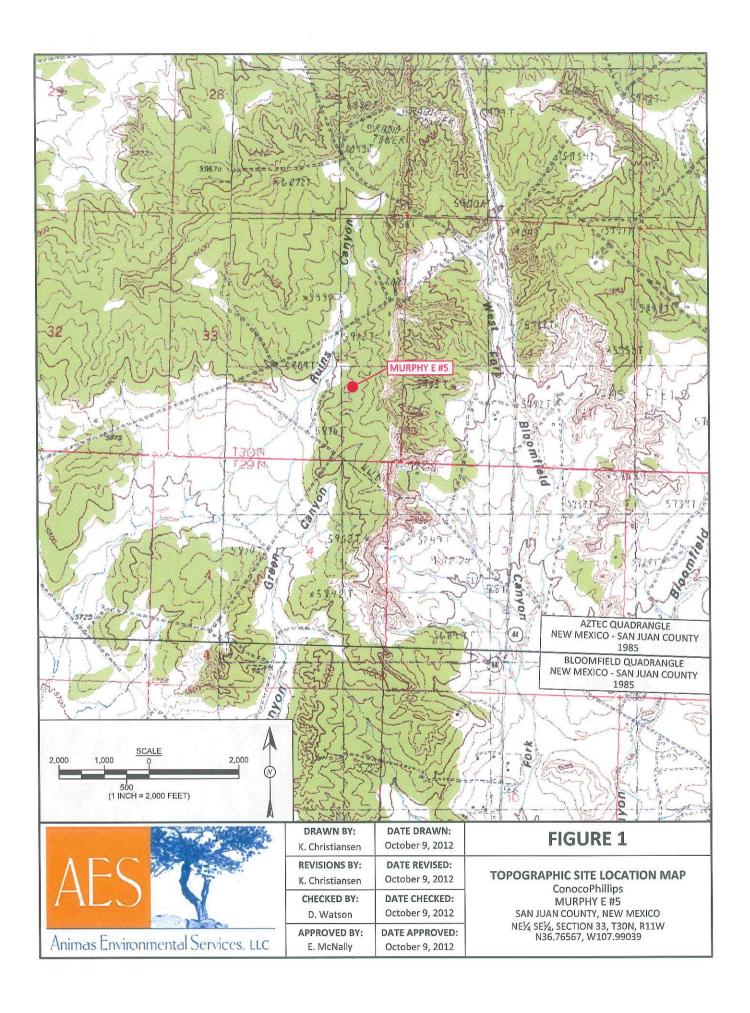

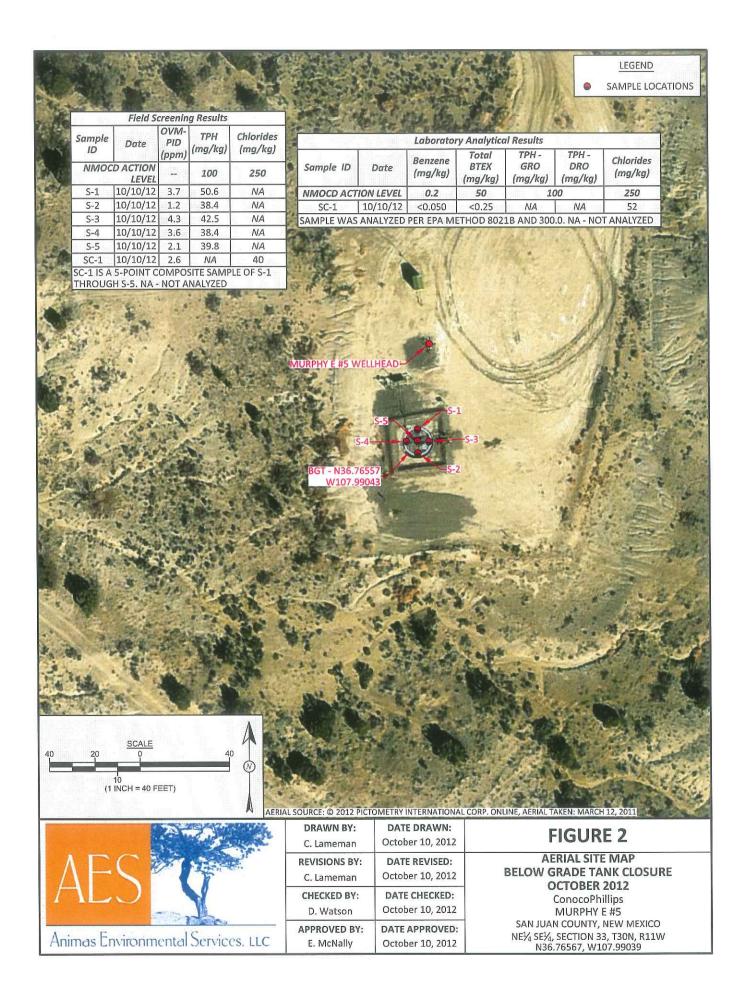

AES Field Screening Report

Client: ConocoPhillips

Project Location: Murphy E#5

Date: 10/10/2012

Matrix: Soil



Animas Environmental Services, LLC

www.animasenvironmental.com

624 E. Comanche Farmington, NM 87401 505-564-2281

Durango, Colorado 970-403-3274

		Time of			Field	Field TPH				TPH
	Collection	Sample	Sample	MVO	Chloride	Analysis	Field TPH*	TPH PQL		Analysts
Sample ID	Date	Collection	Location	(ppm)	(mg/kg)	Time	(mg/kg)	(mg/kg)	DF	Initials
S-1	10/10/2012	9:37	North	3.7	NA	10:17	50.7	20.0	П	CEL
	10/10/2012	9:39	South	1.2	NA	10:20	38.4	20.0	П	CEL
5-3	10/10/2012	9:41	East	4.3	NA	10:24	42.5	20.0	⊣	CEL
S-4	10/10/2012	9:43	West	3.6	NA	10:27	38.4	20.0	Н	CEL
S-5	10/10/2012	9:45	Center	2.1	NA	10:30	39.8	20.0	П	CEL
SC-1	SC-1 10/10/2012	9:47	Composite	2.6	40		Not And	Not Analyzed for Field TPH	TPH	

Practical Quantitation Limit PQL Not Detected at the Reporting Limit 2

Dilution Factor DF

Not Analyzed

*Field TPH concentrations recorded may be below PQL.

Total Petroleum Hydrocarbons - USEPA 418.1

Field Chloride - Quantab Chloride Titrators or Drop Count Titration with

Silver Nitrate

Analyst:



Hall Environmental Analysis Laboratory
4901 Hawkins NE
Albuquerque, NM 87109
TEL: 505-345-3975 FAX: 505-345-4107
Website: www.hallenvironmental.com

OrderNo.: 1210588

October 17, 2012

Ross Kennemer Animas Environmental Services 624 East Comanche Farmington, NM 87401 TEL: (505) 486-1776

FAX (505) 324-2022

RE: CoP Murphy E #5

Dear Ross Kennemer:

Hall Environmental Analysis Laboratory received 1 sample(s) on 10/11/2012 for the analyses presented in the following report.

These were analyzed according to EPA procedures or equivalent. To access our accredited tests please go to www.hallenvironmental.com or the state specific web sites. See the sample checklist and/or the Chain of Custody for information regarding the sample receipt temperature and preservation. Data qualifiers or a narrative will be provided if the sample analysis or analytical quality control parameters require a flag. All samples are reported as received unless otherwise indicated. Lab measurement of analytes considered field parameters that require analysis within 15 minutes of sampling such as pH and residual chlorine are qualified as being analyzed outside of the recommended holding time.

Please don't hesitate to contact HEAL for any additional information or clarifications.

Sincerely,

Andy Freeman

Laboratory Manager

andyl

4901 Hawkins NE

Albuquerque, NM 87109

Analytical Report Lab Order 1210588

Date Reported: 10/17/2012

Hall Environmental Analysis Laboratory, Inc.

CLIENT: Animas Environmental Services

CoP Murphy E #5

Project: 1210588-001

Lab ID:

Client Sample ID: SC-1

Collection Date: 10/10/2012 9:47:00 AM

Received Date: 10/11/2012 9:57:00 AM Matrix: MEOH (SOIL)

Analyses	Result	RL Qu	al Units	DF	Date Analyzed
EPA METHOD 8021B: VOLATILES					Analyst: NSB
Benzene	ND	0.050	mg/Kg	1	10/12/2012 1:42:28 PM
Toluene	ND	0.050	mg/Kg	1	10/12/2012 1:42:28 PM
Ethylbenzene	ND	0.050	mg/Kg	1	10/12/2012 1:42:28 PM
Xylenes, Total	ND	0.10	mg/Kg	1	10/12/2012 1:42:28 PM
Surr: 4-Bromofluorobenzene	112	80-120	%REC	1	10/12/2012 1:42:28 PM
EPA METHOD 300.0: ANIONS					Analyst: SRM
Chloride	52	30	mg/Kg	20	10/11/2012 12:06:38 PM

Qualifiers:

- Value exceeds Maximum Contaminant Level.
- Value above quantitation range
- Analyte detected below quantitation limits
- P Sample pH greater than 2
- RL Reporting Detection Limit

- Analyte detected in the associated Method Blank B
- Holding times for preparation or analysis exceeded H
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- Spike Recovery outside accepted recovery limits Page 1 of 4

QC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#:

1210588

17-Oct-12

Client:

Animas Environmental Services

Project:

CoP Murphy E #5

Sample ID MB-4252

SampType: MBLK

TestCode: EPA Method 300.0: Anions

LowLimit

LowLimit

64.4

90

Client ID: PBS

Batch ID: 4252

RunNo: 6174

Prep Date: 10/11/2012

Sample ID LCS-4252

Analysis Date: 10/11/2012

SeaNo: 177945

Units: mg/Kg

Analyte

Result

SPK value SPK Ref Val %REC LowLimit PQL

15.00

HighLimit

%RPD **RPDLimit**

%RPD

Qual

Chloride

ND 1.5

SampType: LCS

TestCode: EPA Method 300.0: Anions

Batch ID: 4252

14

RunNo: 6174

Client ID: LCSS Prep Date:

10/11/2012

Analysis Date: 10/11/2012

SegNo: 177946 %REC

Units: mg/Kg

Analyte

PQL Result SPK value SPK Ref Val

1.5

HighLimit

RPDLimit Qual

Chloride

Sample ID 1210398-003AMS

10/11/2012

SampType: MS

96.3 TestCode: EPA Method 300.0: Anions

110

Client ID:

BatchQC

Sample ID 1210398-003AMSD

Batch ID: 4252

RunNo: 6174

Prep Date:

Analysis Date: 10/11/2012

SeqNo: 177963

Units: mg/Kg-dry

Analyte

SPK value SPK Ref Val Result POL

%REC

HighLimit %RPD 117

RPDLimit

Qual

Chloride

20 16

TestCode: EPA Method 300.0: Anions

73.5

Client ID: **BatchQC** SampType: MSD Batch ID: 4252

PQL

16

RunNo: 6174

Prep Date:

10/11/2012 Analysis Date: 10/11/2012

8.436

8.436

SeqNo: 177964

Units: mg/Kg-dry

Qual

Analyte Chloride

Result

21

16.26

16.26

SPK value SPK Ref Val %REC

LowLimit 64.4 78.9

HighLimit 117 %RPD 4.25 **RPDLimit**

20

Qualifiers:

- Value exceeds Maximum Contaminant Level.
- Value above quantitation range
- Analyte detected below quantitation limits P Sample pH greater than 2
- Analyte detected in the associated Method Blank B
- H Holding times for preparation or analysis exceeded
- Not Detected at the Reporting Limit ND RPD outside accepted recovery limits
- Page 2 of 4

OC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#:

RPDLimit

1210588

17-Oct-12

Client:

Animas Environmental Services

Project:

CoP Murphy E #5

Sample ID 5ML RB

SampType: MBLK

TestCode: EPA Method 8015B: Gasoline Range

Client ID: PBS

Batch ID: R6205

POL

RunNo: 6205

Prep Date:

Analysis Date: 10/12/2012

SeqNo: 178737

Units: %REC HighLimit

Analyte

Result

SPK value SPK Ref Val %REC

116

1000

LowLimit 103 84 %RPD

Qual

Surr: BFB

1000

TestCode: EPA Method 8015B: Gasoline Range

Sample ID 2.5UG GRO LCS

Client ID: LCSS

SampType: LCS Batch ID: R6205

POL

RunNo: 6205

Units: %REC

116

116

Prep Date:

Analysis Date: 10/12/2012

SeqNo: 178738

84

84

84

%RPD

%RPD

%RPD

Analyte Surr: BFB Result 1100

SPK value SPK Ref Val 1000

%REC LowLimit

HighLimit

RPDLimit

Qual

Sample ID 1210582-004BMSD

SampType: MSD

TestCode: EPA Method 8015B: Gasoline Range

Client ID:

BatchQC

Batch ID: R6205

RunNo: 6205

Units: %REC

0

Analyte Surr: BFB

Prep Date:

Analysis Date: 10/12/2012 Result POL

SeqNo: 178752 SPK value SPK Ref Val %REC LowLimit 109

HighLimit

RPDLimit

Qual

Sample ID B27

Client ID:

Prep Date:

SampType: MBLK

TestCode: EPA Method 8015B: Gasoline Range

RunNo: 6205

Batch ID: R6205 Analysis Date: 10/12/2012

Analyte

Result

1100

800

SPK value SPK Ref Val

1000

730.5

SeqNo: 178761 %REC LowLimit Units: %REC HighLimit

RPDLimit

Qual

Surr: BFB Sample ID 2.5UG GRO LCS-II

SampType: LCS

105

TestCode: EPA Method 8015B: Gasoline Range

116

Client ID: LCSS Prep Date:

PBS

Batch ID: R6205

Analysis Date: 10/13/2012

RunNo: 6205

Analyte

Result 1100 SPK value SPK Ref Val

1000

SeqNo: 178762

Units: %REC

Surr: BFB

PQL

Batch ID: R6205

Analysis Date: 10/12/2012

PQL

POL

%REC Lowl imit 112 84

HighLimit %RPD **RPDLimit**

Qual

Sample ID 1210653-005BMS

116

Client ID:

BatchQC

SampType: MS

TestCode: EPA Method 8015B: Gasoline Range RunNo: 6205

Prep Date: Analyte

Surr: BFB

Prep Date:

Result 1100

Result 1200 SPK value SPK Ref Val 1000

SeqNo: 178768 %REC

113

SeqNo: 178769

Units: %REC

RPDLimit

Qual

SampType: MSD

TestCode: EPA Method 8015B: Gasoline Range

LowLimit

84

LowLimit

84

%RPD

n

%RPD

Sample ID 1210653-005BMSD

Client ID: BatchQC

Batch ID: R6205

Analysis Date: 10/12/2012

1000

SPK value SPK Ref Val

RunNo: 6205

%REC

117

Units: %REC

HighLimit

116

HighLimit

116

RPDLimit

Qual S

Surr: BFB

Analyte

Oualifiers: Value exceeds Maximum Contaminant Level.

Е Value above quantitation range

Analyte detected in the associated Method Blank B

Holding times for preparation or analysis exceeded H ND Not Detected at the Reporting Limit

Page 3 of 4

Analyte detected below quantitation limits Sample pH greater than 2

RPD outside accepted recovery limits

QC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#:

1210588

17-Oct-12

Client:

Animas Environmental Services

Project:

CoP Murphy E #5

	1940 70									
Sample ID 5ML RB	Samp	Туре: МЕ	LK	Test	Code: EF	A Method	8021B: Volat	iles		
Client ID: PBS	Bato	ch ID: R6:	205	R	unNo: 62	205				
Prep Date:	Analysis	Date: 10	/12/2012	S	eqNo: 17	78787	Units: mg/K	g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	ND	0.050								
Toluene	ND	0.050								
Ethylbenzene	ND	0.050								
Xylenes, Total	ND	0.10								
Surr: 4-Bromofluoroben	zene 1.1		1.000		111	80	120			
Sample ID 100NG I	STEX LCS Samp	Type: LC	s	Test	Code: EF	PA Method	8021B: Vola	tiles		
Client ID: LCSS	Bate	ch ID: R6	205	R	tunNo: 6	205				
Prep Date:	Analysis	Date: 10	/12/2012	S	SeqNo: 1	78788	Units: mg/k	(g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	1.0	0.050	1.000	0	104	76.3	117			
Toluene	1.0	0.050	1.000	0	105	80	120			
Ethylbenzene	1.0	0.050	1.000	0	104	77	116			
Xylenes, Total	3.1	0.10	3.000	0	104	76.7	117			
Surr: 4-Bromofluorober	zene 1.2		1.000		117	80	120			
Sample ID 1210588	3-001AMS Samp	туре: М5	3	TestCode: EPA Method 8021B: Volatiles						
Client ID: SC-1	Bat	ch ID: R6	205	F	RunNo: 6	205				
Prep Date:	Analysis	Date: 10)/12/2012	S	SeqNo: 1	78790	Units: mg/h	(g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	0.72	0.050	0.6894	0	105	67.2	113			
Toluene	0.72	0.050	0.6894	0	104	62.1	116			
Ethylbenzene	0.73	0.050	0.6894	0	105	67.9	127			
Xylenes, Total	2.2	0.10	2.068	0	105	60.6	134			
Surr: 4-Bromofluorober	zene 0.82		0.6894		119	80	120			

Sample ID 1210588-001AMS	SD SampT	ype: MS	SD.	TestCode: EPA Method 8021B: Volatiles								
Client ID: SC-1	Batch	n ID: R6	205	F								
Prep Date:	Analysis D	Date: 10)/12/2012	S	SeqNo: 1	78791	Units: mg/K	(g				
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual		
Benzene	0.70	0.050	0.6894	0	102	67.2	113	3.42	14.3			
Toluene	0.69	0.050	0.6894	0	100	62.1	116	3.44	15.9			
Ethylbenzene	0.70	0.050	0.6894	0	101	67.9	127	4.09	14.4			
Xylenes, Total	2.1	0.10	2.068	0	100	60.6	134	4.65	12.6			
Surr: 4-Bromofluorobenzene	0.84		0.6894		121	80	120	0	0	S		

Qualifiers:

- * Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH greater than 2

- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits

Page 4 of 4



Hall Environmental Analysis Laboratory 4901 Hawkins NE Albuquerque, NM 87105 TEL: 505-345-3975 FAX: 505-345-4107

Website: www.hallenvironmental.com

Sample Log-In Check List

10 101.10	ork Order Number: 1210588
Received by/date: At 10/11/12	Withill Comme
Logged By: Michelle Garcia 10/11/2012 9:57:00 AM	Mikell Garrie
Completed By: Michelle Garcia 10/11/2012 10:01:51 AM	Martel Garas
Reviewed By: 70 10/11/17	
Chain of Custody	
1. Were seals intact?	Yes ☐ No ☐ Not Present ☑
2. Is Chain of Custody complete?	Yes ☑ No □ Not Present □
3. How was the sample delivered?	Courier
<u>Log In</u>	
4. Coolers are present? (see 19. for cooler specific information)	Yes ☑ No ☐ NA ☐
5. Was an attempt made to cool the samples?	Yes ☑ No ☐ NA ☐
6. Were all samples received at a temperature of >0° C to 6.0°C	Yes ☑ No □ NA □
7. Sample(s) in proper container(s)?	Yes ☑ No □
8. Sufficient sample volume for indicated test(s)?	Yes ₩ No □
9. Are samples (except VOA and ONG) properly preserved?	Yes ☑ No □
10. Was preservative added to bottles?	Yes □ No ☑ NA □
11. VOA vials have zero headspace?	Yes ☐ No ☐ No VOA Vials ☑
12. Were any sample containers received broken?	Yes No 🗹
13. Does paperwork match bottle labels? (Note discrepancies on chain of custody)	Yes ✓ No ☐ # of preserved bottles checked for pH:
14. Are matrices correctly identified on Chain of Custody?	Yes ☑ No ☐ (<2 or >12 unless noted)
15. Is it clear what analyses were requested?	Yes No L Adjusted?
 Were all holding times able to be met? (If no, notify customer for authorization.) 	Yes ✓ No ☐ Checked by:
Special Handling (if applicable)	
17. Was client notified of all discrepancies with this order?	Yes □ No □ NA 🗹
Person Notified: Date: By Whom: Via: Regarding: Client Instructions:	eMail Phone Fax In Person
18. Additional remarks:	
19. Cooler Information Cooler No Temp °C Condition Seal Intact Seal No Seal No Seal Intact Seal No Seal I	eal Date Signed By
11.0 0000 165	

Client: Animas Environmental Services	www.hallenvironme	MURPHY E & S 4901 Hawki	nington, NM 87401 Project #: Tel. 505-345-3975 Fax 505-345-4107	Analysis Request	Project Manager:	□ Level 4 (Full Validation) A. Kenne were	Sample: C. Laueman / Z. Twillo X 6		Sample Request ID Type and # Type	SC-1 4-ages wealth -00/XX					Received by: Date Time Remarks: (31)L TO C.	Received by: Date Time
nvironmental Serv		24 E Comanche Farn	Farmington, NM 87401	505-564-2281	505-324-2022	□ Level 4 (F	Officer		Matrix Sample F	V					Reinquished by:	Relinquished by:
Client: Animas E		Mailing Address 62	Fa	Phone #: 50	Fax#:	QA/QC Package:	2	ype)		8 10-12 6997 8					Date: Time: Re	Time:

District I 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III District IV 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Submit 1 Copy to appropriate District Office to accordance with 19.15.29 NMAC.

Form C-141 Revised August 8, 2011

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

Release Notification and Corrective Action

						OPERAT	OR		☐ Initial Report ☐ Final Rep						
				l & Gas Compan		Contact Crystal Tafoya									
		^h St, Farmingt	on, NM			Telephone No.(505) 326-9837									
Facility Nat	me: Murpl	ıy E 5			F	Facility Type: Gas Well									
Surface Ow	ner BLM			Mineral O	wner B	LM (SF-04	476								
LOCATION OF RELEASE															
Unit Letter	Section		Range	Feet from the		South Line	Feet from the	East/	West Line	County		-			
I	33	30N	11W	1590	S	outh	1070		East	San Juan					
Latitude 36.76580 Longitude 107.990230 NATURE OF RELEASE															
Type of Rele	Droc Droc	luced Fluids		NAT	URE	Volume of	- Deposit Discretization	nknown	Volume R	ecovered	Non	10			
Source of Re	STATISTA SECURE SEC	w Grade Tan	K				our of Occurr				lour of Discovery				
000100 01110						Unknown			October 9						
Was Immedi	iate Notice (Yes	No 🛛 Not Re	quired	If YES, To	Whom?								
By Whom?						Date and H									
Was a Water	rcourse Read		es 🛛 1	No		If YES, Vo	lume Impactir	ng the Wa	tercourse.						
If a Waterco	urse was Im	pacted, Describ	e Fully.*												
The second secon		em and Remed sure Activities		n Taken.*											
The regulat	ory standar esults for T	PH, BTEX and	nt this sit	cen.* le was determined des were below the er action is requin	he regul	latory standa	rds set forth	in the NN	IOCD Guid						
regulations a public healfl should their or the enviro	all operators h or the envi operations honment. In a	are required to ronment. The anave failed to according to the second sec	report ar acceptand dequately CD accep	e is true and comp nd/or file certain r ce of a C-141 repo investigate and re otance of a C-141	elease no ort by the emediate	otifications as e NMOCD m e contaminati	nd perform cor arked as "Fina on that pose a	rrective active	ctions for rele does not reli ground water	eases which eve the ope , surface w	may e rator o ater, hu	ndanger f liability ıman health			
				OIL CC	NSER'	VATION	DIVISIO	NC							
Signature:	Consta	Approved by Environmental Specialist:													
Printed Nan	ne: Crystal	Tafoya				r ipproved by	Livioninella	ar opecial							
Title: Field	Title: Field Environmental Specialist							Approval Date: Expirat				on Date:			
E-mail Add	ress: crystal.	Conditions of Approval:				Attached									
Date: 1/24/		Phone: (-9837											

