

Submit 3 Copies
to Appropriate
District Office

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-103
Revised 1-1-89

DISTRICT I
P.O. Box 1980, Hobbs, NM 88240

DISTRICT II
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION
P.O. Box 2088
Santa Fe, New Mexico 87504-2088

WELL API NO.
30-025-05844

5. Indicate Type of Lease
STATE FEE

6. State Oil & Gas Lease No.
E 5674

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE 'APPLICATION FOR PERMIT'
(FORM C-101) FOR SUCH PROPOSALS.)

7. Lease Name or Unit Agreement Name
East Eumont Unit
008598

1. Type of Well:
OIL WELL GAS WELL OTHER

8. Well No.
99

2. Name of Operator
OXY USA Inc. 16696

9. Pool name or Wildcat
Eumont Yates 7 Rvr Qn 022800

3. Address of Operator
P.O. Box 50250 Midland, TX 79710-0250

4. Well Location
Unit Letter L : 1980 Feet From The South Line and 660 Feet From The West Line
Section 36 Township 19S Range 31E NMPM Lea County

10. Elevation (Show whether DF, RKB, RT, GR, etc.)
3604

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>		CASING TEST AND CEMENT JOB <input type="checkbox"/>	
OTHER: _____ <input type="checkbox"/>		OTHER: _____ <input type="checkbox"/>	

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

EEU #99
TD-3940' OH-3847-3940' CIBP-3500'
8-5/8" 32# CSG @ 310' W/ 300sx, 12-1/4" HOLE, TOC-CIRC
5-1/2" 15.5# CSG @ 3804' W/ 800sx, 7-7/8" HOLE, TOC-SURF-CALC
1. RIH & TAG CIBP @ 3500', DUMP 5sx CMT TO 3463'
2. M&P 25sx @ 2825-2660'
3. M&P 20sx @ 1465-1315'
4. PERF & SQZ @ 360', M&P 35sx CMT TO 260'
5. M&P 10sx CMT SURFACE PLUG
10# MLF BETWEEN PLUGS

THE COMMISSION MUST BE NOTIFIED 24 HOURS PRIOR TO THE BEGINNING OF PLUGGING OPERATIONS FOR THE C-103 TO BE APPROVED.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.
SIGNATURE David Stewart TITLE Regulatory Analyst DATE 10/13/98
TYPE OR PRINT NAME David Stewart TELEPHONE NO. 9156855717


(This space for State Use)
APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

Jo

gic
df

OXY USA INC. PROPOSED
 EAST EUMONT UNIT #99
 SEC 36 T19S R37E LEA NM

0.0 - 75.0' CEMENT PLUG 10sx
 260.0 - 360.0' CEMENT PLUG 35sx
 1315.0 - 1465.0' CEMENT PLUG 20sx
 2660.0 - 2825.0' CEMENT PLUG 25sx
 3463.0 - 3500.0' CEMENT PLUG 5sx
 3500.0 - 3500.0' CIBP

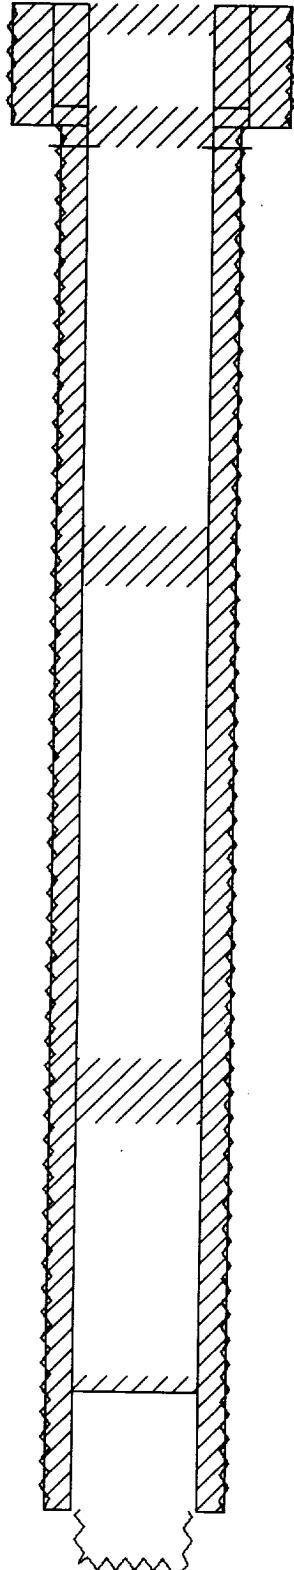

0.0 - 310.0' 12 1/4" OD HOLE
 0.0 - 310.0' CEMENT 300sx-CIRC
 0.0 - 310.0' 8 5/8" OD SURF CSG
 360.0 - 360.0' SQUEEZE PERFS

310.0 - 3804.0' 7 7/8" OD HOLE
 0.0 - 3804.0' CEMENT 800sx-CALC
 0.0 - 3804.0' 5 1/2" OD PROD CSG

3804.0 - 3940.0' 4 3/4" OD HOLE

TD: 3940'