<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone: (575) 393-6161 Fax: (575) 393-0720

811 S. First St., Artesia, NM 88210 Phone: (575) 748-1283 Fax: (575) 748-9720

District III

1000 Rio Brazos Road, Aztec, NM 87410 Phone: (505) 334-6178 Fax: (505) 334-6170 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico Energy Minerals and Natural Resources

Oil Conservation Division

☐AMENDED REPORT


Form C-101 Revised July 18, 2013

1220 South St. Francis Dr.

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

Santa Fe, NM 87505

				stream Permian, I					372311	l	
	5910 N Central Expressway, Suite 850, Dallas, TX 75206					30-	³ API Number 30-025-46397				
326	erty Code		ROBINSON	BINSON STATE SWD Property Name						. Well No. 1	
					face Locatio						
UL - Lot	Section	Township	Range	Lot Idn	Feet from		/S Line	Feet From	E/W Line	County	
F	4	22S	36E		1868		DRTH	1564	WEST	LEA	
UL - Lot	Section	Township	Range	8. Proposed	El Bottom Ho Feet from		YS Line	Feet From	E/W Line	County	
-	-	-	-	Lot Iun	-	14/	-	-	L/W Line	-	
				9. D oo	ol Informatio	<u> </u>					
					Pool Name	<u>) [1</u>				Pool Code	
				SWI	D; GLORIET <i>A</i>	1				96106	
					l Well Infor	mation					
	Production 8-3/4"		12. Well Type S	_		=		^{4.} Lease Type urface/ State Mine	15. Ground Level Elevation 3,589'		
16. M			17. Proposed Depth		18. Formation		19. Contractor		1413	^{20.} Spud Date	
			6,600'	nce from nearest fresh v	Glorieta			TBD Distance t	o postact curface	Upon Approval	
140)' (CP-0		d 1)		3,872	3,872 (CP-00727) Distance to nearest surface wat 20,			0,898' (Northeast)		
We will b	e using a c	closed-loop	system in lieu o	f lined pits							
				^{1.} Proposed Casi	ing and Cem	ent Pro	ogram				
Type	Hole	e Size	Casing Size	Casing Weig	ght/ft	Setting	g Depth	Sacks of	Cement	Estimated TOC	
Surface	12-	1/4"	9-5/8"	40 lb/ft		15	553'	515		Surface	
Production	8-3	/4"	7''	26 lb/ft		6,6	00'	1,00	00	Surface	
Tubing	-		4-1/2"	20 lb/ft		5,7	30'	N/A		N/A	
			Casi	ng/Cement Pro	gram: Addit	ional C	Comments	5			
			2	2. Proposed Blov	vout Prevent	ion Pro	ogram		T		
	Type			Working Pressure		Test Pressure		sure		Manufacturer	
Annular, Pipe & Blind/Shear Rams 3,000 psi		3,000 psi		3,000 psi		si	Hydril, Cameron or Equive				
^{23.} I hereby cer of my knowle			given above is tru	e and complete to the	ne best		OIL	CONSERVA	TION DIV	ISION	
I further cer	tify that I h	ave complie		O(A) NMAC an	d/or	roved By	/:	2			
19.15.14.9 (B Signature: \(\lambda\)	athan Allem		DIE.			,		Louis			
Printed name:					Title	е: р	atroloum	Engineer			
	Title: Regulatory Specialist - ALL Consulting					roved Da		U	Expiration Date	× 09/30/2021	
E-mail Addres	ss: nallema	an@all-llc.	com				U.7/JI				
Date: 9/19/2019 Phone: 918-237-0559				Con	SEE ATTACHED Conditions of Approval Attached						

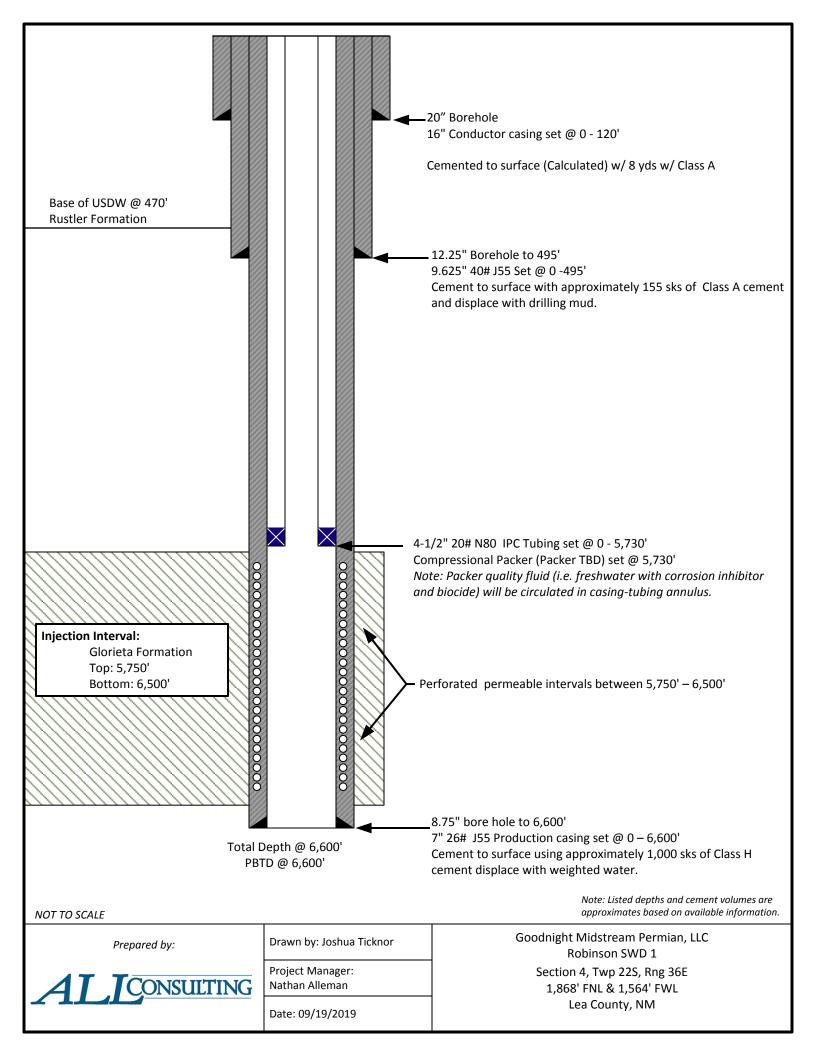

Goodnight Midstream Permian LLC

Robinson SWD 1 1,868' FNL & 1,564' FWL Section 4 , Twp 22S, Rng 36E Lea County, New Mexico

Proposed Drilling Plan for New SWD

1. **Geologic Information:** Permian geologic formations

The Permian Glorieta Formation consist of interbedded carbonates rocks including dolomites, siltstones, and sands. Several thick sections of porous and permeable intervals are present within this formation in the area. Geologic information and depths of formation tops were obtained from surrounding wells within the area of interest. Total depth is 100 feet below the base of the Glorieta Formation. The base of the Rustler Formation and top of the Salado Formation is at approximately 470 feet plus 25 feet equals 495 feet to set bottom of the surface casing to protect the deepest underground sources of drinking water (USDWs).

Estimated Formation Top Depths:

Rustler	270'
Salado	470'
Grayburg	3,945'
San Andres	4,405'
Glorieta	5,750'
Total Depth	6,600'

2. **Proposed Drilling** Plan:

- a. Move in equipment, excavate cellar and install tinhorn, and then drill conductor hole and set and cement in conductor casing.
- b. Mobilize drilling rig and rig up drilling rig and associated equipment onsite. Set up H2S wind direction indicators and monitors; brief all personnel on Emergency Evacuation Routes and ALL Consulting Site Health and Safety Plan.
- c. Everyone onsite will have stop work authority.
- d. Perform Job Safety Analysis (JSA) meetings before each drilling shift change and prior to any subcontractor performing any task on the location. All equipment should be inspected daily and repaired or replaced as required.
- e. Drilling operations commence.
- f. Have mud logger monitoring returns. All drill cuttings and waste hauled to specified waste facility.
- g. After drilling the surface hole and setting and cementing the casing; if hydrogen sulfide (H2S) levels are detected greater than 10ppm, implement H2S Plan by ceasing operations, shut in well, employ H2S safety trailer and personnel safety devices, install flare line, etc. – refer to plan.
- h. Proper secondary containment needs to be in place. Spills need to be cleaned up immediately. Repair or otherwise correct the situation within 48 hours before resuming operations. Notify Oil Conservation Division (OCD) within 24 hours. Remediation started as soon as possible if required. Operator shall comply with 19.15.29 NMAC and 19.15.30 NMAC, as appropriate.

- i. Sundry forms need to be completed and filed as required by OCD.
- 3. **Proposed Casing Program:** Casing designed as follows:

STRING	HOLE SZ	DFPTH	CSG SZ	COND	WT/GRD	CLLPS/BRS	TNSN
STINING	TIOLL 32	DLI III	000 02		WI/ORD	(Minimum Safety	Factors)
Conductor	20"	0-120'	16.0"	n/a	n/a	n/a	n/a
Surface	12.25"	0-495'	9.625"	New	40# J55	1.125/1.1	1.8
Production	8.75"	0-6,600'	7.0"	New	26# J55	1.125/1.1	1.8
Tubing	NA	0-5,730'	4.5"	New	20# N80 IPC	1.125/1.1	1.8

Notes:

- ✓ A deviation survey will be conducted and submitted with the Well Completion Report (Form C-105)
- √ While running all casing strings, the pipe will be kept a minimum of 1/3 full at all times to avoid approaching the collapse pressure of casing.
- ✓ Based on well completions and geophysical logs on adjacent wells, 7.0" casing shoe is expected to be set at 6,600'. Similarly, total depth will be approximately 6,600' as determined by open hole geophysical logging and after suitable porosity and low resistivity values have been identified. Maximum injection interval is anticipated to be from 5,750' to 6,600', but may change based upon actual wellbore determinations. A sundry notice will document such events as a C-105 well completion report filed within 60 days.

4. **Proposed Cementing Plans:**

Surface Casing: Cemented with approximately 155 sacks of Class A cement with 25% excess and circulated to the surface.

Production Casing: Cement with approximately 1,000 sacks of Class H cement with 25% excess and cement back to surface inside the 9-5/8" surface casing string. Cement top to be confirmed by cement bond logging after cement has cured to appropriate compressive strength.

- 5. **Pressure Control:** All Blowout Preventers (BOP) and related equipment will comply with well control requirements as described OCD Rules and Regulations and API RP 53, Section 17. The BOP will be either a Hydril, Cameron or equivalent. Minimum working pressure of the BOP and related equipment required for the drilling shall be 500 psi. The maximum working pressure is anticipated at 3,000 psig and the test pressure will be 3,000 psig. The OCD Hobbs district office shall be notified a minimum of 4 hours in advance for a representative to witness all BOP pressure tests. The test shall be performed by an independent service company utilizing a test plug (no cup of J-packer). The results of the test shall be recorded on a calibrated test chart submitted to the OCD district office. BOP testing shall be conducted at:
 - a. Installation:
 - b. After equipment or configuration changes;

- c. At 30 days from any previous test, and;
- d. Any time operations warrant, such as well conditions.

The BOP specifications to be used during the various phases of the drilling and casing installation are included in the table below:

Casing Size	Annular Preventer	Rams
16"	26-3/4" – 3M, with diverter	None
9.625"	11" – 5M	Pipe & Blind/Shear – 5M
7.0"	11" – 5M	Pipe & Blind/Shear – 5M

A diagram showing the representative BOP setup is included as Attachment 1.

- 6. **Auxiliary Well Control and Monitoring:** Hydraulic remote BOP operation and mudlogging to monitor returns.
- 7. **Mud Program and Monitoring:** Mud will be balanced for all operations with adjustment as needed based on actual wellbore conditions and is proposed as follows:

DEPTH	MUD TYPE	WEIGHT	FV	PV	ΥP	FL	рН
0-495'	FW Spud Mud	8.5-9.2	70-40	20	12	NC	10.0
495'-6,600'	Brine Mud	9.2-10.0	28-32	NC	NC	NC	10.0

Mud and all cuttings monitored with all drill cuttings recovered for disposal. Returns shall be visually and electronically monitored. In the event of H2S, mud shall be adjusted appropriately by weight and H2S scavengers.

8. **H2S Safety:** This well and related facilities are not expected to have H2S releases. However, there may be H2S in the area. There are no private residences or public facilities in the area but a contingency plan has been developed. Goodnight Midstream Permian, LLC will have a company representative available to personnel throughout all operations. If H2S levels greater than 10ppm are detected or suspected, the H2S Contingency Plan will be implemented at the appropriate level.

H2S Safety – There is a low risk of H2S in this area. The operator will comply with the provisions of New Mexico Administrative Code (NMAC) 19.15.11 and Bureau of Land Management (BLM) Onshore Oil and Gas Order #6.

- a. Monitoring all personnel will wear monitoring devices.
- b. Warning Sign a highly visible H2S warning sign will be placed for obvious viewing at the vehicular entrance point onto location.
- c. Wind Detection two (2) wind direction socks will be placed on location.
- d. Communications will be via cellular phones and/or radios located within reach of the driller, the rig floor and safety trailer when applicable.
- e. Alarms will be located at the rig floor, circulating pump/reverse unit area and the flare line and will be set for visual (red flashing light) at 15 ppm and visual and audible (115 decibel siren) at 20 ppm.
- f. Mud program If H2S levels require, proper mud weight, safe drilling practices and H2S scavengers will minimize potential hazards.

g. Metallurgy – all tubulars, pressure control equipment, flowlines, valves, manifolds and related equipment will be rated for H2S service if required.


The Goodnight Midstream Permian, LLC H2S Contingency Plan will be implemented if levels greater than 10ppm H2S are detected.

- 9. **Geophysical Logging and Testing:** Goodnight Midstream Permian, LLC expects to run:
 - a. Geophysical logging through the proposed injection interval will ensure the target interval remains within the Glorieta.
 - b. An open hole gamma ray, SP, compensated density- neutron and dual resistivity log suite will be run from total depth to approximately 525'.
 - c. A cement bond log with gamma ray and collar locator will be run (Radial, CET or equivalent) on the production casing.
 - d. No cores or drill stem tests will be conducted. (The well may potentially be step rate tested in the future if additional injection pressures are required.)
- 10. **Potential Hazards:** H2S is a potential hazard. No abnormal pressure or temperatures are anticipated, but drilling operations will be prepared in the event that those conditions occur.

No loss of circulation is expected to occur with the exception of drilling into the target disposal zone. All onsite personnel will be familiar with the safe operation of the equipment being used to drill this well. The maximum anticipated bottom-hole pressure is 2500 psig and the maximum anticipated bottom-hole temperature is 210°F.

- 11. **Waste Disposal Management:** All drill cuttings, fluids, and other solid wastes associated with drilling and completion operations will be transported to a solid waste facility and commercial Class IID injection operation that has been approved and permitted by the Environmental Bureau of the OCD.
- 12. Anticipated Drilling Commencement Date: Upon approval of the permit for saltwater disposal (SWD), operations would begin within 30 days based on rig availability. Drilling and completion of the well will take approximately six to seven weeks. Installation of the surface facility such as the secondary containment and tank battery, plumbing, injection pump(s), and other treatment and filtering associated equipment would be occurring after the well is completed. In any event, it is not expected for the construction of the surface facility of the project to last more than 90 days, pending on availability of subcontractors and equipment lead times.
- 13. **Completion for Salt Water Disposal:** Subsequent to SWD permit issuance from OCD and prior to commencing any work, a Notice of Intent (NOI) sundry will be submitted to complete the well for SWD and will detail the completion workover including all work otherwise described above, any change to the procedure noted herein and to perform mechanical integrity pressure testing per BLM and OCD test procedures (including appropriate OCD notification). The tubing and packer will be set at a depth of approximately 5,730 feet and the casing/tubing annulus will be filled with freshwater and corrosion inhibitor and pressure tested to the required test pressure using the standard annulus pressure test. Anticipated daily maximum volume is 25,000 barrels of water per day (bpd) and average of 12,500 bpd at a maximum surface injection pressure of 1,150 psig (0.2 psi/ft to the top of the injection interval).

If satisfactory disposals rates cannot be achieved at default pressure of .02 psi/ft, Goodnight Midstream Permian, LLC will conduct a step-rate test and apply for an injection pressure increase 50 psig below actual parting pressure achieved during the step-rate testing.

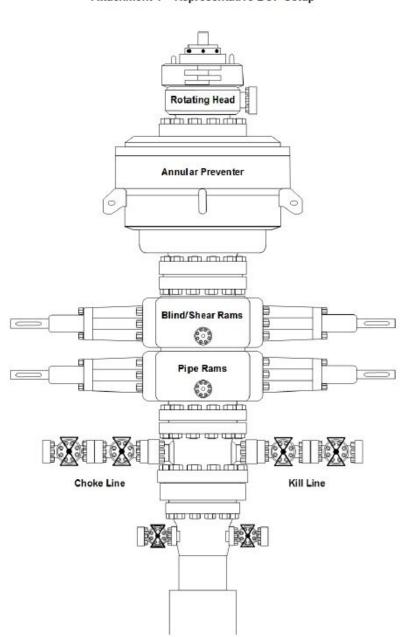

Attachment 1 - Representative BOP Setup