

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

OCD - HOBBS
06/02/2020
RECEIVED

FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. NMNM094118
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other		6. If Indian, Allottee or Tribe Name
1c. Type of Completion: <input type="checkbox"/> Hydraulic Fracturing <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		7. If Unit or CA Agreement, Name and No.
2. Name of Operator DEVON ENERGY PRODUCTION COMPANY LP [6137]		8. Lease Name and Well No. RAILSPLITTER 15-22 FED COM [328254] 4H
3a. Address 333 West Sheridan Avenue, Oklahoma City, OK 73102	3b. Phone No. (include area code) (800) 583-3866	9. API Well No. 30-025-47215
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface NESW / 2120 FSL / 1421 FWL / LAT 32.042018 / LONG -103.461711 At proposed prod. zone SESW / 20 FSL / 2320 FWL / LAT 32.021738 / LONG -103.458795		10. Field and Pool, or Exploratory [98105] UNDESIGNATED/WOLFCAMP
14. Distance in miles and direction from nearest town or post office*		12. County or Parish LEA
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 1421 feet		13. State NM
16. No of acres in lease 1760		17. Spacing Unit dedicated to this well 480.0
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 1744 feet		20. BLM/BIA Bond No. in file FED: NMB000801
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3275 feet		22. Approximate date work will start* 09/01/2020
24. Attachments		23. Estimated duration 45 days

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be requested by the BLM. |

25. Signature (Electronic Submission)	Name (Printed/Typed) Rebecca Deal / Ph: (800) 583-3866	Date 12/18/2019
Title Regulatory Compliance Professional		
Approved by (Signature) (Electronic Submission)	Name (Printed/Typed) Cody Layton / Ph: (575) 234-5959	Date 05/27/2020
Title Assistant Field Manager Lands & Minerals		
Office Carlsbad Field Office		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

GCP Rec 06/02/2020

SL

(Continued on page 2)

APPROVED WITH CONDITIONS
Approval Date: 05/27/2020

KZ
06/03/2020

*(Instructions on page 2)

1. Geologic Formations

TVD of target	12760	Pilot hole depth	N/A
MD at TD:	20412	Deepest expected fresh water	

Basin

Formation	Depth (TVD) from KB	Water/Mineral Bearing/Target Zone?	Hazards*
Rustler	700		
Salt	1000		
Base of Salt	5100		
Delaware	5350		
Bone Spring 1st	9600		
Bone Spring 2nd	11125		
Bone Spring 3rd	12200		
Wolfcamp	12625		

*H2S, water flows, loss of circulation, abnormal pressures, etc.

2. Casing Program (Primary Design)

Hole Size	Casing Interval		Csg. Size	Wt (PPF)	Grade	Conn	Min SF Collapse	Min SF Burst	Min SF Tension
	From	To							
17 1/2	0	725 TVD	13 3/8	48.0	H40	STC	1.125	1.25	1.6
9 7/8	0	12200 TVD	7 5/8	29.7	P110	Flushmax III	1.125	1.25	1.6
6 3/4	0	TD	5 1/2	20.0	P110	Vam SG	1.125	1.25	1.6
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

- All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 IILB.1.h Must have table for contingency casing.
- Rustler top will be validated via drilling parameters (i.e. reduction in ROP) and surface casing setting depth revised accordingly if needed.
- A variance is requested for collapse rating on intermediate casing. Operator will keep pipe full while running casing.
- Int casing shoe will be selected based on drilling data/gamma, setting depth with be revised accordingly if needed.
- A variance is requested to wave the centralizer requirement for the Intermediate casing and production casing.
- A variance is requested to set intermediate casing in the curve if hole conditions dictate that a higher shoe strength is required.

Casing Program (Alternative Design)

Hole Size	Casing Interval		Csg. Size	Wt (PPF)	Grade	Conn	Min SF Collapse	Min SF Burst	Min SF Tension
	From	To							
17 1/2	0	725 TVD	13 3/8	48.0	H40	STC	1.125	1.25	1.6
9 7/8	0	12200 TVD	8 5/8	32.0	P110	TLW	1.125	1.25	1.6
7 7/8	0	TD	5 1/2	17.0	P110	BTC	1.125	1.25	1.6
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

- All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 IILB.1.h Must have table for contingency casing.
- Rustler top will be validated via drilling parameters (i.e. reduction in ROP) and surface casing setting depth revised accordingly if needed.
- A variance is requested for collapse rating on intermediate casing. Operator will keep pipe full while running casing.
- Int casing shoe will be selected based on drilling data/gamma, setting depth with be revised accordingly if needed.
- A variance is requested to wave the centralizer requirement for the Intermediate casing and production casing.
- Variance requested to drill 10.625" hole instead of 9.875" for intermediate 1, the 8.625" connection will change from TLW to BTC.
- A variance is requested to set intermediate casing in the curve if hole conditions dictate that a higher shoe strength is required.

Railsplitter 15-22 Fed Com 4H

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

3. Cementing Program (Primary Design)

Casing	# Sks	TOC	Wt. (lb/gal)	Yld (ft3/sack)	Slurry Description
Surface	563	Surf	13.2	1.44	Lead: Class C Cement + additives
Int 1	763	Surf	9	3.27	Lead: Class C Cement + additives
	783	4000' above shoe	13.2	1.44	Tail: Class H / C + additives
Int 1 Two Stage w/ DV @ TVD of Delaware	961	Surf	9	3.27	1st stage Lead: Class C Cement + additives
	93	500' above shoe	13.2	1.44	1st stage Tail: Class H / C + additives
	464	Surf	9	3.27	2nd stage Lead: Class C Cement + additives
	93	500' above DV	13.2	1.44	2nd stage Tail: Class H / C + additives
Int 1 Intermediate Squeeze	As Needed	Surf	9	1.44	Squeeze Lead: Class C Cement + additives
	763	Surf	9	3.27	Lead: Class C Cement + additives
	783	4000' above shoe	13.2	1.44	Tail: Class H / C + additives
Production	62	10244	9.0	3.3	Lead: Class H / C + additives
	521	12244	13.2	1.4	Tail: Class H / C + additives

If a DV tool is ran the depth(s) will be adjusted based on hole conditions and cement volumes will be adjusted proportionally. Slurry weights will be adjusted based on estimated fracture gradient of the formation. DV tool will be set a minimum of 50 feet below previous casing and a minimum of 200 feet above current shoe. If cement is not returned to surface during the primary cement job on the surface casing string, a planned top job will be conducted immediately after completion of the primary job.

Casing String	% Excess
Surface	50%
Intermediate 1	30%
Intermediate 1 (Two Stage)	25%
Prod	10%

3. Cementing Program (Alternative Design)

Casing	# Sks	TOC	Wt. ppg	Yld (ft3/sack)	Slurry Description
Surface	563	Surf	13.2	1.44	Lead: Class C Cement + additives
Int 1	480	Surf	9	3.27	Lead: Class C Cement + additives
	465	4000' above shoe	13.2	1.44	Tail: Class H / C + additives
Int 1 Two Stage w DV @ ~4500	564	Surf	9	3.27	1st stage Lead: Class C Cement + additives
	55	500' above shoe	13.2	1.44	1st stage Tail: Class H / C + additives
	304	Surf	9	3.27	2nd stage Lead: Class C Cement + additives
	55	500' above DV	13.2	1.44	2nd stage Tail: Class H / C + additives
Int 1 Intermediate Squeeze	As Needed	Surf	13.2	1.44	Squeeze Lead: Class C Cement + additives
	480	Surf	9	3.27	Lead: Class C Cement + additives
	465	4000' above shoe	13.2	1.44	Tail: Class H / C + additives
Int 1 (10.625" Hole Size)	730	Surf	9	3.27	Lead: Class C Cement + additives
	768	4000' above shoe	13.2	1.44	Tail: Class H / C + additives
Production	117	10244	9.0	3.3	Lead: Class H / C + additives
	1081	12244	13.2	1.4	Tail: Class H / C + additives

If a DV tool is ran the depth(s) will be adjusted based on hole conditions and cement volumes will be adjusted proportionally. Slurry weights will be adjusted based on estimated fracture gradient of the formation. DV tool will be set a minimum of 50 feet below previous casing and a minimum of 200 feet above current shoe. If cement is not returned to surface during the primary cement job on the surface casing string, a planned top job will be conducted immediately after completion of the primary job.

Casing String	% Excess
Surface	50%
Intermediate 1	30%
Intermediate 1 (Two Stage)	25%
Prod	10%

4. Pressure Control Equipment (Three String Design)

BOP installed and tested before drilling which hole?		Size?	Min. Required WP	Type	✓	Tested to:
Int 1		13-58"	5M	Annular	X	50% of rated working pressure
				Blind Ram	X	5M
				Pipe Ram		
				Double Ram	X	
				Other*		
Production		13-5/8"	10M	Annular (5M)	X	100% of rated working pressure
				Blind Ram	X	10M
				Pipe Ram		
				Double Ram	X	
				Other*		
				Annular (5M)		
				Blind Ram		
				Pipe Ram		
				Double Ram		
				Other*		
N	A variance is requested for the use of a diverter on the surface casing. See attached for schematic.					
Y	A variance is requested to run a 5 M annular on a 10M system					

5. Mud Program (Three String Design)

Section	Type	Weight (ppg)
Surface	FW Gel	8.5-9
Intermediate	DBE / Cut Brine	10-10.5
Production	OBM	10-10.5

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	PVT/Pason/Visual Monitoring
---	-----------------------------

6. Logging and Testing Procedures

Logging, Coring and Testing	
X	Will run GR/CNL from TD to surface (horizontal well - vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
	No logs are planned based on well control or offset log information.
	Drill stem test? If yes, explain.
	Coring? If yes, explain.

Additional logs planned		Interval
	Resistivity	Int. shoe to KOP
	Density	Int. shoe to KOP
X	CBL	Production casing
X	Mud log	Intermediate shoe to TD
	PEX	

7. Drilling Conditions

Condition	Specify what type and where?
BH pressure at deepest TVD	6967
Abnormal temperature	No

Mitigation measure for abnormal conditions. Describe. Lost circulation material/sweeps/mud scavengers.

Hydrogen Sulfide (H₂S) monitors will be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered measured values and formations will be provided to the BLM.

N	H ₂ S is present
Y	H ₂ S plan attached.

8. Other facets of operation

Is this a walking operation? Potentially

- 1 If operator elects, drilling rig will batch drill the surface holes and run/cement surface casing; walking the rig to next wells on the pad.
- 2 The drilling rig will then batch drill the intermediate sections and run/cement intermediate casing; the wellbore will be isolated with a blind flange and pressure gauge installed for monitoring the well before walking to the next well.
- 3 The drilling rig will then batch drill the production hole sections on the wells with OBM, run/cement production casing, and install TA caps or tubing heads for completions.

NOTE: During batch operations the drilling rig will be moved from well to well however, it will not be removed from the pad until all wells have production casing run/cemented.

Will be pre-setting casing? Potentially

- 1 Spudder rig will move in and batch drill surface hole.
 - a. Rig will utilize fresh water based mud to drill surface hole to TD. Solids control will be handled entirely on a closed loop basis.,
- 2 After drilling the surface hole section, the spudder rig will run casing and cement following all of the applicable rules and regulations (OnShore Order 2, all COAs and NMOCD regulations).
- 3 The wellhead will be installed and tested once the surface casing is cut off and the WOC time has been reached.
- 4 A blind flange with the same pressure rating as the wellhead will be installed to seal the wellbore. Pressure will be monitored with a pressure gauge installed on the wellhead.
- 5 Spudder rig operations is expected to take 4-5 days per well on a multi-well pad.
- 6 The NMOCD will be contacted and notified 24 hours prior to commencing spudder rig operations.
- 7 Drilling operations will be performed with drilling rig. At that time an approved BOP stack will be nipped up and tested on the wellhead before drilling operations commence on each well.
 - a. The NMOCD will be contacted / notified 24 hours before the drilling rig moves back on to the pad with the pre-set surface casing.

Attachments

X Directional Plan
 Other, describe

Devon Energy Annular Preventer Summary

1. Component and Preventer Compatibility Table

The table below, which covers the drilling and casing of the 10M MASP portion of the well, outlines the tubulars and the compatible preventers in use. This table, combined with the mud program, documents that two barriers to flow can be maintained at all times, independent of the rating of the annular preventer.

6-3/4" Production hole section, 10M requirement

Component	OD	Preventer	RWP
Drillpipe	4.5"	Fixed lower 4.5" Upper 4.5-7" VBR	10M
HWDP	4.5"	Fixed lower 4.5" Upper 4.5-7" VBR	10M
Drill collars and MWD tools	4.75"	Upper 4.5-7" VBR	10M
Mud Motor	4.75"	Upper 4.5-7" VBR	10M
Production casing	5.5"	Upper 4.5-7" VBR	10M
ALL	0-13-5/8"	Annular	5M
Open-hole	-	Blind Rams	10M

VBR = Variable Bore Ram. Compatible range listed in chart.

2. Well Control Procedures

Well control procedures are specific to the rig equipment and the operation at the time the kick occurs. Below are the minimal high-level tasks prescribed to assure a proper shut-in while drilling, tripping, running casing, pipe out of the hole (open hole), and moving the BHA through the BOPs. The pressure at which control is swapped from the annular to another compatible ram is variable, but the operator will document in the submission their operating pressure limit. The operator may choose an operating pressure less than or equal to RWP, but in no case will it exceed the RWP of the annular preventer.

General Procedure While Drilling

1. Sound alarm (alert crew)
2. Space out drill string
3. Shut down pumps (stop pumps and rotary)
4. Shut-in Well (uppermost applicable BOP, typically annular preventer first. HCR and choke will already be in the closed position.)
5. Confirm shut-in
6. Notify toolpusher/company representative
7. Read and record the following:
 - a. SIDPP and SICP
 - b. Pit gain
 - c. Time
8. Regroup and identify forward plan
9. If pressure has built or is anticipated during the kill to reach the RWP of the annular preventer, confirm spacing and swap to the upper pipe ram.

Devon Energy Annular Preventer Summary

General Procedure While Tripping

1. Sound alarm (alert crew)
2. Stab full opening safety valve and close
3. Space out drill string
4. Shut-in (uppermost applicable BOP, typically annular preventer first. HCR and choke will already be in the closed position.)
5. Confirm shut-in
6. Notify toolpusher/company representative
7. Read and record the following:
 - a. SIDPP and SICP
 - b. Pit gain
 - c. Time
8. Regroup and identify forward plan
9. If pressure has built or is anticipated during the kill to reach the RWP of the annular preventer, confirm spacing and swap to the upper pipe ram.

General Procedure While Running Casing

1. Sound alarm (alert crew)
2. Stab crossover and full opening safety valve and close
3. Space out string
4. Shut-in (uppermost applicable BOP, typically annular preventer first. HCR and choke will already be in the closed position.)
5. Confirm shut-in
6. Notify toolpusher/company representative
7. Read and record the following:
 - a. SIDPP and SICP
 - b. Pit gain
 - c. Time
8. Regroup and identify forward plan
9. If pressure has built or is anticipated during the kill to reach the RWP of the annular preventer, confirm spacing and swap to compatible pipe ram.

General Procedure With No Pipe In Hole (Open Hole)

1. Sound alarm (alert crew)
2. Shut-in with blind rams or BSR. (HCR and choke will already be in the closed position.)
3. Confirm shut-in
4. Notify toolpusher/company representative
5. Read and record the following:
 - a. SICP
 - b. Pit gain
 - c. Time
6. Regroup and identify forward plan

Devon Energy Annular Preventer Summary

General Procedures While Pulling BHA thru Stack

1. PRIOR to pulling last joint of drillpipe thru the stack.
 - a. Perform flowcheck, if flowing:
 - b. Sound alarm (alert crew)
 - c. Stab full opening safety valve and close
 - d. Space out drill string with tool joint just beneath the upper pipe ram.
 - e. Shut-in using upper pipe ram. (HCR and choke will already be in the closed position.)
 - f. Confirm shut-in
 - g. Notify toolpusher/company representative
 - h. Read and record the following:
 - i. SIDPP and SICP
 - ii. Pit gain
 - iii. Time
 - i. Regroup and identify forward plan
2. With BHA in the stack and compatible ram preventer and pipe combo immediately available.
 - a. Sound alarm (alert crew)
 - b. Stab crossover and full opening safety valve and close
 - c. Space out drill string with upset just beneath the compatible pipe ram.
 - d. Shut-in using compatible pipe ram. (HCR and choke will already be in the closed position.)
 - e. Confirm shut-in
 - f. Notify toolpusher/company representative
 - g. Read and record the following:
 - i. SIDPP and SICP
 - ii. Pit gain
 - iii. Time
 - h. Regroup and identify forward plan
3. With BHA in the stack and NO compatible ram preventer and pipe combo immediately available.
 - a. Sound alarm (alert crew)
 - b. If possible to pick up high enough, pull string clear of the stack and follow “Open Hole” scenario.
 - c. If impossible to pick up high enough to pull the string clear of the stack:
 - d. Stab crossover, make up one joint/stand of drillpipe, and full opening safety valve and close
 - e. Space out drill string with tooljoint just beneath the upper pipe ram.
 - f. Shut-in using upper pipe ram. (HCR and choke will already be in the closed position.)
 - g. Confirm shut-in
 - h. Notify toolpusher/company representative
 - i. Read and record the following:
 - i. SIDPP and SICP
 - ii. Pit gain
 - iii. Time
 - j. Regroup and identify forward plan



Fluid Technology

ContiTech Beattie Corp.
Website: www.contitechbeattie.com

Monday, June 14, 2010

RE: Drilling & Production Hoses
Lifting & Safety Equipment

To Helmerich & Payne,

A Continental ContiTech hose assembly can perform as intended and suitable for the application regardless of whether the hose is secured or unsecured in its configuration. As a manufacturer of High Pressure Hose Assemblies for use in Drilling & Production, we do offer the corresponding lifting and safety equipment, this has the added benefit of easing the lifting and handling of each hose assembly whilst affording hose longevity by ensuring correct handling methods and procedures as well as securing the hose in the unlikely event of a failure; but in no way does the lifting and safety equipment affect the performance of the hoses providing the hoses have been handled and installed correctly. It is good practice to use lifting & safety equipment but not mandatory.


Should you have any questions or require any additional information/clarifications then please do not hesitate to contact us.

ContiTech Beattie is part of the Continental AG Corporation and can offer the full support resources associated with a global organization.

Best regards,

Robin Hodgson
Sales Manager
ContiTech Beattie Corp

ContiTech Beattie Corp,
11535 Brittnmoore Park Drive,
Houston, TX 77041
Phone: +1 (832) 327-0141
Fax: +1 (832) 327-0148
www.contitechbeattie.com



RIG 212



QUALITY DOCUMENT

PHOENIX RUBBER
INDUSTRIAL LTD.

6728 Szeged, Budapesti út 10. Hungary • H-6701 Szeged, P. O. Box 152
Phone: (3662) 566-737 • Fax: (3662) 566-738

SALES & MARKETING: H-1092 Budapest, Ráday u. 42-44. Hungary • H-1440 Budapest, P. O. Box 26
Phone: (361) 456-4200 • Fax: (361) 217-2972, 456-4273 • www.taurusemerge.hu

QUALITY CONTROL INSPECTION AND TEST CERTIFICATE				CERT. N°: 552	
PURCHASER: Phoenix Beattie Co.				P.O. N°: 1519FA-871	
PHOENIX RUBBER order N°: 170466		HOSE TYPE: 3" ID Choke and Kill Hose			
HOSE SERIAL N°: 34128		NOMINAL / ACTUAL LENGTH: 11,43 m			
W.P. 68,96 MPa 10000 psi		T.P. 103,4 MPa 15000 psi		Duration: 60 min.	
Pressure test with water at ambient temperature <p style="text-align: center;">See attachment. (1 page)</p>					
↑ 10 mm = 10 Min. → 10 mm = 25 MPa					
COUPLINGS					
Type	Serial N°		Quality	Heat N°	
3" coupling with 4 1/16" Flange end	720 719		AISI 4130	C7626	
			AISI 4130	47357	
API Spec 16 C Temperature rate: "B"					
All metal parts are flawless					
WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.					
Date:	Inspector		Quality Control		
29. April. 2002.			PHOENIX RUBBER Industrial Ltd. Hose Inspection and Verification Dept. PHOENIX RUBBER G.G.		

40920-0-00015 N6006

8	GN↓ +0.000 °C	14:00		
	RD↓ +0.000 °C	14:00		
	BL ↓1844.5 sec	14:00		
7	GN↓ +0.000 °C	13:40	40	60
	RD↓ +0.000 °C	13:40		
	BL ↓1847.5 sec	13:40		
6	GN↓ +0.000 °C	13:20		
	RD↓ +0.000 °C	13:20		
	BL ↓1850.5 sec	13:20		
5	GN↓ +0.000 °C	13:00		
	RD↓ +0.000 °C	13:00		
	BL ↓1855.5 sec	13:00		
4				
3				
2				

GENEX RUBBER
Industrial Ltd.
Hose Inspection and
Certification Dept.

VERIFIED TRUE CO.
PHOENIX RUBBER CO.

WCDSC Permian NM

Lea County (NAD83 New Mexico East)

Sec 15-T26S-R34E

Railsplitter 15-22 Fed Com 4H

Wellbore #1

Plan: Permit Plan 1

Standard Planning Report - Geographic

12 December, 2019

Planning Report - Geographic

Database:	EDM r5000.141_Prod US	Local Co-ordinate Reference:	Well Railsplitter 15-22 Fed Com 4H
Company:	WCDSC Permian NM	TVD Reference:	RKB @ 3299.80ft
Project:	Lea County (NAD83 New Mexico East)	MD Reference:	RKB @ 3299.80ft
Site:	Sec 15-T26S-R34E	North Reference:	Grid
Well:	Railsplitter 15-22 Fed Com 4H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permit Plan 1		

Project	Lea County (NAD83 New Mexico East)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site		Sec 15-T26S-R34E				
Site Position:		Northing:	383,264.34 usft	Latitude:	32.050709	
From:	Map	Easting:	809,962.78 usft	Longitude:	-103.466304	
Position Uncertainty:		0.00 ft	Slot Radius:	13-3/16 "	Grid Convergence:	0.46 °

Well	Railsplitter 15-22 Fed Com 4H					
Well Position	+N/-S	0.00 ft	Northing:	380,114.35 usft	Latitude:	32.042018
	+E/-W	0.00 ft	Easting:	811,411.42 usft	Longitude:	-103.461711
Position Uncertainty		0.50 ft	Wellhead Elevation:		Ground Level:	3,274.80 ft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2015	12/12/2019	6.62	59.88	47,587.18050281

Design	Permit Plan 1			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.00	0.00	0.00	172.55

Plan Survey Tool Program	Date	12/12/2019		
Depth From (ft)	Depth To (ft)	Survey (Wellbore)	Tool Name	Remarks
1	0.00	20,411.98 Permit Plan 1 (Wellbore #1)	MWD+HDGM OWSG MWD + HDGM	

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00	
3,158.51	6.59	62.40	3,157.06	17.51	33.50	1.00	1.00	0.00	62.40	
11,455.14	6.59	62.40	11,398.96	458.32	876.67	0.00	0.00	0.00	0.00	
11,894.15	0.00	0.00	11,837.00	470.00	899.00	1.50	-1.50	0.00	180.00	
12,244.19	0.00	0.00	12,187.04	470.00	899.00	0.00	0.00	0.00	0.00	
13,144.19	90.00	179.53	12,760.00	-102.94	903.69	10.00	10.00	0.00	179.53	PBHL - Railsplitter 15
20,411.98	90.00	179.53	12,760.00	-7,370.48	963.23	0.00	0.00	0.00	0.00	PBHL - Railsplitter 15

Planning Report - Geographic

Database:	EDM r5000.141_Prod US	Local Co-ordinate Reference:	Well Railsplitter 15-22 Fed Com 4H
Company:	WCDSC Permian NM	TVD Reference:	RKB @ 3299.80ft
Project:	Lea County (NAD83 New Mexico East)	MD Reference:	RKB @ 3299.80ft
Site:	Sec 15-T26S-R34E	North Reference:	Grid
Well:	Railsplitter 15-22 Fed Com 4H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permit Plan 1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
0.00	0.00	0.00	0.00	0.00	0.00	380,114.35	811,411.42	32.042018	-103.461711
100.00	0.00	0.00	100.00	0.00	0.00	380,114.35	811,411.42	32.042018	-103.461711
200.00	0.00	0.00	200.00	0.00	0.00	380,114.35	811,411.42	32.042018	-103.461711
300.00	0.00	0.00	300.00	0.00	0.00	380,114.35	811,411.42	32.042018	-103.461711
400.00	0.00	0.00	400.00	0.00	0.00	380,114.35	811,411.42	32.042018	-103.461711
500.00	0.00	0.00	500.00	0.00	0.00	380,114.35	811,411.42	32.042018	-103.461711
600.00	0.00	0.00	600.00	0.00	0.00	380,114.35	811,411.42	32.042018	-103.461711
700.00	0.00	0.00	700.00	0.00	0.00	380,114.35	811,411.42	32.042018	-103.461711
800.00	0.00	0.00	800.00	0.00	0.00	380,114.35	811,411.42	32.042018	-103.461711
900.00	0.00	0.00	900.00	0.00	0.00	380,114.35	811,411.42	32.042018	-103.461711
1,000.00	0.00	0.00	1,000.00	0.00	0.00	380,114.35	811,411.42	32.042018	-103.461711
1,100.00	0.00	0.00	1,100.00	0.00	0.00	380,114.35	811,411.42	32.042018	-103.461711
1,200.00	0.00	0.00	1,200.00	0.00	0.00	380,114.35	811,411.42	32.042018	-103.461711
1,300.00	0.00	0.00	1,300.00	0.00	0.00	380,114.35	811,411.42	32.042018	-103.461711
1,400.00	0.00	0.00	1,400.00	0.00	0.00	380,114.35	811,411.42	32.042018	-103.461711
1,500.00	0.00	0.00	1,500.00	0.00	0.00	380,114.35	811,411.42	32.042018	-103.461711
1,600.00	0.00	0.00	1,600.00	0.00	0.00	380,114.35	811,411.42	32.042018	-103.461711
1,700.00	0.00	0.00	1,700.00	0.00	0.00	380,114.35	811,411.42	32.042018	-103.461711
1,800.00	0.00	0.00	1,800.00	0.00	0.00	380,114.35	811,411.42	32.042018	-103.461711
1,900.00	0.00	0.00	1,900.00	0.00	0.00	380,114.35	811,411.42	32.042018	-103.461711
2,000.00	0.00	0.00	2,000.00	0.00	0.00	380,114.35	811,411.42	32.042018	-103.461711
2,100.00	0.00	0.00	2,100.00	0.00	0.00	380,114.35	811,411.42	32.042018	-103.461711
2,200.00	0.00	0.00	2,200.00	0.00	0.00	380,114.35	811,411.42	32.042018	-103.461711
2,300.00	0.00	0.00	2,300.00	0.00	0.00	380,114.35	811,411.42	32.042018	-103.461711
2,400.00	0.00	0.00	2,400.00	0.00	0.00	380,114.35	811,411.42	32.042018	-103.461711
2,500.00	0.00	0.00	2,500.00	0.00	0.00	380,114.35	811,411.42	32.042018	-103.461711
2,600.00	1.00	62.40	2,599.99	0.40	0.77	380,114.75	811,412.19	32.042019	-103.461708
2,700.00	2.00	62.40	2,699.96	1.62	3.09	380,115.97	811,414.51	32.042023	-103.461701
2,800.00	3.00	62.40	2,799.86	3.64	6.96	380,117.99	811,418.38	32.042028	-103.461688
2,900.00	4.00	62.40	2,899.68	6.47	12.37	380,120.81	811,423.79	32.042036	-103.461671
3,000.00	5.00	62.40	2,999.37	10.10	19.32	380,124.45	811,430.74	32.042046	-103.461648
3,100.00	6.00	62.40	3,098.90	14.54	27.82	380,128.89	811,439.23	32.042058	-103.461621
3,158.51	6.59	62.40	3,157.06	17.51	33.50	380,131.86	811,444.92	32.042066	-103.461602
3,200.00	6.59	62.40	3,198.28	19.72	37.71	380,134.07	811,449.13	32.042072	-103.461589
3,300.00	6.59	62.40	3,297.62	25.03	47.88	380,139.38	811,459.30	32.042086	-103.461556
3,400.00	6.59	62.40	3,396.96	30.34	58.04	380,144.69	811,469.46	32.042100	-103.461523
3,500.00	6.59	62.40	3,496.30	35.66	68.20	380,150.01	811,479.62	32.042115	-103.461490
3,600.00	6.59	62.40	3,595.64	40.97	78.37	380,155.32	811,489.78	32.042129	-103.461457
3,700.00	6.59	62.40	3,694.98	46.28	88.53	380,160.63	811,499.95	32.042143	-103.461424
3,800.00	6.59	62.40	3,794.32	51.60	98.69	380,165.94	811,510.11	32.042158	-103.461391
3,900.00	6.59	62.40	3,893.66	56.91	108.85	380,171.26	811,520.27	32.042172	-103.461358
4,000.00	6.59	62.40	3,993.00	62.22	119.02	380,176.57	811,530.44	32.042187	-103.461325
4,100.00	6.59	62.40	4,092.34	67.54	129.18	380,181.88	811,540.60	32.042201	-103.461292
4,200.00	6.59	62.40	4,191.68	72.85	139.34	380,187.20	811,550.76	32.042215	-103.461259
4,300.00	6.59	62.40	4,291.02	78.16	149.51	380,192.51	811,560.92	32.042230	-103.461226
4,400.00	6.59	62.40	4,390.36	83.48	159.67	380,197.82	811,571.09	32.042244	-103.461194
4,500.00	6.59	62.40	4,489.70	88.79	169.83	380,203.14	811,581.25	32.042258	-103.461161
4,600.00	6.59	62.40	4,589.04	94.10	179.99	380,208.45	811,591.41	32.042273	-103.461128
4,700.00	6.59	62.40	4,688.38	99.41	190.16	380,213.76	811,601.57	32.042287	-103.461095
4,800.00	6.59	62.40	4,787.72	104.73	200.32	380,219.08	811,611.74	32.042302	-103.461062
4,900.00	6.59	62.40	4,887.06	110.04	210.48	380,224.39	811,621.90	32.042316	-103.461029
5,000.00	6.59	62.40	4,986.40	115.35	220.65	380,229.70	811,632.06	32.042330	-103.460996
5,100.00	6.59	62.40	5,085.74	120.67	230.81	380,235.02	811,642.23	32.042345	-103.460963
5,200.00	6.59	62.40	5,185.08	125.98	240.97	380,240.33	811,652.39	32.042359	-103.460930
5,300.00	6.59	62.40	5,284.42	131.29	251.13	380,245.64	811,662.55	32.042373	-103.460897

Planning Report - Geographic

Database:	EDM r5000.141_Prod US	Local Co-ordinate Reference:	Well Railsplitter 15-22 Fed Com 4H
Company:	WCDSC Permian NM	TVD Reference:	RKB @ 3299.80ft
Project:	Lea County (NAD83 New Mexico East)	MD Reference:	RKB @ 3299.80ft
Site:	Sec 15-T26S-R34E	North Reference:	Grid
Well:	Railsplitter 15-22 Fed Com 4H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permit Plan 1		

Planned Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
5,400.00	6.59	62.40	5,383.76	136.61	261.30	380,250.95	811,672.71	32.042388	-103.460864	
5,500.00	6.59	62.40	5,483.10	141.92	271.46	380,256.27	811,682.88	32.042402	-103.460831	
5,600.00	6.59	62.40	5,582.44	147.23	281.62	380,261.58	811,693.04	32.042417	-103.460798	
5,700.00	6.59	62.40	5,681.78	152.55	291.78	380,266.89	811,703.20	32.042431	-103.460765	
5,800.00	6.59	62.40	5,781.12	157.86	301.95	380,272.21	811,713.36	32.042445	-103.460732	
5,900.00	6.59	62.40	5,880.46	163.17	312.11	380,277.52	811,723.53	32.042460	-103.460699	
6,000.00	6.59	62.40	5,979.81	168.49	322.27	380,282.83	811,733.69	32.042474	-103.460667	
6,100.00	6.59	62.40	6,079.15	173.80	332.44	380,288.15	811,743.85	32.042489	-103.460634	
6,200.00	6.59	62.40	6,178.49	179.11	342.60	380,293.46	811,754.02	32.042503	-103.460601	
6,300.00	6.59	62.40	6,277.83	184.42	352.76	380,298.77	811,764.18	32.042517	-103.460568	
6,400.00	6.59	62.40	6,377.17	189.74	362.92	380,304.09	811,774.34	32.042532	-103.460535	
6,500.00	6.59	62.40	6,476.51	195.05	373.09	380,309.40	811,784.50	32.042546	-103.460502	
6,600.00	6.59	62.40	6,575.85	200.36	383.25	380,314.71	811,794.67	32.042560	-103.460469	
6,700.00	6.59	62.40	6,675.19	205.68	393.41	380,320.03	811,804.83	32.042575	-103.460436	
6,800.00	6.59	62.40	6,774.53	210.99	403.58	380,325.34	811,814.99	32.042589	-103.460403	
6,900.00	6.59	62.40	6,873.87	216.30	413.74	380,330.65	811,825.16	32.042604	-103.460370	
7,000.00	6.59	62.40	6,973.21	221.62	423.90	380,335.96	811,835.32	32.042618	-103.460337	
7,100.00	6.59	62.40	7,072.55	226.93	434.06	380,341.28	811,845.48	32.042632	-103.460304	
7,200.00	6.59	62.40	7,171.89	232.24	444.23	380,346.59	811,855.64	32.042647	-103.460271	
7,300.00	6.59	62.40	7,271.23	237.56	454.39	380,351.90	811,865.81	32.042661	-103.460238	
7,400.00	6.59	62.40	7,370.57	242.87	464.55	380,357.22	811,875.97	32.042675	-103.460205	
7,500.00	6.59	62.40	7,469.91	248.18	474.71	380,362.53	811,886.13	32.042690	-103.460173	
7,600.00	6.59	62.40	7,569.25	253.50	484.88	380,367.84	811,896.29	32.042704	-103.460140	
7,700.00	6.59	62.40	7,668.59	258.81	495.04	380,373.16	811,906.46	32.042719	-103.460107	
7,800.00	6.59	62.40	7,767.93	264.12	505.20	380,378.47	811,916.62	32.042733	-103.460074	
7,900.00	6.59	62.40	7,867.27	269.43	515.37	380,383.78	811,926.78	32.042747	-103.460041	
8,000.00	6.59	62.40	7,966.61	274.75	525.53	380,389.10	811,936.95	32.042762	-103.460008	
8,100.00	6.59	62.40	8,065.95	280.06	535.69	380,394.41	811,947.11	32.042776	-103.459975	
8,200.00	6.59	62.40	8,165.29	285.37	545.85	380,399.72	811,957.27	32.042790	-103.459942	
8,300.00	6.59	62.40	8,264.63	290.69	556.02	380,405.04	811,967.43	32.042805	-103.459909	
8,400.00	6.59	62.40	8,363.97	296.00	566.18	380,410.35	811,977.60	32.042819	-103.459876	
8,500.00	6.59	62.40	8,463.31	301.31	576.34	380,415.66	811,987.76	32.042834	-103.459843	
8,600.00	6.59	62.40	8,562.65	306.63	586.51	380,420.97	811,997.92	32.042848	-103.459810	
8,700.00	6.59	62.40	8,661.99	311.94	596.67	380,426.29	812,008.09	32.042862	-103.459777	
8,800.00	6.59	62.40	8,761.33	317.25	606.83	380,431.60	812,018.25	32.042877	-103.459744	
8,900.00	6.59	62.40	8,860.67	322.57	616.99	380,436.91	812,028.41	32.042891	-103.459711	
9,000.00	6.59	62.40	8,960.01	327.88	627.16	380,442.23	812,038.57	32.042905	-103.459679	
9,100.00	6.59	62.40	9,059.35	333.19	637.32	380,447.54	812,048.74	32.042920	-103.459646	
9,200.00	6.59	62.40	9,158.69	338.51	647.48	380,452.85	812,058.90	32.042934	-103.459613	
9,300.00	6.59	62.40	9,258.03	343.82	657.65	380,458.17	812,069.06	32.042949	-103.459580	
9,400.00	6.59	62.40	9,357.37	349.13	667.81	380,463.48	812,079.22	32.042963	-103.459547	
9,500.00	6.59	62.40	9,456.71	354.45	677.97	380,468.79	812,089.39	32.042977	-103.459514	
9,600.00	6.59	62.40	9,556.05	359.76	688.13	380,474.11	812,099.55	32.042992	-103.459481	
9,700.00	6.59	62.40	9,655.39	365.07	698.30	380,479.42	812,109.71	32.043006	-103.459448	
9,800.00	6.59	62.40	9,754.74	370.38	708.46	380,484.73	812,119.88	32.043020	-103.459415	
9,900.00	6.59	62.40	9,854.08	375.70	718.62	380,490.05	812,130.04	32.043035	-103.459382	
10,000.00	6.59	62.40	9,953.42	381.01	728.78	380,495.36	812,140.20	32.043049	-103.459349	
10,100.00	6.59	62.40	10,052.76	386.32	738.95	380,500.67	812,150.36	32.043064	-103.459316	
10,200.00	6.59	62.40	10,152.10	391.64	749.11	380,505.98	812,160.53	32.043078	-103.459283	
10,300.00	6.59	62.40	10,251.44	396.95	759.27	380,511.30	812,170.69	32.043092	-103.459250	
10,400.00	6.59	62.40	10,350.78	402.26	769.44	380,516.61	812,180.85	32.043107	-103.459217	
10,500.00	6.59	62.40	10,450.12	407.58	779.60	380,521.92	812,191.02	32.043121	-103.459185	
10,600.00	6.59	62.40	10,549.46	412.89	789.76	380,527.24	812,201.18	32.043136	-103.459152	
10,700.00	6.59	62.40	10,648.80	418.20	799.92	380,532.55	812,211.34	32.043150	-103.459119	
10,800.00	6.59	62.40	10,748.14	423.52	810.09	380,537.86	812,221.50	32.043164	-103.459086	

Planning Report - Geographic

Database:	EDM r5000.141_Prod US	Local Co-ordinate Reference:	Well Railsplitter 15-22 Fed Com 4H
Company:	WCDSC Permian NM	TVD Reference:	RKB @ 3299.80ft
Project:	Lea County (NAD83 New Mexico East)	MD Reference:	RKB @ 3299.80ft
Site:	Sec 15-T26S-R34E	North Reference:	Grid
Well:	Railsplitter 15-22 Fed Com 4H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permit Plan 1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
10,900.00	6.59	62.40	10,847.48	428.83	820.25	380,543.18	812,231.67	32.043179	-103.459053
11,000.00	6.59	62.40	10,946.82	434.14	830.41	380,548.49	812,241.83	32.043193	-103.459020
11,100.00	6.59	62.40	11,046.16	439.46	840.58	380,553.80	812,251.99	32.043207	-103.458987
11,200.00	6.59	62.40	11,145.50	444.77	850.74	380,559.12	812,262.15	32.043222	-103.458954
11,300.00	6.59	62.40	11,244.84	450.08	860.90	380,564.43	812,272.32	32.043236	-103.458921
11,400.00	6.59	62.40	11,344.18	455.39	871.06	380,569.74	812,282.48	32.043251	-103.458888
11,455.14	6.59	62.40	11,398.96	458.32	876.67	380,572.67	812,288.08	32.043258	-103.458870
11,500.00	5.91	62.40	11,443.55	460.59	880.99	380,574.93	812,292.41	32.043265	-103.458856
11,600.00	4.41	62.40	11,543.14	464.76	888.97	380,579.10	812,300.38	32.043276	-103.458830
11,700.00	2.91	62.40	11,642.93	467.71	894.63	380,582.06	812,306.04	32.043284	-103.458812
11,800.00	1.41	62.40	11,742.86	469.46	897.97	380,583.81	812,309.39	32.043289	-103.458801
11,894.15	0.00	0.00	11,837.00	470.00	899.00	380,584.35	812,310.42	32.043290	-103.458798
11,900.00	0.00	0.00	11,842.85	470.00	899.00	380,584.35	812,310.42	32.043290	-103.458798
12,000.00	0.00	0.00	11,942.85	470.00	899.00	380,584.35	812,310.42	32.043290	-103.458798
12,100.00	0.00	0.00	12,042.85	470.00	899.00	380,584.35	812,310.42	32.043290	-103.458798
12,200.00	0.00	0.00	12,142.85	470.00	899.00	380,584.35	812,310.42	32.043290	-103.458798
12,244.19	0.00	0.00	12,187.04	470.00	899.00	380,584.35	812,310.42	32.043290	-103.458798
KOP @ 12244' MD, 2588' FSL, 2320' FWL									
12,300.00	5.58	179.53	12,242.76	467.28	899.02	380,581.63	812,310.44	32.043283	-103.458798
12,400.00	15.58	179.53	12,340.94	448.95	899.17	380,563.29	812,310.59	32.043232	-103.458798
12,485.00	24.08	179.53	12,420.82	420.14	899.41	380,534.48	812,310.82	32.043153	-103.458798
FTP @ 12485' MD, 2538' FSL, 2320' FWL									
12,500.00	25.58	179.53	12,434.44	413.84	899.46	380,528.19	812,310.88	32.043136	-103.458798
12,600.00	35.58	179.53	12,520.42	363.03	899.88	380,477.38	812,311.29	32.042996	-103.458798
12,700.00	45.58	179.53	12,596.27	298.06	900.41	380,412.41	812,311.82	32.042817	-103.458798
12,800.00	55.58	179.53	12,659.69	220.91	901.04	380,335.26	812,312.46	32.042605	-103.458797
12,900.00	65.58	179.53	12,708.75	133.92	901.75	380,248.27	812,313.17	32.042366	-103.458797
13,000.00	75.58	179.53	12,741.95	39.73	902.52	380,154.08	812,313.94	32.042107	-103.458797
13,100.00	85.58	179.53	12,758.30	-58.79	903.33	380,055.56	812,314.75	32.041836	-103.458797
13,144.19	90.00	179.53	12,760.00	-102.94	903.69	380,011.41	812,315.11	32.041715	-103.458797
13,200.00	90.00	179.53	12,760.00	-158.75	904.15	379,955.60	812,315.57	32.041562	-103.458797
13,300.00	90.00	179.53	12,760.00	-258.74	904.97	379,855.61	812,316.39	32.041287	-103.458797
13,400.00	90.00	179.53	12,760.00	-358.74	905.79	379,755.61	812,317.21	32.041012	-103.458797
13,500.00	90.00	179.53	12,760.00	-458.74	906.61	379,655.61	812,318.02	32.040737	-103.458797
13,600.00	90.00	179.53	12,760.00	-558.73	907.43	379,555.62	812,318.84	32.040462	-103.458797
13,700.00	90.00	179.53	12,760.00	-658.73	908.25	379,455.62	812,319.66	32.040187	-103.458797
13,800.00	90.00	179.53	12,760.00	-758.73	909.07	379,355.62	812,320.48	32.039912	-103.458797
13,900.00	90.00	179.53	12,760.00	-858.72	909.89	379,255.63	812,321.30	32.039638	-103.458797
14,000.00	90.00	179.53	12,760.00	-958.72	910.70	379,155.63	812,322.12	32.039363	-103.458797
14,100.00	90.00	179.53	12,760.00	-1,058.72	911.52	379,055.64	812,322.94	32.039088	-103.458797
14,200.00	90.00	179.53	12,760.00	-1,158.71	912.34	378,955.64	812,323.76	32.038813	-103.458797
14,300.00	90.00	179.53	12,760.00	-1,258.71	913.16	378,855.64	812,324.58	32.038538	-103.458797
14,400.00	90.00	179.53	12,760.00	-1,358.71	913.98	378,755.65	812,325.40	32.038263	-103.458797
14,500.00	90.00	179.53	12,760.00	-1,458.70	914.80	378,655.65	812,326.22	32.037988	-103.458797
14,600.00	90.00	179.53	12,760.00	-1,558.70	915.62	378,555.65	812,327.04	32.037713	-103.458797
14,700.00	90.00	179.53	12,760.00	-1,658.70	916.44	378,455.66	812,327.86	32.037439	-103.458797
14,800.00	90.00	179.53	12,760.00	-1,758.69	917.26	378,355.66	812,328.67	32.037164	-103.458797
14,900.00	90.00	179.53	12,760.00	-1,858.69	918.08	378,255.66	812,329.49	32.036889	-103.458797
15,000.00	90.00	179.53	12,760.00	-1,958.69	918.90	378,155.67	812,330.31	32.036614	-103.458797
15,100.00	90.00	179.53	12,760.00	-2,058.68	919.72	378,055.67	812,331.13	32.036339	-103.458797
15,161.00	90.00	179.53	12,760.00	-2,119.68	920.22	377,994.67	812,331.63	32.036171	-103.458797
Cross section @ 15161' MD, 0' FNL, 2320' FWL									
15,200.00	90.00	179.53	12,760.00	-2,158.68	920.54	377,955.67	812,331.95	32.036064	-103.458797
15,300.00	90.00	179.53	12,760.00	-2,258.68	921.35	377,855.68	812,332.77	32.035789	-103.458797

Planning Report - Geographic

Database:	EDM r5000.141_Prod US	Local Co-ordinate Reference:	Well Railsplitter 15-22 Fed Com 4H
Company:	WCDSC Permian NM	TVD Reference:	RKB @ 3299.80ft
Project:	Lea County (NAD83 New Mexico East)	MD Reference:	RKB @ 3299.80ft
Site:	Sec 15-T26S-R34E	North Reference:	Grid
Well:	Railsplitter 15-22 Fed Com 4H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permit Plan 1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
15,400.00	90.00	179.53	12,760.00	-2,358.67	922.17	377,755.68	812,333.59	32.035514	-103.458797
15,500.00	90.00	179.53	12,760.00	-2,458.67	922.99	377,655.68	812,334.41	32.035240	-103.458797
15,600.00	90.00	179.53	12,760.00	-2,558.67	923.81	377,555.69	812,335.23	32.034965	-103.458797
15,700.00	90.00	179.53	12,760.00	-2,658.66	924.63	377,455.69	812,336.05	32.034690	-103.458797
15,800.00	90.00	179.53	12,760.00	-2,758.66	925.45	377,355.70	812,336.87	32.034415	-103.458797
15,900.00	90.00	179.53	12,760.00	-2,858.66	926.27	377,255.70	812,337.69	32.034140	-103.458797
16,000.00	90.00	179.53	12,760.00	-2,958.65	927.09	377,155.70	812,338.50	32.033865	-103.458797
16,100.00	90.00	179.53	12,760.00	-3,058.65	927.91	377,055.71	812,339.32	32.033590	-103.458796
16,200.00	90.00	179.53	12,760.00	-3,158.65	928.73	376,955.71	812,340.14	32.033315	-103.458796
16,300.00	90.00	179.53	12,760.00	-3,258.64	929.55	376,855.71	812,340.96	32.033041	-103.458796
16,400.00	90.00	179.53	12,760.00	-3,358.64	930.37	376,755.72	812,341.78	32.032766	-103.458796
16,500.00	90.00	179.53	12,760.00	-3,458.63	931.18	376,655.72	812,342.60	32.032491	-103.458796
16,600.00	90.00	179.53	12,760.00	-3,558.63	932.00	376,555.72	812,343.42	32.032216	-103.458796
16,700.00	90.00	179.53	12,760.00	-3,658.63	932.82	376,455.73	812,344.24	32.031941	-103.458796
16,800.00	90.00	179.53	12,760.00	-3,758.62	933.64	376,355.73	812,345.06	32.031666	-103.458796
16,900.00	90.00	179.53	12,760.00	-3,858.62	934.46	376,255.73	812,345.88	32.031391	-103.458796
17,000.00	90.00	179.53	12,760.00	-3,958.62	935.28	376,155.74	812,346.70	32.031116	-103.458796
17,100.00	90.00	179.53	12,760.00	-4,058.61	936.10	376,055.74	812,347.52	32.030842	-103.458796
17,200.00	90.00	179.53	12,760.00	-4,158.61	936.92	375,955.75	812,348.34	32.030567	-103.458796
17,300.00	90.00	179.53	12,760.00	-4,258.61	937.74	375,855.75	812,349.15	32.030292	-103.458796
17,400.00	90.00	179.53	12,760.00	-4,358.60	938.56	375,755.75	812,349.97	32.030017	-103.458796
17,500.00	90.00	179.53	12,760.00	-4,458.60	939.38	375,655.76	812,350.79	32.029742	-103.458796
17,600.00	90.00	179.53	12,760.00	-4,558.60	940.20	375,555.76	812,351.61	32.029467	-103.458796
17,700.00	90.00	179.53	12,760.00	-4,658.59	941.02	375,455.76	812,352.43	32.029192	-103.458796
17,800.00	90.00	179.53	12,760.00	-4,758.59	941.83	375,355.77	812,353.25	32.028917	-103.458796
17,900.00	90.00	179.53	12,760.00	-4,858.59	942.65	375,255.77	812,354.07	32.028643	-103.458796
18,000.00	90.00	179.53	12,760.00	-4,958.58	943.47	375,155.77	812,354.89	32.028368	-103.458796
18,100.00	90.00	179.53	12,760.00	-5,058.58	944.29	375,055.78	812,355.71	32.028093	-103.458796
18,200.00	90.00	179.53	12,760.00	-5,158.58	945.11	374,955.78	812,356.53	32.027818	-103.458796
18,300.00	90.00	179.53	12,760.00	-5,258.57	945.93	374,855.78	812,357.35	32.027543	-103.458796
18,400.00	90.00	179.53	12,760.00	-5,358.57	946.75	374,755.79	812,358.17	32.027268	-103.458796
18,500.00	90.00	179.53	12,760.00	-5,458.57	947.57	374,655.79	812,358.99	32.026993	-103.458796
18,600.00	90.00	179.53	12,760.00	-5,558.56	948.39	374,555.80	812,359.80	32.026718	-103.458796
18,700.00	90.00	179.53	12,760.00	-5,658.56	949.21	374,455.80	812,360.62	32.026444	-103.458796
18,800.00	90.00	179.53	12,760.00	-5,758.56	950.03	374,355.80	812,361.44	32.026169	-103.458796
18,900.00	90.00	179.53	12,760.00	-5,858.55	950.85	374,255.81	812,362.26	32.025894	-103.458796
19,000.00	90.00	179.53	12,760.00	-5,958.55	951.66	374,155.81	812,363.08	32.025619	-103.458796
19,100.00	90.00	179.53	12,760.00	-6,058.55	952.48	374,055.81	812,363.90	32.025344	-103.458796
19,200.00	90.00	179.53	12,760.00	-6,158.54	953.30	373,955.82	812,364.72	32.025069	-103.458796
19,300.00	90.00	179.53	12,760.00	-6,258.54	954.12	373,855.82	812,365.54	32.024794	-103.458795
19,400.00	90.00	179.53	12,760.00	-6,358.54	954.94	373,755.82	812,366.36	32.024519	-103.458795
19,500.00	90.00	179.53	12,760.00	-6,458.53	955.76	373,655.83	812,367.18	32.024245	-103.458795
19,600.00	90.00	179.53	12,760.00	-6,558.53	956.58	373,555.83	812,368.00	32.023970	-103.458795
19,700.00	90.00	179.53	12,760.00	-6,658.53	957.40	373,455.83	812,368.82	32.023695	-103.458795
19,800.00	90.00	179.53	12,760.00	-6,758.52	958.22	373,355.84	812,369.63	32.023420	-103.458795
19,900.00	90.00	179.53	12,760.00	-6,858.52	959.04	373,255.84	812,370.45	32.023145	-103.458795
20,000.00	90.00	179.53	12,760.00	-6,958.52	959.86	373,155.84	812,371.27	32.022870	-103.458795
20,100.00	90.00	179.53	12,760.00	-7,058.51	960.68	373,055.85	812,372.09	32.022595	-103.458795
20,200.00	90.00	179.53	12,760.00	-7,158.51	961.50	372,955.85	812,372.91	32.022320	-103.458795
20,300.00	90.00	179.53	12,760.00	-7,258.51	962.31	372,855.86	812,373.73	32.022046	-103.458795
20,332.00	90.00	179.53	12,760.00	-7,290.51	962.58	372,823.86	812,373.99	32.021958	-103.458795
LTP @ 20332' MD, 100' FSL, 2320' FWL									
20,400.00	90.00	179.53	12,760.00	-7,358.50	963.13	372,755.86	812,374.55	32.021771	-103.458795

Planning Report - Geographic

Database:	EDM r5000.141_Prod US	Local Co-ordinate Reference:	Well Railsplitter 15-22 Fed Com 4H
Company:	WCDSC Permian NM	TVD Reference:	RKB @ 3299.80ft
Project:	Lea County (NAD83 New Mexico East)	MD Reference:	RKB @ 3299.80ft
Site:	Sec 15-T26S-R34E	North Reference:	Grid
Well:	Railsplitter 15-22 Fed Com 4H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permit Plan 1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
20,411.97	90.00	179.53	12,760.00	-7,370.47	963.23	372,743.89	812,374.65	32.021738	-103.458795
PBHL; 20' FSL, 2320' FWL									
20,411.98	90.00	179.53	12,760.00	-7,370.48	963.23	372,743.88	812,374.65	32.021738	-103.458795

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (usft)	Easting (usft)	Latitude	Longitude
- hit/miss target									
- Shape									
PBHL - Railsplitter 15-22	0.00	0.00	0.00	-7,370.48	963.23	372,743.88	812,374.65	32.021738	-103.458795
- plan misses target center by 7433.16ft at 0.00ft MD (0.00 TVD, 0.00 N, 0.00 E)									
- Point									

Plan Annotations					
Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates			
		+N/-S (ft)	+E/-W (ft)	Comment	
12,244.19	12,187.04	470.00	899.00	KOP @ 12244' MD, 2588' FSL, 2320' FWL	
12,485.00	12,420.82	420.14	899.41	FTP @ 12485' MD, 2538' FSL, 2320' FWL	
15,161.00	12,760.00	-2,119.68	920.22	Cross section @ 15161' MD, 0' FNL, 2320' FWL	
20,332.00	12,760.00	-7,290.51	962.58	LTP @ 20332' MD, 100' FSL, 2320' FWL	
20,411.97	12,760.00	-7,370.47	963.23	PBHL; 20' FSL, 2320' FWL	

Devon Energy

WELL DETAILS: Railsplitter 15-22 Fed Com 4H

RKB @ 3299.80ft

3274.80

Northing
380114.35




Easting
811411.42

Latitude
32.042018

Longitude
-103.461711

SECTION DETAILS Permit Plan 1

	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	VSect	Annotation
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
	2500.00	0.00	0.00	2500.00	0.00	0.00	0.00	0.00	
	3158.51	6.59	62.40	3157.06	17.51	33.50	1.00	-13.02	
	11455.14	6.59	62.40	11398.96	458.32	876.67	0.00	-340.86	
5	11894.15	0.00	0.00	11837.00	470.00	899.00	1.50	-349.54	
6	12244.19	0.00	0.00	12187.04	470.00	899.00	0.00	-349.54	KOP @ 12244' MD, 2588' FSL, 2320' FWL
7	13144.19	90.00	179.53	12760.00	-102.94	903.69	10.00	219.18	
8	20411.98	90.00	179.53	12760.00	-7370.48	963.23	0.00	7433.16	PBHL; 20' FSL, 2320' FWL

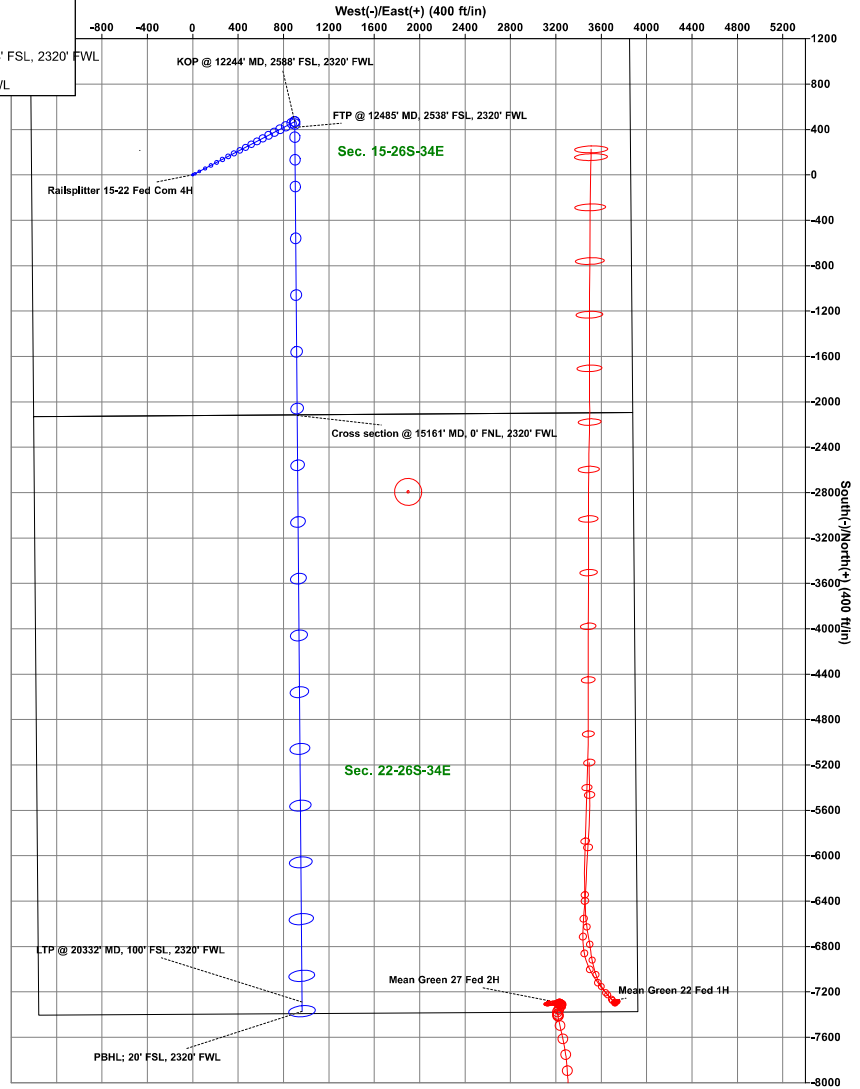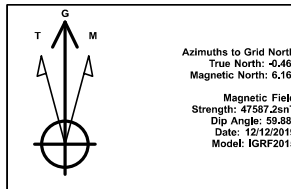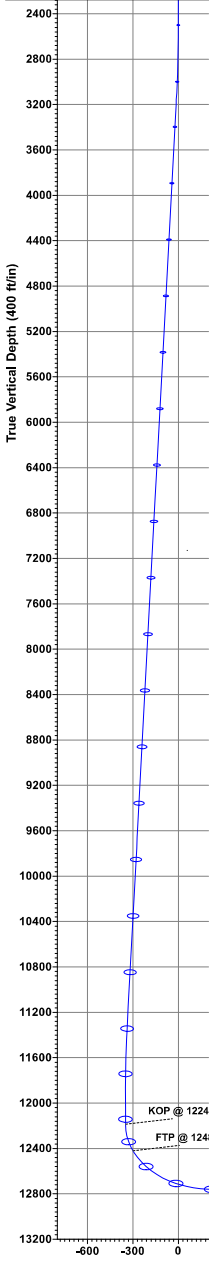

Cross section @ 15161' MD, 0' FNL, 2320' FWL

LTP @ 20332' MD, 100' FSL, 2320' FWL

PBHL; 20' FSL, 2320' FWL

Vertical Section at 172.55° (300 ft/in)



Commitment Runs Deep



Design Plan
Operation and Maintenance Plan
Closure Plan

SENM - Closed Loop Systems
June 2010

I. Design Plan

Devon uses MI SWACO closed loop system (CLS). The MI SWACO CLS is designed to maintain drill solids at or below 5%. The equipment is arranged to progressively remove solids from the largest to the smallest size. Drilling fluids can thus be reused and savings is realized on mud and disposal costs. Dewatering may be required with the centrifuges to insure removal of ultra fine solids.

The drilling location is constructed to allow storm water to flow to a central sump normally the cellar. This insures no contamination leaves the drilling pad in the event of a spill. Storm water is reused in the mud system or stored in a reserve fluid tank farm until it can be reused. All lubricants, oils, or chemicals are removed immediately from the ground to prevent the contamination of storm water. An oil trap is normally installed on the sump if an oil spill occurs during a storm.

A tank farm is utilized to store drilling fluids including fresh water and brine fluids. The tank farm is constructed on a 20 ml plastic lined, bermed pad to prevent the contamination of the drilling site during a spill. Fluids from other sites may be stored in these tanks for processing by the solids control equipment and reused in the mud system. At the end of the well the fluids are transported from the tank farm to an adjoining well or to the next well for the rig.

Prior to installing a closed-loop system on site, the topsoil, if present, will be stripped and stockpiled for use as the final cover or fill at the time of closure.

Signs will be posted on the fence surrounding the closed-loop system unless the closed-loop system is located on a site where there is an existing well, that is operated by Devon.

II. Operations and Maintenance Plan

Primary Shakers: The primary shakers make the first removal of drill solids from the drilling mud as it leaves the well bore. The shakers are sized to handle maximum drilling rate at optimal screen size. The shakers normally remove solids down to 74 microns.



devon

1 Primary Shakers
 2 Mud Cleaner
 3 Centrifuge
 4 Dewatering System
 5 Cuttings Boxes
 6 Process Tank
 7 Sump Pump
 8 Reserve Fluids

Dewatering System: The dewatering system is a chemical mixing and dosing system designed to enhance the solids removal of the centrifuge. Not commonly used in shallow wells. It may contain pH adjustment, coagulant mixing and dosing, and polymer mixing and dosing. Chemical flocculation binds ultra fine solids into a mass that is within the centrifuge operating design. The

dewatering system improves the centrifuge cut point to infinity or allows for the return of clear water or brine fluid. This ability allows for the ultimate control of low gravity solids.

Cuttings Boxes: Cuttings boxes are utilized to capture drill solids that are discarded from the solids control equipment. These boxes are set upon a rail system that allows for the removal and replacement of a full box of cuttings with an empty one. They are equipped with a cover that insures no product is spilled into the environment during the transportation phase.

Process Tank: (Optional) The process tank allows for the holding and process of fluids that are being transferred into the mud system. Additionally, during times of lost circulation the process tank may hold active fluids that are removed for additional treatment. It can further be used as a mixing tank during well control conditions.

Sump and Sump Pump: The sump is used to collect storm water and the pump is used to transfer this fluid to the active system or to the tank for to hold in reserve. It can also be used to collect fluids that may escape during spills. The location contains drainage ditches that allow the location fluids to drain to the sump.

Reserve Fluids (Tank Farm): A series of frac tanks are used to replace the reserve pit. These are steel tanks that are equipped with a manifold system and a transfer pump. These tanks can contain any number of fluids used during the drilling process. These can include fresh water, cut brine, and saturated salt fluid. The fluid can be from the active well or reclaimed fluid from other locations. A 20 ml liner and berm system is employed to ensure the fluids do not migrate to the environment during a spill.

If a leak develops, the appropriate division district office will be notified within 48 hours of the discovery and the leak will be addressed. Spill prevention is accomplished by maintaining pump packing, hoses, and pipe fittings to insure no leaks are occurring. During an upset condition the source of the spill is isolated and repaired as soon as it is discovered. Free liquid is removed by a diaphragm pump and returned to the mud system. Loose topsoil may be used to stabilize the spill and the contaminated soil is excavated and placed in the cuttings boxes. After the well is finished and the rig has moved, the entire location is scrapped and testing will be performed to determine if a release has occurred.

All trash is kept in a wire mesh enclosure and removed to an approved landfill when full. All spent motor oils are kept in separate containers and they are removed and sent to an approved recycling center. Any spilled lubricants, pipe

dope, or regulated chemicals are removed from soil and sent to landfills approved for these products.

These operations are monitored by Mi Swaco service technicians. Daily logs are maintained to ensure optimal equipment operation and maintenance. Screen and chemical use is logged to maintain inventory control. Fluid properties are monitored and recorded and drilling mud volumes are accounted for in the mud storage farm. This data is kept for end of well review to insure performance goals are met. Lessons learned are logged and used to help with continuous improvement.

A MI SWACO field supervisor manages from 3-5 wells. They are responsible for training personnel, supervising installations, and inspecting sites for compliance of MI SWACO safety and operational policy.

III. Closure Plan

A maximum 340' X 340' caliche pad is built per well. All of the trucks and steel tanks fit on this pad. All fluid cuttings go to the steel tanks to be hauled by various trucking companies to an agency approved disposal.

PECOS DISTRICT

DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Devon Energy Production Company LP
LEASE NO.:	NMNM094118
LOCATION:	Section 15, T.26 S., R.34 E., NMPM
COUNTY:	Lea County, New Mexico

WELL NAME & NO.:	Railsplitter 15-22 Fed Com 2H
SURFACE HOLE FOOTAGE:	2290'/S & 432'/W
BOTTOM HOLE FOOTAGE:	20'/S & 1010'/W

WELL NAME & NO.:	Railsplitter 15-22 Fed Com 4H
SURFACE HOLE FOOTAGE:	2120'/S & 1421'/W
BOTTOM HOLE FOOTAGE:	20'/S & 2320'/W

WELL NAME & NO.:	Railsplitter 15-22 Fed Com 7H
SURFACE HOLE FOOTAGE:	2390'/S & 1709'/E
BOTTOM HOLE FOOTAGE:	20'/S & 2300'/E

WELL NAME & NO.:	Railsplitter 15-22 Fed Com 8H
SURFACE HOLE FOOTAGE:	2390'/S & 405'/E
BOTTOM HOLE FOOTAGE:	20'/S & 360'/E

WELL NAME & NO.:	Railsplitter 15-22 Fed Com 11H
SURFACE HOLE FOOTAGE:	2390'/S & 1649'/E
BOTTOM HOLE FOOTAGE:	20'/S & 1200'/E

COA

H2S	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No	
Potash	<input checked="" type="checkbox"/> None	<input type="checkbox"/> Secretary	<input type="checkbox"/> R-111-P
Cave/Karst Potential	<input checked="" type="checkbox"/> Low	<input type="checkbox"/> Medium	<input type="checkbox"/> High
Cave/Karst Potential	<input type="checkbox"/> Critical		
Variance	<input type="checkbox"/> None	<input checked="" type="checkbox"/> Flex Hose	<input type="checkbox"/> Other
Wellhead	<input type="checkbox"/> Conventional	<input checked="" type="checkbox"/> Multibowl	<input type="checkbox"/> Both
Other	<input type="checkbox"/> 4 String Area	<input type="checkbox"/> Capitan Reef	<input type="checkbox"/> WIPP
Other	<input checked="" type="checkbox"/> Fluid Filled	<input checked="" type="checkbox"/> Cement Squeeze	<input type="checkbox"/> Pilot Hole
Special Requirements	<input type="checkbox"/> Water Disposal	<input checked="" type="checkbox"/> COM	<input type="checkbox"/> Unit

OPERATOR IS ONLY APPROVED FOR THE FOLLOWING DESIGN, OTHER DESIGNS SUBMITTED WILL BE VOID.

A. HYDROGEN SULFIDE

Hydrogen Sulfide (H₂S) monitors shall be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

Alternate Casing Design:

1. The **13-3/8** inch surface casing shall be set at approximately **840 feet** (a minimum of **25 feet (Lea County)** into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Intermediate casing must be kept fluid filled to meet BLM minimum collapse requirement.

2. The minimum required fill of cement behind the **8-5/8** inch intermediate casing is:
 - Cement to surface. If cement does not circulate see B.1.a, c-d above.

Operator has proposed to pump down 13-3/8" X 8-5/8" annulus. Operator must run a CBL from TD of the 8-5/8" casing to surface. Submit results to BLM.

Production casing must be kept fluid filled to meet BLM minimum collapse requirement.

3. The minimum required fill of cement behind the **5-1/2** inch production casing is:

- Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **10,000 (10M)** psi. **Variance is approved to use a 5000 (5M) Annular which shall be tested to 5000 (5M) psi.**
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.

- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)
393-3612

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not

hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).
- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.



**Devon Energy Center
333 West Sheridan Avenue
Oklahoma City, Oklahoma 73102-5015**

Hydrogen Sulfide (H₂S) Contingency Plan

For



Railsplitter 15-22 Fed Com 4H

**Sec-15 T-26S R-34E
2120 FSL & 1421' FWL
LAT. = 32.042018' N (NAD83)
LONG = 103.461711' W**

Lea County NM

Railsplitter 15-22 Fed Com 4H

This is an open drilling site. H₂S monitoring equipment and emergency response equipment will be used within 500' of zones known to contain H₂S, including warning signs, wind indicators and H₂S monitor.

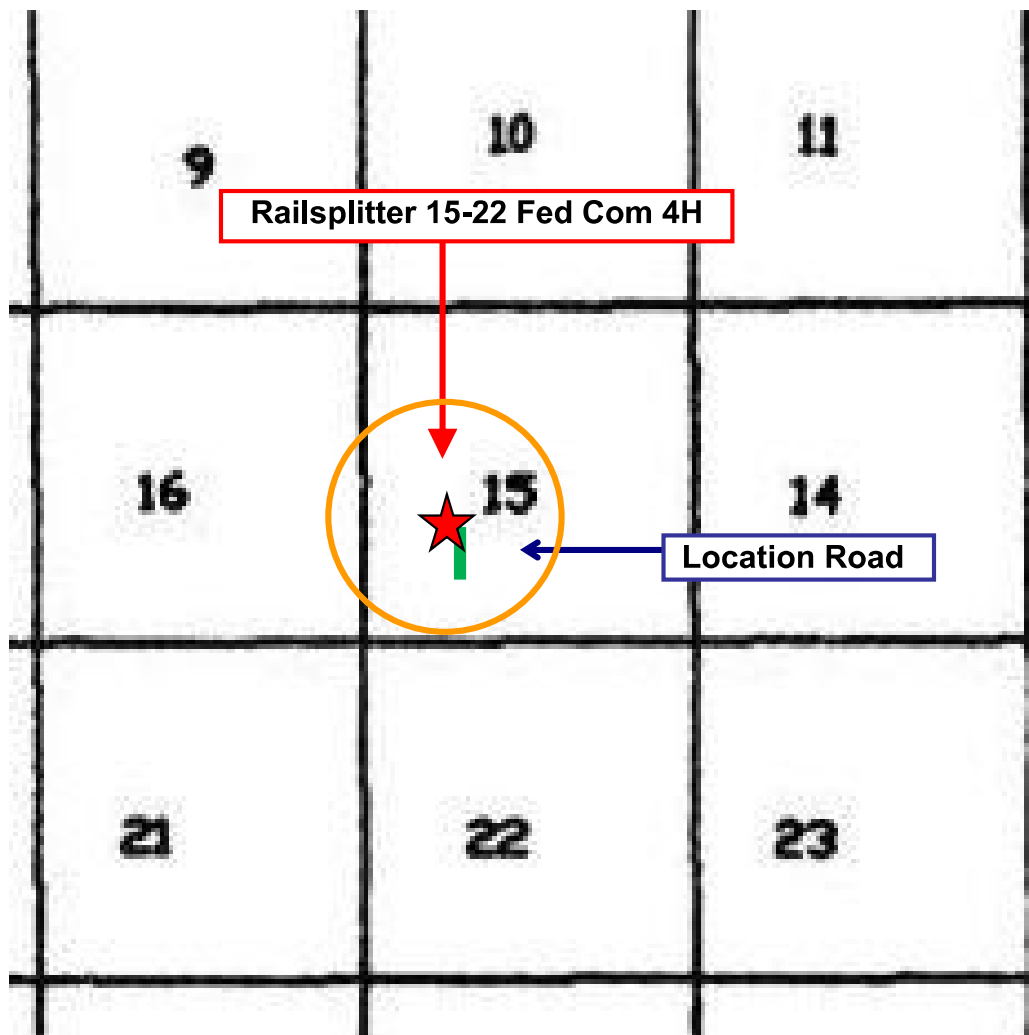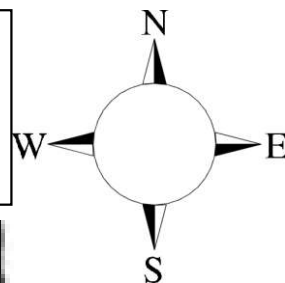

Assumed 100 ppm ROE = 3000' (Radius of Exposure)
100 ppm H₂S concentration shall trigger activation of this plan.

Escape

Crews shall escape upwind of escaping gas in the event of an emergency release of gas. Escape can be facilitated from the location entrance road. Crews should then block the entrance to the location from the lease road so as not to allow anyone traversing into a hazardous area. The blockade should be at a safe distance outside of the ROE. There are no homes or buildings in or near the ROE.

Assumed 100 ppm ROE = 3000'

100 ppm H₂S concentration shall trigger activation of this plan.

Emergency Procedures

In the event of a release of gas containing H₂S, the first responder(s) must

- Isolate the area and prevent entry by other persons into the 100 ppm ROE.
- Evacuate any public places encompassed by the 100 ppm ROE.
- Be equipped with H₂S monitors and air packs in order to control the release.
- Use the “buddy system” to ensure no injuries occur during the response
- Take precautions to avoid personal injury during this operation.
- Contact operator and/or local officials to aid in operation. See list of phone numbers attached.
- Have received training in the
 - Detection of H₂S, and
 - Measures for protection against the gas,
 - Equipment used for protection and emergency response.

Ignition of Gas Source

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO₂). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally, the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever there is an ignition of the gas

Characteristics of H₂S and SO₂

Common Name	Chemical Formula	Specific Gravity	Threshold Limit	Hazardous Limit	Lethal Concentration
Hydrogen Sulfide	H ₂ S	1.189 Air = 1	10 ppm	100 ppm/hr	600 ppm
Sulfur Dioxide	SO ₂	2.21 Air = 1	2 ppm	N/A	1000 ppm

Contacting Authorities

Devon Energy Corp. personnel must liaison with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available. The following call list of essential and potential responders has been prepared for use during a release. Devon Energy Corp. Company response must be in coordination with the State of New Mexico's 'Hazardous Materials Emergency Response Plan' (HMER)

Hydrogen Sulfide Drilling Operation Plan

I. HYDROGEN SULFIDE (H₂S) TRAINING

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

1. The hazards and characteristics of hydrogen sulfide (H₂S)
2. The proper use and maintenance of personal protective equipment and life support systems.
3. The proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
4. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

1. The effects of H₂S metal components. If high tensile tubulars are to be used, personnel will be trained in their special maintenance requirements.
2. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
3. The contents and requirements of the H₂S Drilling Operations Plan and Public Protection Plan.

There will be an initial training session just prior to encountering a known or probable H₂S zone (within 3 days or 500 feet) and weekly H₂S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H₂S Drilling Operations Plan and the Public Protection Plan.

II. HYDROGEN SULFIDE TRAINING

Note: All H₂S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonably expected to contain H₂S.

1. Well Control Equipment

- A. Flare line
- B. Choke manifold – Remotely Operated
- C. Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit
- D. Auxiliary equipment may include if applicable: annular preventer and rotating head.
- E. Mud/Gas Separator

2. Protective equipment for essential personnel:

30-minute SCBA units located at briefing areas, as indicated on well site diagram, with escape units available in the top doghouse. As it may be difficult to communicate audibly while wearing these units, hand signals shall be utilized.

3. H₂S detection and monitoring equipment:

Portable H₂S monitors positioned on location for best coverage and response. These units have warning lights which activate when H₂S levels reach 10 ppm and audible sirens which activate at 15 ppm. Sensor locations:

- Bell nipple
- Possum Belly/Shale shaker
- Rig floor
- Choke manifold
- Cellar

Visual warning systems:

- A. Wind direction indicators as shown on well site diagram
- B. Caution/ Danger signs shall be posted on roads providing direct access to locations. Signs will be painted a high visibility yellow with black lettering of sufficient size to be reasonable distance from the immediate location. Bilingual signs will be used when appropriate.

4. Mud program:

The mud program has been designed to minimize the volume of H₂S circulated to surface. Proper mud weight, safe drilling practices and the use of H₂S scavengers will minimize hazards when penetrating H₂S bearing zones.

5. Metallurgy:

- A. All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold lines, and valves shall be H₂S trim.
- B. All elastomers used for packing and seals shall be H₂S trim.

6. Communication:

- A. Company personnel have/use cellular telephones in the field.
- B. Land line (telephone) communications at Office

7. Well testing:

- A. Drill stem testing will be performed with a minimum number of personnel in the immediate vicinity, which are necessary to safety and adequately conduct the test. The drill stem testing will be conducted during daylight hours and formation fluids will not be flowed to the surface. All drill-stem-testing operations conducted in an H₂S environment will use the closed chamber method of testing.
- B. There will be no drill stem testing.

<u>Devon Energy Corp. Company Call List</u>		
Drilling Supervisor – Basin – Mark Kramer		405-823-4796
EHS Professional – Laura Wright		405-439-8129
<u>Agency Call List</u>		
<u>Lea County (575)</u>	Hobbs	
	Lea County Communication Authority	393-3981
	State Police	392-5588
	City Police	397-9265
	Sheriff's Office	393-2515
	Ambulance	911
	Fire Department	397-9308
	LEPC (Local Emergency Planning Committee)	393-2870
	NMOCD	393-6161
	US Bureau of Land Management	393-3612
<u>Eddy County (575)</u>	Carlsbad	
	State Police	885-3137
	City Police	885-2111
	Sheriff's Office	887-7551
	Ambulance	911
	Fire Department	885-3125
	LEPC (Local Emergency Planning Committee)	887-3798
	US Bureau of Land Management	887-6544
	NM Emergency Response Commission (Santa Fe)	(505) 476-9600
	24 HR	(505) 827-9126
	National Emergency Response Center	(800) 424-8802
	National Pollution Control Center: Direct	(703) 872-6000
	For Oil Spills	(800) 280-7118
	Emergency Services	
	Wild Well Control	(281) 784-4700
	Cudd Pressure Control	(915) 699-0139 (915) 563-3356
	Halliburton	(575) 746-2757
	B. J. Services	(575) 746-3569
<u>Give GPS position:</u>	Native Air – Emergency Helicopter – Hobbs (NM and TX)	(800)642-7828
	Flight For Life - Lubbock, TX	(806) 743-9911
	Aerocare - Lubbock, TX	(806) 747-8923
	Med Flight Air Amb - Albuquerque, NM	(575) 842-4433
	Lifeguard Air Med Svc. Albuquerque, NM	(800) 222-1222
	Poison Control (24/7)	(575) 272-3115
	Oil & Gas Pipeline 24 Hour Service	(800) 364-4366
	NOAA – Website - www.nhc.noaa.gov	

Prepared in conjunction with
Dave Small



Devon Energy - Well Pad Rig Location Layout Safety Equipment Location

