<u>District 1</u> 1625 N. French Dr., Hobbs, NM 88240 <u>District II</u> 811 S. First St., Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-144 Revised April 3, 2017

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office.

For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit Relow-Grade Tank or

Provided I alik, of Closure Plan Application
Proposed Alternative Method Permit or Closure Plan Application
Type of action: Below grade tank registration Permit of a pit or proposed alternative method Closure of a pit, below-grade tank, or proposed alternative method Modification to an existing permit/or registration Closure plan only submitted for an existing permitted or non-permitted pit, below-grade tank,
or proposed alternative method
Instructions: Please submit one application (Form C-144) per individual pit, below-grade tank or alternative request
lease be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the avironment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.
1. Operator:Coleman Oil & Gas In OGRID #:4838
Address: P.O Drawer 3337 Farmington, NM 87499
Facility or well name: Taliaferro #005M
API Number:30-045-24746 OCD Permit Number:
U/L or Qtr/Qtr I Section 30 Township 31N Range 12W County: San Juan
Center of Proposed Design: Latitude36.8678932Longitude108.1326523NAD83
Surface Owner: X Federal X State Private Tribal Trust or Indian Allotment
2.
Pit: Subsection F, G or J of 19.15.17.11 NMAC
Temporary: Drilling Workover
☐ Permanent ☐ Emergency ☐ Cavitation ☐ P&A ☐ Multi-Well Fluid Management Low Chloride Drilling Fluid ☐ yes ☐ no
Lined Unlined Liner type: Thicknessmil LLDPE HDPE PVC Other
☐ String-Reinforced
Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x D
3. Below-grade tank: Subsection I of 19.15.17.11 NMAC
Volume: 120 bbl Type of fluid:produced water
Tank Construction material: fiberglass
Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☐ Other
Liner type: Thicknessmil
Alternative Method: Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.
Submittal of an exception request is required. Exceptions must be submitted to the Salita Fe intyrionmental Bureau office for consideration of approval.
5.
Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church)
☐ Four foot height, four strands of barbed wire evenly spaced between one and four feet
Alternate. Please specify

6. Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)	
Screen Netting Other	
Monthly inspections (If netting or screening is not physically feasible)	
7.	
Signs: Subsection C of 19.15.17.11 NMAC	
212"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers	
Signed in compliance with 19.15.16.8 NMAC	
3.	
Variances and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.	
Please check a box if one or more of the following is requested, if not leave blank:	
☐ Variance(s): Requests must be submitted to the appropriate division district for consideration of approval.	
Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	
Siting Criteria (regarding permitting): 19.15.17.10 NMAC	
Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accep material are provided below. Siting criteria does not apply to drying pads or above-grade tanks.	dable source
General siting	
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank.	☐ Yes ☑ No
- MM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	□ NA
Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within the area overlying a subsurface mine. (Does not apply to below grade tanks) - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	Yes No
 Within an unstable area. (Does not apply to below grade tanks) Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	☐ Yes ☐ No
Within a 100-year floodplain. (Does not apply to below grade tanks) - FEMA map	☐ Yes ☐ No
Below Grade Tanks	
TV' 1 100 C + C + + + + + + + + + + + + + + + +	
Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark).	☐ Yes ☒ No
- Topographic map; Visual inspection (certification) of the proposed site	
Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)	
Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial	☐ Yes ☐ No
application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	
Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock	
within 200 horizontal feet of a spring of a private, domestic fresh water well used by less than rive households for domestic of stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No

Within 100 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site					
Temporary Pit Non-low chloride drilling fluid					
Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site					
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No				
Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No				
Within 300 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No				
Permanent Pit or Multi-Well Fluid Management Pit					
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No				
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No				
Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No				
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Ycs ☐ No				
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 Naturations: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the do attached. Mydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19. and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:	O NMAC				
Treviously Approved Design (attach copy of design) At Frances.					
Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the do attached. Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC A List of wells with approved application for permit to drill associated with the pit. Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 and 19.15.17.13 NMAC Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:	9.15.17.9 NMAC				


	VIII. 1	
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a che	ck mark in the box, that the do	cuments are
attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.1 Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMA Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.15.15.15.15.15.15.15.15.15.15.15.15.	IO NMAC .C	
 □ Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC □ Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.12 NMAC □ Quality Control/Quality Assurance Construction and Installation Plan □ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC □ Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17. □ Nuisance or Hazardous Odors, including H₂S, Prevention Plan 		
 Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan 		
☐ Erosion Control Plan ☐ Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and	19.15.17.13 NMAC	
13. Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed cl	osure plan.	
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below Alternative		id Management Pit
Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop system In-place Burial On-site Trench Burial Alternative Closure Method	s)	
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of closure plan. Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	on C of 19.15.17.13 NMAC etion H of 19.15.17.13 NMAC AC	
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recomprovided below. Requests regarding changes to certain siting criteria require justifications and/or dem 19.15.17.10 NMAC for guidance.	mendations of acceptable source nonstrations of equivalency. Pl	e material are ease refer to
Ground water is less than 25 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby	y wells	☐ Yes ⊠ No ☐ NA
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby	y wells	☐ Yes ☒ No ☐ NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby	3	Yes No
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site		Yes No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the tin Visual inspection (certification) of the proposed site; Aerial photo; Satellite image		Ycs 🛛 No
Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock water the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the process of the process of the state of the state of the process of the process of the process of the state of the process of th	roposed site	☐ Yes ☑ No
Written confirmation or verification from the municipality; Written approval obtained from the municipality	dity	☐ Yes ☑ No
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of		☐ Yes ⊠ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered to	ınder a municipal ordinance	


 adopted pursuant to NMSA 1978, Section 3-27-3, as amended. Written confirmation or verification from the municipality; Written approval obtained from the municipality 	☐ Yes ⊠ No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ⊠ No
 Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	☐ Yes ⊠ No
Within a 100-year floodplain FEMA map	☐ Yes ⊠ No
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 19.15.17. Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cann Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	11 NMAC 15.17.11 NMAC
Operator Application Certification: I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and below Name (Print):Vanessa Fields Title: _Agent/Regulatory Compliance Manager Date:	
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment) OCD Representative Signature: 49/9/1	9
Title: Environmental Specalist OCD Permit Number:	
Closure Report (required within 60 days of closure completion): 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not section of the form until an approved closure plan has been obtained and the closure activities have been completed. Closure Completion Date:	g the closure report. ot complete this
20.	
Closure Method: ☐ Waste Excavation and Removal ☐ On-Site Closure Method ☐ Alternative Closure Method ☐ Waste Removal (Closed-☐ If different from approved plan, please explain.	loop systems only)
Closure Report Attachment Checklist: Instructions: Each of the following items must be attached to the closure report. Please it mark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division) Proof of Deed Notice (required for on-site closure for private land only) Plot Plan (for on-site closures and temporary pits) Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (required for on-site closure)	indicate, by a check

	The state of the s
22. Operator Closure Certification:	
I hereby certify that the information and attachm belief. I also certify that the closure complies wi	nts submitted with this closure report is true, accurate and complete to the best of my knowledge and all applicable closure requirements and conditions specified in the approved closure plan.
Name (Print):	Title:
Signature:	Date:
e-mail address:	Telephone:

Taliaferro #005M 30-045-24746 Depth to Groundwater Cathodic Well Taliaferrro #004 E 80' Elevation 6021'

Taliaferro #005M Elevation 5973'
Groundwater 53'

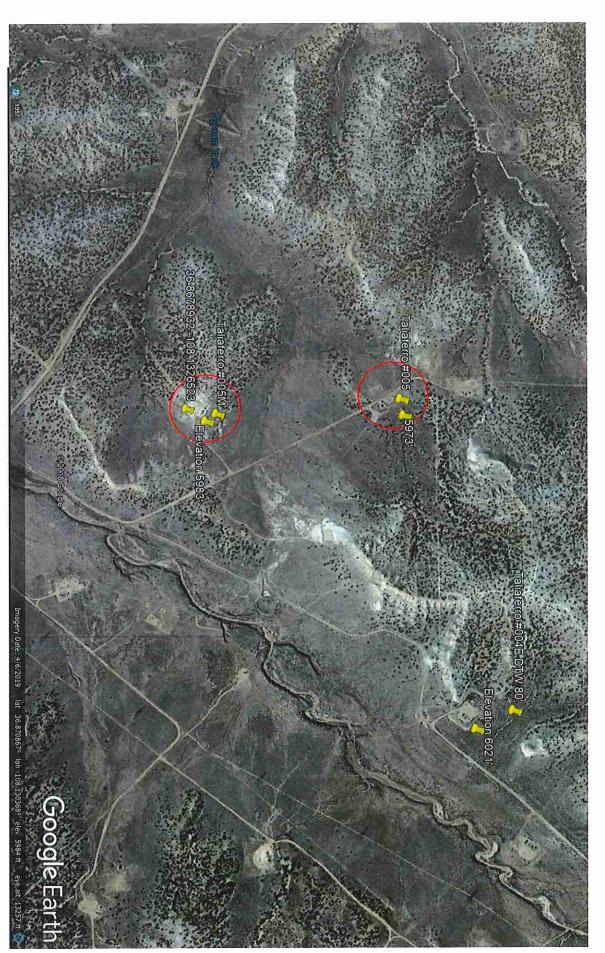

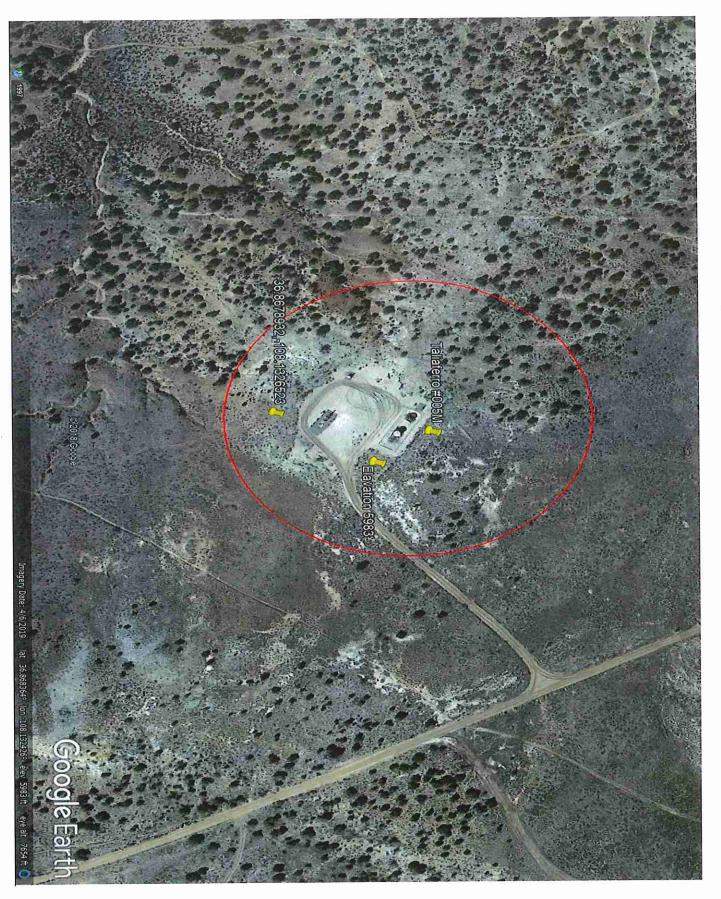

30-045-24452

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS NORTHWESTERN NEW MEXICO (Submit 3 copies to OCD Aztec Office)

Operator_	MERIDIAN OIL INC.	Loca	tion: Uni	t_C_Sec	. 29 Twp	31 Rng 12
Name of We	ell/Wells or Pipeline	Serviced	TALTAFERR	O #4E		granning storing story and fire followsk and the Edit School of Maring annuals a
						cps 6297w
Elevation_	N/A Completion Date_	12/22/86 Tot	al Depth	380' _L	and Type	* N/A
Casing, Si	lzes, Types & Depths_		N/A	The second section of the sect	gydanga antago e na walana ay maraka daga aliada a Galaga anta	
If Casing	is cemented, show amo	ounts & typ	es used	N/A		
If Cement	or Bentonite Plugs ha	ave been pl	aced, sho	w depth	ıs & amou	nts used
_	chickness of water zon		scription 80' & 190		er when	possible:
Depths gas	encountered:	N/A				
Type & amo	ount of coke breeze us	sed:	N/A			
Depths and	odes placed: 360', 350',	340', 330',	320', 310',	, 3001, 2	290' 280'	. 270 '
	it pipes placed:			EIV		
	perforations:			1991		
Remarks:			a MA		NIA 3	
		—···—	OIL	DIST. 3		

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included

^{*}Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee. If Federal or Indian, add Lease Number.

DMPANY (Suice)	1ex 45 7	etes/eum DAILI			
WELL NAME:	r zár s	WELL NUMBER:	SECTION:	TOWNSHIP:	RANGE:
TALIA FERRO		· 4-E	29 3	3:1	4 - 125
<u> </u>	WATER AT	FEET	HOLE MADE:		and the state of the
80	1 1900	and the second	380	Carried States of the Control of the	1000年 海 公局部沿台公司
		DESCRIPTION OF		· :	
FROM	то	1.1	FORMATION IS	F	. COLOR
0'	801	SANG	1 w/alay =	Kingers_	Breen I
80	190	Clay 4	5ANG		BROWN
1901	240	Sand	Destant +		GRAJ
	380	Shale a	1/50 000	ail .	Real Section
240'	380	Shale a	15ome sa		Para de la
		-	37, 3		·
	.,	1	77		10000000000000000000000000000000000000
		-		· ·	
		<u> -</u>			
		<u> </u>			***
					* * * * * * * * * * * * * * * * * * * *
		-			
		<u> </u>			
, ,	* *		- 15-15-15-15-15-15-15-15-15-15-15-15-15-1		· Cap Way
	_		e in the tippe to get		أراه فوارد المالية
				2:-	1-14
				_	
				•	1928
	~				
				-	
			•		1
REMARKS: 2	stee Volume	- WAS ARK	exex 6 9	Allows per	e minute.
HEMAINO.			1. 1. 1. 1	The state of	the state of the state of
		:		1c.	
*	~		, to the second	C. C. C. C.	
	,				

Driller

National Flood Hazard Layer FIRMette





Legend

SEE FIS REPORT FOR DETAILED LEGEND AND INDEX MAP FOR FIRM PANEL LAYOUT

Regulatory Floodway With BFE or Depth zone AE, AO, AH, VE, AR Without Base Flood Elevation (BFE) Zone A, V, A99




0.2% Annual Chance Flood Hazard, Area of 1% annual chance flood with average depth less than one foot or with drainag



areas of less than one square mile zone



Chance Flood Hazard Zone X Future Conditions 1% Annual



Area with Reduced Flood Risk due to Levee. See Notes. Zone X



NO SCREEN Area of Minimal Flood Hazard Zone X



Effective LOMRs

Area of Undetermined Flood Hazard Zone

GENERAL ---- Channel, Culvert, or Storn STRUCTURES 1111111 Levee, Dike, or Floodwall Channel, Culvert, or Storm Sewer



Cross Sections with 1% Annual Chance Coastal Transect Water Surface Elevation



Coastal Transect Baseline Jurisdiction Boundary



FEATURES OTHER

Digital Data Available

MAP PANELS

Unmapped



No Digital Data Available

The pin displayed on the map is an approximate point selected by the user and does not represe an authoritative property location.

This map complies with FEMA's standards for the use of digital flood maps if it is not void as described below. The basemap shown complies with FEMA's basemap accuracy standards

authoritative NFHL web services provided by FEMA. This map was exported on 8/27/2019 at 5:05:45 PM and does not become superseded by new data over time. time. The NFHL and effective information may change or reflect changes or amendments subsequent to this date and The flood hazard information is derived directly from the

regulatory purposes. unmapped and unmodernized areas cannot be used for FIRM panel number, and FIRM effective date. Map images for legend, scale bar, map creation date, community identifiers, elements do not appear: basemap imagery, flood zone labels, This map image is void if the one or more of the following map

250

500


1,000

1,500

2,000



Coal Mine Resources in New Mexico NM Mining and Minerals Division

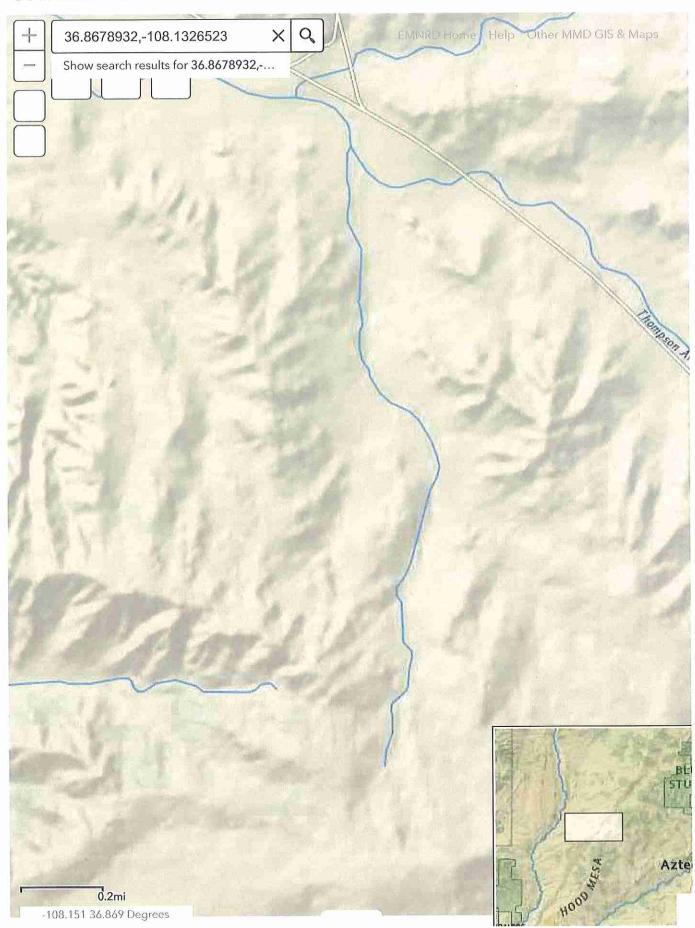

All rights reserved

Coleman Oil & Gas Inc. San Juan Basin Below Grade Tank Closure Plan

Lease Name: Taliaferro #005M API No.: 30-045-24746

Description: Unit I, Section 30, Township 31N, Range 12W, San Juan County

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure requirements of below-grade tanks on Coleman Oil & Gas Inc. locations. This is Coleman Oil & Gas Inc standard procedure for all below-grade tanks. A separate plan will be submitted for any below-grade tank which does not conform to this plan.

General Plan

- 1. COLEMAN OIL & GAS INC. will obtain approval of this closure plan prior to commencing closure of the below grade tank at this location pursuant to 19.15.17.13.C (1) NMAC
- 2. COLEMAN OIL & GAS INC. will notify the surface owner by email if Bureau of Land Management or by certified mail for any fee owners, return receipt requested, that the Coleman Oil & Gas Inc. plans closure operations at least 72 hours, but no more than one week, prior to any closure operation. Notice will include:
 - a. Well Name
 - b. API#
 - c. Well Location
- 3. COLEMAN OIL & GAS INC. will notify the NMOCD Aztec Office by email that the Coleman Oil & Gas Inc. plans closure operations at least 72 hours, but no more than one week, prior to any closure operation. Notice will include:
 - a. Well Name
 - b. API#
 - c. Well Location
- 4. Within 60 days of cessation of operations, COLEMAN OIL & GAS INC. will remove liquids and sludge from below-grade tanks prior to implementing a closure method and will dispose of the liquids and sludge in a division-approved facility. Approved facilities and waste streams include:
 - a. Soils, tank bottoms, produced sand, pit sludge and other exempt wastes impacted by petroleum hydrocarbons will be disposed of at:

 Envirotech: Permit #NM01-0011 and IEI: Permit # NM01-0010B
 - b. Produced Water will be disposed of at:

 Basin Disposal: Permit # NM01-005 and COLEMAN OIL & GAS INC. owned saltwater

 Disposal Facilities

- 5. Within six (6) months of cessation of operations, COLEMAN OIL & GAS INC. Will remove the below-grade tank and dispose of it in a division-approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves. If there is any equipment associated with a below-grade tank, then the Coleman Oil & Gas Inc. shall remove the equipment, unless the equipment is required for some other purpose.
- 6. COLEMAN OIL & GAS INC. will collect a closure sample of the soil beneath the location of the below grade tank that is being closed. The closure sample will consist of a five-point composite sample to include any obvious stained or wet soils, or other evidence of contamination. The closure sample will be analyzed for all constituents listed in Table I below, including DRO+GRO, Chlorides, TPH, benzene and BTEX.

TABLE I						
Depth Below bottom of pit to groundwater less than 10,000 mg/l TDS	Constituent	Method	Limit			
	Chloride	EPA 300.0	600 mg/kg			
	TPH	Method 418.1	100 mg/kg			
	BTEX	Method 8021B or 8260B	50 mg/kg			
< 50 Feet	Benzene	Method 8021B or 8260B	10 mg/kg			
	Chloride	EPA 300.0	10,000 mg/kg			
	TPH	Method 418.1	2,500 mg/kg			
	GRO + DRO	Method 8015	1,000 mg/kg			
	BTEX	Method 8021B or 8260B	50 mg/kg			
51 feet - 100 feet	Benzene	Method 8021B or 8260B	10 mg/kg			
	Chloride	EPA 300.0	20,000 mg/kg			
	TPH	EPA 418.1	2,500 mg/kg			
	GRO + DRO	Method 8015	1,000 mg/kg			
	BTEX	Method 8021B or 8260B	50 mg/kg			
> 100 feet	Benzene	Method 8021B or 8260B	10 mg/kg			

- 7. If any contaminant concentration is higher than the parameters listed in Table I of 19.15.17.13 NMAC, the division may require additional delineation upon review of the results and the Coleman Oil & Gas Inc. must receive approval before proceeding with closure. If all contaminant concentrations are less than or equal to the parameters listed in Table I of 19.15.17.13 NMAC, then the Coleman Oil & Gas Inc. can proceed to backfill the pit, pad, or excavation with non-waste containing, uncontaminated, earthen material.
- 8. After closure has occurred, COLEMAN OIL & GAS INC. will reclaim the former BGT area, if it is no longer being used for extraction of oil and gas, by substantially restoring the impacted surface area to the condition that existed prior to oil and gas operations. COLEMAN OIL & GAS INC. will construct the soil cover to the site's existing grade and prevent ponding of water and erosion of the cover materials. The soil cover shall consist of the background thickness of topsoil, or one foot of suitable materials to establish vegetation at the site, whichever is greater. All areas will be reclaimed as early as practicable, and as close to their original condition or land use as possible. They shall be maintained in a way as to control dust and minimize erosion.
- 9. COLEMAN OIL & GAS INC. will complete reclamation of all disturbed areas no longer in use when the ground disturbance activities at the site have been completed. The reseeding shall take place during the first favorable growing season after closure. Reclamation activities will be considered completed when a uniform vegetative cover has been established that reflects a life-form ratio of plus or minus fifty percent (50%) of predisturbance levels, and a total percent plant cover of at least seventy percent (70%) of pre-disturbance levels, excluding noxious weeds.
 - *Re-vegetation and reclamation obligations imposed by other applicable federal, state or tribal agencies on lands managed by those agencies shall supersede the above requirements, provided they provide equal or better protection of fresh water, human health and the environment.
- 10. COLEMAN OIL & GAS INC. will notify the Aztec Office of the NMOCD by email when reclamation and closure activities are completed.
- 11. Within 60 days of closure, COLEMAN OIL & GAS INC. will submit a closure report to the Aztec office of the NMOCD, filed on Form C-144. The report will include the following:
 - a. Proof of closure notice to NMOCD and surface owner
 - b. Confirmation sampling analytical results
 - c. Soil backfill and cover installation information
 - d. Photo documentation of site reclamation